

NACOmatic

Effective: 23-Sep-2010

Expires: 21-Oct-2010



Warranty

I make absolutely no warranty nor guarantee whatsoever about the accuracy, availability, applicability and/or correctness of any of the information in this document.

The official, original NACO documents are available for your downloading pleasure from: <http://naco.faa.gov/index.asp?xml=naco/onlineproducts>

Copyright

This compilation is protected by US copyright laws and international copyright treaties.

Limitations

The sale, hosting and/or distribution of this document in any and all forms, is prohibited.

Release from Liability

All users of this compilation must agree to be legally bound hereby, that Douglas R. Ranz ("Released Party") SHALL NOT BE LIABLE FOR MY DEATH OR INJURY TO MY PERSON, OR FOR ANY LOSS FOR DAMAGE TO MY PROPERTY OR REPUTATION caused in any manner whatsoever, whether attributable to the negligence of the Released Party, or for any other reason, occurring during the time that I am operating an aircraft.

I do hereby waive any right of action against the Released Party from any and all causes or claims that I may have against them from the beginning of time. I further agree not to sue on any such cause or claim. This agreement shall not release liability for gross negligence or willful misconduct of the Released Party. I agree to indemnify and hold the Released Party harmless for any losses, judgments, damages or fees he may incur, including but not limited to attorneys fees, arising out any lawsuit related to the planning, flight and/or enforcement of or legal challenge to this agreement. It is my intention that this agreement be interpreted and enforced to the maximum extent allowed by Michigan law.

WI Min Alt#3	-	5	LSE	-	191
WI Min Rdr#3	-	12	LUM	-	264
WI Min TO#3	-	14	MDZ	-	261
3CU	-	83	MFI	-	255
3D2	-	126	MKE	-	279
3T3	-	76	MRJ	-	311
44C	-	67	MSN	-	224
4R5	-	205	MTW	-	249
57C	-	114	MWC	-	305
61C	-	133	OCQ	-	355
63C	-	137	OEO	-	358
82C	-	346	OLG	-	444
87Y	-	222	OSH	-	363
8D1	-	344	OVS	-	72
91C	-	398	PBH	-	380
92C	-	401	PCZ	-	492
93C	-	426	PDC	-	393
AHH	-	34	PKF	-	376
AIG	-	38	PVB	-	385
ARV	-	317	RAC	-	403
ASX	-	54	RCX	-	208
ATW	-	42	RHI	-	412
AUW	-	496	RNH	-	348
BCK	-	69	RPD	-	420
BUU	-	79	RRL	-	268
C02	-	210	RYV	-	477
C29	-	273	RZN	-	442
C35	-	410	SBM	-	430
C47	-	390	SSQ	-	438
C59	-	105	STE	-	451
CLI	-	97	SUE	-	460
CMY	-	447	SUW	-	466
CWA	-	327	TKV	-	470
D25	-	246	UBE	-	102
DAF	-	339	UES	-	485
DLL	-	62	UNU	-	173
EAU	-	118	VIQ	-	341
EFT	-	323	VOK	-	85
EGV	-	108	Y23	-	93
ENW	-	181	Y50	-	500
ETB	-	502	Y51	-	474
EZS	-	428			
FLD	-	128			
GRB	-	141			
GTG	-	139			
HXF	-	154			
HYR	-	157			
ISW	-	510			
JVL	-	161			
LNL	-	212			
LNR	-	217			

WI Mins - Alternates #3	-	5	MINOCQUA-WOODRUFF .	ARV	-	317	
WI Mins - Radar #3	-	12	MONROE	EFT	-	323	
WI Mins - Take-Off #3	-	14	MOSINEE	CWA	-	327	
AMERY	AHH	-	34	NECEDAH	DAF	-	339
ANTIGO	AIG	-	38	NEILLSVILLE	VIQ	-	341
APPLETON	ATW	-	42	NEW HOLSTEIN	8D1	-	344
ASHLAND	ASX	-	54	NEW LISBON	82C	-	346
BARABOO	DLL	-	62	NEW RICHMOND	RNH	-	348
BELOIT	44C	-	67	OCONTO	OCQ	-	355
BLACK RIVER FALLS .	BCK	-	69	OSCEOLA	OEO	-	358
BOSCOBEL	OVS	-	72	OSHKOSH	OSH	-	363
BOYCEVILLE	3T3	-	76	PARK FALLS	PKF	-	376
BURLINGTON	BUU	-	79	PHILLIPS	PBH	-	380
CABLE	3CU	-	83	PLATTEVILLE	PVB	-	385
CAMP DOUGLAS	VOK	-	85	PORTAGE	C47	-	390
CHETEK	Y23	-	93	PRAIRIE DU CHIEN ..	PDC	-	393
CLINTONVILLE	CLI	-	97	PRAIRIE DU SAC	91C	-	398
CUMBERLAND	UBE	-	102	PULASKI	92C	-	401
DELANAN	C59	-	105	RACINE	RAC	-	403
EAGLE RIVER	EGV	-	108	REEDSBURG	C35	-	410
EAST TROY	57C	-	114	RHINELANDER	RHI	-	412
EAU CLAIRE	EAU	-	118	RICE LAKE	RPD	-	420
EPHRAIM	3D2	-	126	RICHLAND CENTER ...	93C	-	426
FOND DU LAC	FLD	-	128	SHAWANO	EZS	-	428
FORT ATKINSON	61C	-	133	SHEBOYGAN	SBM	-	430
FRIENDSHIP ADAMS ..	63C	-	137	SHELL LAKE	SSQ	-	438
GRANTSBURG	GTG	-	139	SIREN	RZN	-	442
GREEN BAY	GRB	-	141	OLON SPRINGS	OLG	-	444
HARTFORD	HXF	-	154	SPARTA	CMY	-	447
HAYWARD	HYR	-	157	STEVENS POINT	STE	-	451
JANESVILLE	JVL	-	161	STURGEON BAY	SUE	-	460
JUNEAU	UNU	-	173	SUPERIOR	SUW	-	466
KENOSHA	ENW	-	181	TOMAHAWK	TKV	-	470
LA CROSSE	LSE	-	191	VIROQUA	Y51	-	474
LA POINTE	4R5	-	205	WATERTOWN	RYV	-	477
LADYSMITH	RCX	-	208	WAUKESHA	UES	-	485
LAKE GENEVA	C02	-	210	WAUPACA	PCZ	-	492
LAND O'LAKES	LNL	-	212	WAUSAU	AUW	-	496
LONE ROCK	LNR	-	217	WAUTOMA	Y50	-	500
MADISON	87Y	-	222	WEST BEND	ETB	-	502
MADISON	MSN	-	224	WISCONSIN RAPIDS ..	ISW	-	510
MANITOWISH WATERS .	D25	-	246				
MANITOWOC	MTW	-	249				
MARSHFIELD	MFI	-	255				
MEDFORD	MDZ	-	261				
MENOMONIE	LUM	-	264				
MERRILL	RRL	-	268				
MIDDLETON	C29	-	273				
MILWAUKEE	MKE	-	279				
MILWAUKEE	MWC	-	305				
MINERAL POINT	MRJ	-	311				

INSTRUMENT APPROACH PROCEDURE CHARTS

A IFR ALTERNATE AIRPORT MINIMUMS

Standard alternate minimums for non precision approaches are 800-2 (NDB, VOR, LOC, TACAN, LDA, VORTAC, VOR/DME, ASR or WAAS LNAV); for precision approaches 600-2 (ILS or PAR). Airports within this geographical area that require alternate minimums other than standard or alternate minimums with restrictions are listed below. NA - means alternate minimums are not authorized due to unmonitored facility or absence of weather reporting service. Civil pilots see FAR 91. IFR Alternate Airport Minimums: Ceiling and Visibility Minimums not applicable to USA/USN/USAF. Pilots must review the IFR Alternate Airport Minimums Notes for alternate airfield suitability.

NAME ALTERNATE MINIMUMS

ALTON/ST. LOUIS, IL

ST. LOUIS RGNL ILS or LOC Rwy 29¹
 LOC BC Rwy 11¹
 NDB Rwy 17²
 RNAV (GPS) Rwy 11
 RNAV (GPS) Rwy 17
 RNAV (GPS) Rwy 29
 RNAV (GPS) Rwy 35
 VOR-A

NA when local weather not available.

¹NA when control tower closed.

²Categories A,B, 900-2; Category C, 900-2½;
 Category D, 900-2¾.

ANTIGO, WI

LANGLADE COUNTY NDB Rwy 16¹
 RNAV (GPS) Rwy 16
 RNAV (GPS) Rwy 34

NA when local weather not available.

¹Category C, 800-2½; Category D, 800-2¾.

APPLETON, WI

OUTAGAMIE COUNTY
 RGNL ILS or LOC Rwy 3¹
 RNAV (GPS) Rwy 3
 RNAV (GPS) Rwy 12
 RNAV (GPS) Rwy 21
 RNAV (GPS) Rwy 30
 VOR/DME Rwy 21

NA when local weather not available.

¹NA when control tower closed.

ASHLAND, WI

JOHN F. KENNEDY
 MEMORIAL RNAV (GPS) Rwy 2
 RNAV (GPS) Rwy 13
 RNAV (GPS) Rwy 20
 RNAV (GPS) Rwy 31
 VOR Rwy 2¹
 VOR Rwy 31

NA when local weather not available.

¹Category C, 800-2½; Category D, 800-2¾.

NAME ALTERNATE MINIMUMS

BARABOO, WI

BARABOO
 WISCONSIN DELLS RNAV (GPS) Rwy 1
 RNAV (GPS) Rwy 19
 VOR-A

NA when local weather not available.

BELLEVILLE, IL

SCOTT AFB/
 MIDAMERICA ILS or LOC/DME Rwy 14L¹
 ILS or LOC Rwy 14R¹²
 ILS Rwy 32L²³
 ILS or LOC Rwy 32R¹
 RNAV (GPS) Rwy 14L⁴⁵
 RNAV (GPS) Rwy 32R⁴⁵

¹ILS, Category C, 700-2; Category D, 800-2½;
 Category E, 800-2¾. LOC, Category D, 800-
 2½; Category E, 800-2¾.

²NA when control tower closed.

³ILS, Category D, 800-2½; Category E, 800-
 2¾. LOC, Category E, 800-2¾.

⁴NA when local weather not available.

⁵Category D, 800-2¾.

BLOOMINGTON/NORMAL, IL

CENTRAL IL RGNL ARPT AT BLOOMINGTON-
 NORMAL ILS or LOC Rwy 20¹²
 ILS or LOC Rwy 29¹
 ILS or LOC/DME Rwy 2¹²
 LOC BC Rwy 11
 RNAV (GPS) Rwy 2
 RNAV (GPS) Rwy 11
 RNAV (GPS) Rwy 20
 RNAV (GPS) Rwy 29

NA when local weather not available.

¹ILS, Category D, 700-2.

²NA when control tower closed.

BOSCobel, WI

BOSCobel RNAV (GPS) Rwy 7¹
 RNAV (GPS) Rwy 25¹
 VOR/DME Rwy 25²

NA when local weather not available.

¹Categories A,B, 900-2; Category C, 1000-2¾.

²Categories A,B,1000-2; Category C, 1000-2¾.

23 SEP 2010 to 21 OCT 2010

23 SEP 2010 to 21 OCT 2010

NAME ALTERNATE MINIMUMS
BURLINGTON, WI
 BURLINGTON MUNI RNAV (GPS) Rwy 29
 VOR Rwy 29¹
 NA when local weather not available.
¹Category D, 800-2½.

CAHOKIA/ST. LOUIS, IL
 ST. LOUIS
 DOWNTOWN ILS or LOC Rwy 30L¹²³
 RNAV (GPS) Rwy 12R³⁴
¹NA when control tower closed.
²ILS, Category D, 700-2.
³NA when local weather not available.
⁴Category D, 800-2½.

CARBONDALE-MURPHYSBORO, IL
 SOUTHERN ILLINOIS RNAV (GPS) Rwy 18L
 RNAV (GPS) Rwy 36R
 NA when local weather not available.

CHAMPAIGN-URBANA, IL
 UNIVERSITY OF ILLINOIS-
 WILLARD ILS or LOC Rwy 32R¹²
 LOC/DME BC Rwy 14L¹²
 RADAR-1¹
 RNAV (GPS) Rwy 4²
 RNAV (GPS) Rwy 14L²
 RNAV (GPS) Rwy 18²
 RNAV (GPS) Rwy 22²
 RNAV (GPS) Rwy 32R²
 RNAV (GPS) Rwy 36²
 VOR Rwy 4²
 VOR/DME Rwy 14L²
¹NA when control tower closed.
²NA when local weather not available.

CHICAGO, IL
 CHICAGO MIDWAY
 INTL VOR/DME RNAV or GPS Rwy 22L
 Category D, 800-2½.

CHICAGO O'HARE INTL ILS or LOC Rwy 9L
 ILS or LOC Rwy 9R
 ILS, LOC, Categories A, B, 1100-2; Categories
 C, D, 1100-3.

LANSING MUNI RNAV (GPS) Rwy 9
 RNAV (GPS) Rwy 27
 RNAV (GPS) Rwy 36
 VOR-A
 NA when local weather not available.

CHICAGO(WEST CHICAGO), IL
 DUPAGE ILS or LOC Rwy 2L
 RNAV (GPS) Rwy 10
 RNAV (GPS) Rwy 20R
 VOR Rwy 10
 NA when local weather not available.

NAME ALTERNATE MINIMUMS
CHICAGO/AURORA, IL
 AURORA MUNI ILS or LOC Rwy 9¹
 ILS or LOC Rwy 33¹²
 RNAV (GPS) Rwy 9¹
 RNAV (GPS) Rwy 33²
¹NA when control tower closed.
²NA when local weather not available.
³ILS, Categories A,B,C,D, 700-2.

**CHICAGO/PROSPECT HEIGHTS/
 WHEELING, IL**
 CHICAGO EXECUTIVE ILS or LOC Rwy 16
 RNAV (GPS) Rwy 16
 NA when local weather not available.

CHICAGO/ROMEOVILLE, IL
 LEWIS UNIVERSITY RNAV (GPS) Rwy 2
 RNAV (GPS) Rwy 9
 RNAV (GPS) Rwy 20
 RNAV (GPS) Rwy 27
 VOR Rwy 9
 NA when local weather not available.
 Category D, 800-2½.

CHICAGO/WAUKEGAN, IL
 WAUKEGAN RGNL ILS Rwy 23
 NA when control tower closed.

CLINTONVILLE, WI
 CLINTONVILLE MUNI RNAV (GPS) Rwy 4
 RNAV (GPS) Rwy 14
 RNAV (GPS) Rwy 22
 RNAV (GPS) Rwy 32
 NA when local weather not available.

DANVILLE, IL
 VERMILION RGNL ILS or LOC Rwy 21
 RNAV (GPS) Rwy 3
 RNAV (GPS) Rwy 21
 RNAV (GPS) Rwy 34
 VOR/DME Rwy 3
 VOR Rwy 21
 NA when local weather not available.

DE KALB, IL
 DE KALB TAYLOR MUNI ... ILS or LOC Rwy 2¹
 RNAV (GPS) Rwy 2
 RNAV (GPS) Rwy 9
 RNAV (GPS) Rwy 20
 RNAV (GPS) Rwy 27
 NA when local weather not available.
¹Categories C,D, 700-2.

NAME ALTERNATE MINIMUMS

DECATUR, IL

DECATUR ILS or LOC Rwy 6²³
 LOC BC Rwy 24¹
 RNAV (GPS) Rwy 6²
 RNAV (GPS) Rwy 18²
 RNAV (GPS) Rwy 24²
 RNAV (GPS) Rwy 30²
 RNAV (GPS) Rwy 36²
 VOR Rwy 18²
 VOR Rwy 36²

¹NA when control tower closed.

²NA when local weather not available.

³ILS, Category D, 700-2.

EAGLE RIVER, WI

EAGLE RIVER UNION NDB Rwy 22¹
 RNAV (GPS) Rwy 4
 RNAV (GPS) Rwy 22

NA when local weather not available.

¹Category C, 800-2¼; Category D, 800-2½.

EAU CLAIRE, WI

CHIPPEWA VALLEY
 RGNL ILS or LOC Rwy 22¹²
 RNAV (GPS) Rwy 4¹²
 RNAV (GPS) Rwy 22¹²
 VOR-A²³

¹Category D, 800-2½.

²NA when local weather not available.

³Categories A, B, 900-2; Category C, 900-2½;

Category D, 1000-3.

EFFINGHAM, IL

EFFINGHAM COUNTY
 MEMORIAL RNAV (GPS) Rwy 1
 VOR Rwy 1

NA when local weather not available.

Category D, 900-2¼.

FAIRFIELD, IL

FAIRFIELD MUNI RNAV (GPS) Rwy 9
 NA when local weather not available.

FLORA, IL

FLORA MUNI RNAV (GPS) Rwy 3
 RNAV (GPS) Rwy 21
 NA when local weather not available.

FOND DU LAC, WI

FOND DU LAC
 COUNTY RNAV (GPS) Rwy 36
 NA when local weather not available.

FREEPORT, IL

ALBERTUS RNAV (GPS) Rwy 6
 RNAV (GPS) Rwy 24
 VOR Rwy 24

NA when local weather not available.

NAME ALTERNATE MINIMUMS

GREEN BAY, WI

AUSTIN STRAUBEL INTL ILS or LOC Rwy 6
 LOC BC Rwy 24
 RADAR-1

NA when control tower closed.

HARRISBURG, IL

HARRISBURG-RALEIGH NDB Rwy 24
 RNAV (GPS) Rwy 6
 RNAV (GPS) Rwy 24

NA when local weather not available.

HAYWARD, WI

SAWYER COUNTY RNAV (GPS) Rwy 2
 RNAV (GPS) Rwy 20

NA when local weather not available.

Category C, 800-2¼; Category D, 1000-3.

JACKSONVILLE, IL

JACKSONVILLE MUNI RNAV (GPS) Rwy 4
 RNAV (GPS) Rwy 13
 RNAV (GPS) Rwy 22
 RNAV (GPS) Rwy 31
 VOR Rwy 13

NA when local weather not available.

JANESVILLE, WI

SOUTHERN WISCONSIN
 RGNL ILS or LOC Rwy 4¹⁴
 ILS or LOC Rwy 32²³⁴
 RNAV (GPS) Rwy 4³
 RNAV (GPS) Rwy 14³
 RNAV (GPS) Rwy 22³

¹ILS, Category D, 700-2.

²ILS, LOC, Categories A,B, 1100-2; Categories C,D, 1100-3.

³NA when local weather not available.

⁴NA when control tower closed.

JOLIET, IL

JOLIET RGNL RNAV (GPS) Rwy 13
 VOR Rwy 13

NA when local weather not available.

JUNEAU, WI

DODGE COUNTY LOC Rwy 26
 NDB Rwy 2
 NDB Rwy 20
 RNAV (GPS) Rwy 2
 RNAV (GPS) Rwy 8
 RNAV (GPS) Rwy 20
 RNAV (GPS) Rwy 26

NA when local weather not available.

23 SEP 2010 to 21 OCT 2010

23 SEP 2010 to 21 OCT 2010

NAME ALTERNATE MINIMUMS

KANKAKEE, IL

GREATER KANKAKEE RNAV (GPS) Rwy 4
RNAV (GPS) Rwy 16
RNAV (GPS) Rwy 22
RNAV (GPS) Rwy 34
VOR Rwy 4
VOR Rwy 22

NA when local weather not available.

KENOSHA, WI

KENOSHA RGNL ILS or LOC Rwy 7L¹
RNAV (GPS) Rwy 7L
RNAV (GPS) Rwy 15
RNAV (GPS) Rwy 25R
RNAV (GPS) Rwy 33
VOR Rwy 15
VOR Rwy 25R

NA when local weather not available.

¹NA when control tower closed.

LA CROSSE, WI

LA CROSSE MUNI ILS or LOC Rwy 18¹⁴
NDB Rwy 18³⁵
RNAV (GPS) Rwy 3²³
RNAV (GPS) Rwy 13³⁴
RNAV (GPS) Rwy 18³⁴
RNAV (GPS) Rwy 21³⁵
RNAV (GPS) Rwy 31³⁶
RNAV (GPS) Rwy 36³⁴
VOR Rwy 13³⁴
VOR Rwy 36¹⁴

¹NA when control tower closed.

²Categories A,B, 1100-2; Category C, 1100-3;
Category D, 1200-3.

³NA when local weather not available.

⁴Category C, 800-2½; Category D, 1200-3.

⁵Categories A,B, 1200-2; Categories C,D,
1200-3.

⁶Categories A,B, 1000-2; Category C, 1000-3;
Category D, 1200-3.

LAND O'LAKES, WI

KING'S LAND O'LAKES ... RNAV (GPS) Rwy 14
RNAV (GPS) Rwy 32

NA when local weather not available.

LAWRENCEVILLE, IL

LAWRENCEVILLE-VINCENNES

INTL VOR Rwy 36
Category D, 800-2½.

LINCOLN, IL

LOGAN COUNTY NDB Rwy 21¹
RNAV (GPS) Rwy 3
RNAV (GPS) Rwy 21
VOR Rwy 3

NA when local weather not available.

¹Category C, 800-2½, Category D, 800-2½.

NAME ALTERNATE MINIMUMS

LITCHFIELD, IL

LITCHFIELD MUNI RNAV (GPS) Rwy 18
RNAV (GPS) Rwy 36

NA when local weather not available.

LONE ROCK, WI

TRI-COUNTY RGNL RNAV (GPS) Rwy 9¹
RNAV (GPS) Rwy 27¹
VOR-A²

NA when local weather not available.

¹Categories A,B, 900-2; Category C, 900-2½.

²Categories A,B, 1000-2; Category C 1000-2½.

MACOMB, IL

MACOMB MUNI LOC Rwy 27¹
RNAV (GPS) Rwy 9
RNAV (GPS) Rwy 27
VOR/DME-A

NA when local weather not available.

¹NA when FBO closed.

MADISON, WI

DANE COUNTY RGNL-

TRUAX FIELD ILS or LOC Rwy 21¹
ILS or LOC/DME Rwy 18¹²
ILS or LOC/DME Rwy 36¹²
RADAR-1²
VOR/DME or TACAN Rwy 14²
VOR/DME or TACAN Rwy 18²
VOR/DME or TACAN Rwy 32²
VOR Rwy 21³

¹NA when control tower closed.

²Category E, 900-3.

³Categories A,B, 900-2; Category C, 900-2½;
Category D, 900-2½.

MANITOWOC, WI

MANITOWOC COUNTY ILS or LOC Rwy 17¹
RNAV (GPS) Rwy 17¹
RNAV (GPS) Rwy 35¹
VOR Rwy 17
VOR/DME Rwy 35¹

Category D, 800-2½.

¹NA when local weather not available.

MARION, IL

WILLIAMSON COUNTY

RGNL ILS or LOC Rwy 20¹
NDB Rwy 20
RNAV (GPS) Rwy 2
RNAV (GPS) Rwy 20
VOR Rwy 2
VOR Rwy 20²

NA when local weather not available.

¹NA when control tower closed.

²Category C, 800-2½; Category D, 800-2½.

NAME ALTERNATE MINIMUMS
MARSHFIELD, WI

MARSHFIELD MUNI **NDB or GPS Rwy 4¹**
NDB Rwy 16¹
RNAV (GPS) Rwy 16²
RNAV (GPS) Rwy 34²

¹NA except for operators with approved weather reporting service.

²NA when local weather not available.

MATTOON-CHARLESTON, IL

COLES COUNTY

MEMORIAL **ILS or LOC Rwy 29**
NDB Rwy 29
RNAV (GPS) Rwy 24
RNAV (GPS) Rwy 29
VOR Rwy 6
VOR Rwy 24

NA when local weather not available.

MEDFORD, WI

TAYLOR COUNTY **RNAV (GPS) Rwy 27**
NA when local weather not available.

MENOMONIE, WI

MENOMONIE MUNI-SCORE

FIELD **RNAV (GPS) Rwy 9**
RNAV (GPS) Rwy 27
VOR/DME Rwy 27

NA when local weather not available.

MERRILL, WI

MERRILL MUNI **RNAV (GPS) Rwy 7**
RNAV (GPS) Rwy 25

NA when local weather not available.

MILWAUKEE, WI

LAWRENCE J. TIMMERMAN **LOC Rwy 15L**
VOR or GPS Rwy 4L
VOR or GPS Rwy 15L

NA when control tower closed.

MINOCQUA-WOODRUFF, WI

LAKELAND/NOBLE F. LEE

MEMORIAL FIELD **RNAV (GPS) Rwy 18**
RNAV (GPS) Rwy 28
RNAV (GPS) Rwy 36

NA when local weather not available.

MOLINE, IL

QUAD-CITY INTL **ILS or LOC Rwy 9¹**
ILS or LOC Rwy 27¹²³
RNAV (GPS) Rwy 13³
RNAV (GPS) Rwy 31³

¹NA when control tower closed.

²ILS, Category D, 700-2.

³NA when local weather not available.

NAME ALTERNATE MINIMUMS
MONROE, WI

MONROE MUNI **RNAV (GPS) Rwy 12**
RNAV (GPS) Rwy 30
VOR/DME Rwy 30

NA when local weather not available.

MORRIS, IL

MORRIS MUNI-JAMES R

WASHBURN FIELD **RNAV (GPS) Rwy 36**
NA when local weather not available.

MOSINEE, WI

CENTRAL WISCONSIN **ILS or LOC Rwy 8¹**
ILS or LOC Rwy 35

NA when control tower closed.

¹NA when local weather not available.

MOUNT CARMEL, IL

MOUNT CARMEL MUNI **RNAV (GPS) Rwy 4**
RNAV (GPS) Rwy 22

NA when local weather not available.

MOUNT VERNON, IL

MOUNT VERNON **ILS Rwy 23¹²**
RNAV (GPS) Rwy 5³
RNAV (GPS) Rwy 23³

¹NA between 2000-0630 local time.

²ILS, Category D, 700-2.

³NA when local weather not available.

NEW RICHMOND, WI

NEW RICHMOND RGNL . **RNAV (GPS) Rwy 14**
RNAV (GPS) Rwy 32

NA when local weather not available.

OLNEY-NOBLE, IL

OLNEY-NOBLE **NDB Rwy 3**
RNAV (GPS) Rwy 3
RNAV (GPS) Rwy 11
VOR/DME-A

NA when local weather not available.

OSCEOLA, WI

L O SIMENSTAD MUNI ... **RNAV (GPS) Rwy 28**
NA when local weather not available.

OSHKOSH, WI

WITTMAN RGNL **ILS or LOC Rwy 36¹**
LOC/DME BC Rwy 18¹
RNAV (GPS) Rwy 9²
RNAV (GPS) Rwy 18²
RNAV (GPS) Rwy 27²
RNAV (GPS) Rwy 36¹
VOR Rwy 9²
VOR Rwy 18²³

¹NA when control tower closed.

²NA when local weather not available.

³Category D, 800-2¼.

ALTERNATE MINS

M6

NAME ALTERNATE MINIMUMS
PARIS, IL
 EDGAR COUNTY RNAV (GPS) Rwy 9
 RNAV (GPS) Rwy 27
 VOR/DME-A
 NA when local weather not available.

PEORIA, IL
 GENERAL DOWNING-
 PEORIA INTL ILS or LOC Rwy 4
 ILS or LOC Rwy 31
 RNAV (GPS) Rwy 4
 RNAV (GPS) Rwy 13
 RNAV (GPS) Rwy 22
 RNAV (GPS) Rwy 31
 VOR/DME or TACAN Rwy 31
 NA when local weather not available.

PERU, IL
 ILLINOIS VALLEY RGNL-WALTER A.
 DUNCAN FIELD RNAV (GPS) Rwy 18
 RNAV (GPS) Rwy 36
 NA when local weather not available.

PHILLIPS, WI
 PRICE COUNTY RNAV (GPS) Rwy 1
 RNAV (GPS) Rwy 19
 NA when local weather not available.

PLATTEVILLE, WI
 PLATTEVILLE MUNI RNAV (GPS) Rwy 7
 RNAV (GPS) Rwy 15
 RNAV (GPS) Rwy 25
 RNAV (GPS) Rwy 33
 NA when local weather not available.

PONTIAC, IL
 PONTIAC MUNI RNAV (GPS) Rwy 6
 RNAV (GPS) Rwy 24
 VOR Rwy 24
 NA when local weather not available.

PRAIRIE DU CHIEN, WI
 PRAIRIE DU CHIEN MUNI ... VOR/DME Rwy 29
 Category A/B 1000-2, Category C/D 1200-3.

QUINCY, IL
 QUINCY RGNL-
 BALDWIN FIELD RNAV (GPS) Rwy 4
 RNAV (GPS) Rwy 13
 RNAV (GPS) Rwy 18
 RNAV (GPS) Rwy 22
 RNAV (GPS) Rwy 31
 RNAV (GPS) Rwy 36
 VOR Rwy 4
 VOR/DME Rwy 22
 NA when local weather not available.

NAME ALTERNATE MINIMUMS
RACINE, WI
 JOHN H. BATTEN RNAV (GPS) Rwy 4
 RNAV (GPS) Rwy 22
 RNAV (GPS) Rwy 32
 VOR Rwy 4
 NA when local weather not available.

RANTOUL, IL
 RANTOUL NATL AVN CNTR-
 FRANK ELLIOTT FLD RNAV (GPS) Rwy 9
 RNAV (GPS) Rwy 27
 NA when local weather not available.

RHINELANDER, WI
 RHINELANDER-
 ONEIDA COUNTY RNAV (GPS) Rwy 9
 RNAV (GPS) Rwy 15
 RNAV (GPS) Rwy 27
 RNAV (GPS) Rwy 33
 NA when local weather not available.

RICE LAKE, WI
 RICE LAKE REGIONAL-
 CARL'S FIELD ILS or LOC Rwy 1¹
 RNAV (GPS) Rwy 1
 RNAV (GPS) Rwy 19
 VOR Rwy 1
 VOR/DME Rwy 19
 NA when local weather not available.

¹ILS, Category D, 700-2.

SHEBOYGAN, WI
 SHEBOYGAN COUNTY
 MEMORIAL RNAV (GPS) Rwy 3
 RNAV (GPS) Rwy 13
 RNAV (GPS) Rwy 21
 RNAV (GPS) Rwy 31
 VOR Rwy 3¹
 VOR Rwy 21
 NA when local weather not available.

¹Categories A, B, 1000-2; Category C, 1000-2½; Category D, 1000-3.

SPARTA, IL
 SPARTA COMMUNITY-
 HUNTER FIELD RNAV (GPS) Rwy 36
 NA when local weather not available.

23 SEP 2010 to 21 OCT 2010

23 SEP 2010 to 21 OCT 2010

NAME ALTERNATE MINIMUMS

SPRINGFIELD, IL

ABRAHAM LINCOLN

CAPITAL ILS or LOC Rwy 4¹²

ILS or LOC Rwy 22¹²

RADAR-1²³

RNAV (GPS) Rwy 4

RNAV (GPS) Rwy 13

RNAV (GPS) Rwy 22

RNAV (GPS) Rwy 31

VOR/DME Rwy 4

VOR/DME Rwy 13

VOR/DME Rwy 22

VOR/DME Rwy 31

NA when local weather not available.

¹ILS, Category D, 700-2.

²NA when control tower closed.

³Category E, 800-2¼.

STERLING ROCKFALLS, IL

WHITESIDE CO-

JOSEPH H BITTORF FIELD NDB Rwy 7

RNAV (GPS) Rwy 7

RNAV (GPS) Rwy 25

NA when local weather not available.

STEVENS POINT, WI

STEVENS POINT

MUNI RNAV (GPS) Rwy 3

RNAV (GPS) Rwy 12

RNAV (GPS) Rwy 21

RNAV (GPS) Rwy 30

VOR/DME Rwy 3

VOR/DME Rwy 21

VOR/DME Rwy 30

Category D, 800-2¼.

NA when local weather not available.

STURGEON BAY, WI

DOOR COUNTY

CHERRYLAND RNAV (GPS) Rwy 2

RNAV (GPS) Rwy 20

NA when local weather not available.

TAYLORVILLE, IL

TAYLORVILLE MUNI NDB Rwy 18

RNAV (GPS) Rwy 18

RNAV (GPS) Rwy 36

NA when local weather not available.

NAME ALTERNATE MINIMUMS

TOMAHAWK, WI

TOMAHAWK RGNL RNAV (GPS) Rwy 9

RNAV (GPS) Rwy 27

NA when local weather not available.

WATERTOWN, WI

WATERTOWN MUNI RNAV (GPS) Rwy 5¹²

RNAV (GPS) Rwy 11¹³

RNAV (GPS) Rwy 23¹²

RNAV (GPS) Rwy 29¹²

VOR/DME Rwy 29²
¹NA when local weather not available.

²Category D, 900-3.

³Categories A, B, 900-2; Category C, 900-2¼;

Category D, 900-3.

WAUKESHA, WI

WAUKESHA COUNTY ILS or LOC Rwy 10¹²

RNAV (GPS) Rwy 10¹³

RNAV (GPS) Rwy 28¹³

VOR-A¹³
¹NA when local weather not available.

²ILS, Category C, 700-2; Category D, 700-2¼.

LOC, Category D, 800-2¼.

³Category D, 800-2¼.

WAUPACA, WI

WAUPACA MUNI RNAV (GPS) Rwy 10

RNAV (GPS) Rwy 28

NA when local weather not available.

WAUSAU, WI

WAUSAU DOWNTOWN .. RNAV (GPS) Rwy 12

NA when local weather not available.

WEST BEND, WI

WEST BEND MUNI RNAV (GPS) Rwy 6

RNAV (GPS) Rwy 13

RNAV (GPS) Rwy 24

RNAV (GPS) Rwy 31

VOR Rwy 24

NA when local weather not available.

RADAR MINS

10098

RADAR INSTRUMENT APPROACH MINIMUMS

CHAMPAIGN/URBANA, IL Amdt. 6A, OCT 28, 2002 (FAA)

ELEV 754

UNIVERSITY OF ILLINOIS-WILLARD

RADAR - 316°-135° 121.35 285.65 136°-315° 132.85 291.0 **A**

	RWY	GS/TCH/RPI	CAT	DA/ MDA-VIS	HAT/ HATH/ HAA	CEIL-VIS	CAT	DA/ MDA-VIS	HAT/ HATH/ HAA	CEIL-VIS
ASR	14L		ABC	1100-1	346	(400-1)	D	1100-1½	346	(400-1½)
	32R		ABC	1100/24	351	(400-½)	D	1100/50	351	(400-1)
CIRCLING			A	1160-1	406	(500-1)	B	1220-1	466	(500-1)
			C	1220-1½	466	(500-1½)	D	1320-2	566	(600-2)

When control tower closed, ASR not authorized.

Category D S-32R visibility increased to RVR 6000 for inoperative MALSR.

CHICAGO/ROCKFORD, IL Amdt. 10A, DEC 21, 2006 (FAA)

ELEV 742

CHICAGO/ ROCKFORD INTL

RADAR - 121.0 327.0

	RWY	GS/TCH/RPI	CAT	DA/ MDA-VIS	HAT/ HATH/ HAA	CEIL-VIS	CAT	DA/ MDA-VIS	HAT/ HATH/ HAA	CEIL-VIS
ASR	1		AB	1160/24	431	(500-½)	C	1160/40	431	(500-¾)
			D	1160/50	431	(500-1)				
	7		AB	1180/24	438	(500-½)	C	1180/40	438	(500-¾)
			D	1180/50	438	(500-1)				
	25		AB	1220-1	485	(500-1)	C	1220-1¼	485	(500-1¼)
			D	1220-1½	485	(500-1½)				
CIRCLING			A	1220-1	478	(500-1)	b	1240-1	498	(500-1)
			C	1240-1½	498	(500-1½)	D	1320-2	578	(600-2)

GREEN BAY, WI

Amdt. 9C, JUL 6, 2006 (FAA)

ELEV 695

AUSTIN STRAUBEL INTL

RADAR - 119.4 338.2 **▽ A**

	RWY	GS/TCH/RPI	CAT	DA/ MDA-VIS	HAT/ HATH/ HAA	CEIL-VIS	CAT	DA/ MDA-VIS	HAT/ HATH/ HAA	CEIL-VIS
ASR	36		AB	1100/24	418	(500-½)	C	1100/40	418	(500-¾)
			D	1100/50	418	(500-1)				
	24		AB	1120-1	438	(500-1)	C	1120-1¼	438	(500-1¼)
			D	1120-1½	438	(500-1½)				
	18		AB	1220-1	525	(600-1)	C	1220-1½	525	(600-1½)
			D	1220-1¼	525	(600-1¼)				
	6		AB	1220/24	528	(600-½)	C	1220/50	528	(600-1)
			D	1220/60	528	(600-1¼)				
CIRCLING			AB	1220-1	525	(600-1)	C	1220-1½	525	(600-1½)
			D	1260-2	565	(600-2)				

For inoperative MALSR, increase ASR S-36 Category D visibility to RVR 6000.

When control tower closed, ASR not authorized.

EC-3

RADAR INSTRUMENT APPROACH MINIMUMS

RADAR MINS

10098

N1

23 SEP 2010 to 21 OCT 2010

23 SEP 2010 to 21 OCT 2010


RADAR INSTRUMENT APPROACH MINIMUMS

MADISON, WI

Amdt. 17A, April 8, 2010 (FAA)

ELEV 887

DANE COUNTY RGNL-TRUAX FIELD

RADAR - 135.45 343.7 

	RWY	GS/TCH/RPI	CAT	DA/ MDA-VIS	HAT/ HATH/ HAA CEIL-VIS	CAT	DA/ MDA-VIS	HAT/ HATH/ HAA CEIL-VIS
ASR	21		AB	1360-½	473 (500-½)	C	1360-¾	473 (500-¾)
			D	1360-1	473 (500-1)	E	1360-1¼	473 (500-1¼)
	36		AB	1360/24	498 (500-½)	C	1360/50	498 (500-1)
			D	1360/60	498 (500-1¼)	E	1360/1½	498 (500-1½)
	14		AB	1360-1	499 (500-1)	C	1360-1¼	499 (500-1¼)
			D	1360-1½	499 (500-1½)	E	1360-1¾	499 (500-1¾)
	18		AB	1360/24	500 (600-½)	C	1360/40	500 (600-¾)
			D	1360/50	500 (600-1)	E	1360/60	500 (600-1¼)
	32		AB	1440-1	579 (600-1)	C	1440-1½	579 (600-1½)
			D	1440-1¾	579 (600-1¾)	E	1440-2	579 (600-2)
CIRCLING			A	1440-1	553 (600-1)	B	1460-1	573 (600-1)
			C	1460-1½	573 (600-1½)	D	1460-2	573 (600-2)
			E	1700-3	813 (900-3)			

When control tower closed, ASR procedures not authorized.

SPRINGFIELD, IL

Amdt. 9, OCT 27, 2005 (FAA)

ELEV 597

ABRAHAM LINCOLN CAPITAL

RADAR - 118.6 323.0

	RWY	GS/TCH/RPI	CAT	DA/ MDA-VIS	HAT/ HATH/ HAA CEIL-VIS	CAT	DA/ MDA-VIS	HAT/ HATH/ HAA CEIL-VIS
ASR	22		ABC	960-½	363 (400-½)	DE	960-1	363 (400-1)
	31		AB	1240-½	650 (700-1)	C	1240-1¼	650 (700-1¼)
			D	1240-1½	650 (700-1½)	E	1240-1¾	650 (700-1¾)
	4		ABC	960/24	368 (400-½)	DE	960/50	368 (400-1)
CIRCLING			AB	1240-1	643 (700-1)	C	1240-1¾	643 (700-1¾)
			D	1240-2	643 (700-2)	E	1380-2¾	783 (800-2¾)

If local altimeter setting not received, use Logan County altimeter setting and increase all MDAs 60 feet.

For inoperative MALSR; increase S-4 categories D and E visibility to 6000; increase S-22 categories D and E visibility to 1¼; increase S-31 category E visibility to 2¼.

When control tower closed, ASR not authorized.

RADAR INSTRUMENT APPROACH MINIMUMS

RADAR MINS

INSTRUMENT APPROACH PROCEDURE CHARTS

IFR TAKE-OFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

Civil Airports and Selected Military Airports

ALL USERS: Airports that have Departure Procedures (DPs) designed specifically to assist pilots in avoiding obstacles during the climb to the minimum enroute altitude, and/or airports that have civil IFR take-off minimums other than standard, are listed below. Take-off Minimums and Departure Procedures apply to all runways unless otherwise specified. Altitudes, unless otherwise indicated, are minimum altitudes in MSL.

DPs specifically designed for obstacle avoidance are referred to as Obstacle Departure Procedures (ODPs) and are described below in text, or published separately as a graphic procedure. If the (Obstacle) DP is published as a graphic procedure, its name will be listed below, and it can be found in either this volume (civil), or a separate Departure Procedure volume (military), as appropriate. Users will recognize graphic obstacle DPs by the term "(OBSTACLE)" included in the procedure title; e.g., TETON TWO (OBSTACLE). If not assigned a SID or radar vector by ATC, an ODP may be flown without ATC clearance to ensure obstacle clearance.

Graphic DPs designed by ATC to standardize traffic flows, ensure aircraft separation and enhance capacity are referred to as "Standard Instrument Departures (SIDs)". SIDs also provide obstacle clearance and are published under the appropriate airport section. ATC clearance must be received prior to flying a SID.

CIVIL USERS NOTE: Title 14 Code of Federal Regulations Part 91 prescribes standard take-off rules and establishes take-off minimums for certain operators as follows: (1) Aircraft having two engines or less - one statute mile. (2) Aircraft having more than two engines - one-half statute mile. These standard minima apply in the absence of any different minima listed below.

MILITARY USERS NOTE: Civil (nonstandard) take-off minima are published below. For military take-off minima, refer to appropriate service directives.

NAME TAKE-OFF MINIMUMS

ALTON/ST. LOUIS, IL

ST. LOUIS RGNL (ALN)

AMDT 1 10266 (FAA)

NOTE: **Rwy 11**, tree and pole beginning 1066' from DER, 668' left of centerline, up to 76' AGL/575' MSL. **Rwy 17**, multiple trees beginning 1274' from DER, 282' left of centerline, up to 67' AGL/606' MSL. Multiple trees beginning 1624' from DER, 115' right of centerline, up to 102' AGL/621' MSL. **Rwy 29**, multiple trees and floodlight on hangar beginning 665' from DER, 406' left of centerline, up to 99' AGL/618' MSL. Multiple trees beginning 1570' from DER, 197' right of centerline, up to 75' AGL/604' MSL. **Rwy 35**, multiple trees and light standard beginning 823' from DER, 478' left of centerline, up to 67' AGL/596' MSL. Multiple trees beginning 1035' from DER, 15' right of centerline, up to 43' AGL/572' MSL.

AMERY, WI

AMERY MUNI (AHH)

AMDT 1 05076 (FAA)

TAKE-OFF MINIMUMS: **Rwy 18**, 400-1 or std. with a min. climb of 335' per NM to 1600

NOTE: **Rwy 18**, towers 6684' from departure end of runway, 2072' left of centerline, 140' AGL/1340' MSL.

NAME TAKE-OFF MINIMUMS

ANTIGO, WI

LANGLADE COUNTY (AIG)

ORIG 08101 (FAA)

TAKE-OFF MINIMUMS: **Rwy 8**, 400-2 or std. w/ min. climb of 221' per NM to 1900, or alternatively, with std. takeoff min. and a normal 200'/NM climb gradient, takeoff must occur no later than 1800' prior to departure end of runway.

NOTE: **Rwy 8**, Trees beginning 3692' from departure end of runway, 538' right of centerline, up to 100' AGL/1799' MSL. Vehicle and road 796' from departure end of runway, 27' right of centerline, 15' AGL/1544' MSL. **Rwy 16**, Vehicle and road beginning 150' from departure end of runway, 212' left of centerline, 15' AGL/1539' MSL. **Rwy 26**, Trees beginning 2447' from departure end of runway, on centerline, up to 100' AGL/1614' MSL.

APPLETON, WI

OUTAGAMIE COUNTY RGNL (ATW)

ORIG 10154 (FAA)

NOTE: **Rwy 3**, antenna on building, 266' from DER, 259' right of centerline, 12' AGL/891' MSL. Trees beginning 545' from DER, 467' right of centerline, up to 42' AGL/911' MSL. **Rwy 12**, tree, 85' from DER, 310' left of centerline, 13' AGL/861' MSL. **Rwy 30**, trees beginning 568' from DER, 575' right of centerline, up to 21' AGL/950' MSL.

ASHLAND, WI

JOHN F. KENNEDY MEMORIAL (ASX)
AMDT 1 08157 (FAA)

NOTE: **Rwy 2**, trees beginning 52' from departure end of runway, 209' right of centerline, up to 100' AGL/939' MSL. Trees beginning 119' from departure end of runway, 110' left of centerline, up to 100' AGL/929' MSL. Antenna 2411' from departure end of runway, 920' left of centerline, 117' AGL/926' MSL. **Rwy 13**, trees beginning 44' from departure end of runway, 161' right of centerline, up to 100' AGL/878' MSL. Trees beginning 831' from departure end of runway, 241' left of centerline, up to 100' AGL/868' MSL. **Rwy 20**, truck on road 329' from departure end of runway, 576' right of centerline, 15' AGL/844' MSL. Trees beginning 206' from departure end of runway, 229' right of centerline, up to 100' AGL/893' MSL. Trees beginning 1152' from departure end of runway, 295' left of centerline, up to 100' AGL/893' MSL. **Rwy 31**, truck on road 65' from departure end of runway, 325' right and 331' left of centerline, 15' AGL/844' MSL. Trees beginning 90' from departure end of runway, 172' right of centerline, up to 100' AGL/919' MSL. Trees beginning 34' from departure end of runway, 222' left of centerline, up to 100' AGL/838' MSL.

BARABOO, WI

BARABOO WISCONSIN DELLS (DLL)
ORIG 85017 (FAA)

TAKE-OFF MINIMUMS: **Rwy 1**, 300-1.

DEPARTURE PROCEDURE: **Rwy 14**, southeastbound departures, climbing left turn to heading 070° intercept DLL R-090, climb to 3200 before proceeding southeastbound. **Rwys 19, 32**, southeastbound departures (090° CW 180°) climb on runway heading to 3200 before proceeding on course.

BELLEVILLE, IL

SCOTT AFB, MID AMERICA (BLV)
ORIG 10210 (FAA)

TAKE-OFF MINIMUMS: **Rwy 32L**, 300-1½ or std. w/ a min. climb of 250' per NM to 800.

NOTE: **Rwy 32L**, tree 1.24 NM from DER, 2285' left of centerline, 100' AGL/699' MSL. **Rwy 32R**, trees beginning 352' from DER, 198' left of centerline, up to 77' AGL/501' MSL. Trees beginning 1349' from DER, 439' right of centerline, up to 94' AGL/516' MSL.

BLACK RIVER FALLS, WI

BLACK RIVER FALLS AREA (BCK)
AMDT 1 (FAA)

DEPARTURE PROCEDURE: **Rwys 8, 26**, climb runway heading to 1400 before proceeding on course.

BLOOMINGTON-NORMAL, IL

CENTRAL IL RGNL ARPT AT BLOOMINGTON-NORMAL (BMI)
ORIG 07074 (FAA)

DEPARTURE PROCEDURE: **Rwy 20**, climb heading 198° to 1400 before turning left.

NOTE: **Rwy 2**, pole 1638' from departure end of runway, 908' right of centerline, 78' AGL/922' MSL. **Rwy 11**, tree 2069' from departure end of runway, 1031' right of centerline, 60' AGL/933' MSL.

BOLINGBROOK, IL

BOLINGBROOK'S CLOW INTL (1C5)
ORIG 10098 (FAA)

NOTE: **Rwy 18**, multiple buildings and trees beginning 84' from DER, 349' left of centerline, up to 100' AGL/769' MSL. Trees 774' from DER, 163' right of centerline, up to 100' AGL/749' MSL. **Rwy 36**, building and trees beginning 288' from DER, 40' left of centerline, up to 100' AGL/775' MSL. Multiple buildings and sign beginning at DER, 73' right of centerline, up to 50' AGL/700' MSL.

BOSCOBEL, WI

BOSCOBEL (OVS)
AMDT 1 07298 (FAA)

TAKE-OFF MINIMUMS: **Rwy 2**, 600-3 or std. w/ min. climb of 447' per NM to 1300. **Rwy 7**, std. w/ min. climb of 548' per NM to 1500, or 1200-2½ for climb in visual conditions. **Rwy 20**, std. w/ min. climb of 672' per NM to 1400 or 1200-2½ for climb in visual conditions. **Rwy 25**, std. w/ min. climb of 381' per NM to 1300 or 1200-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 2**, climb heading 017° to 1300 before turning south. **Rwy 7**, climb heading 067° to 1500 before turning south, or for climb in visual conditions, cross Boscobel Airport at or above 1700 before proceeding on course. **Rwy 20**, climb heading 197° to 1500 before turning east, or for climb in visual conditions, cross Boscobel Airport at or above 1700 before proceeding on course. **Rwy 25**, climb heading 247° to 1500 before proceeding on course, or for climb in visual conditions, cross Boscobel Airport at or above 1700 before proceeding on course.

NOTE: **Rwy 2**, trees 1.3 NM from departure end of runway, 2536' left of centerline, 100' AGL/1118' MSL. Trees 1.6 NM from departure end of runway, 1276' left of centerline, 100' AGL/1127' MSL. Trees 1750' from departure end of runway, 470' left of centerline, 100' AGL/835' MSL. **Rwy 7**, trees 1.2 NM from departure end of runway, 2270' right of centerline, 100' AGL/1167' MSL. Trees 1290' from departure end of runway, 580' left of centerline, 100' AGL/726' MSL. Tree 13' from departure end of runway, 489' left of centerline, 10' AGL/690' MSL. Trees 1988' from departure end of runway, 250' left of centerline, 40' AGL/738' MSL. **Rwy 20**, tower 1.7 NM from departure end of runway, 640' right of centerline, 205' AGL/1196' MSL. Tower 3070' from departure end of runway, 865' left of centerline, 100' AGL/790' MSL. **Rwy 25**, tree 1.6 NM from departure end of runway, 2290' right of centerline, 100' AGL/1137' MSL. Tree 2.1 NM from departure end of runway, 1110' right of centerline, 100' AGL/1066' MSL. Trees 958' from departure end of runway, 478' right of centerline, 40' AGL/737' MSL. Trees 1165' from departure end of runway, 701' left of centerline, 40' AGL/731' MSL. Tree 1.6 NM from departure end of runway, 2290' right of centerline, 100' AGL/1137' MSL.

BOYCEVILLE, WI

BOYCEVILLE MUNI (3T3)
ORIG 02332 (FAA)

TAKE-OFF MINIMUMS: **Rwy 8**, 1300-2 or std. with a min. climb of 340' per NM to 2700.

NOTE: **Rwy 8**, tower 6.44 NM from departure end of runway, 3378' right of centerline, 1200' AGL/2180' MSL.

BURLINGTON, WI

BURLINGTON MUNI (BUU)
AMDT 2 86128 (FAA)

TAKE-OFF MINIMUMS: **Rwy 29**, 300-1 or std. with a min. climb of 260' per NM to 1100.
DEPARTURE PROCEDURE: **Rwy 11**, climb runway heading to 1400 before turning.

CABLE, WI

CABLE UNION (3CU)
AMDT 4 99308 (FAA)

DEPARTURE PROCEDURE: **Rwy 16**, west departures, climb runway heading to 1900 before turning westbound.

CAHOKIA/ST. LOUIS, IL

ST. LOUIS DOWNTOWN (CPS)
AMDT 8 10266 (FAA)

TAKEOFF MINIMUMS: **Rwy 5**, 200-1 ¼ or std. with a min. climb of 343' per NM to 700. **Rwy 30L**, 400-2½ or std. with a min. climb of 220' per NM to 900, alternatively, with standard takeoff minimums and a normal 200' per NM climb gradient, takeoff must occur no later than 2100' prior to DER.

DEPARTURE PROCEDURE: **Rwy 5**, climb on heading 047° to 900 before turning left. **Rwys 12L, 12R**, climb on heading 122° to 1000 before turning left. **Rwy 23**, climb on heading 227° to 2000 before turning. **Rwys 30L, 30R**, climb on heading 302° to 1600 before turning.

NOTE: **Rwy 5**, obstruction light on transmission tower 1649' from DER, 19' left of centerline, 79' AGL/482' MSL. Transmission tower 324' from DER, 79' right of centerline, 78' AGL/487' MSL. **Rwy 12L**, tree 1629' from DER, 144' left of centerline, 45' AGL/453' MSL. **Rwy 12R**, tree 3822' from DER, 20' left of centerline, 94' AGL/509' MSL. Tree 2082' from DER, 927' right of centerline, 69' AGL/486' MSL. **Rwy 23**, multiple trees beginning 815' from DER, 69' left of centerline, up to 56' AGL/470' MSL. Multiple trees beginning 740' from DER, 4' right of centerline, up to 78' AGL/492' MSL. **Rwy 30L**, multiple trees beginning 2510' from DER, 503' left of centerline, up to 107' AGL/521' MSL. Multiple trees beginning 737' from DER, 32' right of centerline, up to 99' AGL/508' MSL.

CANTON, IL

INGERSOLL (CTK)
ORIG 08213 (FAA)

NOTE: **Rwy 9**, tree 1335' from departure end of runway, 772' right of centerline, 100' AGL/749' MSL. **Rwy 36**, tree 1162' from departure end of runway, 486' right of centerline, 100' AGL/739' MSL.

CARBONDALE/MURPHYSBORO, IL

SOUTHERN ILLINOIS (MDH)
ORIG 10042 (FAA)

TAKE-OFF MINIMUMS: **Rwys 18L, 18R**, std. w/ min. climb of 225' per NM to 1100, or 900-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwys 18L, 18R**, for climb in visual conditions, cross Southern Illinois airport at or above 1200 MSL before proceeding on course.

NOTE: **Rwy 6**, road 179' from DER, 214' left of centerline, 418' MSL. **Rwy 18L**, tree 3235' from DER, 696' right of centerline, 100' AGL/497' MSL. Antenna 2731' from DER, 458' left of centerline, 100' AGL/483' MSL. Tower 2780' from DER, 484' left of centerline, 100' AGL/483' MSL. Pole 1166' from DER, 192' right of centerline, 100' AGL/439' MSL. **Rwy 24**, trees beginning 633' from DER left and right of centerline up to 100' AGL/485' MSL. **Rwy 36L**, trees beginning 480' from DER left and right of centerline up to 100' AGL/479' MSL.

CARM, IL

CARM MUNI (CUL)
AMDT 1 83356 (FAA)

DEPARTURE PROCEDURE: **Rwy 36**, climb runway heading to 1000 before turning westbound.

CASEY, IL

CASEY MUNI (1H8)
AMDT 4 10210 (FAA)

TAKE-OFF MINIMUMS: **Rwys 18, 36**, NA- Environmental.

NOTE: **Rwy 4**, tank 4010' from DER, 1464' right of centerline, 140' AGL/785' MSL. Vehicle on road 651' from DER, 539' right of centerline, 15' AGL/671' MSL. Trees 998' from DER, 463' right of centerline, 100' AGL/756' MSL. **Rwy 22**, vehicle on road 255' from DER, 399' left of centerline, 15' AGL/671' MSL. Trees 2297' from DER, 766' right of centerline, 100' AGL/756' MSL.

CENTRALIA, IL

CENTRALIA MUNI (ENL)
AMDT 1 82133 (FAA)

TAKE-OFF MINIMUMS: **Rwy 18**, 300-1.

CHAMPAIGN/URBANA, IL

UNIVERSITY OF ILLINOIS-WILLARD (CMI)
ORIG 09015 (FAA)

DEPARTURE PROCEDURE: **Rwy 4**, climb heading 041° to 1300 before turning left.

NOTE: **Rwy 4**, trees beginning 56' from departure end of runway, 23' left of centerline, up to 63' AGL/808' MSL. Trees beginning 56' from departure end of runway, 89' right of centerline, up to 98' AGL/843' MSL. **Rwy 14R**, rod on obstruction light 520' from departure end of runway, 383' left of centerline, 17' AGL/760' MSL. Glide slope 541' from departure end of runway, 439' left of centerline, 36' AGL/779' MSL. Rod on obstruction light 543' from departure end of runway, 439' left of centerline, 37' AGL/780' MSL. **Rwy 18**, Terrain beginning 2' from departure end of runway, from left to right of centerline, up to 0' AGL/749' MSL. **Rwy 32L**, terrain 20' from departure end of runway, 152' right of centerline, 0' AGL/752' MSL. Antenna on ASR 1920' from departure end of runway, 331' left of centerline, 82' AGL/831' MSL.

CHICAGO, IL

CHICAGO MIDWAY INTL (MDW)

AMDT 10 08101 (FAA)

DEPARTURE PROCEDURE: **Rwys 4L, 4R**, Climbing right turn to 2400 heading 100° before proceeding on course. **Rwys 13C, 13L, 13R**, Climb heading 135° to 1400 before turning. **Rwys 22L, 22R**, Climb heading 224° to 1300 before turning. **Rwys 31C, 31L, 31R**, Climb heading 315° to 1500 before turning.

NOTE: **Rwy 4L**, fence 18' from departure end of runway, 257' left of centerline, 12' AGL/616' MSL. Vehicle plus road 143' from departure end of runway, 163' left of centerline, 16' AGL/620' MSL. Building 251' from departure end of runway, 217' left of centerline, 26' AGL/630' MSL. Sign 1912' from departure end of runway, 330' left of centerline, 88' AGL/692' MSL. Multiple light poles and trees beginning 375' from departure end of runway, 98' right of centerline, up to 75' AGL/679' MSL.

Rwy 4R, LOC 300' from departure end of runway, on centerline, 10' AGL/614' MSL. Light pole and multiple trees beginning 40' from departure end of runway, 369' left of centerline, up to 75' AGL/679' MSL. Blast fence 277' from departure end of runway, 45' left of centerline, 9' AGL/613' MSL. Tower 3983' from departure end of runway, 1142' left of centerline, 109' AGL/708' MSL. Multiple light poles and trees beginning 96' from departure end of runway, 21' right of centerline, up to 53' AGL/657' MSL. Train beginning 1483' from departure end of runway, 570' right of centerline, 48' AGL/654' MSL. **Rwy 13C**, LOC 248' from departure end of runway, on centerline, 8' AGL/619' MSL. Building 101' from departure end of runway, 254' left of centerline, 14' AGL/625' MSL. Trees beginning 288' from departure end of runway, 459' left of centerline, up to 76' AGL/680' MSL. Trees beginning 109' from departure end of runway, 402' right of centerline, up to 86' AGL/700' MSL. **Rwy 13L**, multiple poles and trees beginning 362' from departure end of runway, 215' left of centerline, up to 71' AGL/675' MSL. Trees beginning 1136' from departure end of runway, 54' right of centerline, up to 76' AGL/680' MSL. **Rwy 13R**, wind sock 263' from departure end of runway, 256' left of centerline, 9' AGL/621' MSL. Tree 1852' from departure end of runway, 960' left of centerline, 75' AGL/661' MSL. Building 459' from departure end of runway, 594' right of centerline, 50' AGL/660' MSL. Hangar 661' from departure end of runway, 291' right of centerline, 52' AGL/661' MSL. **Rwy 22L**, multiple poles and trees beginning 74' from departure end of runway, 375' left of centerline, up to 70' AGL/689' MSL. Multiple poles and trees beginning 465' from departure end of runway, 49' right of centerline, up to 60' AGL/679' MSL. Tank 4100' from departure end of runway, 161' right of centerline, 109' AGL/728' MSL. **Rwy 22R**, multiple poles and trees beginning 575' from departure end of runway, 168' left of centerline, up to 58' AGL/677' MSL. Tank 4100' from departure end of runway, 161' left of centerline, 109' AGL/728' MSL. Fence 198' from departure end of runway, 3' right of centerline, 12' AGL/630' MSL. Trees beginning 183' from departure end of runway, 65' right of centerline, up to 72' AGL/686' MSL.

CHICAGO MIDWAY INTL (CONT)

Rwy 31C, LOC 239' from departure end of runway, on centerline, 10' AGL/617' MSL. Trees beginning 452' from departure end of runway, 454' left of centerline, up to 63' AGL/667' MSL. Spire 2207' from departure end of runway, 699' left of centerline, 78' AGL/684' MSL. Multiple poles and trees beginning 142' from departure end of runway, 28' right of centerline, up to 73' AGL/672' MSL. DME 183' from departure end of runway, 309' right of centerline, 17' AGL/624' MSL. Sign 1528' from departure end of runway, 270' right of centerline, 52' AGL/652' MSL. Tank 5576' from departure end of runway, 1430' right of centerline, 162' AGL/756' MSL. **Rwy 31L**, trees beginning 1299' from departure end of runway, 85' left of centerline, up to 53' AGL/662' MSL. Trees beginning 1779' from departure end of runway, 26' right of centerline, up to 68' AGL/667' MSL. **Rwy 31R**, multiple poles and trees beginning 379' from departure end of runway, 49' left of centerline, up to 65' AGL/664' MSL. Pole and trees beginning 70' from departure end of runway, 50' right of centerline, up to 68' AGL/667' MSL.

CHICAGO-O'HARE INTL (ORD)

AMDT 17 10210 (FAA)

TAKEOFF MINIMUMS: **Rwy 27L**, std. w/ min. climb of 220' per NM to 1700. **Rwy 27R**, std. w/ min. climb of 228' per NM to 1800. **Rwy 28**, std. w/ min. climb of 222' per NM to 1700. **Rwy 32L**, std. w/ min. climb of 240' per NM to 1800.

NOTE: **Rwy 4L**, buildings beginning 3302' from DER, 1198' right of centerline, up to 109' AGL/751' MSL. **Rwy 4R**, tree 810' from DER, 611' right of centerline, 36' AGL/675' MSL. Trees beginning 2149' from DER, 834' left of centerline, up to 100' AGL/749' MSL. Parked aircraft on ramp 153' from DER, 329' left of centerline, 80' AGL/735' MSL. **Rwy 9L**, building 2771' from DER, 1234' right of centerline, 94' AGL/745' MSL. **Rwy 9R**, street light 877' from DER, 689' right of centerline, 40' AGL/673' MSL. Tree 3492' from DER, 1054' left of centerline, 100' AGL/744' MSL. **Rwy 10**, parked aircraft on ramp 33' from DER, 440' left of centerline, 80' AGL/735' MSL. Parked aircraft on ramp 940' from DER, 641' left of centerline, 80' AGL/735' MSL. Towers beginning 2522' from DER, 983' right of centerline, up to 127' AGL/771' MSL. **Rwy 14L**, light poles beginning 981' from DER, 745' left of centerline, up to 40' AGL/684' MSL. Parked aircraft on ramp 100' from DER, 383' right of centerline, 80' AGL/729' MSL. Sign 1292' from DER, 724' right of centerline, 37' AGL/682' MSL. **Rwy 14R**, parked aircraft on ramp 1104' from DER, 766' right of centerline, 80' AGL/736' MSL. **Rwy 22R**, parked aircraft on ramp 34' from DER, 430' left of centerline, 80' AGL/736' MSL. **Rwy 27L**, parked aircraft on ramp, 70' from DER, 408' left of centerline, 80' AGL/740' MSL. Rod on tower 2591' from DER, 1181' left of centerline, 86' AGL/753' MSL. Parked aircraft on ramp 3627' from DER, 1225' right of centerline, 80' AGL/754' MSL. **Rwy 27R**, tanks beginning 1489' from DER, 886' left of centerline, 53' AGL/726' MSL. Lighted hopper and elevator 2778' from DER, 1020' left of centerline, 111' AGL/776' MSL. **Rwy 28**, trees beginning 1717' from DER, 752' left of centerline, up to 100' AGL/789' MSL. **Rwy 32L**, pole 1993' from DER, 791' left of centerline, 49' AGL/716' MSL.

23 SEP 2010 to 21 OCT 2010

23 SEP 2010 to 21 OCT 2010

CHICAGO, IL (CON'T)

LANSING MUNI (IGQ)

AMDT 5 09183 (FAA)

TAKE-OFF MINIMUMS: **Rwy 36**, 300-1¼ or std. w/ min. climb of 322' per NM to 900.

DEPARTURE PROCEDURE: **Rwy 36**, climb heading 002° to 1200 before proceeding on course.

NOTE: **Rwy 9**, poles beginning 1203' from DER, from left to right of centerline, up to 32' AGL/647' MSL. Building 1882' from DER, 964' left of centerline, 50' AGL/668' MSL. Tower 4314' from DER, 664' left of centerline, 149' AGL/764' MSL. **Rwy 18**, trees beginning 381' from DER, 440' right of centerline, up to 42' AGL/661' MSL.

Rwy 27, hangar and building beginning 254' from DER, 69' right of centerline, up to 26' AGL/641' MSL. Trees, antennas, antennas on buildings, signs, light poles, and road with vehicles beginning 326' from DER, from left to right of centerline, up to 68' AGL/683' MSL. Tank 575' from DER, 65' left of centerline, 16' AGL/630' MSL. **Rwy 36**, pole 5546' from DER, 1932' right of centerline, 164' AGL/777' MSL.

CHICAGO/AURORA, IL

AURORA MUNI (ARR)

AMDT 1 07298 (FAA)

NOTE: **Rwy 9**, vehicle on road 794' from departure end of runway, right and left of centerline, 15' AGL/734' MSL.

Multiple trees beginning 4126' from departure end of runway, on centerline, 100' AGL/819' MSL. **Rwy 15**, multiple trees, power poles and road beginning 900' from departure end of runway, 47' right of centerline, up to 100' AGL/809' MSL. Power pole 1313' from departure end of runway, 47' left of centerline, 34' AGL/733' MSL.

Rwy 18, multiple power poles beginning 1218' from departure end of runway, 190' right of centerline, up to 35' AGL/734' MSL. Multiple trees beginning 3646' from departure end of runway, on centerline up to 100' AGL/809' MSL. **Rwy 27**, vehicle on road 1020' from departure end of runway, right and left of centerline, 15' AGL/734' MSL. **Rwy 33**, multiple trees and road beginning 788' from departure end of runway, 238' right of centerline, up to 79' AGL/788' MSL. Road and power pole beginning 577' from departure end of runway, 137' left of centerline, up to 38' AGL/747' MSL. **Rwy 36**, tree, pole and fence beginning 31' from departure end of runway, 169' left of centerline, up to 35' AGL/734' MSL. Vehicle on road beginning 1099' from departure end of runway, right and left of centerline, 15' AGL/734' MSL.

CHICAGO/PROSPECT HEIGHTS/ WHEELING, IL

CHICAGO EXECUTIVE (PWK)

AMDT 2 04330 (FAA)

TAKE-OFF MINIMUMS: **Rwy 24**, 300-1 or std. with min. climb of 286' per NM to 900.

NOTE: **Rwy 6**, tree 226' from departure end of runway, 226' right of centerline, 51' AGL/691' MSL. **Rwy 12**, antenna 4287' from departure end of runway, 1191' right of centerline, 129' AGL/769' MSL. **Rwy 16**, tree 1572' from departure end of runway, 423' left of centerline, 62' AGL/702' MSL. Obstruction light, 393' from departure end of runway, 383' right of centerline, 14' AGL/658' MSL. **Rwy 24**, tower 2955' from departure end of runway, 990' left of centerline, 133' AGL/783' MSL. **Rwy 30**, antenna 5171' from departure end of runway, 758' right of centerline, 152' AGL/802' MSL. Tower 4865' from departure end of runway 1002' right of centerline, 131' AGL/778' MSL. **Rwy 34**, tree 479' from departure end of runway, 465' left of centerline, 79' AGL/723' MSL.

CHICAGO/ROMEOVILLE, IL

LEWIS UNIVERSITY (LOT)

AMDT 1 10154 (FAA)

TAKE-OFF MINIMUMS: **Rwy 2**, 300-1¼ or std. w/ min. climb of 420' per NM to 1200.

DEPARTURE PROCEDURE: **Rwy 2**, climb heading 016° to 1300 before turning right.

NOTE: **Rwy 2**, multiple towers, tree, and stack beginning 1196' from DER, 49' left of centerline, up to 213' AGL/876' MSL. **Rwy 9**, multiple trees and building beginning 243' from DER, 358' left of centerline, up to 64' AGL/735' MSL. Multiple light poles, trees, and sign beginning 112' from DER, 174' right of centerline, up to 77' AGL/721' MSL. **Rwy 27**, multiple trees beginning 1143' from DER, 634' right of centerline, up to 70' AGL/723' MSL.

CHICAGO/WAUKEGAN, IL

WAUKEGAN RGNL (UGN)

ORIG 91122 (FAA)

TAKE-OFF MINIMUMS: **Rwy 14**, 300-1.

CHICAGO/WEST CHICAGO, IL

DUPAGE (DPA)

ORIG 07354 (FAA)

NOTE: **Rwy 2L**, tree 2249' from departure end of runway, 1065' left of centerline, 15' AGL/831' MSL. **Rwy 2R**, tower 4561' from departure end of runway, 1540' right of centerline, 140' AGL/899' MSL. **Rwy 10**, building 631' from departure end of runway, 611' left of centerline, 15' AGL/777' MSL, tree 872' from departure end of runway, 336' left of centerline, 15' AGL/815' MSL, tree 1437' from departure end of runway, 367' left of centerline, 15' AGL/827' MSL, stack 1639' from departure end of runway, 184' left of centerline, 50' AGL/810' MSL. **Rwy 15**, road 267' from departure end of runway, 130' left of centerline, 15' AGL/815' MSL, road 467' from departure end of runway, 8' left of centerline, 15' AGL/815' MSL. Signal pole 804' from departure end of runway, 235' right of centerline, 15' AGL/800' MSL, trees beginning 1075' from departure end of runway, 133' right of centerline, 15' AGL/832' MSL. **Rwy 33**, multiple trees starting 332' from departure end of runway, 356' left and right of centerline, 15' AGL/836' MSL, obstruction light on pole 887' from departure end of runway, 149' left of centerline, 10' AGL/796' MSL, obstruction light on pole 927' from departure end of runway, 120' right of centerline, 10' AGL/793' MSL.

CLINTONVILLE, WI

CLINTONVILLE MUNI (CLI)

AMDT 1 07074 (FAA)

TAKE-OFF MINIMUMS: **Rwys 9, 27**, NA-environmental. NOTE: **Rwy 4**, trees beginning 382' from departure end of runway, 485' right of centerline, up to 100' AGL/914' MSL, elevator 1199' from departure end of runway, 300' right of centerline, up to 100' AGL/930' MSL. **Rwy 14**, trees beginning 379' from departure end of runway, 424' right of centerline, up to 100' AGL/909' MSL. **Rwy 22**, trees beginning 729' from departure end of runway, 471' right of centerline, up to 100' AGL/929' MSL. **Rwy 32**, trees beginning 1215' from departure end of runway, 426' left of centerline, up to 100' AGL/934' MSL.

DANVILLE, IL

VERMILION RGNL (DNV)
ORIG 09183 (FAA)

NOTE: **Rwy 3**, tree 2298' from departure end of runway, 725' right of centerline, 50' AGL/761' MSL. **Rwy 16**, tree 4101' from departure end of runway, 378' left of centerline, 50' AGL/789' MSL. **Rwy 21**, tree 1982' from departure end of runway, 802' left of centerline, 50' AGL/728' MSL. **Rwy 34**, tree 3460' from departure end of runway, 2' right of centerline, 50' AGL/812' MSL.

DE KALB, IL

DE KALB TAYLOR MUNI (DKB)
AMDT 4 99140 (FAA)

TAKE-OFF MINIMUMS: **Rwy 27**, 300-1.
DEPARTURE PROCEDURE: **Rwy 9**, climb runway heading to 1400 before proceeding on course.

DECATUR, IL

DECATUR (DEC)

AMDT 3 10266 (FAA)

DEPARTURE PROCEDURE: **Rwy 6**, climb heading 060° to 1700 before turning left. **Rwy 30**, climb heading 300° to 1400 before turning right. **Rwy 36**, climbing left turn to intercept AXC VORTAC R-340 to 2000 before proceeding on course.

NOTE: **Rwy 24**, pole 802' from DER, 664' left of centerline, 30' AGL/704' MSL. Trees beginning 895' from DER, 722' right of centerline, up to 88' AGL/762' MSL. **Rwy 30**, trees beginning 948' from DER, 395' left of centerline, up to 78' AGL/742' MSL. Trees beginning 1314' from DER, 57' right of centerline, up to 90' AGL/739' MSL. **Rwy 36**, trees beginning 1549' from DER, 14' left of centerline, up to 75' AGL/749' MSL. Trees beginning 460' from DER, 84' right of centerline, up to 72' AGL/751' MSL.

DEHAVAN, WI

LAKE LAWN (C59)

AMDT 1 03247 (FAA)

NOTE: **Rwy 18**, trees 150' from departure end of runway, 200' right of centerline, 56' AGL/1023' MSL. Trees 300' from departure end of runway, 200' right of centerline, 50' AGL/1017' MSL. **Rwy 36**, trees 90' from departure end of runway, 175' left of centerline, 66' AGL/1045' MSL. Poles 251' from departure end of runway, 86' right of centerline, 66' AGL/1045' MSL. Pole 90' from departure end of runway, 240' right of centerline, 60' AGL/1039' MSL. Pole 85' from departure end of runway, 170' left of centerline, 60' AGL/1039' MSL.

DIXON, IL

DIXON MUNI - CHARLES R WALGREEN
FIELD (C73)

AMDT 2 09155 (FAA)

TAKE-OFF MINIMUMS: **Rwy 12**, 600-1½ or std. w/ min. climb of 410' per NM to 1400.

DEPARTURE PROCEDURE: **Rwy 12**, climb heading 123° to 1300 before turning right.

NOTE: **Rwy 12**, T-L towers beginning 1.20 NM from DER, left and right of centerline, up to 180' AGL/1139' MSL. **Rwy 8**, vehicle on road 336' from DER, 184' right of centerline, 15' AGL/812' MSL. Road 359' from DER on centerline, 796' MSL. **Rwy 26**, trees beginning 386' from DER, 182' right and left of centerline, up to 52' AGL/833' MSL. Multiple roof tops and poles beginning 164' from DER, 360' right of centerline, up to 25' AGL/806' MSL. Stack and railroad tracks beginning 570' from DER, 304' right of centerline, up to 60' AGL/843' MSL.

EAGLE RIVER, WI

EAGLE RIVER UNION (EGV)

ORIG 06271 (FAA)

NOTE: **Rwy 4**, road 240' from departure end of runway, 559' right of centerline, 15' AGL/1654' MSL. Terrain 51' from departure end of runway, 288' right of centerline, 0' AGL/1639' MSL. **Rwy 13**, road 268' from departure end of runway, 572' left of centerline, 15' AGL/1654' MSL. **Rwy 22**, road 246' from departure end of runway, 566' right of centerline, 15' AGL/1654' MSL. Multiple trees 476' from departure end of runway, 430' right of centerline, 83' AGL/1722' MSL. Multiple trees 761' from departure end of runway, 147' left of centerline, 96' AGL/1735' MSL.

EAST TROY, WI

EAST TROY MUNI (57C)

ORIG 10210 (FAA)

TAKE-OFF MINIMUMS: **Rwys 18, 36**, NA-Environmental.

NOTE: **Rwy 8**, trees beginning 106' from DER, 45' right of centerline, up to 100' AGL/979' MSL. Trees beginning 34' from DER, 6' left of centerline, up to 100' AGL/908' MSL. **Rwy 26**, vehicle on road 346' from DER, 17' right of centerline, up to 15' AGL/865' MSL. Vehicle on road 561' from DER, 588' left of centerline, up to 15' AGL/865' MSL. Vehicle on road 607' from DER, 46' right of centerline, up to 17' AGL/867' MSL. Trees beginning 1850' from DER, 131' right of centerline, up to 100' AGL/989' MSL. Trees beginning 2870' from DER, 431' left of centerline, up to 100' AGL/959' MSL.

EAU CLAIRE, WI

CHIPPEWA VALLEY RGNL (EAU)

AMDT 2 08157 (FAA)

TAKE-OFF MINIMUMS: **Rwy 14**, 500-2 ¾ or std. w/ min. climb of 295' per NM to 1500. **Rwy 32**, 200-1 ½ or std. w/ min. climb of 270' per NM to 1200.

DEPARTURE PROCEDURE: **Rwy 14**, climb heading 138° to 2000 before proceeding on course.

Rwy 22, climb heading 224° to 1700 before proceeding on course. **Rwy 32**, climb heading 304° to 1700 before proceeding on course.

NOTE: **Rwy 4**, terrain 25' from departure end of runway, 98' left of centerline, 0' AGL/942' MSL. **Rwy 14**, trees beginning 336' from departure end of runway, 73' right of centerline, up to 62' AGL/1110' MSL. Trees beginning 999' from departure end of runway, 29' left of centerline up to 60' AGL/1159' MSL. Radio tower 2.2 NM from departure end of runway, 18' left of centerline, 455' AGL/1349' MSL. **Rwy 22**, vehicle on road and obstruction light on pole beginning 116' from departure end of runway, 426' right of centerline, up to 17' AGL/892' MSL. Trees 639' from departure end of runway, 509' left of centerline, 30' AGL/909' MSL. **Rwy 32**, trees beginning 184' from departure end of runway, 502' left of centerline, up to 67' AGL/1069' MSL. Trees beginning 562' from departure end of runway, 224' right of centerline, up to 74' AGL/933' MSL.

EFFINGHAM, IL

EFFINGHAM COUNTY MEMORIAL (1H2)

AMDT 5 10154 (FAA)

TAKE-OFF MINIMUMS: **Rwy 1**, std. w/ min. climb of 220' per NM to 1300 or 1000-2 ½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 1**, climb heading 009° to 1100 before turning left or for climb in visual conditions, cross Effingham County Memorial airport at or above 1400 before proceeding on course. **Rwy 29**, climb heading 294° to 1100 before turning right.

NOTE: **Rwy 1**, vehicles on roadway, 439' from DER, left and right of centerline, up to 15' AGL/600' MSL. Trees beginning 389' from DER, 499' right of centerline, up to 100' AGL/680' MSL. **Rwy 11**, trees beginning 2071' from DER, left and right of centerline, up to 100' AGL/670' MSL. **Rwy 19**, trees beginning 5' from DER, left and right of centerline, up to 100' AGL/670' MSL.

FAIRFIELD, IL

FAIRFIELD MUNI (FWC)

AMDT 2 99308 (FAA)

TAKE-OFF MINIMUMS: **Rwy 9**, 400-1 or std. with a min. climb of 310' per NM to 800. **Rwy 27**, 300-1 or std. with a min. climb of 320' per NM to 600.

FLORA, IL

FLORA MUNI (FOA)

AMDT 1 84047 (FAA)

DEPARTURE PROCEDURE: **Rwys 3, 33**, climb runway heading to 1100 before turning left. **Rwy 21**, climb runway heading to 1100 before turning right.

FOND DU LAC, WI

FOND DU LAC COUNTY (FLD)

AMDT 1A 10098 (FAA)

DEPARTURE PROCEDURE: **Rwy 9**, climb runway heading to 2000 before turning north. **Rwy 36**, climb runway heading to 2000 before turning east.

NOTE: **Rwy 9**, control tower 190' from DER, 409' right of centerline, 29' AGL/816' MSL.

FREEPORT, IL

ALBERTUS (FEP)

ORIG 07130 (FAA)

TAKE-OFF MINIMUMS: **Rwys 13, 18, 31, 36**, NA-Environmental.

NOTE: **Rwy 24**, multiple trees beginning 446' from departure end of runway, 450' right of centerline, up to 67' AGL/903' MSL.

FRIENDSHIP (ADAMS), WI

ADAMS CO. LEGION FIELD (63C)

AMDT 1 02164 (FAA)

TAKE-OFF MINIMUMS: **Rwys 8, 26**, NA - unsurveyed turf runways. **Rwy 33**, 500-2 or std. with a min. climb of 400' per NM to 1600.

NOTE: **Rwy 15**, powerline 1210' from departure end of runway, 130' left of centerline, 60' AGL/1090' MSL.

Rwy 33, trees 200' from departure end of runway, 200' left of centerline, 57' AGL/1032' MSL. Trees 1.43 NM from departure end of runway, 2653' left of centerline, 100' AGL/1399' MSL. Watch tower 1.69 NM from departure end of runway, 2271' left of centerline, 150' AGL/1400' MSL.

GALESBURG, IL

GALESBURG MUNI (GBG)

ORIG 10210 (FAA)

NOTE: **Rwy 3**, trees beginning 1372' from DER, 352' right of centerline to 752' right of centerline, up to 55' AGL/819' MSL. **Rwy 10**, trees beginning 326' from DER, 154' right of centerline to 764' left of centerline, up to 63' AGL/820' MSL. Light 3969' from DER, 700' left of centerline 106' AGL/863' MSL. **Rwy 21**, trees beginning 361' from DER, 496' left of centerline, to 657' right of centerline, up to 42' AGL/796' MSL. **Rwy 28**, trees beginning 79' from DER, 138' left of centerline, to 330' right of centerline, up to 29' AGL/786' MSL. Pole 1204' from DER, 372' right of centerline 32' AGL/789' MSL.

GRANTSBURG, WI

GRANTSBURG MUNI (GTG)

ORIG 94230 (FAA)

TAKE-OFF MINIMUMS: **Rwy 23**, 300-1.

GRAYSLAKE, IL

CAMPBELL (C81)

AMDT 1 82063 (FAA)

TAKE-OFF MINIMUMS: **Rwy 24**, 300-1.

DEPARTURE PROCEDURE: **Rwy 9**, climb runway heading to 1200 before turning.

GREEN BAY, WI

AUSTIN STRAUBEL INTL (GRB)

AMDT 2 07354 (FAA)

DEPARTURE PROCEDURE: **Rwy 6**, climb heading 062° to 1300 before turning right. **Rwy 18**, climb heading 182° to 1600 before turning left.

NOTE: **Rwy 18**, tree 3022' from departure end of runway, 680' left of centerline, 100' AGL/779' MSL.

Rwy 24, trees beginning 1556' from departure end of runway, 893' left of centerline, up to 100' AGL/779' MSL. Pole 1114' from departure end of runway, 665' left of centerline, 38' AGL/722' MSL.

GREENVILLE, IL

GREENVILLE (GRE)

ORIG 10070 (FAA)

TAKE-OFF MINIMUMS: **Rwys 9, 27**, NA-Environmental.

NOTE: **Rwy 18**, vehicle on road at DER, 376' left of centerline, up to 15' AGL/554' MSL. Trees beginning 534' from DER, 491' right of centerline, up to 100' AGL/639' MSL. Trees beginning 3097' from DER, 54' left of centerline, 100' AGL/629' MSL. **Rwy 36**, vehicle on road at DER, 393' right of centerline, up to 15' AGL/554' MSL.

HARRISBURG, IL

HARRISBURG-RALEIGH (HSB)

AMDT 1 10266 (FAA)

NOTE: **Rwy 6**, trees beginning 62' from DER, 257' left of centerline, up to 100' AGL/519' MSL. Trees and PVC pipe in concrete beginning 627' from DER, 230' left of centerline, up to 100' AGL/519' MSL. Tree 895' from DER, 523' right of centerline, 61' AGL/454' MSL. Tree 5590' from DER, 1383' left of centerline, 100' AGL/539' MSL. **Rwy 14**, vehicle 368' from DER, 594' right of centerline, 15' AGL/394' MSL. Trees beginning 3343' from DER, 1286' left of centerline, up to 100' AGL/509' MSL. **Rwy 24**, trees beginning 919' from DER, 487' right of centerline, up to 100' AGL/509' MSL. Trees beginning 1706' from DER, 420' right of centerline, up to 100' AGL/519' MSL. **Rwy 32**, vehicle 482' from DER, 609' left of centerline, 15' AGL/414' MSL. Trees beginning 1087' from DER, 207' left of centerline, up to 100' AGL/509' MSL. Trees beginning 1616' from DER, 45' right of centerline, up to 100' AGL/509' MSL.

HAYWARD, WI

SAWYER COUNTY (HYR)

AMDT 4 99308

TAKE-OFF MINIMUMS: **Rwy 16**, 300-1 or std. with a min. climb of 300' per NM to 1300. **Rwy 20**, 300-1 or std. with a min. climb of 270' per NM to 1300. **Rwy 34**, 300-1 or std. with a min. climb of 250' per NM to 1300.

DEPARTURE PROCEDURE: **Rwy 16**, climb runway heading to 1900 before turning eastbound.

JANESVILLE, WI

SOUTHERN WISCONSIN RGNL (JVL)

ORIG 08101 (FAA)

TAKE-OFF MINIMUMS: **Rwy 36**, 300-2½ or std. w/a min. climb of 203' per NM to 1200, or alternatively, with standard takeoff minimums and a normal 200'/NM climb gradient, takeoff must occur no later than 1200' prior to departure end of runway.

NOTE: **Rwy 4**, Road 342' from departure end of runway, 520' right of centerline, 17' AGL/846' MSL. Trees beginning 624' from departure end of runway, 366' left of centerline, up to 60' AGL/889' MSL. Light on pole 1290' from departure end of runway, 595' left of centerline, 21' AGL/840' MSL. Antenna 804' from departure end of runway, 190' left of centerline, 16' AGL/825' MSL. **Rwy 32**, Tree 1524' from departure end of runway 857' left of centerline, 100' AGL/869' MSL. **Rwy 36**, tree 1427' from departure end of runway, 108' left of centerline, 42' AGL/851' MSL. Road 385' from departure end of runway, 20' left of centerline, 15' AGL/824' MSL. Tower 1.92 NM from departure end of runway, 1427' left of centerline, 258' AGL/1101' MSL.

JOLIET, IL

JOLIET RGNL (JOT)

AMDT 4 10098 (FAA)

TAKE-OFF MINIMUMS: **Rwy 5**, 300-2 or std. w/a min. climb of 217' per NM to 1000 or alternatively, with standard take-off minimums and a normal 200'/NM climb gradient, take-off must occur no later than 1500' prior to DER. **Rwy 13**, 600-3 or std. w/a min. climb of 300' per NM to 1300.

DEPARTURE PROCEDURE: **Rwy 13**, climb heading 130° to 1100 before turning left.

NOTE: **Rwy 5**, vehicle on road 98' from DER, 379' left of centerline, up to 15' AGL/599' MSL. Vehicle on road 453' from DER, 602' right of centerline, up to 15' AGL/599' MSL. Trees beginning 500' from DER, 627' left of centerline, up to 100' AGL/654' MSL. Pole 878' from DER, 44' right of centerline, 22' AGL/602' MSL. Trees beginning 853' from DER, 597' right of centerline, up to 100' AGL/734' MSL. Rising terrain beginning 1.7 NM from DER, 68' left of centerline, up to 834' MSL.

Rwy 13, vehicle on road 39' from DER, 491' right of centerline, up to 15' AGL/589' MSL. Vehicle on road 177' from DER, 512' left of centerline, up to 15' AGL/584' MSL. Tower 2 NM from DER, 2601' right of centerline, 420' AGL/973' MSL. Building 567' from DER, 270' right of centerline, 28' AGL/602' MSL. **Rwy 23**, vehicle on road beginning 8' from DER, left and right of centerline, up to 15' AGL/594' MSL. Trees beginning 195' from DER, left and right of centerline, up to 100' AGL/709' MSL. **Rwy 31**, buildings beginning 4' from DER, left and right of centerline, up to 100' AGL/606' MSL. Trees beginning 135' from DER, left and right of centerline, up to 100' AGL/675' MSL. Vehicle on road beginning 93' from DER, left and right of centerline, up to 17' AGL/594' MSL. Poles beginning 138' from DER, left and right of centerline, up to 50' AGL/628' MSL.

JUNEAU, WI

DODGE COUNTY (UNU)

ORIG 94286 (FAA)

TAKE-OFF MINIMUMS: **Rwy 20**, 300-1.

KANKAKEE, IL

GREATER KANKAKEE (IKK)
ORIG 07074 (FAA)

NOTE: **Rwy 4**, vehicle on road 532' from departure end of runway, 546' left of centerline, 15' AGL/652' MSL. **Rwy 16**, vehicle on road 729' from departure end of runway, 181' right of centerline, 15' AGL/645' MSL. **Rwy 22**, vehicle on road 1069' from departure end of runway, 622' left of centerline, 15' AGL/653' MSL. **Rwy 34**, vehicle on road 831' from departure end of runway, 189' left of centerline, 15' AGL/650' MSL. Tree 623' from departure end of runway, 203' right of centerline, 25' AGL/650' MSL. Tree 164' from departure end of runway, 541' right of centerline, 60' AGL/630' MSL. Tree 505' from departure end of runway, 122' left of centerline, 65' AGL/635' MSL.

KENOSHA, WI

KENOSHA RGNL (ENW)
ORIG 09239 (FAA)

NOTE: **Rwy 7R**, multiple light poles beginning 560' from DER, 342' right of centerline, up to 26' AGL/729' MSL. Multiple trees and pole beginning 569' from DER, 248' left of centerline, up to 54' AGL/760' MSL. **Rwy 7L**, multiple trees beginning 156' from DER, 324' left of centerline up to 52' AGL/761' MSL. **Rwy 25L**, multiple trees and hangars beginning 10' from DER, 209' right of centerline up to 11' AGL/760' MSL. Tree 22' from DER, 378' left of centerline 24' AGL/763' MSL. Fence, 200' from DER, 456' left of centerline, 8' AGL, 737' MSL. Vehicle on road 889' from DER, 187' left of centerline, 14' AGL/753' MSL. **Rwy 33**, multiple trees beginning 808' from DER, 39' right of centerline up to 81' AGL/811' MSL. Multiple trees beginning 1171' from DER, 78' left of centerline, up to 84' AGL/810' MSL. **Rwy 25R**, trees 2800' from DER, 603' left to right of centerline, 100' AGL/819' MSL.

KEWANEE, IL

KEWANEE MUNI (EZI)
ORIG-A 09351 (FAA)

NOTE: **Rwy 27**, powerlines and utility pole beginning 1424' from DER, 100' right of centerline, up to 79' AGL/925' MSL. Powerlines 2215' from DER, 432' left of centerline, 79' AGL/916' MSL. Tree 2212' from DER, 972' left of centerline, 100' AGL/933' MSL.

LA CROSSE, WI

LA CROSSE MUNI (LSE)
AMDT 5 08269 (FAA)

TAKE-OFF MINIMUMS: **Rwy 3**, std. w/min climb of 460' per NM to 1600, or 1400-2½ for climb in visual conditions. **Rwy 13**, std. w/min. climb of 420' per NM to 2000, or 1400-2½ for climb in visual conditions. **Rwy 18**, std. w/min. climb of 290' per NM to 1800, or 1400-2½ for climb in visual conditions. **Rwy 21**, std. w/min climb of 430' per NM to 2000, or 1400-2½ for climb in visual conditions. **Rwy 31**, std. w/min. climb of 300' per NM to 2500, or 1400-2½ for climb in visual conditions. **Rwy 36**, std. w/min. climb of 325' per NM to 1800, or 1400-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwys 3, 13, 18, 21, 31, 36**, for climb in visual conditions cross La Crosse Muni airport at or above 1900 MSL before proceeding on course.

NOTE: **Rwy 3**, trees 964' from DER, 333' right of centerline, 80' AGL/730' MSL. Multiple trees beginning 499' from DER, 222' left of centerline, 56' AGL/706' MSL. Multiple trees beginning 4327' from DER, 263' right of centerline, up to 89' AGL/809' MSL. Pole 4371' from DER, 203' left of centerline, 84' AGL/784' MSL. Multiple trees 1.89 NM from DER, 2726' right of centerline, 100' AGL/1339' MSL. **Rwy 13**, trees 423' from DER, 446' left of centerline, 46' AGL/696' MSL. Trees 2666' from DER, 503' left of centerline, 97' AGL/747' MSL. **Rwy 18**, vehicle and road 685' from DER, 589' left of centerline, 15' AGL/694' MSL. Multiple trees beginning 1809' from DER, 10' left of centerline, up to 63' AGL/723' MSL. Multiple trees beginning 1630' from DER, 23' right of centerline, up to 67' AGL/727' MSL. **Rwy 21**, multiple trees beginning 1521' from DER, 586' left of centerline, up to 75' AGL/735' MSL. Light poles 1406' from DER, 174' right of centerline 35' AGL/695' MSL. Trees 2706' from DER, 285' right of centerline, 67' AGL/727' MSL. **Rwy 31**, multiple trees beginning 1992' from DER, 289' left of centerline, up to 80' AGL/730' MSL. Multiple trees beginning 2499' from DER, 92' right of centerline, up to 139' AGL/789' MSL.

LA POINTE, WI

MADELINE ISLAND (4R5)
ORIG 08157 (FAA)

TAKE-OFF MINIMUMS: **Rwy 22**, 300-2 or std. w/min. climb of 213' per NM to 1200.

DEPARTURE PROCEDURE: **Rwy 22**, Climb heading 220° to 1200 before proceeding on course.

NOTE: **Rwy 4**, trees beginning 69' from departure end of runway, 5' left of centerline, up to 100' AGL/759' MSL. Trees beginning 340' from departure end of runway, 52' right of centerline, up to 100' AGL/759' MSL. **Rwy 22**, trees beginning 1867' from departure end of runway, 187' left of centerline, up to 100' AGL/710' MSL. Trees beginning 167' from departure end of runway, 23' right of centerline, up to 100' AGL/729' MSL.

LACON, IL

MARSHALL COUNTY (C75)
AMDT 2 89236 (FAA)

TAKE-OFF MINIMUMS: **Rwys 13, 18, 36**, 300-1.

DEPARTURE PROCEDURE: **Rwy 31**, climb runway heading to 1800 before turning.

LADYSMITH, WI

RUSK COUNTY (RCX)

ORIG 01193 (FAA)

TAKE-OFF MINIMUMS: **Rwy 19**, 300-1 or std. with a min. climb of 430' per NM to 1500.

LAKE GENEVA, WI

GRAND GENEVA RESORT (C02)

ORIG 03079 (FAA)

DEPARTURE PROCEDURE: **Rwy 23**, climb runway heading to 1500 before turning westbound.

LAND O'LAKES, WI

KINGS LAND O'LAKES (LNL)

AMDT 4 05132 (FAA)

TAKE-OFF MINIMUMS: **Rwys 5, 23**, NA-obstacles.

NOTE: **Rwy 14**, road and vehicle 195' from departure end of runway, 245' left of centerline, 33' AGL/1737' MSL.

Rwy 32, trees 50' from departure end of runway, 296' right of centerline, up to 100' AGL/1820' MSL. Trees 820' from departure end of runway, 220' right of centerline, 66' AGL/1770' MSL. Multiple trees beginning 480' from departure end of runway, 200' left of centerline, 60' AGL/1764' MSL. Tank 1144' from departure end of runway, 615' right of centerline, 125' AGL/1833' MSL.

LINCOLN, IL

LOGAN COUNTY (AAA)

AMDT 1 05300 (FAA)

TAKE-OFF MINIMUMS: **Rwy 21**, 300-½ or std. with a min. climb of 341' per NM to 800.

NOTE: **Rwy 21**, spire 2193' from departure end of runway, 208' left of centerline, 96' AGL/686' MSL.

LITCHFIELD, IL

LITCHFIELD MUNI (3LF)

AMDT 3 05300 (FAA)

NOTE: **Rwy 9**, tower 1058' left of departure end of runway, 132' AGL/822' MSL.

LONEROCK, WI

TRI COUNTY RGNL (LNR)

AMDT 4 08185 (FAA)

TAKE-OFF MINIMUMS: **Rwys 9, 27**, 600-1½, or 1000-2½ for climb in visual conditions. **Rwys 18, 36**, NA-Environmental.

DEPARTURE PROCEDURE: **Rwys 9, 27**, for climb in visual conditions: cross Tri-County Rgnl Airport at or above 1600 before proceeding on course.

NOTE: **Rwy 9**, terrain and trees beginning 23' from departure end of runway, 238' left of centerline, up to 100' AGL/1129' MSL. Road beginning 244' from departure end of runway, 330' left of centerline, up to 17' AGL/733' MSL. Terrain and trees beginning 18' from departure end of runway, 235' right of centerline, up to 100' AGL/722' MSL. **Rwy 27**, building 764' from departure end of runway, 386' left of centerline, up to 25' AGL/744' MSL. Tree 1381' from departure end of runway, 590' left of centerline, up to 70' AGL/785' MSL. Road beginning 245' from departure end of runway, on centerline, up to 12' AGL/731' MSL. Antennas and poles beginning 920' from departure end of runway, 372' right of centerline, up to 33' AGL/752' MSL. Trees and terrain beginning 2 NM from departure end of runway, 2658' right of centerline, up to 100' AGL/1199' MSL.

MACOMB, IL

MACOMB MUNI (MQB)

AMDT 1 89236 (FAA)

DEPARTURE PROCEDURE: **Rwy 18**, climb runway heading to 1700 before turning right. **Rwy 27**, climb runway heading to 1700 before turning left.

MADISON, WI

BLACKHAWK AIRFIELD (87Y)

ORIG 97338 (FAA)

TAKE-OFF MINIMUMS: **Rwy 27**, 300-2 or std. with a min. climb of 220' per NM to 1300.

DANE COUNTY RGNL-TRUAX FIELD (MSN)

AMDT 7 03219 (FAA)

DEPARTURE PROCEDURE: **Rwy 18**, (Southwest departures 200° CW 260°) climb via heading 182° to 3200 before proceeding on course. **Rwy 21**, (Southwest departures 200° CW 260°) climb via heading 209° to 3200 before proceeding on course.

NOTE: **Rwy 36**, tree 2700' from departure end of runway, 1097' right of centerline, 100' AGL/987' MSL.

MANITO, IL

MANITO MITCHELL (C45)

AMDT 2 82105 (FAA)

TAKE-OFF MINIMUMS: **Rwys 4, 36**, 300-1.

MANITOWISH WATERS, WI

MANITOWISH WATERS (D25)

ORIG 10154 (FAA)

TAKE-OFF MINIMUMS: **Rwys 4, 22**, NA-Environment.

NOTE: **Rwy 14**, trees beginning 93' from DER, 225' right of centerline, up to 100' AGL/1709' MSL. Trees beginning 279' from DER, 441' left of centerline, up to 100' AGL/1709' MSL. **Rwy 32**, trees beginning 70' from DER, 343' left of centerline, up to 100' AGL/1714' MSL. Trees beginning 151' from DER, 362' right of centerline, up to 100' AGL/1714' MSL. Road 617' from DER, 44' right of centerline, 15' AGL/1634' MSL.

MANITOWOC, WI

MANITOWOC COUNTY (MTW)

AMDT 4 09071 (FAA)

TAKE-OFF MINIMUMS: **Rwy 17**, 300-1½ or std. with a min. climb of 254' per NM to 1000.

DEPARTURE PROCEDURE: **Rwy 7**, climb heading 072° to 1200 before proceeding on course. **Rwy 25**, climb heading 252° to 1200 before proceeding on course.

NOTE: **Rwy 7**, tree 520' from DER, 279' left of centerline, 27' AGL/666' MSL. **Rwy 17**, stack 1.24 NM from DER, 1915' left of centerline, 310' AGL/893' MSL. Trees beginning 23' from DER, 16' left of centerline, up to 94' AGL/743' MSL. Trees beginning 1802' from DER, 76' right of centerline, up to 98' AGL/747' MSL. Flagpole 1234' from DER, 512' right of centerline, 36' AGL/695' MSL. Antenna 989' from DER, 511' right of centerline, 39' AGL/688' MSL. **Rwy 25**, tree 734' from DER, 321' right of centerline, 48' AGL/697' MSL. Tree 1870' from DER, 223' left of centerline, 63' AGL/722' MSL. Train on railroad, 744' from DER, on centerline, 23' AGL/676' MSL. **Rwy 35**, trees beginning 167' from DER, 477' right of centerline, up to 66' AGL/710' MSL. Tree 2012' from DER, 863' left of centerline, 67' AGL/716' MSL.

MARION, IL

WILLIAMSON COUNTY RGNL (MWA)

ORIG-A 10070 (FAA)

TAKE-OFF MINIMUMS: **Rwy 11**, 600-3 or std. with a min. climb of 235' per NM to 1200.

DEPARTURE PROCEDURE: **Rwy 11**, Climb via heading 107° to 1100 before turning left.

NOTE: **Rwy 2**, trees beginning 119' from DER, 265' left of centerline, up to 106' AGL/543' MSL. **Rwy 11**, poles beginning 630' from DER, 496' right of centerline, up to 75' AGL/518' MSL. Tree 1298' from DER, 594' right of centerline, 81' AGL/528' MSL. Tank 5154' from DER, 800' right of centerline, 164' AGL/601' MSL. Tower 3.16 NM from DER, 1.32 NM left of centerline, 490' AGL/980' MSL. **Rwy 20**, trees beginning 1538' from DER, 823' right of centerline, up to 68' AGL/521' MSL.

Rwy 29, wind sock 341' from DER, 291' left of centerline, 11' AGL/461' MSL. Trees beginning 559' from DER, 360' right of centerline, up to 77' AGL/534' MSL. Theater screen 1347' from DER, 634' right of centerline, 77' AGL/530' MSL.

MARSHFIELD, WI

MARSHFIELD MUNI (MFI)

ORIG 06271 (FAA)

NOTE: **Rwy 34**, multiple trees beginning 1412' from departure end of runway, 532' left of centerline, up to 60' AGL/1359' MSL.

MATTOON-CHARLESTON, IL

COLES COUNTY MEMORIAL (MTO)

AMDT 4 09351 (FAA)

NOTE: **Rwy 11**, trees beginning 1842' from DER, 869' left of centerline, up to 100' AGL/803' MSL.

MEDFORD, WI

TAYLOR COUNTY (MDZ)

AMDT 2 09071 (FAA)

NOTE: **Rwy 9**, trees beginning 1123' from DER, 561' left of centerline, up to 61' AGL/1540' MSL. Tree 2555' from DER, 592' right of centerline, 75' AGL/1544' MSL. **Rwy 16**, trees beginning 7' from DER, 248' left of centerline, up to 75' AGL/1524' MSL. Vehicle plus road beginning 33' from DER, 8' left of centerline, up to 15' AGL/1466' MSL. Vehicle plus road beginning 27' from DER, 93' right of centerline, up to 15' AGL/1462' MSL. **Rwy 27**, tower 2839' from DER, 1111' left of centerline, 150' AGL/1580' MSL. Trees beginning 1040' from DER, 49' left of centerline, up to 75' AGL/1526' MSL. Silo 1593' from DER, 789' right of centerline, 30' AGL/1499' MSL. Trees beginning 2008' from DER, 147' right of centerline, up to 68' AGL/1527' MSL. **Rwy 34**, terrain, trees and poles beginning 37' from DER, 187' right of centerline, up to 41' AGL/1510' MSL. Vehicle plus road beginning 490' from DER, 485' right of centerline, up to 15' AGL/1476' MSL.

MENOMONIE, WI

MENOMONIE MUNI-SCORE FIELD (LUM)

ORIG 96284 (FAA)

TAKE-OFF MINIMUMS: **Rwys 9, 18, 27, 36**, 300-1.

MERRILL, WI

MERRILL MUNI (RRL)

ORIG 07242 (FAA)

NOTE: **Rwy 7**, bush 55' from departure end of runway, 468' left of centerline, 5' AGL/1311' MSL. Pole 392' from departure end of runway, 512' right of centerline, 23' AGL/1329' MSL. Building 358' from departure end of runway, 451' right of centerline, 21' AGL/1327' MSL. Multiple trees beginning 905' from departure end of runway, from 727' right to 552' left of centerline, up to 91' AGL/1400' MSL. Multiple trees beginning 2597' from departure end of runway, from 22' right to 86' left of centerline, up to 82' AGL/1401' MSL. **Rwy 16**, multiple trees beginning 1587' from departure end of runway, on centerline, up to 100' AGL/1439' MSL. **Rwy 25**, bush 132' from departure end of runway, 494' right of centerline, 13' AGL/1331' MSL. Pole 1240' from departure end of runway, 778' left of centerline, 37' AGL/1356' MSL. Multiple trees beginning 1085' from departure end of runway, from 554' right to 359' left of centerline, up to 69' AGL/1388' MSL. **Rwy 34**, multiple trees beginning 49' from departure end of runway, from 33' right to 139' left of centerline, up to 100' AGL/1439' MSL.

MIDDLETON, WI

MIDDLETON MUNI-MOREY FIELD (C29)

AMDT 1 05356 (FAA)

TAKE-OFF MINIMUMS: **Rwy 28**, 300-1 or std. with a min. climb of 468' per NM to 1300. **Rwys 1, 19**, NA-turf.

DEPARTURE PROCEDURE: **Rwy 10**, climb via heading 101° to 2600 before proceeding on course.

Rwy 28, climb via heading 281° to 2600 before proceeding on course.

NOTE: **Rwy 28**, multiple trees beginning 2067' from departure end of runway, 583' left of centerline, up to 60' AGL/1032' MSL.

MILWAUKEE, WI

GENERAL MITCHELL INTL (MKE)

AMDT 6 09183 (FAA)

TAKE-OFF MINIMUMS: **Rwy 7R**, 300-1½ or std. with a min. climb of 300' per NM to 1100. **Rwy 31**, 300-1½ or std. w/a min. climb of 257' per NM to 1000.

NOTE: **Rwy 1R**, antenna, 581' from DER, 600' left of centerline, 46' AGL/719' MSL. Trees beginning 3210' from DER, 462' right of centerline, up to 100' AGL/795' MSL.

Rwy 1L, fence beginning 148' from DER, 391' left of centerline, up to 4' AGL/679' MSL. Vehicle on road, 459' from DER, 577' left of centerline, 17' AGL/696' MSL. Pole, 575' from DER, 593' left of centerline, 6' AGL/689' MSL. Pole, 1859' from DER, 912' right of centerline, 18' AGL/734' MSL. Antenna, 1928' from DER, 1' right of centerline, 15' AGL/727' MSL. Pole, 2291' from DER, 937' right of centerline, 28' AGL/750' MSL. Tower, 2284' from DER, 463' right of centerline, 17' AGL/739' MSL. Pole, 2393' from DER, 683' right of centerline, 14' AGL/736' MSL. Trees, beginning 2492' from DER, 971' left of centerline, up to 54' AGL/780' MSL. Trees, beginning 2816' from DER, 154' right of centerline, up to 100' AGL/799' MSL.

Rwy 7R, multiple poles beginning 457' from DER, 456' right of centerline, up to 36' AGL/709' MSL. Train on track, 566' from DER, 12' right of centerline, up to 23' AGL/734' MSL. Multiple poles beginning 801' from DER, 199' left of centerline, up to 38' AGL/711' MSL. Trees, beginning 1211' from DER, 186' right of centerline, up to 100' AGL/779' MSL. Tree, 2192' from DER, 456' left of centerline, 66' AGL/742' MSL. Stack, 1.12 NM from DER, 2171' right of centerline, 210' AGL/926' MSL. Stack, 1.21 NM from DER, 1164' left of centerline, 180' AGL/891' MSL. **Rwy 7L**, hanger, 319' from DER, 456' right of centerline, 13' AGL/696' MSL. Tree, 730' from DER, 675' left of centerline, 100' AGL/779' MSL. Pole, 1727' from DER, 194' left of centerline, 55' AGL/751' MSL. Tower, 1864' from DER, 48' left of centerline, 30' AGL/742' MSL. **Rwy 13**, multiple light poles, beginning 379' from DER, 156' left of centerline, up to 36' AGL/709' MSL. Multiple light poles beginning 858' from DER, 144' right of centerline, up to 36' AGL/709' MSL. Train on track, 556' from DER, 405' left of centerline, 23' AGL/734' MSL. Multiple trees beginning 1222' from DER, 206' left of centerline, up to 100' AGL/779' MSL. Multiple trees beginning 1067' from DER, 406' right of centerline, up to 100' AGL/770' MSL. **Rwy 19L**, tree, 1785' from DER, 863' left of centerline, 100' AGL/779' MSL. Rod on glide slope antenna, 1837' from DER, 559' right of centerline, 63' AGL/749' MSL. **Rwy 19R**, tree, 778' from DER, 647' right of centerline, 100' AGL/809' MSL. Vehicle on road, 398' from DER, 588' left of centerline, 17' AGL/726' MSL. **Rwy 25L**, tree, 1072' from DER, 757' left of centerline, 100' AGL/829' MSL. Tower, 3330' from DER, 1222' right of centerline, 57' AGL/812' MSL. **Rwy 25R**, flag pole, 603' from DER, 336' left of centerline, 36' AGL/709' MSL. Hanger, 625' from DER, 363' right of centerline, 26' AGL/702' MSL. Tree, 855' from DER, 401' right of centerline, 100' AGL/779' MSL. Tree, 1297' from DER, 187' left of centerline, 30' AGL/716' MSL. Pole, 1605' from DER, 301' right of centerline, 47' AGL/720' MSL.

MILWAUKEE, WI (CON'T)

GENERAL MITCHELL INTL (CON'T)

Rwy 31, fence, 197' from DER, 244' right of centerline, 7' AGL/681' MSL. Sign, 219' from DER, 449' right of centerline, 50' AGL/730' MSL. Multiple light poles beginning 265' from DER, 69' right of centerline, up to 30' AGL/706' MSL. Multiple light poles beginning 687' from DER, 112' left of centerline, up to 30' AGL/703' MSL. Hanger, 438' from DER, 564' left of centerline, 50' AGL/722' MSL. Pole, 1351' from DER, 340' right of centerline, 46' AGL/735' MSL. Multiple trees, beginning 1504' from DER, 258' right of centerline, up to 100' AGL/775' MSL. Multiple trees, beginning 1122' from DER, 391' left of centerline, up to 100' AGL/768' MSL. Pole, 2629' from DER, 344' right of centerline, 165' AGL/758' MSL. Tank, 1.10 NM from DER, 742' right of centerline, 165' AGL/885' MSL.

LAWRENCE J. TIMMERMAN (MWC)

ORIG 93035 (FAA)

DEPARTURE PROCEDURE: **Rwys 4L, 4R, 15L/R**, climb to 2100 before turning east.

MINOCQUA-WOODRUFF, WI

LAKELAND/NOBLE F. LEE MEMORIAL FIELD (ARV)

ORIG 09351 (FAA)

NOTE: **Rwy 10**, trees beginning 239' from DER, 545' right of centerline, up to 100' AGL/1729' MSL. Trees beginning 424' from DER, 576' left of centerline, up to 100' AGL/1729' MSL. **Rwy 18**, trees beginning 785' from DER, 482' right of centerline, up to 100' AGL/1729' MSL. Trees beginning 825' from DER, 506' left of centerline, up to 100' AGL/1729' MSL. **Rwy 28**, trees beginning 659' from DER, 564' right of centerline, up to 100' AGL/1729' MSL. Trees beginning 474' from DER, 432' left of centerline, up to 100' AGL/1729' MSL.

Rwy 36, trees and windsock beginning 157' from DER, 5' right of centerline, up to 96' AGL/1725' MSL. Trees beginning 1280' from DER, 29' left of centerline, up to 100' AGL/1749' MSL.

MOLINE, IL

QUAD-CITY INTL (MLI)

AMDT 9 04330 (FAA)

TAKE-OFF MINIMUMS: **Rwy 9**, 300-1 or std. with a min. climb of 220' per NM to 800. **Rwy 13**, 300-1½ or std. with a min. climb of 250' per NM to 900. **Rwy 23**, 300-1 or std. with a min. climb of 285' per NM to 800.

DEPARTURE PROCEDURE: **Rwy 5**, climb via heading 048° to 3000 before turning left. **Rwy 9**, climb via heading 090° to 1600 before turning. **Rwy 13**, climb via heading 126° to 1600 before turning. **Rwy 23**, climb via heading 228° to 1600 before turning. **Rwy 27**, climb via heading 270° to 1600 before turning. **Rwy 31**, climb via heading 306° to 3000 before turning right.

NOTE: **Rwy 9**, trees 4800' from departure end of runway, 1472' right of centerline, 30' AGL/740' MSL. **Rwy 13**, trees beginning 5117' from departure end of runway, 1351' right of centerline, up to 50' AGL/775' MSL. **Rwy 23**, numerous trees beginning 3423' from departure end of runway, 292' left of centerline, up to 50' AGL/757' MSL.

23 SEP 2010 to 21 OCT 2010

23 SEP 2010 to 21 OCT 2010

MONEE, IL

BULT FIELD (C56)
ORIG 09071 (FAA)

NOTE: **Rwy 9**, vehicle on road 145' from DER, on centerline, 15' AGL/785' MSL. **Rwy 27**, vehicle on road 150' from DER, on centerline, 15' AGL/797' MSL. Metal chimney 305' from DER, 210' left of centerline, 29' AGL/812' MSL. Tree 367' from DER, 161' left of centerline, 40' AGL/819' MSL. Pole barn 421' from DER, 202' left of centerline, 22' AGL/801' MSL. Trees beginning 1484' from DER, 223' right of centerline, up to 100' AGL/859' MSL.

MONMOUTH, IL

MONMOUTH MUNI (C66)
AMDT 2 93231 (FAA)

TAKE-OFF MINIMUMS: **Rwy 20**, 400-2.

MONROE, WI

MONROE MUNI (EFT)
AMDT 2 09127 (FAA)

NOTE: **Rwy 2**, vehicle on road 926' from DER, left and right of centerline, up to 17' AGL/1116' MSL. Trees beginning 182' from DER, 175' right of centerline, up to 100' AGL/1169' MSL. **Rwy 12**, trees beginning 1234' from DER, 655' right of centerline, up to 100' AGL/1189' MSL. **Rwy 20**, trees beginning 712' from DER, 288' right of centerline, up to 100' AGL/1129' MSL. **Rwy 30**, trees beginning 1918' from DER, 87' right of centerline, up to 100' AGL/1209' MSL. Vehicle on road 1166' from DER, 157' right of centerline, up to 17' AGL/1126' MSL.

MORRIS, IL

MORRIS MUNI - JAMES R. WASHBURN FIELD (C09)
ORIG 08325 (FAA)

TAKE-OFF MINIMUMS: **Rwy 18**, 400-2 or std. w/min. climb of 320' per NM to 1000.

NOTE: **Rwy 18**, tree 511' from departure end of runway, 607' right of centerline, 100' AGL/659' MSL. Tower 8810' from departure end of runway, 647' right of centerline, 290' AGL/840' MSL. **Rwy 36**, trees beginning 1562' from departure end of runway, 758' right of centerline extending to 722' left of centerline, 100' AGL/679' MSL.

MOSINEE, WI

CENTRAL WISCONSIN (CWA)
ORIG 85185 (FAA)

TAKE-OFF MINIMUMS: **Rwy 35**, 300-1.

DEPARTURE PROCEDURE: **Rwy 35**, (northbound departures 350° CW 045°) climbing left turn to 3500 via AUWR-270 before turning on course.

MOUNT CARMEL, IL

MOUNT CARMEL MUNI (AJG)
ORIG 97338 (FAA)

TAKE-OFF MINIMUMS: **Rwy 22**, 300-1 or std. with a min. climb of 340' per NM to 700.

MOUNT STERLING, IL

MOUNT STERLING MUNI (I63)
ORIG 09183 (FAA)

NOTE: **Rwy 18**, trees beginning 1555' from DER, 309' right of centerline, up to 95' AGL/784' MSL. Tree 2243' from DER, 856' left of centerline, 100' AGL/819' MSL. **Rwy 36**, vehicle on road and pole 686' from DER, 486' right of centerline, up to 60' AGL/779' MSL. Vehicle on road and trees beginning 679' from DER, 365' left of centerline, up to 100' AGL/839' MSL.

MOUNT VERNON, IL

MOUNT VERNON (MVN)
ORIG 07074 (FAA)

DEPARTURE PROCEDURE: **Rwy 33**, climb via heading 331° to 1300 before turning left.

NOTE: **Rwy 5**, multiple trees beginning 1615' from departure end of runway, 7' left of centerline, up to 134' AGL/602' MSL, antenna 2477' from departure end of runway, 990' right of centerline, 79' AGL/547' MSL, tree 3329' from departure end of runway, 519' right of centerline, 98' AGL/566' MSL. **Rwy 15**, multiple trees beginning 712' from departure end of runway, 17' right of centerline, up to 71' AGL/529' MSL, tree 908' from departure end of runway, 465' left of centerline, 70' AGL/527' MSL, railroad 608' from departure end of runway, 159' right of centerline, 23' AGL/479' MSL, road 564' from departure end of runway, 3' right of centerline, 15' AGL/472' MSL. **Rwy 23**, multiple trees beginning 1705' from departure end of runway, 102' right of centerline, up to 72' AGL/539' MSL, tree 1797' from departure end of runway, 158' left of centerline, 57' AGL/524' MSL, railroad 238' from departure end of runway, 500' left of centerline, 23' AGL/485' MSL, multiple roads beginning 12' from departure end of runway, 367' left of centerline, up to 15' AGL/479' MSL, fencepost 291' from departure end of runway, 426' right of centerline, 9' AGL/476' MSL. **Rwy 33**, multiple trees beginning 696' from departure end of runway, 130' right of centerline, up to 93' AGL/573' MSL, multiple trees beginning 689' from departure end of runway, 216' left of centerline, up to 105' AGL/585' MSL.

NEW LISBON, WI

MAUSTON-NEW LISBON UNION (82C)
ORIG 97198 (FAA)

TAKE-OFF MINIMUMS: **Rwys 14, 32**, 400-1 or std. with a min. climb of 220' per NM to 1400.

NEW RICHMOND, WI

NEW RICHMOND RGNL (RNH)
ORIG 07354 (FAA)

NOTE: **Rwy 14**, multiple trees beginning 810' from departure end of runway, 230' left of centerline, up to 100' AGL/1099' MSL. Vehicle on road 502' from departure end of runway, 612' left of centerline, 15' AGL/1014' MSL. **Rwy 32**, vehicle on road 425' from departure end of runway, 591' left of centerline, 15' AGL/1014' MSL. Multiple trees beginning 1460' from departure end of runway, 443' right of centerline, up to 100' AGL/1099' MSL.

OLNEY/NOBLE, IL

OLNEY/NOBLE (OLY)
ORIG 10098 (FAA)

NOTE: **Rwy 3**, trees beginning 11' from DER, 108' left of centerline, up to 100' AGL/579' MSL. **Rwy 11**, trees beginning 27' from DER, 292' right of centerline, up to 100' AGL/579' MSL. Trees beginning 1928' from DER, 719' left of centerline, up to 100' AGL/569' MSL. **Rwy 21**, trees beginning 43' from DER, 405' right of centerline, up to 100' AGL/569' MSL. Vehicles on roadway beginning 197' from DER, left and right of centerline, up to 17' AGL/494' MSL. **Rwy 29**, vehicles on roadway beginning 481' from DER, left and right of centerline, up to 15' AGL/504' MSL. Trees beginning 703' from DER, 30' left of centerline, up to 100' AGL/589' MSL. Trees beginning 3791' from DER, left and right of centerline, up to 100' AGL/599' MSL.

OSCEOLA, WI

L.O. SIMENSTAD MUNI (OEO)
ORIG 07074 (FAA)

TAKE-OFF MINIMUMS: **Rwys 4, 22**, NA-environmental.
NOTE: **Rwy 10**, multiple trees beginning 9951' from departure end of runway, 3135' right of centerline, up to 100' AGL/1159' MSL. Multiple trees beginning 1785' from departure end of runway, 932' left of centerline, up to 100' AGL/1149' MSL. **Rwy 28**, multiple trees beginning 3534' from departure end of runway, 1277' right of centerline, up to 100' AGL/979' MSL. Truck on road beginning 421' from departure end of runway 71' left of centerline, 15' AGL/904' MSL.

OSHKOSH, WI

WITTMAN RGNL (OSH)
ORIG 08157 (FAA)

NOTE: **Rwy 4**, vehicle on road 450' from departure end of runway, on centerline, 15' AGL/794' MSL. Trees beginning 577' from departure end of runway, 66' right of centerline, up to 41' AGL/810' MSL. Trees beginning 1053' from departure end of runway, 391' left of centerline, up to 100' AGL/869' MSL. **Rwy 9**, vehicle on road 620' from departure end of runway, on centerline, 15' AGL/794' MSL. Trees and hanger beginning 223' from departure end of runway, 192' right of centerline, up to 104' AGL/863' MSL. Trees, poles beginning 546' from departure end of runway, 280' left of centerline, up to 93' AGL/852' MSL. **Rwy 13**, trees, buildings and poles beginning 503' from departure end of runway, 3' right of centerline, up to 100' AGL/889' MSL. Trees 400' from departure end of runway, 350' left of centerline, 72' AGL/841' MSL. **Rwy 22**, vehicle on road 830' from departure end of runway, on centerline, 15' AGL/814' MSL. Trees and pole beginning 530' from departure end of runway, 193' right of centerline, up to 100' AGL/919' MSL. Antenna and airport beacon on ATCT 1689' from departure end of runway, 869' left of centerline, 88' AGL/883' MSL. **Rwy 27**, trees 1063' from departure end of runway, 583' right of centerline, up to 100' AGL/919' MSL. Trees and traffic signal 2505' from departure end of runway, 307' left of centerline, 100' AGL/949' MSL. **Rwy 31**, trees and antenna on building beginning 1133' from departure end of runway, 347' right of centerline, up to 100' AGL/889' MSL. Trees beginning 3860' from departure end of runway, 1,472' left of centerline, up to 100' AGL/909' MSL. **Rwy 36**, antenna on building 551' from departure end of runway, 263' right of centerline, 14' AGL/803' MSL.

PARIS, IL

EDGAR COUNTY (PRG)
ORIG 07354 (FAA)

NOTE: **Rwy 9**, trees beginning 1923' from departure end of runway, on centerline, up to 100' AGL/744' MSL. **Rwy 27**, elevator 1301' from departure end of runway, 255' left of centerline, 50' AGL/711' MSL. Trees beginning 1301' from departure end of runway, 255' left of centerline, up to 100' AGL/754' MSL. Trees beginning 366' from departure end of runway, 295' right of centerline, up to 100' AGL/759' MSL.

PARK FALLS, WI

PARK FALLS MUNI (PKF)
ORIG 99028 (FAA)

DEPARTURE PROCEDURE: **Rwys 18, 36**, climb runway heading to 3400 before turning east.

PAXTON, IL

PAXTON (1C1)
AMDT 1 10182 (FAA)

TAKE-OFF MINIMUMS: **Rwy 36**, 300-1½ or std. w/ min. climb of 321' per NM to 1200.
DEPARTURE PROCEDURE: **Rwy 36**, vehicles on road 439' from DER, crossing from left to right, up to 15' AGL/796' MSL. Trees beginning 557' from DER, 31' right of centerline, up to 60' AGL/849' MSL. Tower 1.1 NM from DER, 1761' left of centerline, 179' AGL/983' MSL.

PEKIN, IL

PEKIN MUNI (C15)
ORIG 08269 (FAA)

NOTE: **Rwy 9**, trees beginning 62' from departure end of runway, 411' right of centerline, up to 63' AGL/583' MSL. Poles beginning 819' from departure end of runway, 388' left of centerline, up to 32' AGL/552' MSL. Poles beginning 824' from departure end of runway, 411' right of centerline, up to 34' AGL/554' MSL. **Rwy 27**, rising terrain 718' from departure end of runway, 103' left of centerline, up to 550' MSL.

PEORIA, IL

GENERAL DOWNING - PEORIA INTL(PIA)
ORIG 05076 (FAA)

DEPARTURE PROCEDURE: **Rwy 13**, climb via heading 126° to 1400 before turning left.
NOTE: **Rwy 4**, tank 5023' from departure end of runway, 1616' left of centerline, 131' AGL/781' MSL. Multiple trees beginning 1425' from departure end of runway, 573' left of centerline, up to 91' AGL/740' MSL. **Rwy 13**, multiple trees beginning 990' from departure end of runway, 582' left of centerline, up to 45' AGL/676' MSL. Tower 4.5 miles from departure end of runway, 2.5 NM left of centerline, 656' AGL/1340' MSL. **Rwy 22**, tree 1475' from departure end of runway, 554' right of centerline, 54' AGL/693' MSL. Tree 1475' from departure end of runway, 669' right of centerline, 64' AGL/694' MSL. **Rwy 31**, tree 5039' from departure end of runway, 252' right of centerline, 60' AGL/769' MSL. Multiple trees beginning 1196' from departure end of runway, 252' right of centerline, up to 69' AGL/769' MSL.

23 SEP 2010 to 21 OCT 2010

23 SEP 2010 to 21 OCT 2010



PEORIA, IL (CON'T)

MOUNT HAWLEY AUXILIARY (3MY)
AMDT 2A 10154 (FAA)

NOTE: **Rwy 18**, train on railroad tracks 161' from DER, 414' right of centerline, 23' AGL/802' MSL. Fence 366' from DER, 388' left of centerline, 5' AGL/784' MSL. Trees beginning 369' from DER, 21' left of centerline, up to 54' AGL/833' MSL. Trees beginning 404' from DER, 17' right of centerline, up to 74' AGL/853' MSL. Rooflines beginning 708' from DER, 215' left of centerline, 22' AGL/801' MSL. Peaks beginning 714' from DER, 225' left of centerline, 30' AGL/809' MSL. **Rwy 36**, rooflines beginning 205' from DER, 438' right of centerline, 18' AGL/797' MSL. Peaks beginning 239' from DER, 374' right of centerline, up to 37' AGL/816' MSL. Light poles beginning 249' from DER, 390' right of centerline, up to 66' AGL/845' MSL. Antenna 2711' from DER, 655' left of centerline, 61' AGL/858' MSL.

PERU, IL

ILLINOIS VALLEY RGNL-WALTER A.
DUNCAN FIELD (VYS)
ORIG 06103 (FAA)

DEPARTURE PROCEDURE: **Rwy 18**, climb via heading 195° to 1400 before turning east.

PHILLIPS, WI

PRICE COUNTY (PBH)
ORIG 97086 (FAA)

TAKE-OFF MINIMUMS: **Rwy 1**, 300-1 or std. with climb of 240' per NM to 1800.

PLATTEVILLE, WI

PLATTEVILLE MUNI (PVB)
ORIG 09239 (FAA)

NOTE: **Rwy 7**, vehicle on road beginning 499' from DER, left to right of centerline, up to 15' AGL/1053' MSL. Pavilion 250' from DER, 345' left of centerline, 17' AGL/1039' MSL. Poles beginning 208' from DER, 438' left of centerline, up to 37' AGL/1059' MSL. Trees beginning 224' from DER, 17' right of centerline, up to 47' AGL/1069' MSL. Trees beginning 257' from DER, 222' left of centerline, up to 29' AGL/1051' MSL. **Rwy 25**, tree 91' from DER, 277' left of centerline, 21' AGL/1020' MSL. Trees beginning 57' from DER, 325' right of centerline, up to 10' AGL/1009' MSL. **Rwy 15**, tree 1145' from DER, 620' right of centerline, 52' AGL/1073' MSL. Trees beginning 61' from DER, 208' left of centerline, up to 11' AGL/1032' MSL.

PONTIAC, IL

PONTIAC MUNI (PNT)
ORIG 08213 (FAA)

NOTE: **Rwy 24**, multiple buildings beginning 766' from departure end of runway, 60' left of centerline, up to 28' AGL/672' MSL. Tree 2226' from departure end of runway, 1040' left of centerline, 100' AGL/744' MSL. Multiple light poles beginning 3635' from departure end of runway, 262' right of centerline, up to 130' AGL/774' MSL.

POPLAR GROVE, IL

POPLAR GROVE (C77)
ORIG 99308 (FAA)

TAKE-OFF MINIMUMS: **Rwy 30**, 300-1 or std. with a min. climb of 310' per NM to 1000. **Rwys 9, 12, 17, 27, 35**, NA.

PORTAGE, WI

PORTAGE MUNI (C47)
AMDT 1 83286 (FAA)

TAKE-OFF MINIMUMS: **Rwys 17, 22**, 300-1 or std. with a min. climb of 265' per NM to 1000.

PRAIRIE DU CHIEN, WI

PRAIRIE DU CHIEN MUNI (PDC)
AMDT 3 02332 (FAA)

TAKE-OFF MINIMUMS: **Rwy 29, 32**, 800-2 or std. with a min. climb of 289' per NM to 1700.

DEPARTURE PROCEDURE: **Rwys 11, 29, 14, 32**, climb to 2000 before turning on course.

NOTE: **Rwy 29**, tower 9416' right of departure end of runway, 300' AGL/1440' MSL.

PRAIRIE DU SAC, WI

SAUK-PRAIRIE (91C)
ORIG 07354 (FAA)

TAKE-OFF MINIMUMS: **Rwy 36**, std. w/ min. climb gradient of 221' per NM to 1700 or 1000-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 36**, climb heading 357° to 1700 before turning or for climb in visual conditions cross Sauk-Prairie Airport at or above 1700 MSL before proceeding on course.

NOTE: **Rwy 18**, utility pole, 330' from departure end of runway, 325' right of centerline, 19' AGL/839' MSL. Trees beginning 802' from departure end of runway, 175' left of centerline, up to 100' AGL/919' MSL. Trees beginning 921' from departure end of runway, on centerline, up to 100' AGL/929' MSL. **Rwy 36**, navigation light top 15' from departure end of runway, 35' right of centerline, 2' AGL/833' MSL. Navigation light top 16' from departure end of runway, 60' left of centerline, 3' AGL/834' MSL. Silo top 855' from departure end of runway, 414' left of centerline, up to 33' AGL/864' MSL. Trees beginning 967' from departure end of runway, 611' left of centerline, up to 60' AGL/891' MSL.

QUINCY, IL

QUINCY RGNL-BALDWIN FIELD (UIN)
ORIG 07242 (FAA)

NOTE: **Rwy 4**, multiple trees beginning 1041' from departure end of runway, 707' right of centerline, up to 68' AGL/797' MSL. Tree 1128' from departure end of runway, 623' right of centerline, 43' AGL/775' MSL. **Rwy 18**, multiple trees beginning 1720' from departure end of runway, 534' left of centerline, up to 100' AGL/849' MSL. **Rwy 22**, tree 586' from departure end of runway, 636' right of centerline, 67' AGL/796' MSL. **Rwy 36**, multiple trees beginning 4' from departure end of runway, 165' right of centerline, up to 91' AGL/820' MSL.

RACINE, WI

JOHN H. BATTEN (RAC)

AMDT 5 10042 (FAA)

NOTE: **Rwy 32**, blast fence 18' from DER, 103' left of centerline 10' AGL/682' MSL. Vehicle on road 11' from DER, left and right of centerline, 15' AGL/688' MSL. Antennas beginning 143' from DER, 209' left of centerline up to 63' AGL/736' MSL. Obstruction light on pole 215' from DER, 116' right of centerline 25' AGL/698' MSL. Trees beginning 97' from DER, 66' left of centerline up to 72' AGL/748' MSL. Trees beginning 357' from DER, 292' right of centerline up to 59' AGL/732' MSL. **Rwy 14**, vehicle on road beginning 184' from DER, right and left of centerline, up to 15' AGL/672' MSL. Tree 19' from DER, 314' left of centerline, 55' AGL/702' MSL. Trees beginning 71' from DER, 2' right of centerline, up to 100' AGL/753' MSL. Obstruction light on light stand 361' from DER, 525' right of centerline, 60' AGL/717' MSL. Antenna 821' from DER, 375' left of centerline, 48' AGL/698' MSL.

Rwy 4, railroad beginning 18' from DER, right and left of centerline, up to 23' AGL/676' MSL. Trees beginning 195' from DER, 124' left of centerline, up to 52' AGL/712' MSL. Vehicle on road beginning 159' from DER left and right of centerline up to 15' AGL/675' MSL. Trees beginning 64' from DER, 96' right of centerline up to 65' AGL/711' MSL. Poles beginning 220' from DER, 309' left of centerline, up to 45' AGL/695' MSL. Pole 688' from DER, 419' right of centerline, 53' AGL/697' MSL. **Rwy 22**, vehicle on road, 26' from DER, right and left of centerline, 15' AGL/691' MSL. Light standard, 35' from DER, 426' left of centerline, 21' AGL/694' MSL. Trees beginning 252' from DER, 168' left of centerline, up to 86' AGL/713' MSL. Trees beginning 205' from DER, 37' right of centerline, up to 87' AGL/763' MSL. Antenna 3842' from DER, 1213' right of centerline, 104' AGL/797' MSL.

RANTOUL, IL

RANTOUL NATL AVN CNTR-FRANK

ELLIOTT FLD (TIP)

ORIG 08101 (FAA)

NOTE: **Rwy 9**, Rising terrain 84' from departure end of runway, 149' right of centerline, up to 732' MSL.

REEDSBURG, WI

REEDSBURG MUNI (C35)

AMDT 1 85325 (FAA)

TAKE-OFF MINIMUMS: **Rwy 18**, 400-1. **Rwy 36**, 300-1.

DEPARTURE PROCEDURE: **Rwy 25**, climb to 2300 on runway heading before turning northbound.

Rwy 36, climb to 2300 on runway heading before turning westbound.

RHINELANDER, WI

RHINELANDER-ONEIDA COUNTY (RHI)

AMDT 4 10098 (FAA)

TAKE-OFF MINIMUMS: **Rwy 9**, std. w/ min. climb of 230' per NM to 3900 before turning, or 900-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 9**, for climb in visual conditions: cross Rhinelander-Oneida County airport at or above 2400 before proceeding on course.

NOTE: **Rwy 9**, tree 3101' from DER, 1084' right of centerline, 61' AGL/1686' MSL. Tree 3117' from DER, 1194' left of centerline, 67' AGL/1685' MSL. **Rwy 15**, multiple trees beginning 624' from DER, 283' right of centerline, up to 63' AGL/1684' MSL. Multiple trees beginning 663' from DER, 376' left of centerline, up to 52' AGL/1660' MSL. Fence beginning 62' from DER, 482' left of centerline, up to 13' AGL/1625' MSL. Pole 729' from DER, 449' right of centerline, 22' AGL/1634' MSL. **Rwy 33**, multiple trees beginning 890' from DER, 234' right of centerline, up to 98' AGL/1709' MSL. Multiple trees beginning 187' from DER, 106' left of centerline, up to 83' AGL/1678' MSL. Poles beginning 1755' from DER, 297' right of centerline, up to 80' AGL/1691' MSL. Poles beginning 866' from DER, 106' left of centerline, up to 74' AGL/1669' MSL.

RICE LAKE, WI

RICE LAKE RGNL-CARL'S FIELD (RPD)

ORIG 05132 (FAA)

TAKE-OFF MINIMUMS: **Rwy 1**, std. with a min. climb of 231' per NM to 2200, or 1200-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 1**, for climb in visual conditions: Cross Rice Lake Rgnl-Carl's Field at or above 2300. **Rwy 31**, climb via heading 310° to 1900 before turning left.

NOTE: **Rwy 13**, trees 1550' from departure end of runway, 200' right of centerline, 67' AGL/1167' MSL. **Rwy 19**, trees 2780' from departure end of runway, 200' left of centerline, 73' AGL/1169' MSL. **Rwy 31**, trees 1480' from departure end of runway, 50' right of centerline, 64' AGL/1156' MSL.

RICHLAND CENTER, WI

RICHLAND (93C)

AMDT 1A 07241 (FAA)

TAKE-OFF MINIMUMS: **Rwys 9,17**, NA. **Rwy 27**, 400-2 or std. with a min. climb of 491' per NM to 1300. **Rwy 35**, 300-1 or std. with a min. climb of 222' per NM to 1800.

ROBINSON, IL

ROBINSON MUNI (RSV)

ORIG 08269 (FAA)

NOTE: **Rwy 9**, trees 2285' from departure end of runway, 474' left of centerline, 60' AGL/516' MSL. Trees 971' from departure end of runway, 594' left of centerline, 58' AGL/517' MSL. **Rwy 17**, tree 2493' from departure end of runway, 521' right of centerline, 100' AGL/589' MSL. **Rwy 27**, trees beginning at 178' from departure end of runway, 358' right of centerline, up to 78' AGL/547' MSL. Trees beginning at 2190' from departure end of runway, 89' left of centerline, 98' AGL/567' MSL. **Rwy 35**, road with vehicle 693' from departure end of runway, 611' right of centerline, 15' AGL/474' MSL. Tree 1545' from departure end of runway, 841' left of centerline, 100' AGL/554' MSL.

ROCHELLE, IL

ROCHELLE MUNI AIRPORT-KORITZ FIELD
(RPJ)

AMDT 3 03191 (FAA)

TAKE-OFF MINIMUMS: **Rwy 7**, 800-1 or std. with a min. climb of 433' per NM to 1800.

NOTE: **Rwy 7**, tower 3415' from departure end of runway, 1135' right of centerline, 120' AGL/924' MSL. Tower, 3.66 NM from departure end of runway, 2020' left of centerline, 625' AGL/1463' MSL.

ST. JACOB, IL

ST LOUIS METRO-EAST/ SHAFER FIELD
(3K6)

ORIG 87155 (FAA)

TAKE-OFF MINIMUMS: **Rwy 13**, 300-1.

SALEM, IL

SALEM-LECKRONE (SLO)

AMDT 6 01193 (FAA)

TAKE-OFF MINIMUMS: **Rwy 18**, 300-2 or std. with a min. climb of 280' per NM to 900.

SHAWANO, WI

SHAWANO MUNI (E2S)

AMDT 2 07242 (FAA)

TAKE-OFF MINIMUMS: **Rwy 11**, 600-3 or std. w/ min. climb of 329' per NM to 1600. **Rwy 17**, 300-2 or std. w/ min. climb of 245' per NM to 1200. **Rwy 29**, 300-1½ or std. w/ min. climb of 248' per NM to 1100.

NOTE: **Rwy 11**, tower 2.3 NM from departure end of runway, 3006' right of centerline, 222' AGL/1240' MSL. Multiple trees beginning 1700' from departure end of runway, 389' left to 2432' right of centerline, up to 100' AGL/1149' MSL. **Rwy 17**, multiple trees beginning 1710' from departure end of runway, 2951' left to 1292' right of centerline, up to 100' AGL/1059' MSL. Elevator 5839' from departure end of runway, 738' right of centerline, 149' AGL/979' MSL. **Rwy 29**, multiple trees beginning 649' from departure end of runway, 1052' left to 1117' right of centerline, up to 100' AGL/929' MSL. Vehicle on road 538' from departure end of runway, crossing left to right 17' AGL/826' MSL. Water tank 1.1 NM from departure end of runway, 1310' right of centerline, 175' AGL/1019' MSL. **Rwy 35**, ships 1007' from departure end of runway, left to right of centerline, up to 60' AGL/869' MSL. Vehicle on road 580' from departure end of runway, left to right of centerline, up to 15' AGL/824' MSL. Multiple trees beginning 2200' from departure end of runway, 724' left of centerline, up to 100' AGL/909' MSL.

SHEBOYGAN, WI

SHEBOYGAN COUNTY MEMORIAL (SBM)

AMDT 1 09351 (FAA)

NOTE: **Rwy 13**, vehicle on road 744' from DER, west to east, 15' AGL/764' MSL. Trees beginning 302' from DER, 105' left of centerline, up to 56' AGL/796' MSL. **Rwy 21**, vehicle on road 143' from DER, east to northwest, 15' AGL/774' MSL. Tree 230' from DER, 377' right of centerline, 27' AGL/767' MSL. Trees 1475' from DER, 291' right of centerline, 92' AGL/792' MSL. Tower 5414' from DER, 1625' right of centerline, 133' AGL/883' MSL. Obstruction light on localizer, 157' from DER, 4' left of centerline, 11' AGL/750' MSL. Trees 1709' from DER, 35' left of centerline, 83' AGL/794' MSL. **Rwy 31**, pole 405' from DER, 40' right of centerline, 27' AGL/777' MSL. Trees 70' from DER, 352' right of centerline, 56' AGL/806' MSL. Trees 1345' from DER, 482' right of centerline, 76' AGL/826' MSL. Trees 2227' from DER, 17' right of centerline, 71' AGL/821' MSL. Trees 1604' from DER, 32' left of centerline, 92' AGL/842' MSL. Tower 4606' from DER, 920' left of centerline, 139' AGL/889' MSL.

SHELBYVILLE, IL

SHELBY COUNTY (2H0)

ORIG 10154 (FAA)

TAKE-OFF MINIMUMS: **Rwys 4, 22, 14, 32**, NA-Environmental.

NOTE: **Rwy 18**, vehicle on roadway 529' from DER, left and right of centerline, 15' AGL/634' MSL. Building 716' from DER, 561' left of centerline, 25' AGL/644' MSL. Trees 1755' from DER, left and right of centerline, up to 100' AGL/709' MSL. **Rwy 36**, vehicle on roadway 665' from DER, left and right of centerline, 15' AGL/644' MSL. Trees beginning 835' from DER, 653' right of centerline, up to 100' AGL/709' MSL. Trees beginning 1500' from DER, 819' left of centerline, up to 100' AGL/709' MSL.

SHELL LAKE, WI

SHELL LAKE MUNI (SSQ)

ORIG 08045 (FAA)

TAKE-OFF MINIMUMS: **Rwy 14**, 200-1½ or std. w/ min climb of 238' per NM to 1500, or alternatively with standard takeoff minimums and a normal 200'/NM climb gradient, takeoff must occur no later than 2000' prior to departure end of runway. **Rwy 32**, 200-1 ¼ or std. w/ min climb of 235' per NM to 1500, or alternatively with standard takeoff minimums and normal 200'/NM climb gradient, takeoff must occur no later than 2000' prior to departure end of runway.

NOTE: **Rwy 14**, Vehicle and road 91' from departure end of runway, 167' left of centerline, up to 15' AGL/1244' MSL. Trees beginning 147' from departure end of runway, 89' right of centerline up to 100' AGL/1409' MSL. Vehicle and road 218' from departure end of runway, 144' right of centerline, up to 15' AGL/1244' MSL. Trees beginning 358' from departure end of runway, 306' left of centerline up to 100' AGL/1329' MSL. **Rwy 32**, vehicle and road 84' from departure end of runway, 3' left of centerline, up to 15' AGL/1264' MSL. Railroad 347' from departure end of runway, 56' left of centerline, up to 23' AGL/1272' MSL. Vehicle and road 745' from departure end of runway 30' right of centerline, up to 15' AGL/1274' MSL. Railroad 827' from departure end runway, 686' right of centerline, up to 23' AGL/1272' MSL. Trees 2467' from departure end of runway, 853' right of centerline, up to 100' AGL/1349' MSL. Trees 2645' from departure end of runway, 100' left of centerline, up to 100' AGL/1419' MSL.

SPARTA, IL

SPARTA COMMUNITY-HUNTER FIELD (SAR)
ORIG 04106 (FAA)
TAKE-OFF MINIMUMS: **Rwy 18**, 300-1.

SPARTA, WI

SPARTA/FORT MC COY (CMY)
AMDT 1 90123 (FAA)
DEPARTURE PROCEDURE: **Rwys 1, 11, 29**, climb on runway heading to 1400' before turning on course.

SPRINGFIELD, IL

ABRAHAM LINCOLN CAPITAL (SPI)
ORIG 05300 (FAA)
NOTE: **Rwy 4**, multiple trees beginning 1456' from departure end of runway, 734' left of centerline, up to 59' AGL/650' MSL. **Rwy 13**, bush 342' from departure end of runway, 299' right of centerline, 43' AGL/592' MSL. **Rwy 18**, tower 1702' from departure end of runway, 778' right of centerline, 100' AGL/659' MSL. Multiple trees beginning 1503' from departure end of runway, 283' right of centerline, up to 98' AGL/660' MSL. Building 2.53 NM from departure end of runway, 1.2 NM left of centerline, 405' AGL/1000' MSL. **Rwy 31**, multiple trees beginning 1641' from departure end of runway, 619' left of centerline, up to 81' AGL/665' MSL. **Rwy 36**, multiple trees beginning 1873' from departure end of runway, 470' left of centerline, up to 79' AGL/670' MSL. Rod on tower 2397' from departure end of runway, 501' right of centerline, 55' AGL/653' MSL.

STERLING-ROCKFALLS, IL

WHITESIDE COUNTY-JOSEPH H. BITTORF FIELD (SQI)
ORIG 08325 (FAA)
NOTE: **Rwy 7**, elevator 3095' from departure end of runway, 1099' right of centerline, 91' AGL/741' MSL. **Rwy 18**, vehicle on roadway 736' from departure end of runway, on centerline, 15' AGL/664' MSL. Tree 1012' from departure end of runway, 288' left of centerline, 35' AGL/680' MSL. Tree 787' from departure end of runway, 120' left of centerline, 29' AGL/669' MSL. Multiple trees beginning 3619' from departure end of runway, 944' left of centerline, up to 100' AGL/769' MSL. **Rwy 25**, multiple trees beginning 1308' from departure end of runway, 22' left of centerline, up to 82' AGL/732' MSL. Multiple trees beginning 666' from departure end of runway, 42' right of centerline, up to 80' AGL/720' MSL. **Rwy 36**, vehicle on roadway, 575' from departure end of runway, on centerline, 17' AGL/668' MSL. Tree 564' from departure end of runway, 103' right of centerline, 11' AGL/662' MSL.

STEVENS POINT, WI

STEVENS POINT MUNI (STE)
ORIG 09015 (FAA)
NOTE: **Rwy 3**, trees beginning 1175' from departure end of runway, 649' left of centerline, 54' AGL/1173' MSL. Tree 2693' from departure end of runway, 556' right of centerline, 62' AGL/1181' MSL. **Rwy 21**, trees beginning 1127' from departure end of runway, 119' right of centerline, up to 100' AGL/1209' MSL. Trees beginning 1247' from departure end of runway, 151' left of centerline, up to 45' AGL/1153' MSL. **Rwy 12**, poles beginning 177' from departure end of runway, 197' right of centerline, up to 37' AGL/1126' MSL. Trees beginning 757' from departure end of runway, 27' right of centerline, up to 95' AGL/1204' MSL. Trees beginning 958' from departure end of runway, 112' left of centerline, up to 87' AGL/1196' MSL. **Rwy 30**, building 217' from departure end of runway, 535' left of centerline, 30' AGL/1139' MSL. Vehicle and road 499' from departure end of runway, on centerline, 15' AGL/1124' MSL. Trees beginning 848' from departure end of runway, 66' left of centerline, up to 87' AGL/1206' MSL. Trees beginning 869' from departure end of runway, 139' right of centerline, up to 81' AGL/1210' MSL.

STURGEON BAY, WI

DOOR COUNTY CHERRYLAND (SUE)
ORIG 07242 (FAA)
DEPARTURE PROCEDURE: **Rwy 2**, climb heading 016° to 1700 before turning east.
NOTE: **Rwy 2**, 100' tree 1.4 NM from departure end of runway, 2674' left of centerline, 100' AGL/839' MSL. **Rwy 10**, 130' boat 5128' from departure end of runway, on centerline, 130' AGL/710' MSL. **Rwy 20**, multiple trees, antennas, vehicle on road, poles beginning 121' from departure end of runway, 374' right of centerline, 90' AGL/802' MSL. Multiple poles and trees beginning 320' from departure end of runway, 250' left of centerline, 81' AGL/797' MSL. **Rwy 28**, vehicle on road 355' from departure end of runway, on centerline, 15' AGL/734' MSL.

SUPERIOR, WI

RICHARD I. BONG (SUW)
AMDT 5 98281 (FAA)
DEPARTURE PROCEDURE: **Rwy 3**, climb runway heading to 2500 before turning west. **Rwy 31**, climb runway heading to 2500 before turning north.

TAYLORVILLE, IL

TAYLORVILLE MUNI (TAZ)
ORIG 05300 (FAA)
TAKE-OFF MINIMUMS: **Rwys 9, 27**, NA-no survey data.
NOTE: **Rwy 18**, numerous trees 1000' from departure end of runway, from 335' left of centerline to 1150' right of centerline, up to 100' AGL/719' MSL. **Rwy 36**, numerous trees 1580' from departure end of runway, from 20' left of centerline to 570' right of centerline, up to 100' AGL/724' MSL.

TOMAHAWK, WI

TOMAHAWK RGNL (TKV)

ORIG 08269 (FAA)

NOTE: **Rwy 9**, tree 1' from departure end of runway, 402' left of centerline, 8' AGL/1487' MSL. Building 18' from departure end of runway, 439' right of centerline, 16' AGL/1505' MSL. Building 90' from departure end of runway, 440' right of centerline, 16' AGL/1505' MSL. Tree 593' from departure end of runway, 389' right of centerline, 36' AGL/1515' MSL. **Rwy 27**, tree 464' from departure end of runway, 443' right of centerline, 63' AGL/1522' MSL. Vehicle on road 83' from departure end of runway, 439' right of centerline, 15' AGL/1479' MSL. Tree 1965' from departure end of runway, 665' left of centerline, 60' AGL/1539' MSL. Wind cone 4' from departure end of runway, 400' left of centerline, 16' AGL/1495' MSL.

VIROQUA, WI

VIROQUA MUNI (Y51)

ORIG-A 07298 (FAA)

TAKE-OFF MINIMUMS: **Rwys 2, 20**, NA-unsurveyed turf runways. **Rwy 11**, NA. Obstacle.

VOLK FIELD (KVOK)

CAMP DOUGLAS, WI. 07186

TAKE-OFF OBSTACLES: **Rwy 27**: Trees 80' AGL/1019' MSL, 2537' from DER, 983' right of centerline. Trees 80' AGL/1039' MSL, 3742' from DER, 835' left of centerline. **Rwy 9**: Antenna 50' AGL/1040' MSL, 4966' from DER, 625' left of centerline.

WATERTOWN, WI

WATERTOWN MUNI (RYV)

DEPARTURE PROCEDURE: **Rwy 5**, climb runway heading to 2500 before heading west. **Rwy 29**, climb runway heading to 2500 before turning north.

WAUKESHA, WI

WAUKESHA COUNTY (UES)

AMDT 6 09127 (FAA)

TAKE-OFF MINIMUMS: **Rwy 10**, 400-2½ or std. with a min. climb of 316' per NM to 1400.

NOTE: **Rwy 10**, light pole 146' from DER, 326' left of centerline, 9' AGL/918' MSL. Light pole 560' from DER, 597' left of centerline, 17' AGL/936' MSL. Pipe on building 229' from DER, 275' left of centerline, 16' AGL/925' MSL. Trees beginning 1652' from DER, 171' right of centerline, up to 70' AGL/1029' MSL. Trees beginning 1868' from DER, 16' left of centerline, up to 54' AGL/983' MSL. Tower 1.0 NM from DER, 1571' right of centerline, 219' AGL/1148' MSL. Tower 1.1 NM from DER, 1140' right of centerline, 177' AGL/1126' MSL. Tower 1.8 NM from DER, 3455' right of centerline, 272' AGL/1238' MSL. **Rwy 18**, vehicle on road 618' from DER, 162' left of centerline, 15' AGL/946' MSL. Bush 746' from DER, 107' right of centerline, 9' AGL/938' MSL. Trees beginning 753' from DER, 187' right of centerline, up to 18' AGL/957' MSL. Tree 757' from DER, 182' left of centerline, 17' AGL/946' MSL. Tree 1188' from DER, 27' left of centerline, 27' AGL/956' MSL. Pole 1976' from DER, 304' left of centerline, 48' AGL/967' MSL. Pole 2026' from DER, 196' right of centerline, 62' AGL/981' MSL. Tower 2010' from DER, 932' left of centerline, 66' AGL/984' MSL. Rod on stack 4489' from DER, 657' left of centerline, 118' AGL/1037' MSL. **Rwy 28**, vehicle on road 877' from DER, 541' left of centerline, 15' AGL/924' MSL. Pole 1078' from DER, 739' left of centerline, 47' AGL/936' MSL. **Rwy 36**, rod on pole 401' from DER, 555' left of centerline, 46' AGL/945' MSL. Vehicle on road 300' from DER, 349' right of centerline, 15' AGL/914' MSL. Trees beginning 486' from DER, 175' right of centerline, up to 81' AGL/970' MSL. Trees beginning 999' from DER, 124' left of centerline, up to 72' AGL/962' MSL.

WAUPACA, WI

WAUPACA MUNI (PCZ)

AMDT 2 05020 (FAA)

TAKE-OFF MINIMUMS: **Rwy 28**, 300-2 or std with a min. climb of 317' per NM to 1300.

NOTES: **Rwy 10**, trees 1400' from departure end of runway, 300' left of centerline, 41' AGL/850' MSL. **Rwy 13**, road and vehicle 240' from departure end of runway, 275' right of centerline, 29' AGL/832' MSL. **Rwy 28**, trees 1.1 NM from departure end of runway, 1848' left of centerline, 100' AGL, 1119' MSL. **Rwy 31**, trees 800' from departure end of runway, 150' left of centerline, 19' AGL/846' MSL. Trees 1965' from departure end of runway, 585' left of centerline, 100' AGL/979' MSL.

WAUSAU, WI

WAUSAU DOWNTOWN (AUW)

AMDT 4 86044 (FAA)

TAKE-OFF MINIMUMS: **Rwy 30**, 300-1.

Rwy 4, 400-1. **Rwy 12**, 300-1. **Rwy 22**, 700-1.

DEPARTURE PROCEDURE: **All runways**: West departures (220° CW to 300°) climb to 3500 on runway heading before proceeding on course.

Rwy 4, North departures (360° CW 030°) climb on runway heading to 2900 before proceeding on course.



10266

TAKE-OFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES



WAUTOMA, WI

WAUTOMA MUNI (Y50)

ORIG 98225 (FAA)

DEPARTURE PROCEDURE: **Rwy 31**, climb runway heading to 1800 before turning north.

WEST BEND, WI

WEST BEND MUNI (ETB)

ORIG 10042 (FAA)

TAKE-OFF MINIMUMS: **Rwy 13**, 300-1½ or std. w/a min. climb of 260' per NM to 1200. **Rwy 24**, 300-2 or std. w/a min. climb of 250' per NM to 1400. **Rwy 31**, 300-1½ or standard w/a min. climb of 220' per NM to 1100.

NOTE: **Rwy 6**, vehicle on roads beginning 15' from DER, 251' left of centerline, up to 17' AGL/959' MSL. Trees beginning 85' from DER, 2' left of centerline, up to 100' AGL/1019' MSL. Trees beginning 47' from DER, 91' right of centerline, up to 100' AGL/886' MSL. **Rwy 13**, trees beginning 452' from DER, 127' left of centerline, up to 100' AGL/1109' MSL. Trees beginning 214' from DER, 179' right of centerline, up to 100' AGL/1049' MSL. **Rwy 24**, trees beginning 114' from DER, 74' left of centerline, up to 100' AGL/1029' MSL. Trees beginning 89' from DER, 120' right of centerline, up to 100' AGL/969' MSL. Tower 1.9 NM from DER, 2572' right of centerline, 196' AGL/1156' MSL. **Rwy 31**, vehicle on road 99' from DER, 492' left of centerline, 15' AGL/904' MSL. Trees beginning 550' from DER, 173' left of centerline, up to 100' AGL/1039' MSL. Vehicle on road 61' from DER, 498' right of centerline, 15' AGL/906' MSL. Trees beginning 832' from DER, 236' right of centerline, up to 100' AGL/1009' MSL.

23 SEP 2010 to 21 OCT 2010

23 SEP 2010 to 21 OCT 2010

10266



TAKE-OFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES



L20

EC-3

ADAMS CO LEGION FLD (See FRIENDSHIP ADAMS)**ALEXANDER FLD SOUTH WOOD CO** (See WISCONSIN RAPIDS)**AMERY MUNI** (AHH) 2 S UTC-6(-5DT) N45°16.87' W92°22.52'**GREEN BAY**

1088 B S4 FUEL 100LL, JET A NOTAM FILE GRB

L-141, A

RWY 18-36: H4001X75 (ASPH) S-12.5 MIRL

IAP

RWY 18: REIL. VASI(V2L)—GA 3.0° TCH 24'. Trees.

RWY 36: REIL. VASI(V2L)—GA 3.0° TCH 24'. Road.

AIRPORT REMARKS: Unattended. Radio controlled acft activity invof arpt. 100' crane 1500' SE of AER 36 dalgt hrs only. Rwy 36 safety area very rough. MIRL Rwy 18-36 preset low to increase ints and ACTIVATE VASI Rwy 18 and Rwy 36 and REIL Rwy 18 and Rwy 36—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RICE LAKE RCO 122.3 (GREEN BAY RADIO)

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 125.3

RADIO AIDS TO NAVIGATION: NOTAM FILE RPD.

RICE LAKE (T) VORW/DME 110.0 RPD Chan 37 N45°24.91' W91°46.68' 252° 26.5 NM to fld. 1092/1E.

OTS indef.

ANTIGO N45°09.52' W89°06.83' NOTAM FILE AIG.**GREEN BAY**

NDB (MHW) 347 AIG at Langlade Co. Unusable beyond 18 NM.

L-14J

ANTIGO**LANGLADE CO** (AIG) 2 NE UTC-6(-5DT) N45°09.25' W89°06.64'**GREEN BAY**

1521 B S2 FUEL 100LL, JET A NOTAM FILE AIG

L-14J

RWY 16-34: H4001X75 (ASPH-AFSC) S-21 MIRL

IAP

RWY 16: REIL. PAPI(P2R)—GA 3.0° TCH 26'. Trees.

RWY 34: REIL. PAPI(P2L)—GA 3.0° TCH 39'. Trees.

RWY 08-26: H3400X75 (ASPH-AFSC) S-12.5 MIRL

RWY 08: PAPI(P2L)—GA 3.0° TCH 25'. Trees.

RWY 26: PAPI(P2R)—GA 3.0° TCH 28'. Road.

AIRPORT REMARKS: Attended May-Sep 1400-0200Z†, Oct-Apr 1400-2300Z†. MIRL Rwy 16-34 preset on low ints; to increase ints and ACTIVATE MIRL Rwy 08-26; REIL Rws 16 and 34; PAPI Rwy 08; Rwy 26 and Rwy 16 and Rwy 34—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.075 (715) 627-2869.**COMMUNICATIONS:** CTAF/UNICOM 122.8

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 124.4

RADIO AIDS TO NAVIGATION: NOTAM FILE AUW.


WAUSAU (L) VORTACW 111.6 AUW Chan 53 N44°50.81'

W89°35.19' 046° 27.4 NM to fld. 1205/2E.

ANTIGO NDB (MHW) 347 AIG N45°09.52' W89°06.83' at fld.

NOTAM FILE AIG.

Unusable beyond 18 NM.

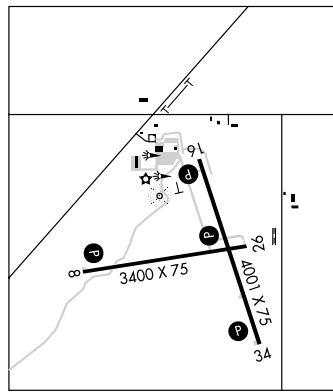

NDB RWY 18

AMERY MUNI (AHH)


NDB AHH 278	APP CRS 165°	Rwy Idg TDZE Apt Elev	4001 1080 1088
-----------------------	------------------------	-----------------------------	---

▼ Use L.O. Simenstad Muni altimeter setting; if not received,
▲ NA use Minneapolis-St. Paul Intl/Wold-Chamberlain altimeter
setting and increase all MDAs 80 feet.


MISSED APPROACH: Climb to 3000, then
left turn direct AHH NDB and hold.

MINNEAPOLIS CENTER
125.3 335.6

UNICOM
122.8 (CTAF) 0

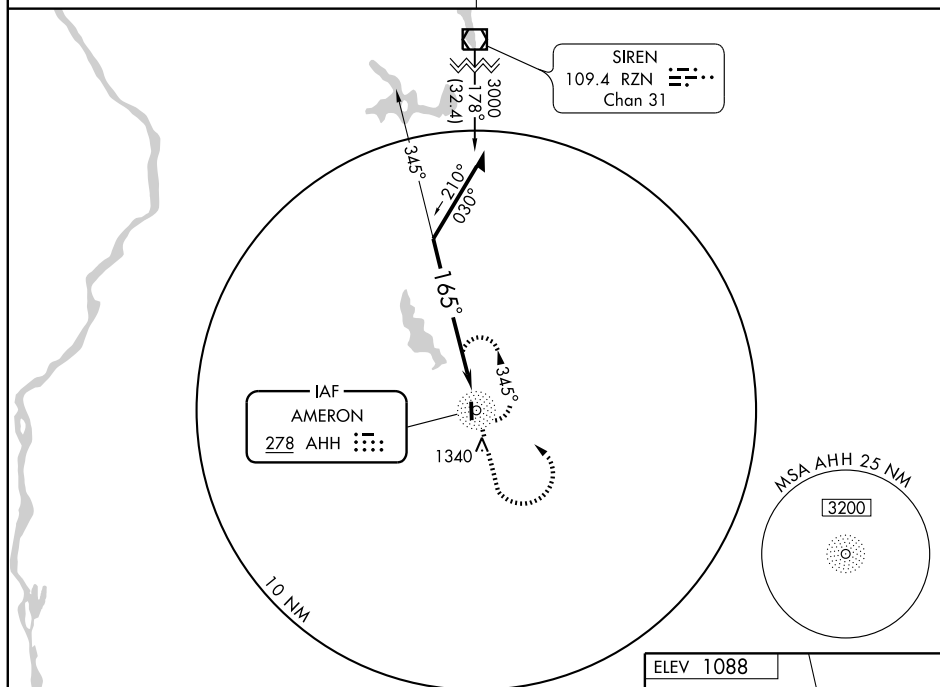

Remain
within 10 NM

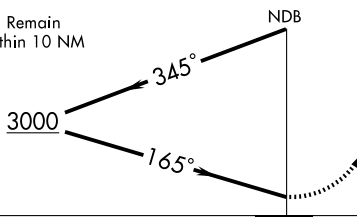

3000

AHH

278

ELEV 1088

81

TDZE
1080165° to
AHH NDB

4001 X75

36

MIRL Rwy 18-36

REIL Rwy 18 and 36

CATEGORY	A	B	C	D
S-18	1820-1	740 (800-1)	1820-2 740 (800-2)	NA
CIRCLING	1820-1	732 (800-1)	1820-2 732 (800-2)	NA

Knots	60	90	120	150	180
Min:Sec					

APP CRS **357°**
Rwy Idg **4001**
TDZE **1088**
Apt Elev **1088**

RNAV (GPS) RWY 36



AMERY MUNI (AHH)

▼ Use L. O. Simenstad Muni altimeter setting; if not received, use Minneapolis-St. Paul Intl/Wold-Chamberlain altimeter setting and increase all MDAs 80 feet. DME/DME RNP-0.3 NA.
▲ NA

MISSED APPROACH: Climb to 3000 direct JANIL and hold.

MINNEAPOLIS CENTER
125.3 335.6

UNICOM
122.8 (CTAF) 0



Procedure NA for arrivals at ALEEN via V148 Northwest bound and BITLR via V413-510 Southeast bound.

RW36 1340

(FAF) HEPIN 2700 357° (6.1)

(IF/IAF) FISOM

(IAF) ANDDE 3000 NoPT 061° (15.2)

3000 NoPT to FISOM 351° (12.6)

(IAF) BITLR

2180 ▲

ELEV 1088

MIRL Rwy 18-36
REIL Rws 18 and 36

81


4001 X 75

TDZE 1088

36

357° to RW36

3000 JANIL



FISOM 4 NM Holding Pattern

HEPIN 2700 357° 177° 3000

VGSI and descent angles not coincident.

CATEGORY	A	B	C	D
RNAV MDA	1700-1	612 (700-1)	1700-1¾ 612 (700-1¾)	NA
CIRCLING	1760-1	672 (700-1)	1760-2 672 (700-2)	NA

ADAMS CO LEGION FLD (See FRIENDSHIP ADAMS)**ALEXANDER FLD SOUTH WOOD CO** (See WISCONSIN RAPIDS)**AMERY MUNI** (AHH) 2 S UTC-6(-5DT) N45°16.87' W92°22.52'**GREEN BAY**

1088 B S4 FUEL 100LL, JET A NOTAM FILE GRB

L-141, A

RWY 18-36: H4001X75 (ASPH) S-12.5 MIRL

IAP

RWY 18: REIL. VASI(V2L)—GA 3.0° TCH 24'. Trees.

RWY 36: REIL. VASI(V2L)—GA 3.0° TCH 24'. Road.

AIRPORT REMARKS: Unattended. Radio controlled acft activity invof arpt. 100' crane 1500' SE of AER 36 dalgt hrs only. Rwy 36 safety area very rough. MIRL Rwy 18-36 preset low to increase ints and ACTIVATE VASI Rwy 18 and Rwy 36 and REIL Rwy 18 and Rwy 36—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RICE LAKE RCO 122.3 (GREEN BAY RADIO)

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 125.3

RADIO AIDS TO NAVIGATION: NOTAM FILE RPD.

RICE LAKE (T) VORW/DME 110.0 RPD Chan 37 N45°24.91' W91°46.68' 252° 26.5 NM to fld. 1092/1E.

OTS indef.

ANTIGO N45°09.52' W89°06.83' NOTAM FILE AIG.**GREEN BAY**

NDB (MHW) 347 AIG at Langlade Co. Unusable beyond 18 NM.

L-14J

ANTIGO**LANGLADE CO** (AIG) 2 NE UTC-6(-5DT) N45°09.25' W89°06.64'**GREEN BAY**

1521 B S2 FUEL 100LL, JET A NOTAM FILE AIG

L-14J

RWY 16-34: H4001X75 (ASPH-AFSC) S-21 MIRL

IAP

RWY 16: REIL. PAPI(P2R)—GA 3.0° TCH 26'. Trees.

RWY 34: REIL. PAPI(P2L)—GA 3.0° TCH 39'. Trees.

RWY 08-26: H3400X75 (ASPH-AFSC) S-12.5 MIRL

RWY 08: PAPI(P2L)—GA 3.0° TCH 25'. Trees.

RWY 26: PAPI(P2R)—GA 3.0° TCH 28'. Road.

AIRPORT REMARKS: Attended May-Sep 1400-0200Z†, Oct-Apr 1400-2300Z†. MIRL Rwy 16-34 preset on low ints; to increase ints and ACTIVATE MIRL Rwy 08-26; REIL Rws 16 and 34; PAPI Rwy 08; Rwy 26 and Rwy 16 and Rwy 34—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.075 (715) 627-2869.**COMMUNICATIONS:** CTAF/UNICOM 122.8

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 124.4

RADIO AIDS TO NAVIGATION: NOTAM FILE AUW.


WAUSAU (L) VORTACW 111.6 AUW Chan 53 N44°50.81'

W89°35.19' 046° 27.4 NM to fld. 1205/2E.

ANTIGO NDB (MHW) 347 AIG N45°09.52' W89°06.83' at fld.

NOTAM FILE AIG.

Unusable beyond 18 NM.

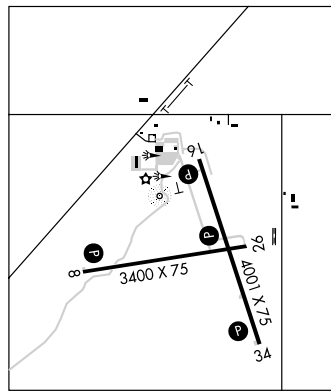






NDB AIG
347APP CRS
180°Rwy Idg **4001**
TDZE **1521**
Apt Elev **1521****NDB RWY 16**

ANTIGO/LANGLADE COUNTY (AIG)



When local altimeter setting not received, use Wausau altimeter setting and increase all MDAs 120 feet and increase visibility Cat A ¼ mile, Cat C and D ½ mile.

MISSED APPROACH: Climb to 3400 then left turn direct AIG NDB and hold.

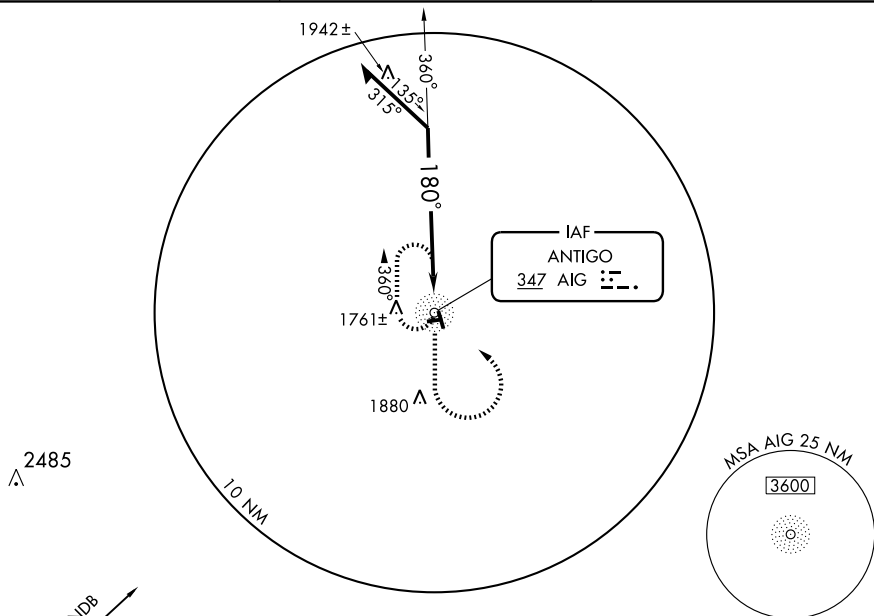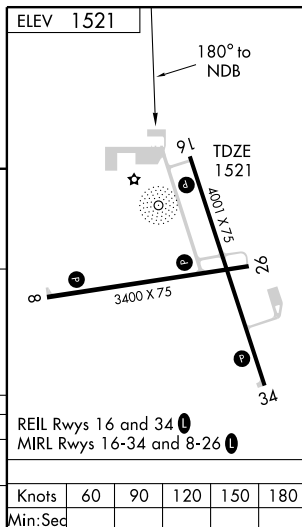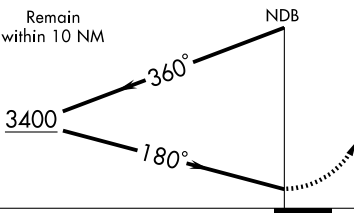AWOS-3
119.075MINNEAPOLIS CENTER
124.4 317.7UNICOM
122.8 (CTAF) 0Remain
within 10 NM

REIL Rwy 16 and 34
MIRL Rwy 16-34 and 8-26

Knots	60	90	120	150	180
Min:Sec					

APP CRS **166°**
Rwy ldg **4001**
TDZE **1521**
Apt Elev **1521**

RNAV (GPS) RWY 16

ANTIGO/ LANGLADE COUNTY (AIG)

▼ DME/DME RNP-0.3 NA. VDP NA when using Wausau altimeter setting.
▲ When local altimeter setting not received, use Wausau altimeter setting and increase all MDAs 120 feet and visibility Cats C and D ½ mile.

MISSED APPROACH: Climb to 3300 direct OTIXE and hold.



AWOS-3

119.075

MINNEAPOLIS CENTER

124.4 317.7

UNICOM

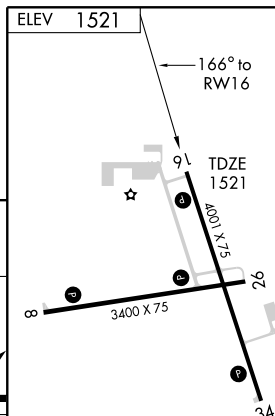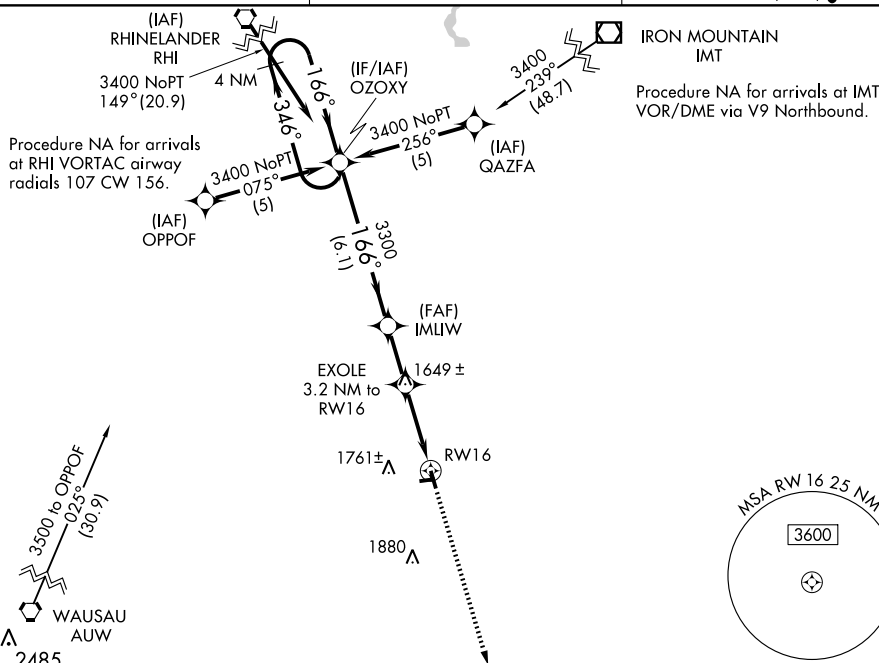122.8 (CTAF) 0

4 NM Holding Pattern OZOXY				3300	OTIXE
3400 ← 346° 166° → 166°				3300	OTIXE
VGSI and descent angles not coincident. 3300 3.04° TCH 40 2580				EXOLE 3.2 NM to RW16	1.2 NM to RW16
6.1 NM 2.2 NM 2 NM 1.2 NM				RW16	
CATEGORY	A	B	C	D	
LNAV MDA	1920-1 399 (400-1)			1920-1¼ 399 (400-1¼)	
CIRCLING	2120-1 599 (600-1)		2120-1½ 599 (600-1½)	2120-2 599 (600-2)	

REIL Rwy 16 and 34 0
MIRL Rwy 16-34 and 8-26 0

APP CRS **346°**
Rwy Idg **4001**
TDZE **1521**
Apt Elev **1521**

RNAV (GPS) RWY 34

ANTIGO/LANGLADE COUNTY (AIG)



T DME/DME RNP-0.3 NA. VDP NA when using Wausau altimeter setting.
A When local altimeter setting not received, use Wausau altimeter setting and increase all MDAs 120 feet, increase LNAV visibilities Cat C and D ¼ mile, Circling Cat C ½ mile and Cat D ¼ mile.

MISSED APPROACH: Climb to 3400 direct OZOXY and hold.

AWOS-3
119.075



MINNEAPOLIS CENTER
124.4 317.7

UNICOM
122.8 (CTAF) 0

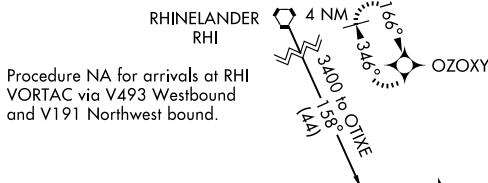

2485

ELEV 1521

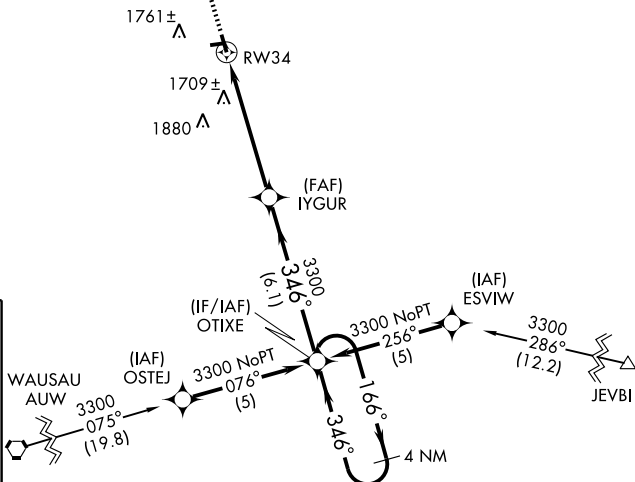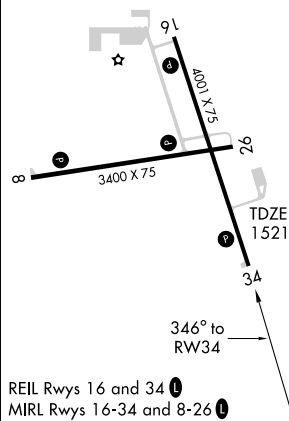


3400	OZOXY	IYUR	OTIXE	4 NM Holding Pattern
1.3 NM to RW34	3.05° TCH 39	346°	166°	3300
1.3	4.1 NM	6.1 NM		
CATEGORY	A	B	C	D
LNAV MDA	1960-1	439 (500-1)	1960-1¼ 439 (500-1¼)	1960-1½ 439 (500-1½)
CIRCLING	2120-1	599 (600-1)	2120-1½ 599 (600-1½)	2120-2 599 (600-2)

AIRPORT DIAGRAM

AL-5216 (FAA)

APPLETON/OUTAGAMIE COUNTY RGNL (ATW)
APPLETON, WISCONSIN

ATIS
127.15
APPLETON TOWER*
119.6
GND CON
121.7
D



NON MOVEMENT
AREA

ELEV
878

44° 16.0'N

JANUARY 2010
ANNUAL RATE OF CHANGE
0.1° W

FIELD
ELEV
918

44° 15.5'N

6501 X 150

LAHSO

LAHSO

8002 X 150

44° 15.0'N

ELEV
888

TERMINAL

CONTROL
TOWER
961

FIRE
STATION

0.9% UP

ELEV
858

RWY 03-21
S-75, D-160, 2S-175, 2D-320
RWY 12-30
S-75, D-160, 2S-175, 2D-320

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

88° 31.5'W

88° 31.0'W

88° 30.5'W

AIRPORT DIAGRAM

APPLETON, WISCONSIN
APPLETON/OUTAGAMIE COUNTY RGNL (ATW)

APPLETON

OUTAGAMIE CO RGNL (ATW) 3 W UTC-6(-5DT) N44°15.49' W88°31.15'

918 B S4 FUEL 100LL, JET A1 +, MOGAS OX 1, 2 Class I, ARFF Index B

NOTAM FILE ATW

RWY 03-21: H8002X150 (CONC-GRVD) S-75, D-160, 2S-175, 2D-320 HIRL

RWY 03: MALSR. PAPI(P4L)—GA 3.0° TCH 47'. Tree.

RWY 21: REIL. PAPI(P4L)—GA 3.0° TCH 47'. Tree.

RWY 12-30: H6501X150 (CONC-GRVD). S-75, D-160, 2S-175, 2D-320 HIRL 0.9% up NW

RWY 12: REIL. VASI(V4L)—GA 3.0° TCH 35'. Tree.

RWY 30: MALSR. PAPI(P4L)—GA 3.0° TCH 61'.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 03	12-30	3300
RWY 21	12-30	4100
RWY 30	03-21	3400

RUNWAY DECLARED DISTANCE INFORMATION

RWY 03:	TORA 8002	TODA 8002	ASDA 8002	LDA 8002
RWY 12:	TORA 6501	TODA 6501	ASDA 6501	LDA 6501
RWY 21:	TORA 8002	TODA 8002	ASDA 8002	LDA 8002
RWY 30:	TORA 6501	TODA 6501	ASDA 6501	LDA 6501

AIRPORT REMARKS: Attended continuously. Birds and migratory waterfowl

on and in/ovf arpt. Snow removal ops in progress winter months. Vehicle operators will be monitoring CTAF; acft ldg/dep Appleton should use CTAF when twr clsd. Rwy 03 touchdown RVR avbl. When twr clsd HIRL Rwy 03-21 preset on low ints, to increase ints and ACTIVATE HIRL Rwy 12-30; MALSR Rwy 03 and Rwy 30; REIL Rwy 12 and Rwy 21—CTAF. PAPI Rwy 03, Rwy 21 and Rwy 30 and VASI Rwy 12 opr 24 hrs. Rwy 21 PAPI rstd byd 8.5° right of course.

WEATHER DATA SOURCES: AWOS-3 (920) 832-2597. LAWRS.

COMMUNICATIONS: CTAF 119.6 ATIS 121.15

UNICOM 122.95

⑦ GREEN BAY APP/DEP CON 126.3 (1130-0530Z‡) ⑦ MINNEAPOLIS CENTER APP/DEP CON 126.3 (0530-1130Z‡)

APPLETON TOWER 119.6 (1130-0500Z‡) GND CON 121.7

AIRSPACE: CLASS D svc 1130-0500Z‡ other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE OSH.

OSHKOSH (L) VORTAC 111.8 OSH Chan 55 N43°59.43' W88°33.36' 004° 16.1 NM to fld. 780/2E.

KOOKY NDB (MHW/LOM) 407 AQ N44°12.95' W88°23.94' 298° 5.8 NM to fld. NOTAM FILE ATW.


Unmonitored.

GAMIE NDB (LOM) 230 AT N44°09.75' W88°35.10' 028° 6.4 NM to fld.

ILS/DME 109.1 I-ATW Chan 28 Rwy 03. Class 1C. LOM GAMIE NDB. LOC unusable byd 20° rgt of course.

ILS/DME 109.7 I-AQZ Chan 34 Rwy 30. Class IT. LOM KOOKY NDB ILS/DME unmonitored.

COMM/NAV/WEATHER REMARKS: Rwy 03. LOC/GS unmonitored when twr clsd. LOM unmonitored.

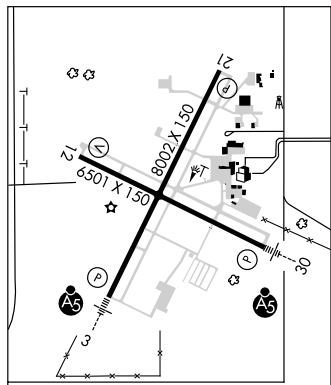

ARBOR VITAE N45°55.57' W89°43.76' NOTAM FILE ARV.

NDB (MHW) 221 ARV at Lakeland/Noble F. Lee Meml Fld.

GREEN BAY
L-14J

ARSHA N45°37.69' W89°37.13' NOTAM FILE RHI.

NDB (LOM) 272 RH 087° 6.4 NM to Rhinelander-Oneida Co.

GREEN BAY

ASHLAND N46°32.96' W90°55.04' NOTAM FILE ASX.

(T) VOR/DME 110.2 ASX Chan 39 at John F. Kennedy Meml.

820/2E. Unmonitored 0000-1200Z‡.

RCO 122.25 (GREEN BAY RADIO)

GREEN BAY
L-14I

LOC/DME I-ATW <u>109.1</u> Chan 28	APP CRS 028°	Rwy Idg 8002 TDZE 888 Apt Elev 918
--	------------------------	---

ILS or LOC RWY 3

APPLETON/OUTAGAMIE COUNTY RGNL (ATW)

▼ ADF REQUIRED: Visibility reduction by helicopters NA. VDP NA when using Austin Straubel Inlt altimeter setting. When using Austin Straubel altimeter setting for inoperative MALS/R increase S-ILS visibility ½ mile all Cats. When local altimeter setting not received, use Austin Straubel Inlt altimeter setting and increase DAs 81 feet all Cats: increase all MDA's 100 feet and S-LOC Cat C and D ¼ mile.

* RVR 1800 authorized with the use of FD or AP or HUD to DA.


MALSR



MISSED APPROACH:
Climb to 2900 then
left turn direct GAMIE
LOM/INT/I-ATW
7.3 DME and hold.

ATIS 127.15	GREEN BAY APP CON★ 126.3 338.2	APPLETON TOWER★ 119.6(CTAF) 0	GND CON 121.7	UNICOM 122.95
----------------	-----------------------------------	----------------------------------	------------------	------------------

ALTERNATE MISSED APCH FIX

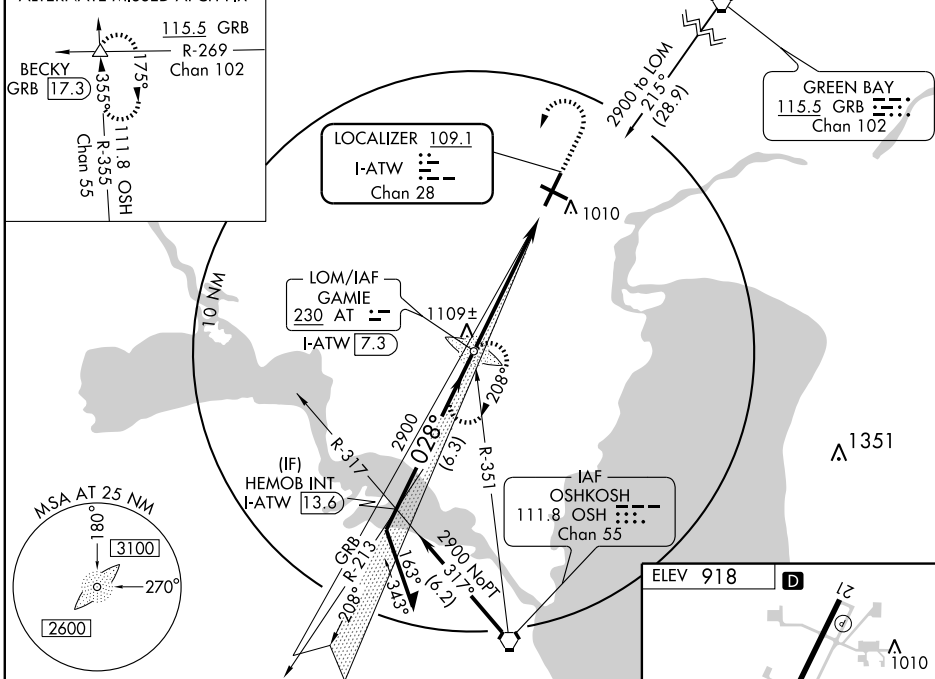

Remain
within 10 NM

2900 — 028° — 2805

3.00°
H 54

2900

GSI and ILS glidepath not coincident.

$$\frac{\text{GS } 3.00^\circ}{\text{TCH } 54}$$

VGSI and ILS glidepath not coincident.

CATEGORY	A	B	C	D
S-ILS 3	* 1088/24 200 (200-½)			
S-LOC 3	1380/24 492 (500-½)	1380/40 492 (500-¾)	1380/50 492 (500-1)	
CIRCLING	1380-1 462 (500-1)	1380-1½ 462 (500-1½)	1480-2 562 (600-2)	

028° 5.8 NM
from FAF

REIL Rwy's 12 and 21
HIRL Rwy's 12-30 and 3-21

FAF to MAP 5.8 NM

Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

APPLETON, WISCONSIN

Amdt 17A 10154

APPLETON/OUTAGAMIE COUNTY RGNL(ATW)

44°15'N - 88°31'W

ILS or LOC RWY 3


EC-3. 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

LOC/DME I-AQZ <u>109.7</u> Chan 34	APP CRS 298°	Rwy Idg 6501 TDZE 875 Apt Elev 918
--	------------------------	---


ILS or LOC RWY 30
APPLETON/OUTAGAMIE COUNTY RGNL (ATW)

T For inoperative MALSR when using Austin Straubel Intl altimeter setting, increase S-ILS all Cats visibility to 1 mile. ADF required. When local altimeter setting not received, use Austin Straubel Intl altimeter setting and increase all DA 81 feet and all MDA 100 feet. Increase S-LOC Cat C and D visibility $\frac{1}{4}$ mile. VDP NA when using Austin Straubel Intl altimeter setting.


<p>MALSR</p> 	<p>MISSED APPROACH: Climb to 2900, then right turn direct KOOKY LOM/I-AQZ 6.5 DME and hold.</p>
---	--

ATIS
127.15


GREEN BAY APP CON★
126.3 338.2

APPLETON TOWER
119.6 (CTAF) 

GND CON
121.7

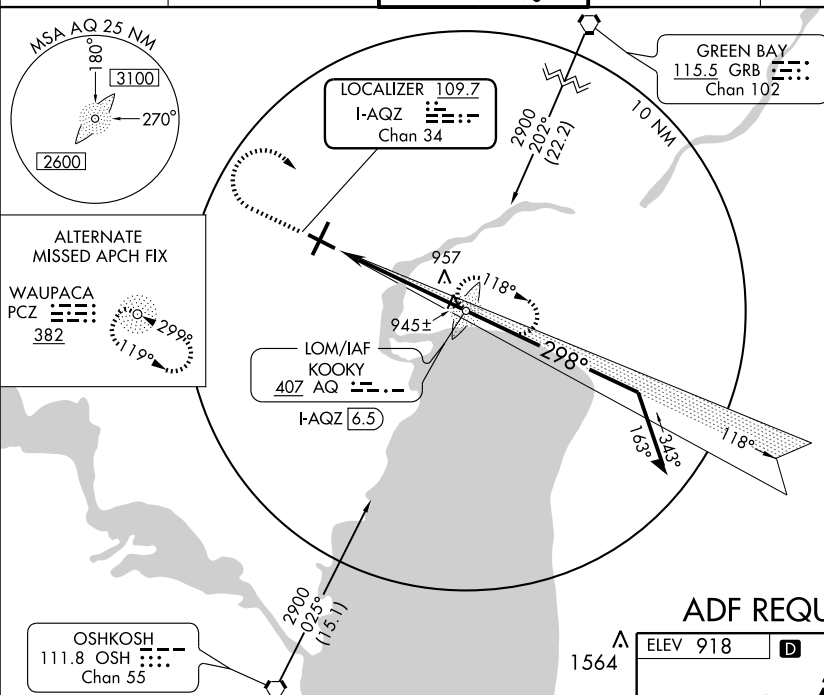UNICOM
122.95

ADF REQUIRED

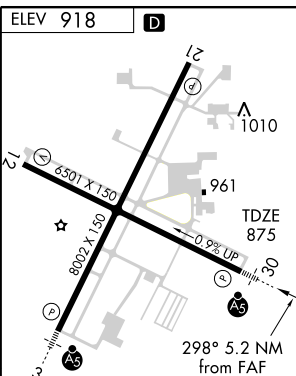

REIL Rwy 11 and 21 **L**
HIRL Rwy 11-29 and 3-21 **L**

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

CATEGORY	A	B	C	D
S-ILS 30	1075-1/2 200 (200-1/2)			
S-LOC 30	1220-1/2 345 (400-1/2)			1220-3/4 345 (400-3/4)
CIRCLING	1340-1 422 (500-1)	1380-1 462 (500-1)	1380-1 1/2 462 (500-1 1/2)	1480-2 562 (600-2)

APPLETON, WISCONSIN

Amdt 3 03JUN10

APPLETON/OUTAGAMIE COUNTY RGNL (ATW)

44°15'N - 88°31'W

ILS or LOC RWY 30

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

LAND AND HOLD SHORT OPERATIONS (LAHSO)

LAHSO is an acronym for "Land and Hold Short Operations." These operations include landing and holding short of an intersection runway, an intersecting taxiway, or other predetermined points on the runway other than a runway or taxiway. Measured distance represents the available landing distance on the landing runway, in feet.

Specific questions regarding these distances should be referred to the air traffic manager of the facility concerned. The Aeronautical Information Manual contains specific details on hold-short operations and markings.

CITY/AIRPORT	LDG RWY	HOLD-SHORT POINT	MEASURED DISTANCE
ALTON/ST. LOUIS, IL			
ST. LOUIS RGNL (ALN)	29	17-35	6,850 feet
	35	11-29	5,100 feet
APPLETON, WI			
OUTAGAMIE COUNTY RGNL (ATW)	03	12-30	3,300 feet
	21	12-30	4,100 feet
	30	03-21	3,400 feet
BLOOMINGTON/NORMAL, IL			
CENTRAL IL REGL ARPT AT			
BLOOMINGTON-NORMAL (BMI)	02	11-29	4,600 feet
	11	02-20	6,200 feet
CARBONDALE-MURPHYSBORO, IL			
SOUTHERN ILLINOIS (MDH)	06	18L-36R	3,100 feet
	24	18R-36L	3,800 feet
	36R	06-24	3,000 feet
CHAMPAIGN-URBANA, IL			
UNIVERSITY OF ILLINOIS-WILLARD (CMI)	04	14L-32R	3,600 feet
	14L	04-22	3,550 feet
	18	04-22	4,100 feet
	22	18-36	4,700 feet
	32R	04-22	4,050 feet
	36	14L-32R	3,950 feet
CHICAGO, IL			
CHICAGO-O'HARE INTL (ORD)	09R	14L-32R	6,100 feet
	10	TWY S	12,156 feet
	22R	09R-27L	6,050 feet
	27L	04L-22R	5,700 feet
CHICAGO/AURORA, IL			
AURORA MUNI (ARR)	09	18-36	3,450 feet
	15	09-27	3,900 feet
	27	15-33	4,000 feet
CHICAGO/PROSPECT HEIGHTS/ WHEELING, IL			
CHICAGO EXECUTIVE (PWK)	16	12-30	3,623 feet
DECATUR, IL			
DECATUR (DEC)	06	12-30	4,800 feet
	12	06-24	4,450 feet
	18	06-24	4,450 feet
	24	12-30	3,000 feet
	24	18-36	8,000 feet
	30	18-36	5,050 feet
	36	12-30	4,800 feet

(SEE CONTINUATION PAGE FOR MORE LISTINGS)

LAND AND HOLD SHORT OPERATIONS (LAHSO)
(CONTINUED)

CITY/AIRPORT	LDG RWY	HOLD-SHORT POINT	MEASURED DISTANCE
GREEN BAY, WI			
AUSTIN STRAUBEL INTL (GRB)	18	06-24	2,692 feet
	24	18-36	6,050 feet
	36	06-24	4,932 feet
MADISON, WI			
DANE COUNTY RGNL- TRUAX FIELD (MSN)	03	14-32	3,400 feet
	18	03-21	4,850 feet
	21	18-36	6,450 feet
	32	18-36	5,300 feet
	36	14-32	7,050 feet
MARION, IL			
WILLIAMSON COUNTY RGNL (MWA)	20	11-29	6,650 feet
	29	02-20	4,650 feet
MOSINEE, WI			
CENTRAL WISCONSIN (CWA)	26	17-35	7,300 feet
	35	08-26	5,000 feet
ROCKFORD, IL			
CHICAGO/ROCKFORD INTL (RFD)	01	07-25	6,000 feet
	07	01-19	8,800 feet
SPRINGFIELD, IL			
ABRAHAM LINCOLN CAPITAL (SPI)	04	13-31	3,200 feet
	22	13-31	4,150 feet
	31	04-22	3,350 feet
	36	13-31	3,000 feet

WAAS CH 56223 W03A	APP CRS 028°	Rwy Idg TDZE 888 Apt Elev 918	8002
--	------------------------	---	-------------

RNAV (GPS) RWY 3


APPLETON/OUTAGAMIE COUNTY RGNL (ATW)

▼ Baro-VNAV NA below -16°C (4°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Austin Straubel Intl altimeter setting and increase all DAs/MDAs 100 feet. Baro/VNAV and VDP NA when using Austin Straubel Intl altimeter setting. For inoperative MALSR increase LPV visibility to RVR 4000 all Cats.




MISSED APPROACH: Climb to 2700 direct ASIGE and hold.

ATIS 127.15	GREEN BAY APP CON★ 126.3 338.2	APPLETON TOWER★ 119.6 (CTAF) 0	GND CON 121.7	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

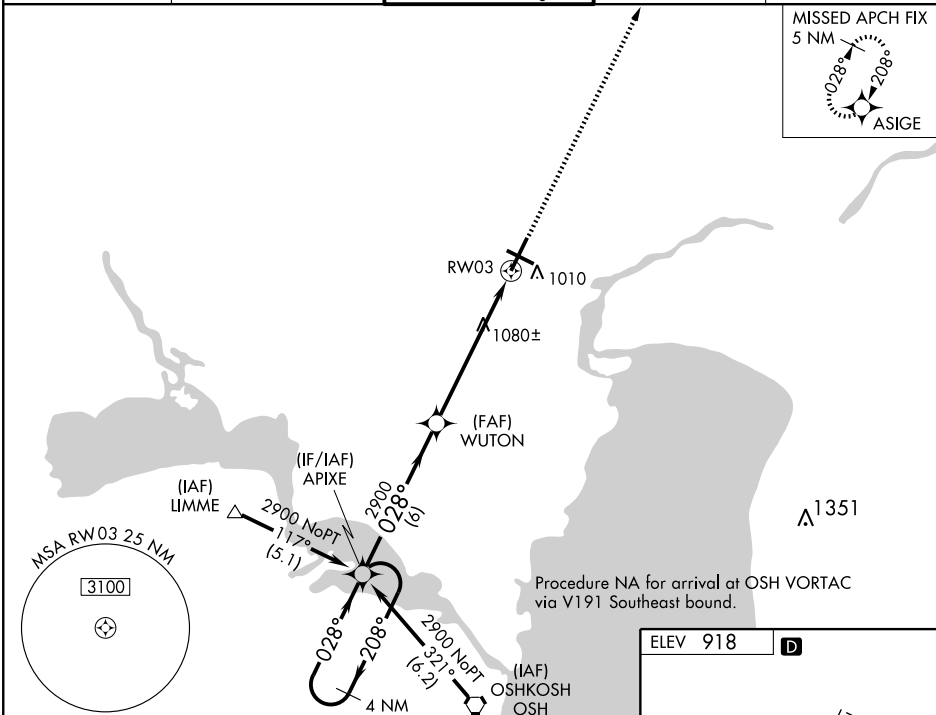

4 NM Holding Pattern				
<div style="display: flex; justify-content: space-around;"> <div> <p>2900 ← 208°</p> <p>2900 → 028°</p> <p>GS 3.00°</p> <p>TCH 47</p> </div> <div> <p>APIXE</p> <p>WUTON</p> <p>2700</p> <p>ASIGE</p> </div> </div>				
<div style="display: flex; justify-content: space-around;"> <div>6 NM</div> <div>4.6 NM</div> <div>1.5 NM</div> </div>				
CATEGORY	A	B	C	D
LPV DA	1138/24		250 (300-½)	
LNAV/VNAV DA	1232/40		344 (400-¾)	
LNAV MDA	1400/24	512 (500-½)	1400/50 512 (500-1)	1400/60 512 (500-1¼)
CIRCLING	1400-1¼	482 (500-1¼)	1400-1½ 482 (500-1½)	1480-2 562 (600-2)

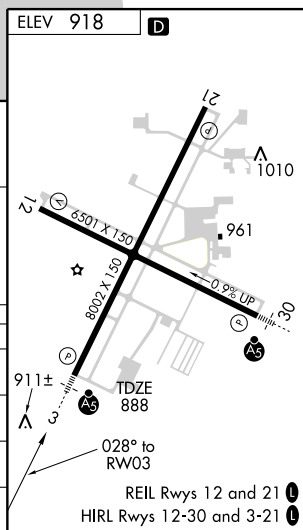

APPLETON, WISCONSIN

Amdt 1 10154

APPLETON/OUTAGAMIE COUNTY RGNL (ATW)

44°15'N - 88°31'W

RNAV (GPS) RWY 3

WAAS CH 82716 W12A	APP CRS 118°	Rwy Idg 6501 TDZE 918 Apt Elev 918
--	------------------------	---

RNAV (GPS) RWY 12

APPLETON/OUTAGAMIE COUNTY RGNL (ATW)

- T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DMD RNP-0.3 NA. When local altimeter not received, use Austin Straubel Intl altimeter setting and increase all DA 81 feet and all MDA 100 feet. Increase LPV and LNAV/VNAV all Cats and LNAV Cat C/D visibility ¼ mile. Baro-VNAV and VDP NA when using Austin Straubel altimeter setting.


MISSED APPROACH: Climb to 2700
direct APESE and hold.

ATIS
127.15

GREEN BAY APP CON★
126.3 338.2

APPLETON TOWER★
119.6 (CTAF) L

GND CON
121.7

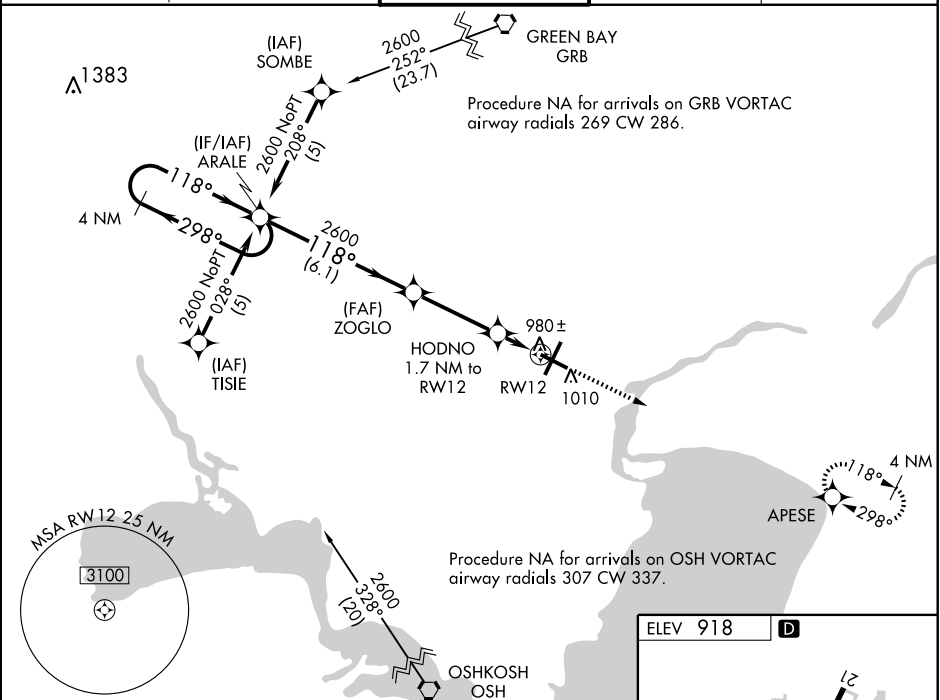UNICOM
122.95

4 NM Holding Pattern

ARALE

ZOGLO

HODNO 1.7 NM to RW12

2600 ← 298° 118° → 2600

GS 3.00° TCH 50

VGS1 and RNAV glidepath not coincident.

2600

118°

*1500

*0.9 NM to RW12

RW12


2700

APSE

*LNAV only

6.1 NM 3.4 NM 0.8 0.9

CATEGORY		A	B	C	D
LPV	DA	1118- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)			
LNAV/ VNAV	DA	1329-1 $\frac{1}{2}$ 411 (500-1 $\frac{1}{2}$)			
LNAV	MDA	1240-1 322 (400-1)			
CIRCLING		1340-1 422 (500-1)	1380-1 462 (500-1)	1380-1 $\frac{1}{2}$ 462 (500-1 $\frac{1}{2}$)	1480-2 562 (600-2)

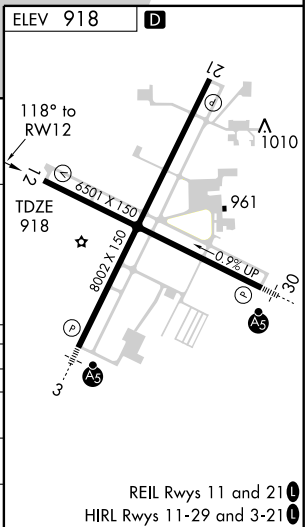

APPLETON, WISCONSIN

Amdt 1 03JUN10

APPLETON/OUTAGAMIE COUNTY RGNL (ATW)

44°15'N - 88°31'W

RNAV (GPS) RWY 12

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010


WAAS CH 93517 W21A	APP CRS 208°	Rwy ldg TDZE Apt Elev	8002 879 918
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21


APPLETON/OUTAGAMIE COUNTY RGNL (ATW)

- ▼ Baro-VNAV NA when using Austin Straubel Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.
- ▲ Visibility reduction by helicopters NA. When local altimeter setting not received, use Austin Straubel Intl altimeter setting and increase all DA 81 feet and all MDA 100 feet. Increase LPV and LNAV/VNAV all Cats and LNAV Cat C/D visibility ¼ mile.
- MISSED APPROACH: Climb to 2900 direct APIXE and hold.

ATIS 127.15	GREEN BAY APP CON★ 126.3 338.2	APPLETON TOWER★ 119.6(CTAF) 0	GND CON 121.7	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

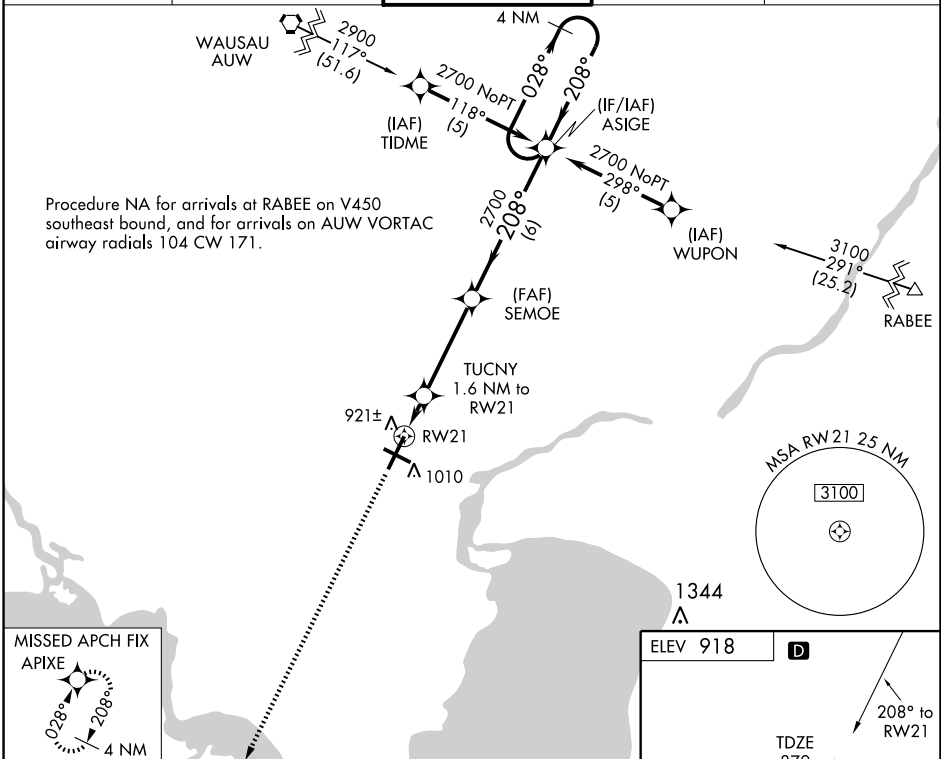


2900	APIXE	SEMOE	ASIGE	4 NM Holding Pattern
*LNAV only	TUCNY 1.6 NM to RW21	2700	028°	2700
	RW21	1440	208°	2700
	1.6	3.9 NM	6 NM	
CATEGORY	A	B	C	D
LPV DA		1129-1	250 (300-1)	
LNAV/VNAV DA		1246-1¼	367(400-1)	
LNAV MDA	1280-1	401(400-1)	1280-1¼	401 (400-1¼)
CIRCLING	1340-1 422 (500-1)	1380-1 462 (500-1)	1380-1½ 462 (500-1½)	1480-2 562 (600-2)

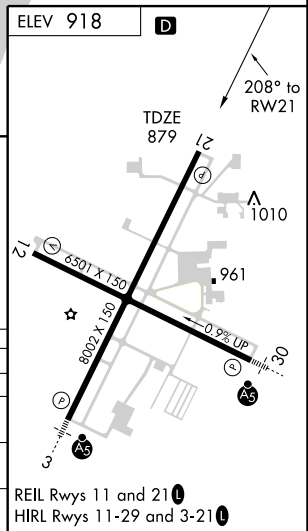

RNAV (GPS) RWY 30
APPLETON/OUTAGAMIE COUNTY RGNL (ATW)

MISSED APPROACH: Climb to 2600 direct ARALE WP hold.

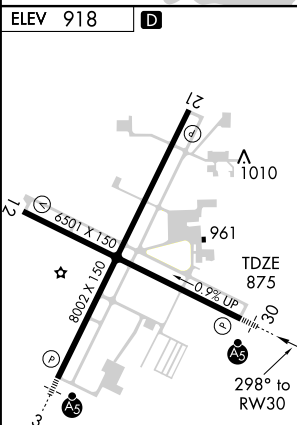UNICOM
122.95

APPLETON/OUTAGAMIE COUNTY RGNL (ATW)

44°15'N - 88°31'W

RNAV (GPS) RWY 30

VORTAC OSH
111.8
 Chan **55**

APP CRS
002°

Rwy Idg **8002**
 TDZE **888**
 Apt Elev **918**

VOR/DME RWY 3

APPLETON/OUTAGAMIE COUNTY RGNL (ATW)

▼ Inoperative table does not apply to Cats. C and D.
 For inoperative MALSR increase Cats. A and B
 visibility to RVR 5000.

MALSR

MISSED APPROACH: Climbing left turn to 2700
 via OSH R-002 to LANKK/10 DME and hold.



ATIS
127.15

GREEN BAY APP CON ★
126.3 338.2


APPLETON TOWER ★
119.6 (CTAF)

GND CON
121.7

UNICOM
122.95

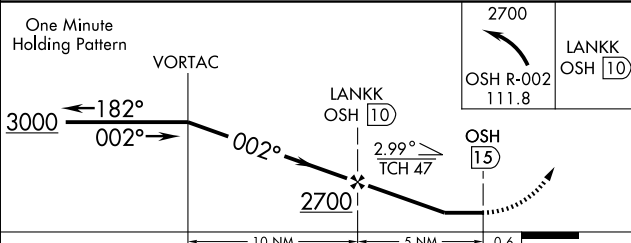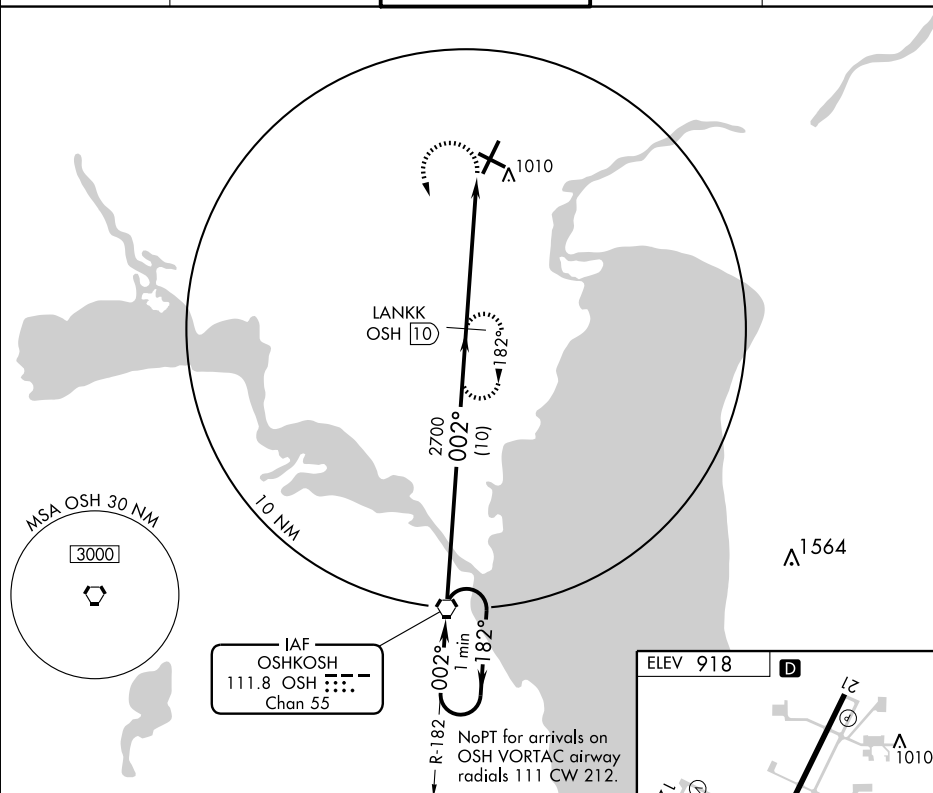

CATEGORY	A	B	C	D
S-3	1380/40 492 (500-¾)		1380/60 492 (500-1¼)	1380-1½ 492 (500-1½)
CIRCLING	1380-1 462 (500-1)		1380-1½ 462 (500-1½)	1480-2 562 (600-2)

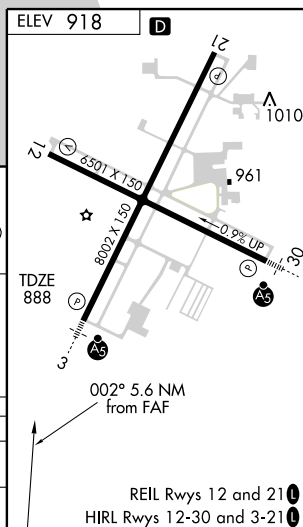

VORTAC OSH 111.8 Chan 55	APP CRS 184°	Rwy Idg TDZE 878 Apt Elev 918	8002 878 918
--	------------------------	---	---

VOR/DME RWY 21

APPLETON/OUTAGAMIE COUNTY RGNL (ATW)

⚠ If local altimeter setting not received, use Austin Straubel Intl altimeter setting and increase all MDAs 100 feet.

MISSED APPROACH: Climb to 2600 then right turn via OSH R-004 to JAXON and hold.



ATIS
127.15

GREEN BAY APP CON★
126.3 338.2

APPLETON TOWER★
119.6 (CTAF) 0

GND CON
121.7

UNICOM
122.95

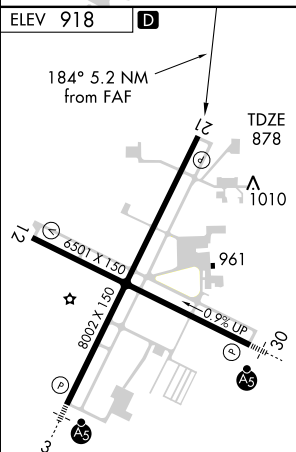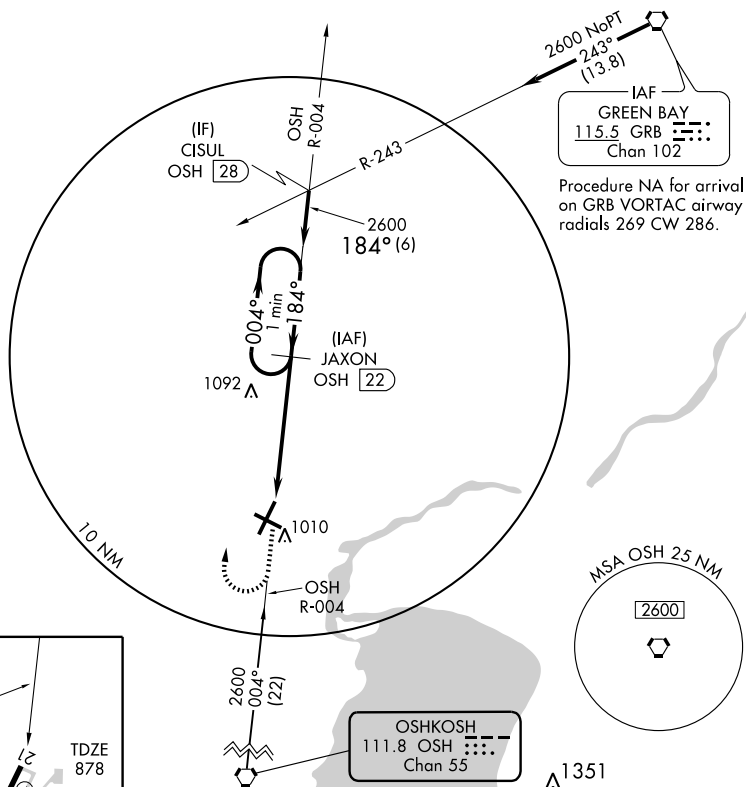

2600

OSH R-004

111.8

JAXON

OSH 22

One Minute Holding Pattern

JAXON

OSH 22

004°

184°

2600

OSH 16.8

184°

3.04°

TCH 47

5.2 NM

CATEGORY	A	B	C	D
S-21	1400-1	522 (500-1)	1400-1½ 522 (500-1½)	1400-1¾ 522 (500-1¾)
CIRCLING	1400-1	482 (500-1)	1400-1½ 482 (500-1½)	1480-2 562 (600-2)

REIL Rwy 12 and 21
HIRL Rwy 12-30 and 3-21

APPLETON, WISCONSIN
Amdt 1 10154

APPLETON/OUTAGAMIE COUNTY RGNL (ATW)
44°15'N - 88°31'W
VOR/DME RWY 21

ASHLAND

JOHN F KENNEDY MEML (ASX) 2 SW UTC-6(-5DT) N46°32.91' W90°55.14'

GREEN BAY

827 B S2 FUEL 100LL, JET A, A1+ NOTAM FILE ASX

H-2K, L-141

RWY 02-20: H5197X100 (ASPH) S-42, D-52 MIRL

IAP

RWY 02: REIL. PAPI(P4L)—GA 3.0° TCH 41'. Trees.

RWY 20: PAPI(P4L)—GA 3.0° TCH 34'. Trees.

RWY 13-31: H3498X75 (ASPH) S-40, D-50 MIRL 0.4% up NW

RWY 13: Trees. RWY 31: PAPI(P2L)—GA 3.0° TCH 37'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2200Z†. For svc after hrs call 715-292-7070. Jet A1+ PPR ctc arpt manager 715-682-7070, after hrs call 715-292-7070. 24 hr self serve 100LL. Deer and other wildlife on and invof arpt. Heavy bird activity spring and summer months. Ultralight activity on and invof arpt. Snow removal ops winter months. Acft over 4000 lbs must stop or park on conc if able. Terminal building open May-Oct 1200-0200Z† and Nov-Apr 1400-2200Z†. ACTIVATE MIRL Rwy 13-31 and Rwy 02-20, REIL Rwy 02 and PAPI Rwy 02, Rwy 20 and Rwy 31—CTAF.

WEATHER DATA SOURCES: ASOS 126.775 (715) 682-5541.

COMMUNICATIONS: CTAF/UNICOM 122.8

ASHLAND RCO 122.25 (GREEN BAY RADIO)


⑤ MINNEAPOLIS CENTER APP/DEP CON 126.45

RADIO AIDS TO NAVIGATION: NOTAM FILE ASX.

ASHLAND (T) VORW/DME 110.2 ASX Chan 39 N46°32.96' W90°55.04' at fld. 820/2E. Unmonitored 0000-1200Z†.

KENNEDY NDB (MHW) 254 ENY N46°33.18' W90°54.87' at fld. Unmonitored 0000-1200Z†.

ILS/DME 109.3 I-ASX Chan 30 Rwy 02. LOC only.

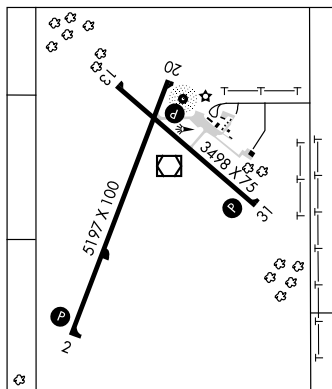

AUSTIN STRAUBEL INTL. (See GREEN BAY)

BADGER N43°07.01' W88°17.06' NOTAM FILE MKE.

CHICAGO

(H) VORTACW 116.4 BAE Chan 111 153° 5 NM to Waukesha Co. 1080/2E. HIWAS.

H-5E, L-28H

BARABOO WISCONSIN DELLS (DLL) 3 NW UTC-6(-5DT) N43°31.32' W89°46.25'

CHICAGO

979 B FUEL 100LL, JET A, MOGAS TPA-1979(1000) NOTAM FILE DLL

L-28G

RWY 01-19: H4800X75 (ASPH) S-19, D-30 HIRL

IAP

RWY 01: REIL. Trees.

RWY 19: REIL. PAPI(P2L)—GA 3.0 TCH 26. Trees.

RWY 14-32: 2708X100 (TURF)

RWY 14: Pole. RWY 32: Trees.

AIRPORT REMARKS: Attended May-Sep 1400-0200Z†, Oct-Apr 1400-2300Z†. Rwy 14-32 not plowed and CLOSED Nov 15 thru Apr 15. Confirm rwy open with arpt manager 608-356-2270. Birds on and invof arpt in fall. HIRL Rwy 01-19 preset on low ints; to increase ints and ACTIVATE REIL Rwy 01 and Rwy 19—CTAF. Rwy 14-32 ends marked by yellow and black A-frames.

WEATHER DATA SOURCES: AWOS-3 118.325 (608) 356-1071

COMMUNICATIONS: CTAF/UNICOM 123.05

DELLS RCO 122.1R 117.0T (GREEN BAY RADIO)

⑤ MADISON APP/DEP CON 135.45 (1200-0500Z†)

⑤ CHICAGO CENTER APP/DEP CON 133.3 (0500-1200Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE DLL.

DELLS (H) VORTAC 117.0 DLL Chan 117 N43°33.05' W89°45.82' 187° 1.8 NM to fld. 1020/3E.

ILS/DME 109.15 I-DLL Chan 28(Y) Rwy 01.

BARRON MUNI (9Y7) 0 NE UTC-6(-5DT) N45°24.45' W91°50.06'

GREEN BAY

1113 TPA-2113(1000) NOTAM FILE GRB

RWY 09-27: 2010X260 (TURF)

RWY 09: Tree. RWY 27: Road.

AIRPORT REMARKS: Attended irregularly. For svcs call arpt manager 715-635-6735 or 715-790-3071. Rwy 09-27 N half plowed; S half skis only. Rwy 09-27 ends marked by yellow cones.

COMMUNICATIONS: CTAF 122.9

RICE LAKE RCO 122.3 (GREEN BAY RADIO)

BAYEE N44°40.59' W89°38.88' NOTAM FILE AUW.

GREEN BAY

NDB (LOM) 351 PH 353° 6.1 NM to Central Wisconsin.

LOC/DME I-ASX 109.3 Chan 30	APP CRS 019°	Rwy Idg TDZE Apt Elev	5197 825 826
---	------------------------	-----------------------------	---

LOC/DME RWY 2

ASHLAND/ JOHN F. KENNEDY MEMORIAL (ASX)






If local altimeter setting not received, use Ironwood
altimeter setting and increase all MDAs 140 feet.
Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 2600 then climbing
right turn to 3000 direct ASX VOR/DME and hold.

ASOS
126.775

MINNEAPOLIS CENTER
126.45 276.4

UNICOM
122.8 (CTAF) 0

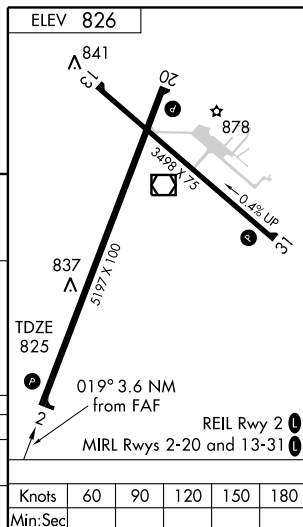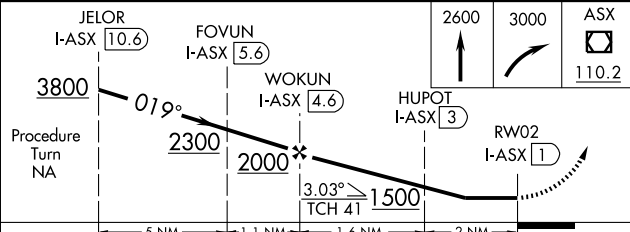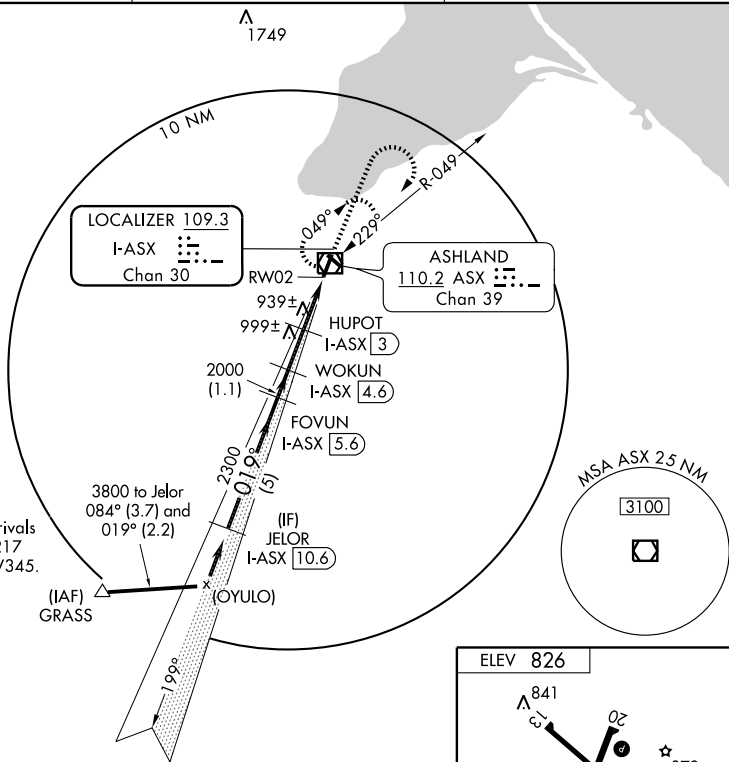

CATEGORY	A	B	C	D
S-2	1200-1	375 (400-1)		1200-1¼ 375 (400-1¼)
CIRCLING	1240-1 414 (500-1)	1280-1 454 (500-1)	1280-1½ 454 (500-1½)	1380-2 554 (600-2)

LOC/DME RWY 2


WAAS CH 72707 W02A	APP CRS 019°	Rwy Idg TDZE 826 Apt Elev 827	5197 826 827
--	------------------------	---	---

RNAV (GPS) RWY 2

ASHLAND/ JOHN F. KENNEDY MEMORIAL (ASX)

<p>Baro-VNAV NA when using Ironwood altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Ironwood altimeter setting and increase all DAs 132 feet and LPV and LNAV/VNAV all Cats. visibility ½ mile, increase all MDAs 140 feet and LNAV Cats. C and D visibility ½ mile, and Circling Cats. C and D visibility ¼ mile.</p>	<p>MISSED APPROACH: Climb to 3200 direct HOSUT and hold.</p>
---	--

ASOS 126.775	MINNEAPOLIS CENTER 126.45 276.4	UNICOM 122.8 (CTAF)
------------------------	---	-------------------------------

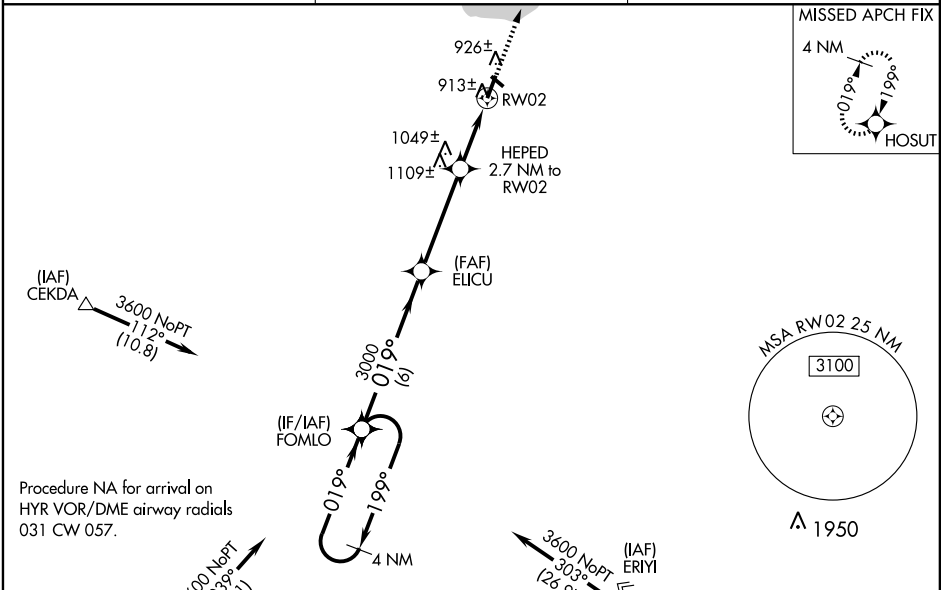

<p>4 NM Holding Pattern</p> <p>3600 ← 199° / 019° →</p> <p>GS 3.00° TCH 41</p> <p>FOMLO</p> <p>ELICU</p> <p>HEPED 2.7 NM to RW02</p> <p>*LNAV only</p> <p>RW02</p> <p>3200 HOSUT</p>				
<p>6 NM 3.9 NM 2.7</p>				
CATEGORY	A	B	C	D
LPV DA	1162-1¼ 336 (400-1¼)			
LNAV/VNAV DA	1183-1¼ 357 (400-1¼)			
LNAV MDA	1300-1	474 (500-1)	1300-1¼ 474 (500-1¼)	1300-1½ 474 (500-1½)
CIRCLING	1300-1	473 (500-1)	1300-1½ 473 (500-1½)	1380-2 553 (600-2)

WAAS CH 61107 W13A	APP CRS 128°	Rwy Idg TDZE Apt Elev	3498 827 827
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 13

ASHLAND/ JOHN F. KENNEDY MEMORIAL (ASX)


Baro-VNAV NA when using Ironwood altimeter setting. For Uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Ironwood altimeter setting and increase all DAs 132 feet and LPV and LNAV/VNAV all Cats. visibility ½ mile, increase all MDAs 140 feet and LNAV Cats. C and D visibility ½ mile and Circling Cat. D visibility ¼ mile.

MISSED APPROACH:
Climb to 3500 direct JILUL and hold.

ASOS 126.775	MINNEAPOLIS CENTER 126.45 276.4	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

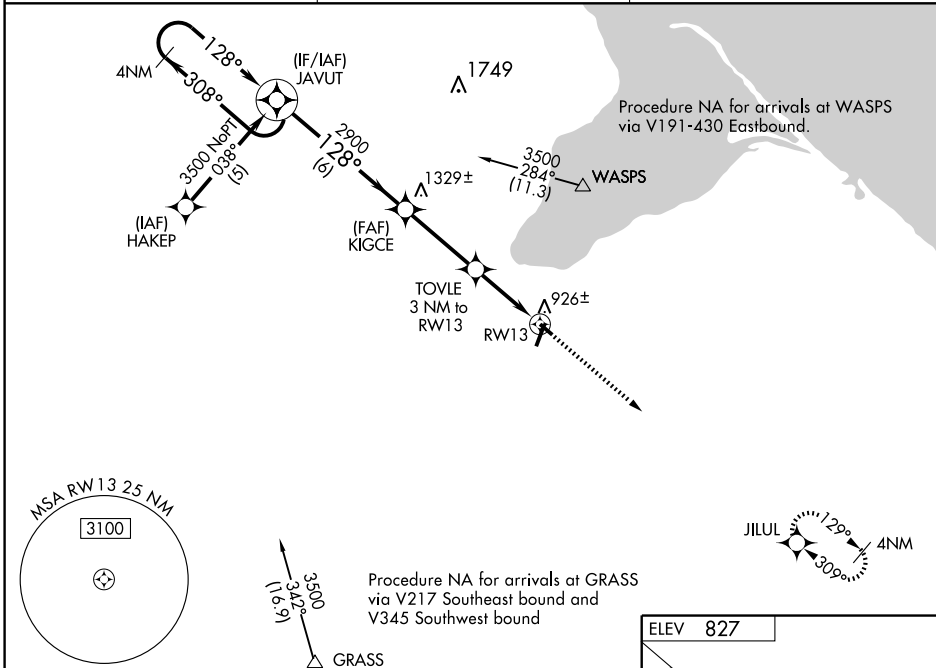

<p>4 NM Holding Pattern</p> <p>3500 ← 308° 128° →</p> <p>JAVUT</p> <p>GS 3.00° TCH 40</p>				
<p>KIGCE</p> <p>TOVLE 3 NM to RWY 13</p> <p>RWY 13</p> <p>*1820</p> <p>2900</p> <p>6 NM 3.3 NM 3 NM</p>				
CATEGORY	A	B	C	D
LPV DA	1155-1¼		328 (400-1¼)	
LNAV/ VNAV DA	1196-1¼		369 (400-1¼)	
LNAV MDA	1200-1 373 (400-1)		1200-1¼ 373 (400-1¼)	
CIRCLING	1240-1 413 (500-1)	1280-1 453 (500-1)	1280-1½ 453 (500-1½)	1380-2 553 (600-2)

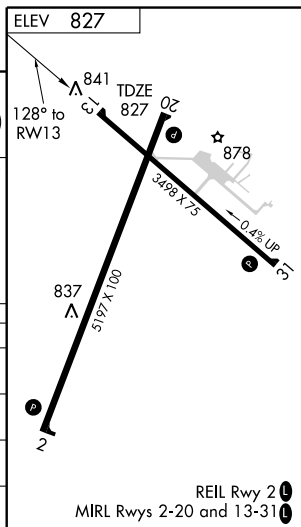

WAAS CH 90307 W20A	APP CRS 199°	Rwy Idg 5197 TDZE 827 Apt Elev 827
--	------------------------	---

RNAV (GPS) RWY 20


ASHLAND/ JOHN F. KENNEDY MEMORIAL (ASX)

Baro-VNAV NA when using Ironwood altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Ironwood altimeter setting and increase all DAs 132 feet and LPV all Cats. visibility ½ mile, LNAV/VNAV all Cats. visibility ¾ mile, increase all MDAs 140 feet and LNAV Cat. C and D visibility ½ mile and Circling Cat. D visibility ¼ mile.

MISSED APPROACH:
Climb to 3600 direct
FOMLO and hold.

ASOS
126,775


MINNEAPOLIS CENTER
126.45 276.4

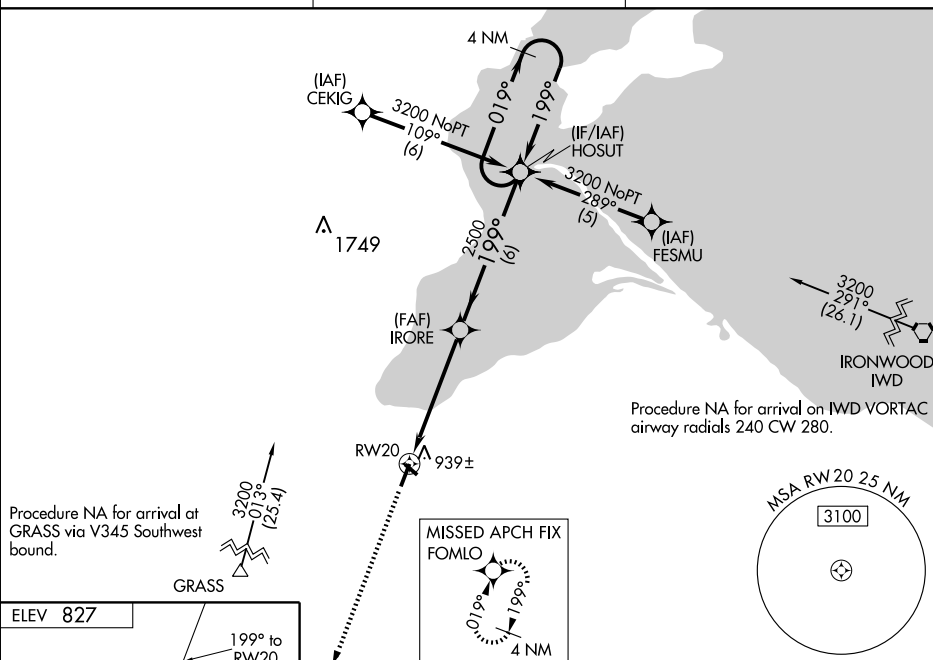UNICOM
122.8 (CTAF) **L**

Procedure NA for arrival at GRASS via V345 Southwest bound.

Procedure NA for arrival on I
airway radials 240 CW 280

ELEV 827

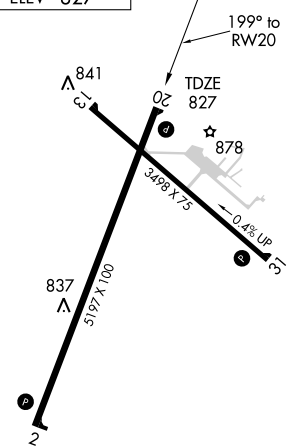REIL Rwy 2 **L**

MIRL Rwy 2-20 and 13-31

3600	FOMLO
	

MISSED APCH FI
FOMLO

MSA RW 20 25 NM

4 NM
Holding Pattern

HOS

RW20

CATEGORY	A	B	C	D
LPV DA	1187-1¼ 360 (400-1¼)			
LNAV/ VNAV DA	1209-1½ 382 (400-1½)			
LNAV MDA	1200-1 373 (400-1)			1200-1¼ 373 (400-1¼)
CIRCLING	1240-1 413 (500-1)	1280-1 453 (500-1)	1280-1½ 453 (500-1½)	1380-2 553 (600-2)

WAAS CH 65807 W31A	APP CRS 309°	Rwy Idg 3498 TDZE 827 Apt Elev 827
--	------------------------	---



RNAV (GPS) RWY 31

ASHLAND/JOHN F. KENNEDY MEMORIAL (ASX)

Baro-VNAV NA when using Ironwood altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Ironwood altimeter setting and increase all DAs 132 feet and LPV and LNAV/VNAV all Cats visibility ½ mile, increase all MDAs 140 feet and LNAV Cat. D visibility ½ mile, LNAV Cat. C and Circling Cat. D visibility ¼ mile.

MISSED APPROACH:
Climb to 3500 direct
JAVUT and hold.

ASOS 126.775	MINNEAPOLIS CENTER 126.45 276.4	UNICOM 122.8 (CTAF) 0
------------------------	---	--

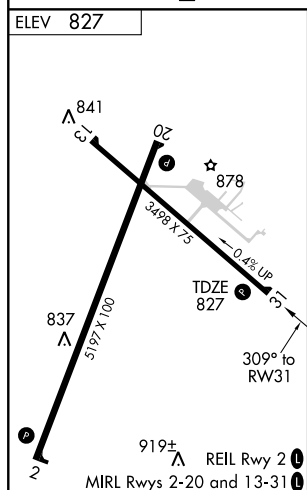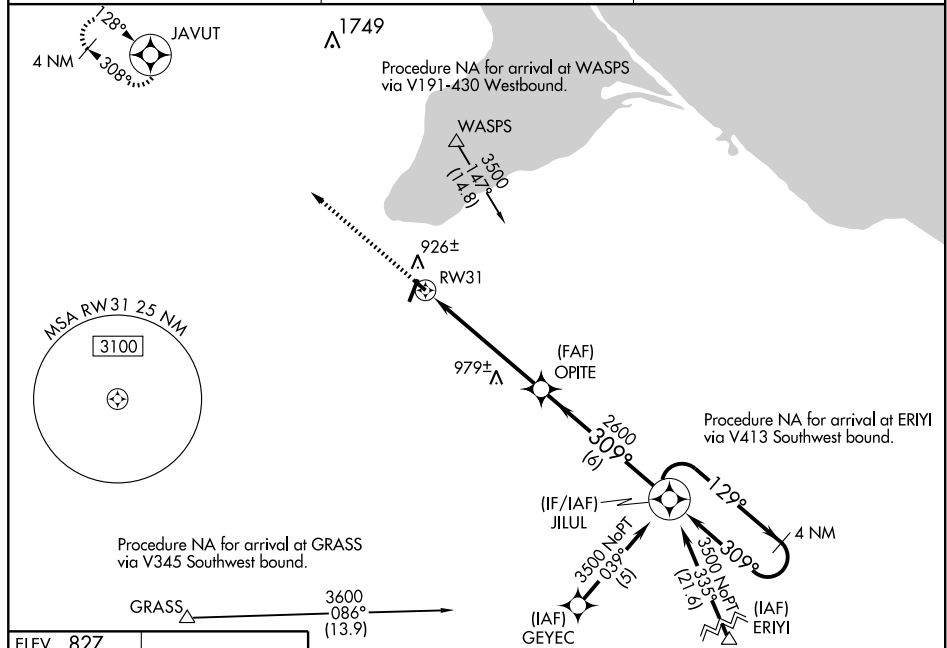

JAVUT

3500

RW31

OPITE

JILUL

4 NM Holding Pattern

3500

129°

309°

2600

GS 3.00° TCH 37'

CATEGORY	A	B	C	D
LPV DA	1120-1		293 (300-1)	
LNAV/VNAV DA	1189-1¼		362 (400-1¼)	
LNAV MDA	1240-1 413 (500-1)		1240-1¼ 413 (500-1¼)	
CIRCLING	1240-1 413 (500-1)	1280-1 453 (500-1)	1280-1½ 453 (500-1½)	1380-2 553 (600-2)

ASHLAND, WISCONSIN
Orig 08157

DATE	TIME	LOCATION	TYPE	STATUS
1/1/2020	10:00 AM	ASHLAND/JOHN F. KENNEDY MEMORIAL (ASX)	ASX	ASX

RNAV (GPS) RWY 31

46° 33'N-90° 55'W

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

VOR/DME ASX 110.2 Chgn 39	APP CRS 024°	Rwy Idg 5197 TDZE 826 Apt Elev 827
---	------------------------	---

VOR RWY 2


ASHLAND/ JOHN F. KENNEDY MEMORIAL (ASX)

Visibility reduction by helicopters NA. When local altimeter setting not received, use Ironwood altimeter setting and increase all MDAs 140 feet and visibility Cat. A ¼ mile, Cat. C and D ½ mile.

MISSED APPROACH: Climb to 2900 then climbing right turn 3100 direct ASX VOR/DME and hold.




ASOS
126,775

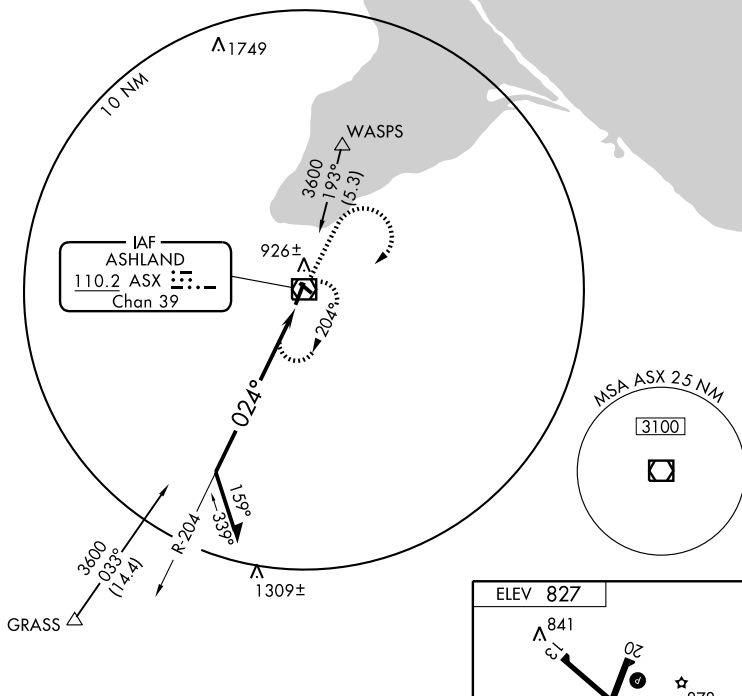
MINNEAPOLIS CENTER
126.45 276.4

UNICOM
122.8 (CTAF) **L**

Remain
within 10 NM

VOR/DME
6000

2900	3100	ASX
		
		110.2

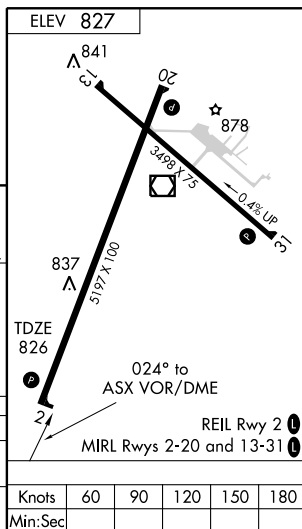

CATEGORY	A	B	C	D
S-2	1620-1 794 (800-1)	1620-1 $\frac{1}{4}$ 794 (800- $\frac{1}{4}$)	1620-2 $\frac{1}{4}$ 794 (800-2 $\frac{1}{4}$)	1620-2 $\frac{1}{2}$ 794 (800-2 $\frac{1}{2}$)
CIRCLING	1620-1 793 (800-1)	1620-1 $\frac{1}{4}$ 793 (800- $\frac{1}{4}$)	1620-2 $\frac{1}{4}$ 793 (800-2 $\frac{1}{4}$)	1620-2 $\frac{1}{2}$ 793 (800-2 $\frac{1}{2}$)

ASHLAND, WISCONSIN
Amdt 6 08157

ASHLAND/ JOHN F. KENNEDY MEMORIAL (ASX)

46°33'N-90°55'W

VOR RWY 2

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

VOR/DME ASX
110.2
 Chan **39**

APP CRS
302°

Rwy Idg **3498**
 TDZE **827**
 Apt Elev **827**

VOR RWY 31

ASHLAND/ JOHN F. KENNEDY MEMORIAL (ASX)



▼ Visibility reduction by helicopters NA. When local altimeter setting not received, use Ironwood altimeter setting and increase all MDAs 140 feet, increase S-31 visibility Cat. C and D ½ mile, increase circling visibility Cat. C ½ mile, Cat. D ¼ mile.

MISSED APPROACH: Climb to 2700 then climbing left turn to 2900 direct ASX VOR/DME and hold.


ASOS
126.775

MINNEAPOLIS CENTER
126.45 276.4


UNICOM
122.8 (CTAF) 0

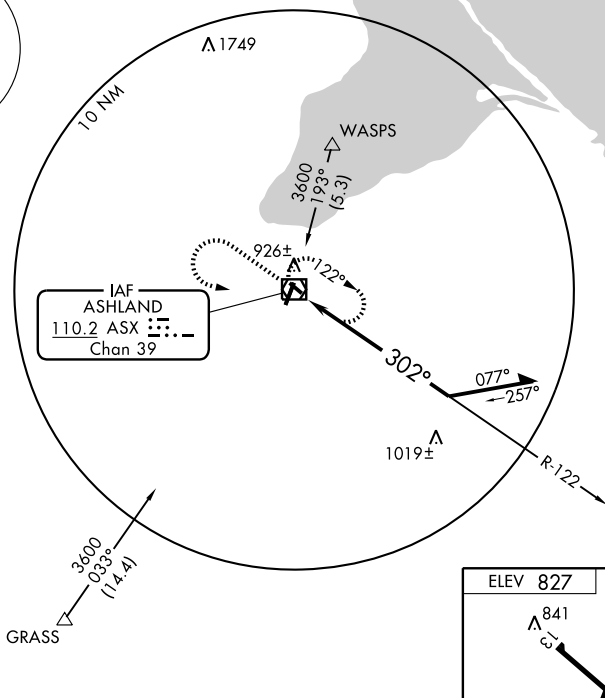

2700 2900 ASX
 ↑ ↻ 110.2

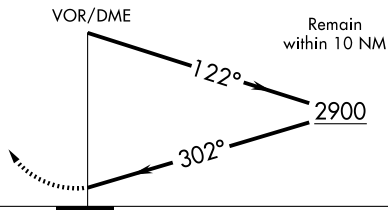

CATEGORY	A	B	C	D
S-31	1400-1	573 (600-1)	1400-1½ 573 (600-1½)	1400-1¾ 573 (600-1¾)
CIRCLING	1400-1	573 (600-1)	1400-1½ 573 (600-1½)	1400-2 573 (600-2)

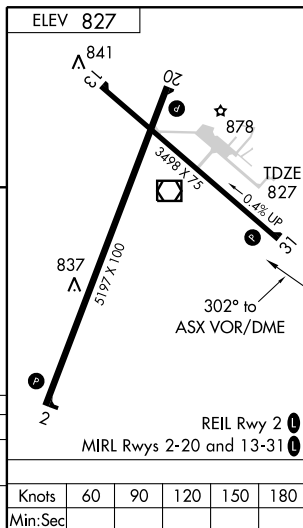

WAAS CH 53304 W01A	APP CRS 010°	Rwy Idg 4800 TDZE 980 Apt Elev 980
--	------------------------	---

RNAV (GPS) RWY 1

BARABOO WISCONSIN DELLS (DLL)

▼ If local altimeter setting not received, use Tri-County Rgnl altimeter setting and increase all DAs 97 feet/MDAs 100 feet. Baro-VNAV NA when using Tri-County Rgnl altimeter setting.
▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling NA to Rwy 14-32.

MISSED APPROACH:
Climb to 3000 direct NOYIL and via 011° track to ZAVOX and hold.

AWOS-3
118.325



MADISON APP CON*
135.45 343.7

UNICOM
123.05 (CTAF)

MISSED APCH FIX




Procedure NA for arrivals on DLL
VORTAC via airway radial 140.

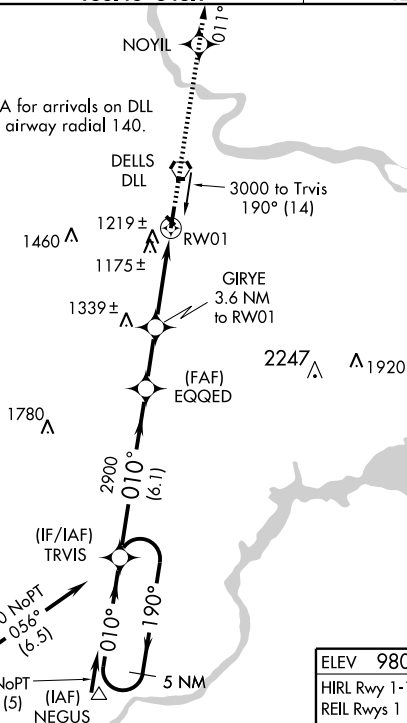


ELEV 980

HIRL Rwy 1-19

REIL Rws 1 and 19

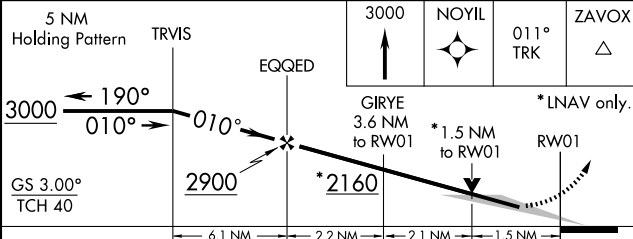

CATEGORY	A	B	C	D
LPV DA	1275-1	295 (300-1)		NA
LNAV/VNAV DA	1495-1 3/4	515 (600-1 3/4)		NA
LNAV MDA	1480-1	500 (500-1)	1480-1 1/4 500 (500-1 1/4)	NA
CIRCLING	1540-1	560 (600-1)	1560-1 1/2 580 (600-1 1/2)	NA



APP CRS	Rwy Idg	4800
190°	TDZE	980
	Apt Elev	980

RNAV (GPS) RWY 19

BARABOO WISCONSIN DELLS (DLL)



▼ If local altimeter setting not received, use Tri-County Rgnl altimeter setting and increase all MDAs 100 feet. Visibility reduction by helicopters NA.
▲ Circling NA to Rwy 14-32. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct TRVIS and hold.

AWOS-3
118.325

MADISON APP CON ★
135.45 343.7

UNICOM
123.05 (CTAF) ①

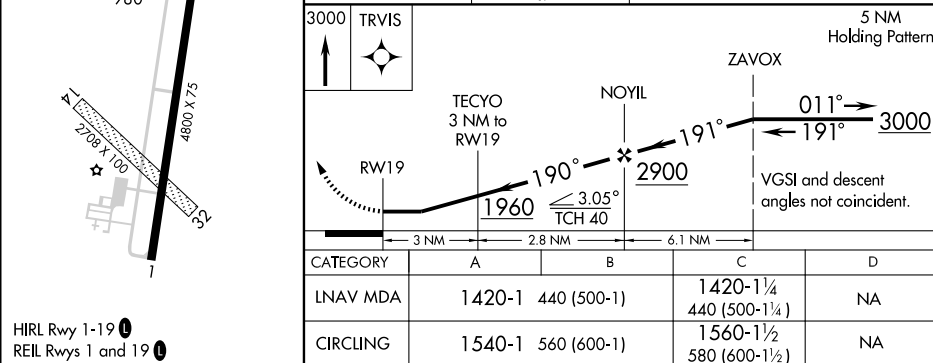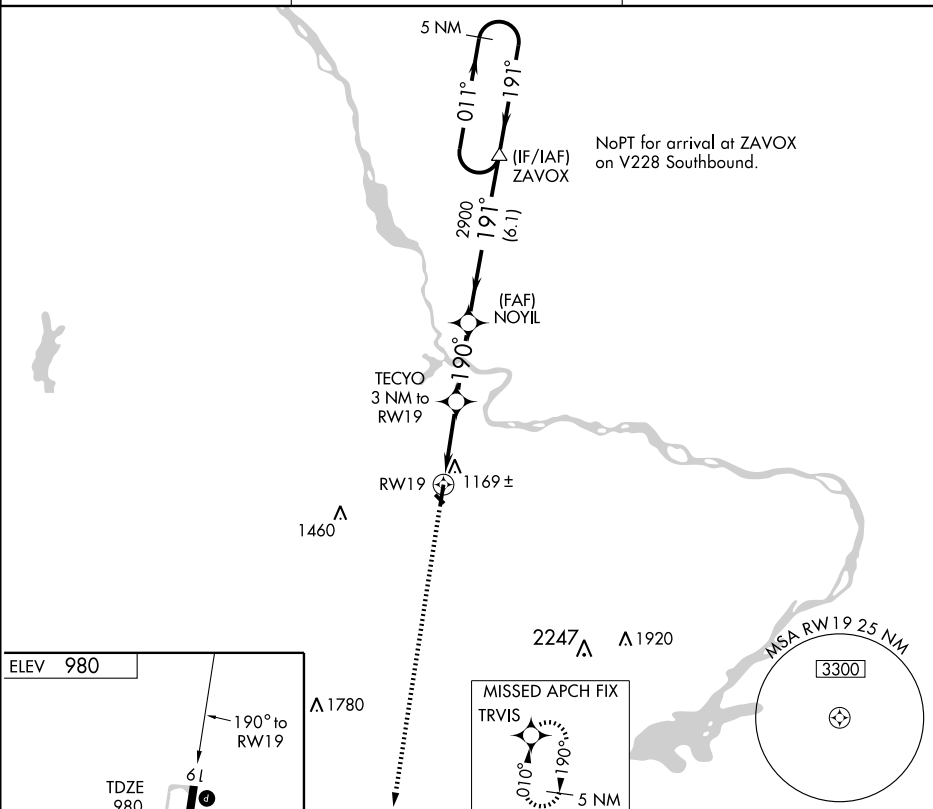

VORTAC DLL 117.0 Chan 117	APP CRS 187°	Rwy Idg TDZE Apt Elev	N/A N/A 980
---	------------------------	-----------------------------	--

VOR-A

BARABOO WISCONSIN DELLS (DLL)



▼ If local altimeter setting not received, use Tri-County
 ▲ Rgnl altimeter setting and increase all MDAs 100 feet.
 Circling NA to Rwy 14-32.

MISSED APPROACH: Climb to 2500 then climbing right turn
 to 3000 direct DLL VORTAC and hold.

AWOS-3
118.325

MADISON APP CON ★
135.45 343.7

UNICOM
123.05(CTAF) ①

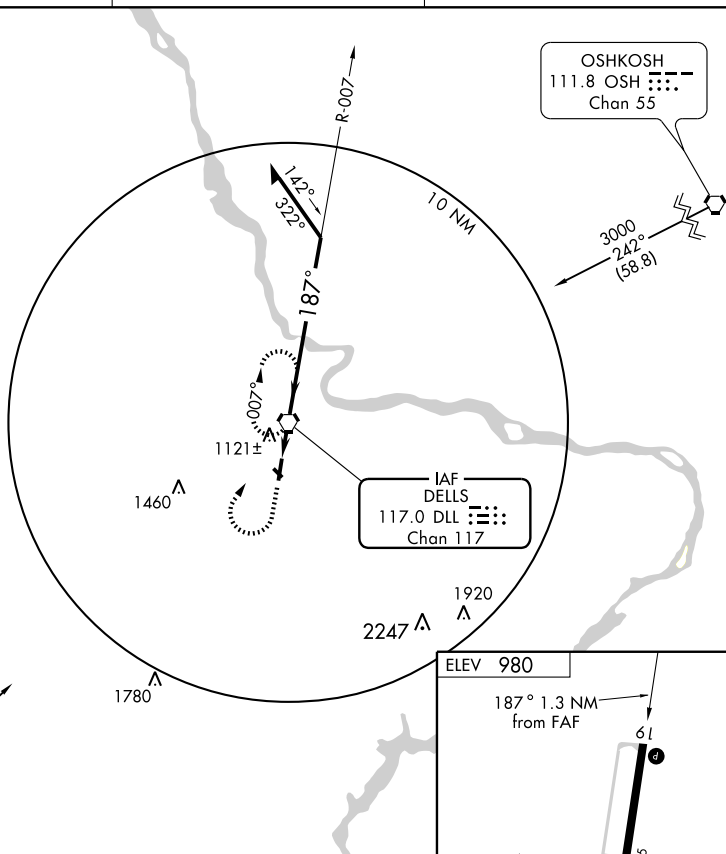


LONE ROCK
 112.8 LNR
 Chan 75


OSHKOSH
 111.8 OSH
 Chan 55

2500
 3000
 DLL
 117.0

VORTAC
 Remain within 10 NM



ELEV 980
 187° 1.3 NM
 from FAF



HIRL Rwy 1-19 ①
 REIL Rws 1 and 19 ①

CATEGORY	A	B	C	D	FAF to MAP 1.3 NM					
CIRCLING	1580-1	600 (600-1)	1580-1½ 600 (600-1½)	NA	Knots	60	90	120	150	180
					Min:Sec	1:18	0:52	0:39	0:31	0:26

BELOIT (44C) 3 E UTC-6(-5DT) N42°29.87' W88°58.06' CHICAGO
 817 B FUEL 100LL TPA-1517(700) NOTAM FILE GRB L-28H
 RWY 07-25: H3300X50 (ASPH) S-12.5 LIRL(NSTD) 0.4% up NE IAP
 RWY 25: Thld dplcd 350'. Road.
AIRPORT REMARKS: Unattended. Glider ops on and invof arpt. ACTIVATE NSTD LIRL Rwy 07-25-CTAF. Rotating bcn ops dusk-0500Z±; other hrs by req, call arpt manager 608-365-2998. Rwy 07-25 NSTD LIRL 100' wide; 50' left and right of rwy centerline. Rwy 07 thld marking NSTD located 92' NE of pavement end.
COMMUNICATIONS: CTAF/UNICOM 122.7
 Ⓡ **ROCKFORD APP/DEP CON 121.0**
RADIO AIDS TO NAVIGATION: NOTAM FILE FEP.
 JANESVILLE (L) VOR/DME 114.3 JVL Chan 90 N42°33.48' W89°06.32' 118° 7.1 NM to fld. 931/3E.

BIG DOCTOR N45°49.28' W92°21.99' NOTAM FILE GRB GREEN BAY
 NDB (MHW) 203 BXR at Burnett Co. VFR only.

BIG FOOT AIRFIELD (See WALWORTH)

BLACKHAWK AIRFIELD (See MADISON)

BLACK RIVER FALLS AREA (BCK) 3 S UTC-6(-5DT) N44°15.05' W90°51.32' GREEN BAY
 836 B FUEL 100LL, JET A NOTAM FILE GRB L-28G
 RWY 08-26: H4600X75 (ASPH) S-12 MIRL 0.3% up E IAP
 RWY 08: REIL. PAPI(P2L)-GA 3.0° TCH 27'. Trees. **RWY 26:** PAPI(P2L)-GA 3.3° TCH 27'. Trees.
AIRPORT REMARKS: Unattended. Fuel 24 hrs self serve. Ultralight activity on and invof arpt. Wildlife, birds on and invof arpt. MIRL Rwy 08-26 preset on low ints; to ACTIVATE higher ints and PAPI Rwy 08 and Rwy 26 and REIL Rwy 08-CTAF.
COMMUNICATIONS: CTAF 122.9
 RCO 122.5 (GREEN BAY RADIO)
 Ⓡ **MINNEAPOLIS CENTER APP/DEP CON 128.6**
RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.
 NODINE (H) VORTAC 117.9 ODI Chan 126 N43°54.74' W91°28.05' 051° 33.4 NM to fld. 1282/1E.
 NDB (MHW) 362 BCK N44°15.28' W90°50.94' at fld. NOTAM FILE GRB. NDB unusable byd 15 NM.

BLOYER FLD (See TOMAH)

BONG N46°41.48' W92°06.21' NOTAM FILE SUW. GREEN BAY
 NDB (MHW) 260 SUW at Richard I Bong. SHUTDOWN. L-14I

BOSCobel (OVS) 2 NE UTC-6(-5DT) N43°09.65' W90°40.44' CHICAGO
 673 B S3 FUEL 100LL TPA-1503(830) NOTAM FILE OVS H-5D, L-28G
 RWY 07-25: H5000X75 (ASPH) S-12.5 D-30 MIRL IAP
 RWY 07: REIL. PAPI(P2L)-GA 3.0° TCH 38'. Trees. **RWY 25:** REIL. PAPI(P2L)-GA 3.0° TCH 40'. Trees.
 RWY 02-20: H3658X58 (ASPH) S-12.5 MIRL
 RWY 02: Trees. **RWY 20:** Trees.
AIRPORT REMARKS: Attended dawn-dusk. MIRL Rwy 07-25 preset on low ints, to increase ints and ACTIVATE MIRL Rwy 02-20 and REIL Rwy 07-25-CTAF.
WEATHER DATA SOURCES: ASOS 126.775 (608) 375-2712.
COMMUNICATIONS: CTAF/UNICOM 122.8
 Ⓡ **CHICAGO CENTER APP/DEP CON 133.3**
 GCO 121.725 (FLIGHT SERVICES)
RADIO AIDS TO NAVIGATION: NOTAM FILE LNR.
 LONE ROCK (L) VOR/DME 112.8 LNR Chan 75 N43°17.66' W90°07.99' 252° 25 NM to fld. 1184/OE.
 HIWAS.

BOULDER JUNCTION (BDJ) 2 N UTC-6(-5DT) N46°08.25' W89°38.76' GREEN BAY
 1666 TPA-2666(1000) NOTAM FILE GRB
 RWY 05-23: 3170X165 (TURF)
 RWY 05: Tree. **RWY 23:** Trees.
 RWY 16-34: 2540X160 (TURF)
 RWY 16: Road. **RWY 34:** Trees
AIRPORT REMARKS: Unattended May-Nov. Arpt CLOSED Dec-Apr. Rwy 05 all rwys marked with yellow A-frames.
COMMUNICATIONS: CTAF 122.9

VOR/DME JVL 114.3 Chan 90	APP CRS 118°	Rwy Idg TDZE Apt Elev	N/A N/A 817
---	------------------------	-----------------------------	--




VOR or GPS-A
BELOIT (44C)

A NA Use Janesville altimeter setting; when not received, use Rockford altimeter setting.

MISSED APPROACH: Climb to 2700 then right turn direct JVL VOR/DME and hold.

ROCKFORD APP CON
121.0 327.0

UNICOM
122.7 (CTAF) **L**

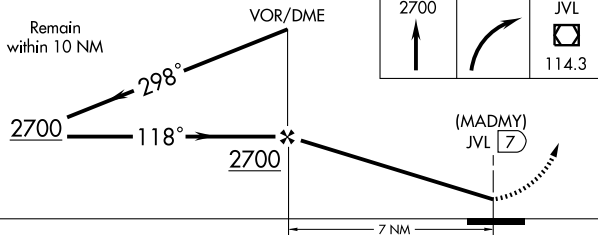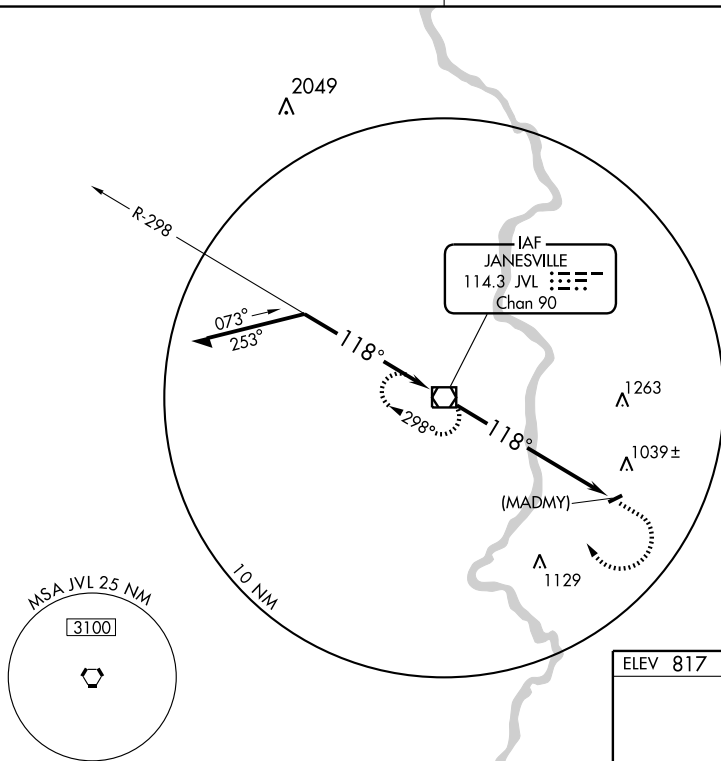

CATEGORY	A	B	C	D
CIRCLING	1380-1	563 (600-1)	NA	
ROCKFORD ALTIMETER SETTING MINIMUMS				
CIRCLING	1420-1	603 (700-1)	NA	

LIRL Rwy 7-25 1					
FAF to MAP 7 NM					
Knots	60	90	120	150	180
Min:Sec	7:00	4:40	3:30	2:48	2:20

BELOIT (44C) 3 E UTC-6(-5DT) N42°29.87' W88°58.06' CHICAGO
 817 B FUEL 100LL TPA-1517(700) NOTAM FILE GRB L-28H
 RWY 07-25: H3300X50 (ASPH) S-12.5 LIRL(NSTD) 0.4% up NE IAP
 RWY 25: Thld dsplcd 350'. Road.
AIRPORT REMARKS: Unattended. Glider ops on and invof arpt. ACTIVATE NSTD LIRL Rwy 07-25-CTAF. Rotating bcn ops dusk-0500Z±; other hrs by req, call arpt manager 608-365-2998. Rwy 07-25 NSTD LIRL 100' wide; 50' left and right of rwy centerline. Rwy 07 thld marking NSTD located 92' NE of pavement end.
COMMUNICATIONS: CTAF/UNICOM 122.7
 Ⓡ **ROCKFORD APP/DEP CON 121.0**
RADIO AIDS TO NAVIGATION: NOTAM FILE FEP.
 JANESVILLE (L) VOR/DME 114.3 JVL Chan 90 N42°33.48' W89°06.32' 118° 7.1 NM to fld. 931/3E.

BIG DOCTOR N45°49.28' W92°21.99' NOTAM FILE GRB GREEN BAY
 NDB (MHW) 203 BXR at Burnett Co. VFR only.

BIG FOOT AIRFIELD (See WALWORTH)

BLACKHAWK AIRFIELD (See MADISON)

BLACK RIVER FALLS AREA (BCK) 3 S UTC-6(-5DT) N44°15.05' W90°51.32' GREEN BAY
 836 B FUEL 100LL, JET A NOTAM FILE GRB L-28G
 RWY 08-26: H4600X75 (ASPH) S-12 MIRL 0.3% up E IAP
 RWY 08: REIL. PAPI(P2L)-GA 3.0° TCH 27'. Trees. **RWY 26:** PAPI(P2L)-GA 3.3° TCH 27'. Trees.
AIRPORT REMARKS: Unattended. Fuel 24 hrs self serve. Ultralight activity on and invof arpt. Wildlife, birds on and invof arpt. MIRL Rwy 08-26 preset on low ints; to ACTIVATE higher ints and PAPI Rwy 08 and Rwy 26 and REIL Rwy 08-CTAF.
COMMUNICATIONS: CTAF 122.9
 RCO 122.5 (GREEN BAY RADIO)
 Ⓡ **MINNEAPOLIS CENTER APP/DEP CON 128.6**
RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.
 NODINE (H) VORTAC 117.9 ODI Chan 126 N43°54.74' W91°28.05' 051° 33.4 NM to fld. 1282/1E.
 NDB (MHW) 362 BCK N44°15.28' W90°50.94' at fld. NOTAM FILE GRB. NDB unusable byd 15 NM.

BLOYER FLD (See TOMAH)

BONG N46°41.48' W92°06.21' NOTAM FILE SUW. GREEN BAY
 NDB (MHW) 260 SUW at Richard I Bong. SHUTDOWN. L-14I

BOSCobel (OVS) 2 NE UTC-6(-5DT) N43°09.65' W90°40.44' CHICAGO
 673 B S3 FUEL 100LL TPA-1503(830) NOTAM FILE OVS H-5D, L-28G
 RWY 07-25: H5000X75 (ASPH) S-12.5 D-30 MIRL IAP
 RWY 07: REIL. PAPI(P2L)-GA 3.0° TCH 38'. Trees. **RWY 25:** REIL. PAPI(P2L)-GA 3.0° TCH 40'. Trees.
 RWY 02-20: H3658X58 (ASPH) S-12.5 MIRL
 RWY 02: Trees. **RWY 20:** Trees.
AIRPORT REMARKS: Attended dawn-dusk. MIRL Rwy 07-25 preset on low ints, to increase ints and ACTIVATE MIRL Rwy 02-20 and REIL Rwy 07-25-CTAF.
WEATHER DATA SOURCES: ASOS 126.775 (608) 375-2712.
COMMUNICATIONS: CTAF/UNICOM 122.8
 Ⓡ **CHICAGO CENTER APP/DEP CON 133.3**
 GCO 121.725 (FLIGHT SERVICES)
RADIO AIDS TO NAVIGATION: NOTAM FILE LNR.
 LONE ROCK (L) VOR/DME 112.8 LNR Chan 75 N43°17.66' W90°07.99' 252° 25 NM to fld. 1184/OE.
 HIWAS.

BOULDER JUNCTION (BDJ) 2 N UTC-6(-5DT) N46°08.25' W89°38.76' GREEN BAY
 1666 TPA-2666(1000) NOTAM FILE GRB
 RWY 05-23: 3170X165 (TURF)
 RWY 05: Tree. **RWY 23:** Trees.
 RWY 16-34: 2540X160 (TURF)
 RWY 16: Road. **RWY 34:** Trees
AIRPORT REMARKS: Unattended May-Nov. Arpt CLOSED Dec-Apr. Rwy 05 all rwys marked with yellow A-frames.
COMMUNICATIONS: CTAF 122.9

BCK NDB 362	APP CRS 073°	Rwy Idg TDZE Apt Elev	4600 836 836
-----------------------	------------------------	-----------------------------	---




NDB RWY 8

BLACK RIVER FALLS AREA (BCK)




Use La Crosse altimeter setting.

MISSED APPROACH: Climb to 2400 then climbing left turn to 2900 direct BCK NDB and hold.

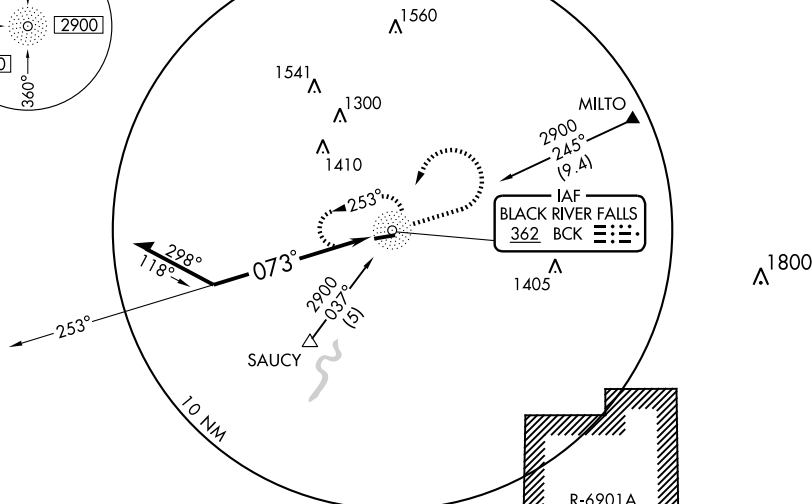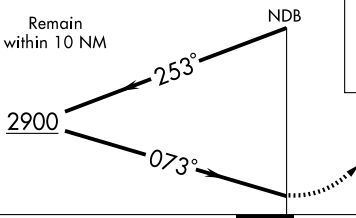MINNEAPOLIS CENTER
128.6 363.0CTAF
122.9 0Remain
within 10 NM

ELEV 836



CATEGORY	A	B	C	D
S-8	1920-1¼ 1084 (1100-1¼)	1920-1½ 1084 (1100-1½)	1920-3	1084 (1100-3)
CIRCLING	1920-1¼ 1084 (1100-1¼)	1920-1½ 1084 (1100-1½)	1920-3	1084 (1100-3)



REIL Rwy 8 0
MIRL Rwy 8-26 0

APP CRS	Rwy Idg	4600
080°	TDZE	836
	Apt Elev	836

RNAV (GPS) RWY 8

BLACK RIVER FALLS AREA (BCK)

<p>▼ Use La Crosse altimeter setting. GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA.</p> <p>▲ NA</p>	<p>MISSED APPROACH: Climb to 2000 then climbing left turn to 3500 direct KOUGH WP and hold.</p>
<p>MINNEAPOLIS CENTER</p> <p>128.6 363.0</p>	<p>CTAF</p> <p>122.9 0</p>

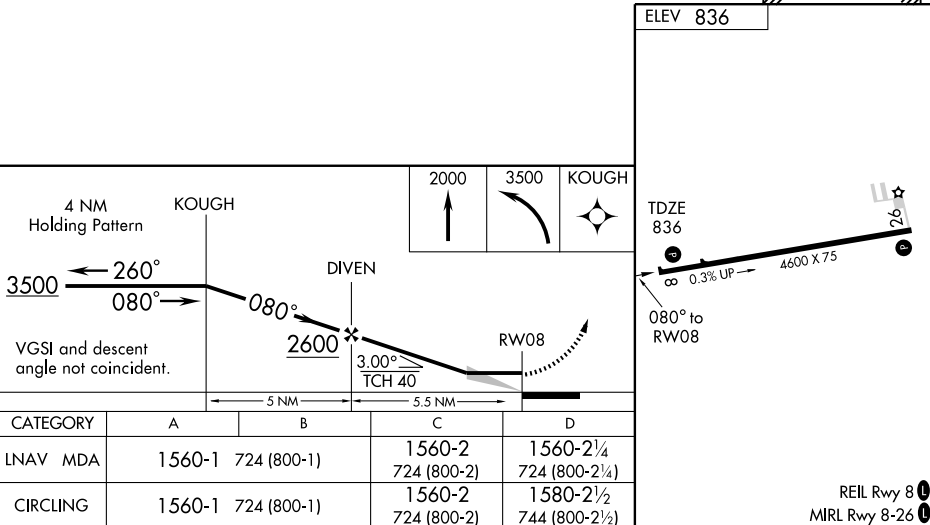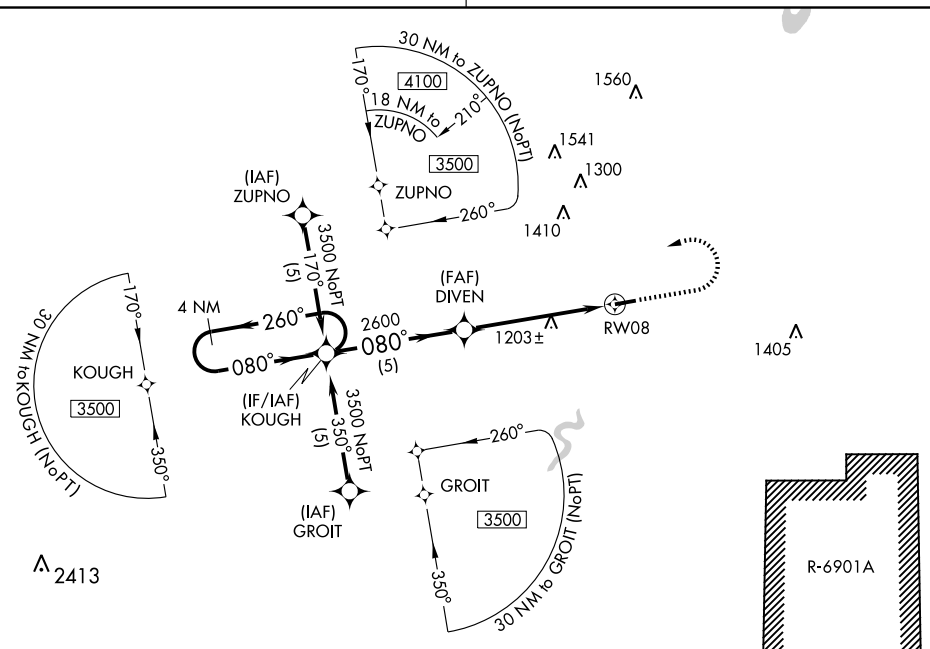

BELOIT (44C) 3 E UTC-6(-5DT) N42°29.87' W88°58.06' CHICAGO
 817 B FUEL 100LL TPA-1517(700) NOTAM FILE GRB L-28H
 RWY 07-25: H3300X50 (ASPH) S-12.5 LIRL(NSTD) 0.4% up NE IAP
 RWY 25: Thld dplcd 350'. Road.
AIRPORT REMARKS: Unattended. Glider ops on and invof arpt. ACTIVATE NSTD LIRL Rwy 07-25-CTAF. Rotating bcn ops dusk-0500Z±; other hrs by req, call arpt manager 608-365-2998. Rwy 07-25 NSTD LIRL 100' wide; 50' left and right of rwy centerline. Rwy 07 thld marking NSTD located 92' NE of pavement end.
COMMUNICATIONS: CTAF/UNICOM 122.7
 Ⓡ **ROCKFORD APP/DEP CON 121.0**
RADIO AIDS TO NAVIGATION: NOTAM FILE FEP.
 JANESVILLE (L) VOR/DME 114.3 JVL Chan 90 N42°33.48' W89°06.32' 118° 7.1 NM to fld. 931/3E.

BIG DOCTOR N45°49.28' W92°21.99' NOTAM FILE GRB GREEN BAY
 NDB (MHW) 203 BXR at Burnett Co. VFR only.

BIG FOOT AIRFIELD (See WALWORTH)

BLACKHAWK AIRFIELD (See MADISON)

BLACK RIVER FALLS AREA (BCK) 3 S UTC-6(-5DT) N44°15.05' W90°51.32' GREEN BAY
 836 B FUEL 100LL, JET A NOTAM FILE GRB L-28G
 RWY 08-26: H4600X75 (ASPH) S-12 MIRL 0.3% up E IAP
 RWY 08: REIL. PAPI(P2L)-GA 3.0° TCH 27'. Trees. **RWY 26:** PAPI(P2L)-GA 3.3° TCH 27'. Trees.
AIRPORT REMARKS: Unattended. Fuel 24 hrs self serve. Ultralight activity on and invof arpt. Wildlife, birds on and invof arpt. MIRL Rwy 08-26 preset on low ints; to ACTIVATE higher ints and PAPI Rwy 08 and Rwy 26 and REIL Rwy 08-CTAF.
COMMUNICATIONS: CTAF 122.9
 RCO 122.5 (GREEN BAY RADIO)
 Ⓡ **MINNEAPOLIS CENTER APP/DEP CON 128.6**
RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.
 NODINE (H) VORTAC 117.9 ODI Chan 126 N43°54.74' W91°28.05' 051° 33.4 NM to fld. 1282/1E.
 NDB (MHW) 362 BCK N44°15.28' W90°50.94' at fld. NOTAM FILE GRB. NDB unusable byd 15 NM.

BLOYER FLD (See TOMAH)

BONG N46°41.48' W92°06.21' NOTAM FILE SUW. GREEN BAY
 NDB (MHW) 260 SUW at Richard I Bong. SHUTDOWN. L-14I

BOSCobel (OVS) 2 NE UTC-6(-5DT) N43°09.65' W90°40.44' CHICAGO
 673 B S3 FUEL 100LL TPA-1503(830) NOTAM FILE OVS H-5D, L-28G
 RWY 07-25: H5000X75 (ASPH) S-12.5 D-30 MIRL IAP
 RWY 07: REIL. PAPI(P2L)-GA 3.0° TCH 38'. Trees. **RWY 25:** REIL. PAPI(P2L)-GA 3.0° TCH 40'. Trees.
 RWY 02-20: H3658X58 (ASPH) S-12.5 MIRL
 RWY 02: Trees. **RWY 20:** Trees.
AIRPORT REMARKS: Attended dawn-dusk. MIRL Rwy 07-25 preset on low ints, to increase ints and ACTIVATE MIRL Rwy 02-20 and REIL Rwy 07-25-CTAF.
WEATHER DATA SOURCES: ASOS 126.775 (608) 375-2712.
COMMUNICATIONS: CTAF/UNICOM 122.8
 Ⓡ **CHICAGO CENTER APP/DEP CON 133.3**
 GCO 121.725 (FLIGHT SERVICES)
RADIO AIDS TO NAVIGATION: NOTAM FILE LNR.
 LONE ROCK (L) VOR/DME 112.8 LNR Chan 75 N43°17.66' W90°07.99' 252° 25 NM to fld. 1184/OE.
 HIWAS.

BOULDER JUNCTION (BDJ) 2 N UTC-6(-5DT) N46°08.25' W89°38.76' GREEN BAY
 1666 TPA-2666(1000) NOTAM FILE GRB
 RWY 05-23: 3170X165 (TURF)
 RWY 05: Tree. **RWY 23:** Trees.
 RWY 16-34: 2540X160 (TURF)
 RWY 16: Road. **RWY 34:** Trees
AIRPORT REMARKS: Unattended May-Nov. Arpt CLOSED Dec-Apr. Rwy 05 all rwys marked with yellow A-frames.
COMMUNICATIONS: CTAF 122.9



WAAS CH 77902 W07A	APP CRS 068°	Rwy Idg TDZE Apt Elev	5000 670 673
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 7

BOSCOBEL (OVS)

<p>▼ ▲</p> <p>If local altimeter setting not received, use Lone Rock altimeter setting and increase all DAs/MDAs 60 feet. Visibility reduction by helicopters NA. DME/DME RNP-0.3 NA.</p>	MISSED APPROACH: Climb to 3000 direct WOREG and hold.
---	--

ASOS 126.775	CHICAGO CENTER 133.3 380.35	GCO 121.725	UNICOM 122.8 (CTAF) 1
------------------------	---------------------------------------	-----------------------	---------------------------------

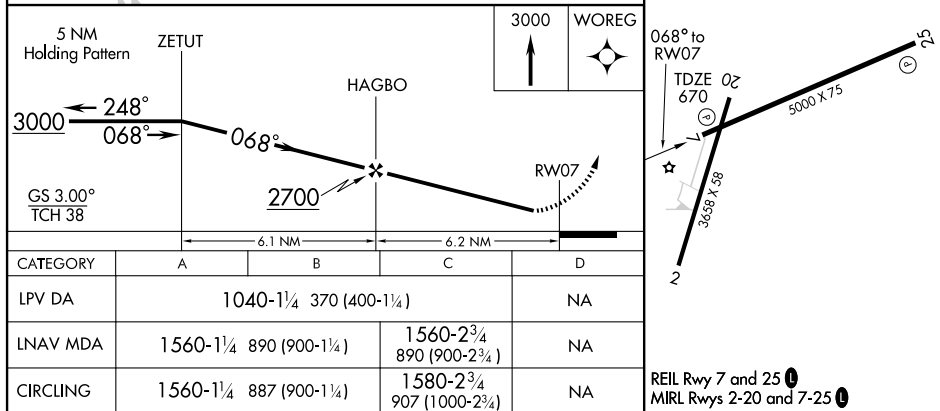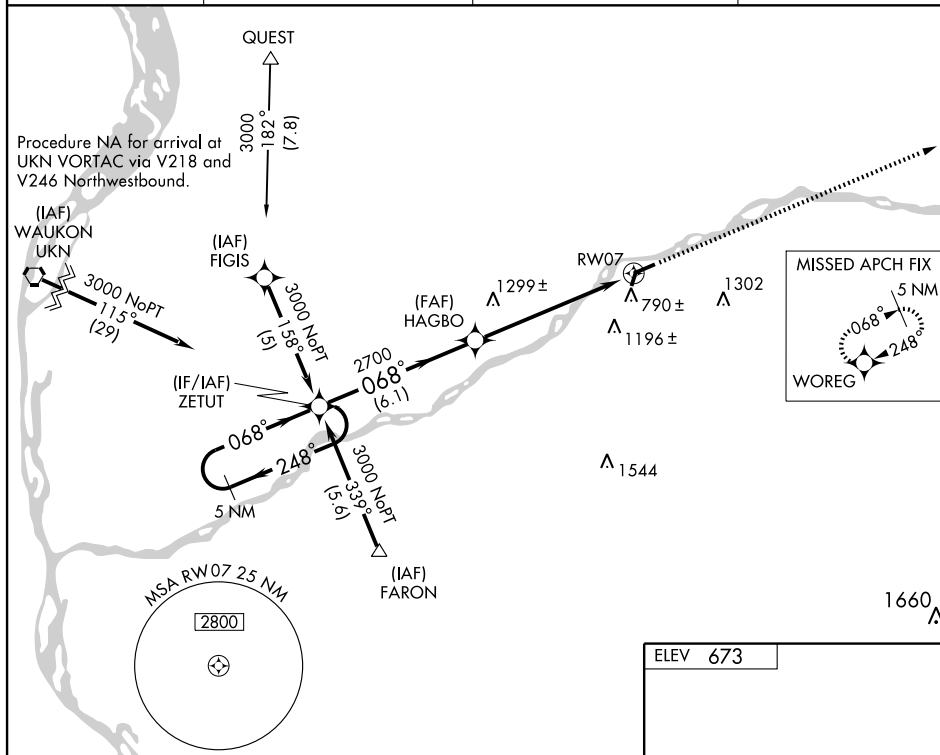

WAAS CH 82505 W25A	APP CRS 248°	Rwy Idg 5000 TDZE 671 Apt Elev 673
--	------------------------	---

RNAV (GPS) RWY 25

BOSCOBEL (OVS)




- T** If local altimeter setting not received, use Lone Rock
A altimeter setting and increase all DAs/MDAs 60 feet.
Visibility reduction by helicopters NA.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct ZETUT and hold.

ASOS
126.775

CHICAGO CENTER
133.3 380.35

GCO
121.725

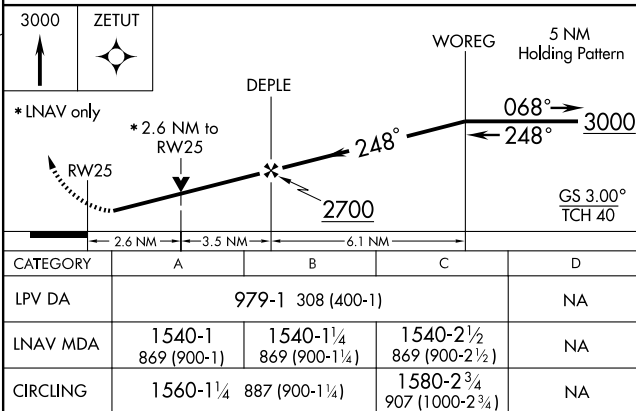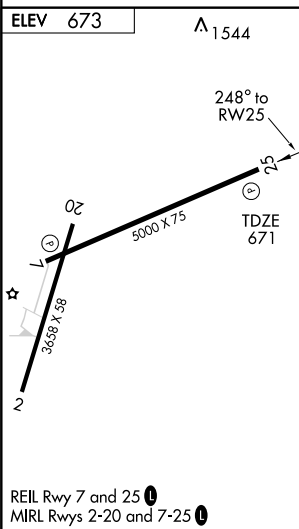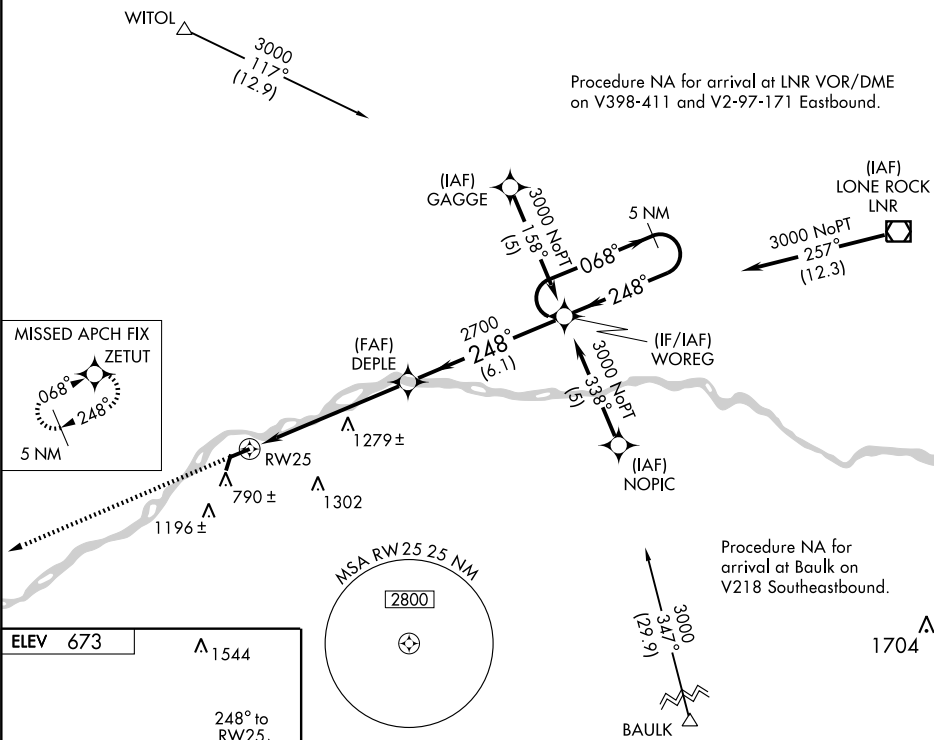UNICOM
122.8 (CTAF) **L**

BOSCOBEL, WISCONSIN

Orig 07242

BOSCOBEL (OVS)

43° 10'N-90° 41'W

RNAV (GPS) RWY 25

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

VOR/DME LNR 112.8 Chan 75	APP CRS 252°	Rwy Idg TDZE 671 Apt Elev 673
---	------------------------	---

VOR/DME RWY 25

BOSCOBEL (OVS)

V If local altimeter setting not received, use Lone Rock altimeter setting and increase all MDAs 60 feet.
A Visibility reduction by helicopters NA.



MISSED APPROACH: Climb to 2700 then right turn via LNR VOR/DME R-252 to SNARE/LNR 18.2 DME and hold.

ASOS
126.775


CHICAGO CENTER
133.3 380.35

GCO
121.725

UNICOM
122.8 (CTAF) 0

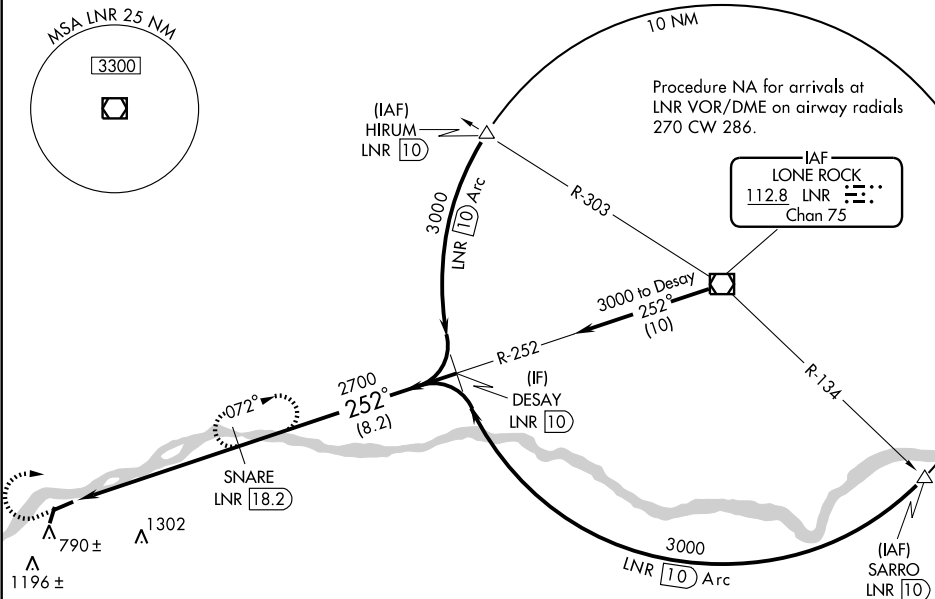

ELEV 673



REIL Rwy 7 and 25
MIRL Rws 2-20 and 7-25

Knots	60	90	120	150	180
Min:Sec					

2700 ↑	LNR R-252 112.8	SNARE LNR 18.2				
			SNARE LNR 18.2	252°	DESAY LNR 10	3000
			2700	3.00° TCH 40	Procedure Turn NA	
			6.2 NM	8.2 NM		
CATEGORY	A		B		C	D
S-25	1620-1¼ 949 (1000-1¼)				1620-2¾ 949 (1000-2¾)	NA
CIRCLING	1620-1¼ 947 (1000-1¼)				1620-2¾ 947 (1000-2¾)	NA

BOSCOBEL, WISCONSIN

Orig 07242

43° 10'N-90° 41'W

BOSCOBEL (OVS)

VOR/DME RWY 25

BOYCEVILLE MUNI (3T3) 0 SE UTC-6(-5DT) N45°02.64' W92°01.22'

GREEN BAY

967 B S3 FUEL 100LL TPA-1967(1000) NOTAM FILE GRB

L-141

RWY 08-26: H3300X60 (ASPH) MIRL 0.5% up E

IAP

RWY 08: PAPI(P2L)—GA 3.0° TCH 28'. Tree.

RWY 26: REIL. PAPI(P2L)—GA 3.0° TCH 23'.

AIRPORT REMARKS: Unattended. Fuel svc unavbl. Crane 160' 2.1 NM east 1300-2359Z± daily. Deer on and invof arpt, primarily after dusk. ACTIVATE MIRL Rwy 08-26, PAPI Rwy 08 and 26 and REIL Rwy 26-122.8.


COMMUNICATIONS: CTAF/UNICOM 122.8.

MINNEAPOLIS CENTER APP/DEP CON 125.3

RADIO AIDS TO NAVIGATION: NOTAM FILE EAU.

EAU CLAIRE (L) VORTACW 112.9 EAU Chan 76 N44°53.86'

W91°28.71' 287° 24.7 NM to fld. 804/4E. HIWAS.

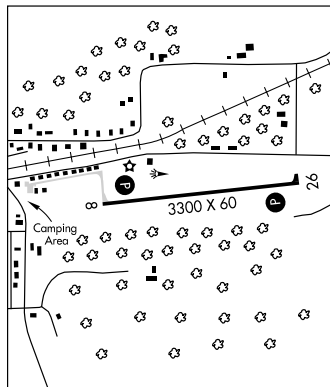

BRENNAND (See NEENAH)

BRODHEAD (C37) 2 S UTC-6(-5DT) N42°35.50' W89°22.51'

CHICAGO

793 NOTAM FILE GRB

RWY 09-27: 2430X155 (TURF) LIRL (NSTD)

RWY 09: Trees. RWY 27: Trees.

RWY 03-21: 1480X100 (TURF)

RWY 03: Trees. RWY 21: Road.

RWY 15-33: 1380X100 (TURF)

RWY 15: Trees. RWY 33: Trees.

AIRPORT REMARKS: Unattended. Rwy not plowed winters, open to ski acft. Rwy 09-27 east 1200' soft and rough.

Rwy 09-27 and Rwy 15 marked by orange and yellow half barrels. Rwy 03-21 marked by half barrels. Rwy 33 marked with concrete pad. ACTIVATE LIRL Rwy 09-27—CTAF.

COMMUNICATIONS: CTAF 122.9

BROOKFIELD

CAPITOL (Ø2C) 3 E UTC-6(-5DT) N43°05.25' W88°10.67'

CHICAGO

850 B S4 FUEL 100LL, MOGAS TPA-1850 (1000) NOTAM FILE GRB

L-28H, A

RWY 03-21: H3501X44 (ASPH) MIRL (NSTD)

RWY 03: TRCV(TRIL). Thld dsplcd 500'. Road.

RWY 21: REIL (NSTD). TRCV(TRIL). Thld dsplcd 195'. Trees.

RWY 09-27: 3395X100 (TURF)

RWY 09: Tree. RWY 27: Trees.

RWY 18-36: 1600X80 (TURF)

RWY 18: Brush. RWY 36: Tree.

AIRPORT REMARKS: Attended Apr-Oct 1400Z±-dusk, Nov-Mar 1400-0000Z±. Rwy 03 and 36 acft ops cannot see Rwy 27 acft ops. Be alert: constant mowing ops on and invof rwy and adjacent areas. Intensive flight training powered acft. Rwy 09-27 and Rwy 18-36 open for ski equipped acft 1 Dec thru 15 Apr. Rwy 09-27 and 18-36 not sanded or plowed. Confirm conditions and snow removal for Rwy 03-21 with arpt manager 262-781-4213. Rwy 21 NSTD REIL, strobes mounted on standard edge lighting poles. Rwy 03-21 NSTD MIRL OTS indef. ACTIVATE NSTD MIRL Rwy 03-21 and VASI Rwy 03 and 21—CTAF. Rwy 03-21 NSTD MIRL; Rwy 03 first 500' unlighted. Rwy 09-27 and Rwy 18-36 ends marked with orange and white A-frames.

COMMUNICATIONS: CTAF/UNICOM 122.7

RADIO AIDS TO NAVIGATION: NOTAM FILE MKE

BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01' W88°17.06' 109° 5 NM to fld. 1080/2E. HIWAS.

BURBUN N42°41.36' W88°18.11' NOTAM FILE GRB.

CHICAGO

(T) VORW/DME 114.5 BUU Chan 92 at Burlington Muni. 780/1W. AWOS-3.

L-28H, A

APP CRS	Rwy Idg	3300
083°	TDZE	964
	Apt Elev	967

RNAV (GPS) RWY 8

BOYCEVILLE MUNI (3T3)


NA Use New Richmond Rgnl altimeter setting.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climbing left turn
to 2800 direct JANAR and hold.



MINNEAPOLIS CENTER
125.3 335.6

UNICOM
122.8 (CTAF) 0

Procedure NA for arrivals at
AGUDE via V78 Westbound.

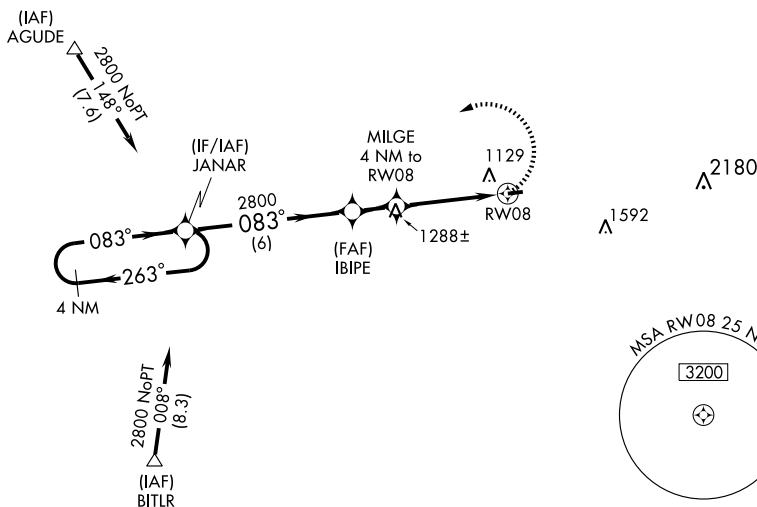

ELEV 967

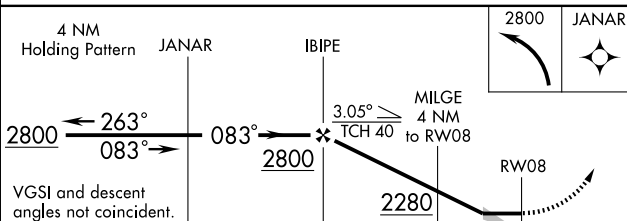

CATEGORY	A	B	C	D
LNNAV MDA	1440-1 476 (500-1)		1440-1¼ 476 (500-1¼)	NA
CIRCLING	1680-1 713 (800-1)		1680-2 713 (800-2)	NA

MIRL Rwy 8-26 0
REIL Rwy 26 0

APP CRS **264°**
Rwy Idg **3300**
TDZE **967**
Apt Elev **967**

RNAV (GPS) RWY 26




BOYCEVILLE MUNI (3T3)

V Use New Richmond Rgnl alimeter setting.
NA DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2800
direct JANAR and hold.



MINNEAPOLIS CENTER
125.3 335.6

UNICOM
122.8 (CTAF) 0

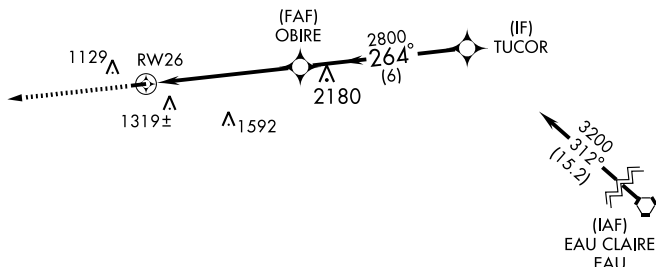


ELEV 967

Procedure NA for arrivals at EAU VORTAC
on airway radials 254 CW 357.



VGS and descent
angles not coincident.

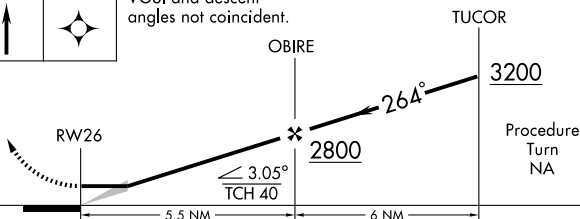

CATEGORY	A	B	C	D
LNNAV MDA	1480-1	513 (600-1)	1480-1½ 513 (600-1½)	NA
CIRCLING	1680-1	713 (800-1)	1680-2 713 (800-2)	NA

MIRL Rwy 8-26 **0**
REIL Rwy 26 **0**

BURLINGTON MUNI (BUU) 1 NW UTC-6(-5DT) N42°41.44' W88°18.28'

CHICAGO

779 B S4 FUEL 100LL, JET A OX 4 NOTAM FILE BUU

L-28H, A

RWY 11-29: H4300X75 (ASPH) S-20 MRL

IAP

RWY 11: REIL. PAPI(P2L)—GA 3.15° TCH 33'. Tree.

RWY 29: REIL. VASI(V2L)—GA 3.0° TCH 36'. Tree. Rgt tfc.

RWY 01-19: 2477X130 (TURF)

RWY 01: Trees. RWY 19: Road. Rgt tfc.

AIRPORT REMARKS: Attended 1400Z±-dusk. Fuel 24 hr self svc. Waterfowl on and in/ov arpt. Tfc departing Rwy 11 avoid overflight of city. ACTIVATE MRL Rwy 11-29; VASI Rwy 29 and PAPI Rwy 11 and REIL Rwy 11 and 29—CTAF. Asph twy 30' wide, except W 700' 35' wide. Rwy 01-19 marked with yellow/black wooden panels.

WEATHER DATA SOURCES: AWOS-3 BUU 114.5 (262) 757-0907.**COMMUNICATIONS:** CTAF/UNICOM 123.05

⑧ MILWAUKEE APP/DEP CON 125.35

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE MKE.

BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01' W88°17.06' 180° 25.6 NM to fld. 1080/2E.

HIWAS.

BURBON (T) VORW/DME 114.5 BUU Chan 92 N42°41.36' W88°18.11' at fld. 780/1W. AWOS-3. NOTAM FILE

GRB.

BURNETT CO (See SIREN)**CABLE UNION** (3CU) 2 SE UTC-6(-5DT) N46°11.71' W91°14.89'

GREEN BAY

1360 B FUEL 100LL NOTAM FILE GRB

L-14I

RWY 16-34: H3709X75 (ASPH) S-28 LIRL 0.4% up S

IAP

RWY 16: REIL. Tree. RWY 34: Trees.

RWY 08-26: 2840X200 (TURF)

RWY 08: Trees. RWY 26: Trees.

AIRPORT REMARKS: Unattended. For arpt manager after hrs call 715-794-2493. Rwy 08-26 CLOSED Nov 21-May 1. Rwy 08-26 marked with orange/white wooden A-frames. No heating units to start acft.

COMMUNICATIONS: CTAF/UNICOM 122.8

HAYWARD RCO 122.1R 113.4T (GREEN BAY RADIO)

MINNEAPOLIS CENTER APP/DEP CON 126.45

RADIO AIDS TO NAVIGATION: NOTAM FILE HYR.

HAYWARD (L) VOR/DME 113.4 HYR Chan 81 N46°01.14' W91°26.78' 035° 13.4 NM to fld. 1208/3E.

VOR portion unusable blo 10000'.

CALIN N44°34.15' W90°09.06' NOTAM FILE MFI.

GREEN BAY

NDB (LOM) 266 DU 338° 4.4 NM to Marshfield Muni.

CAMP LAKE (49C) 1 W UTC-6(-5DT) N42°32.00' W88°09.51'

CHICAGO

755 S4 TPA-1355(600) NOTAM FILE GRB

RWY 18-36: 2250X75 (TURF)

RWY 18: Building. RWY 36: Trees. Rgt tfc.

AIRPORT REMARKS: Attended Mon-Sat 1500-0400Z±. Ultralight activity on and in/ov arpt. Deer activity on and in/ov arpt. Arpt not plowed; confirm conditions with arpt manager 262-889-8187.

COMMUNICATIONS: CTAF 122.9**CAPITOL** (See BROOKFIELD)**CAPPY** N42°50.38' W87°54.78' NOTAM FILE MKE.

CHICAGO

NDB (LOM) 410 MK 008° 6.5 NM to General Mitchell Intl.

CARTER (See PULASKI)

APP CRS	Rwy Idg	4300
290°	TDZE	779
	Apt Elev	779

RNAV (GPS) RWY 29

BURLINGTON MUNI (BUU)

When local altimeter setting not received, use General Mitchell Intl altimeter setting and increase all MDAs 80 feet and LNAV and Circling Cats. C and D visibility ¼ mile. Visibility reduction by helicopters NA. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climbing right turn to 4000 direct WIPED and hold, continue climb in hold to 4000.

AWOS-3
114.50

MILWAUKEE APP CON
125.35 307.0


GCO
121.725

UNICOM
123.05 (CTAF)


Procedure NA for arrivals at
BONOT via V191 Northbound.




Procedure NA for arrivals at
PETTY via V216 Eastbound,
V170 Southeast bound.






1230
1289
1596

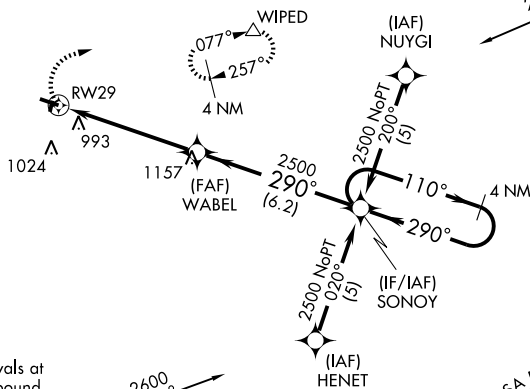

Procedure NA for arrivals at
BESIE via V217 Southbound.



ELEV 779

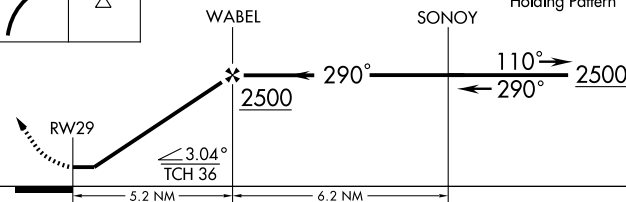

MIRL Rwy 11-29
REIL Rwy 11 and 29

BURLINGTON, WISCONSIN
Orig 08101

42° 41' N-88° 18' W

RNAV (GPS) RWY 29

VORTAC BAE 116.4 Chan 111	APP CRS 180°	Rwy Idg TDZE Apt Elev	N/A N/A 779
---	------------------------	-----------------------------	--

VOR or GPS-A
BURLINGTON MUNI (BUU)

▼
▲ NA Use Milwaukee Mitchell altimeter setting.

MISSED APPROACH: Climb to 2500 then left turn via BAE R-180 to LISSI and hold.


AWOS-3
114.50

MILWAUKEE APP CON
125.35 307.0



GCO
121.725

UNICOM
123.05 (CTAF) ①

RADAR REQUIRED

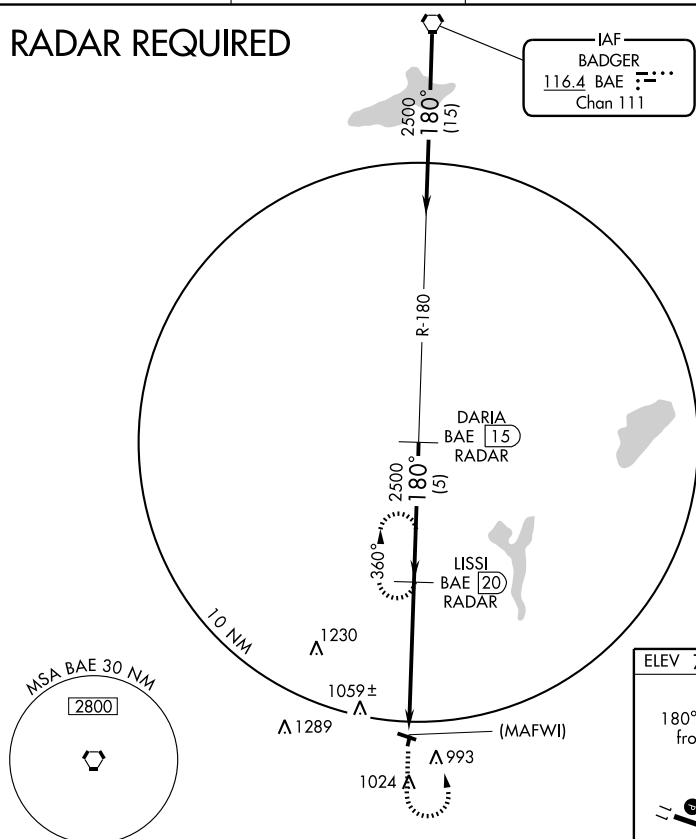

1849 ▲

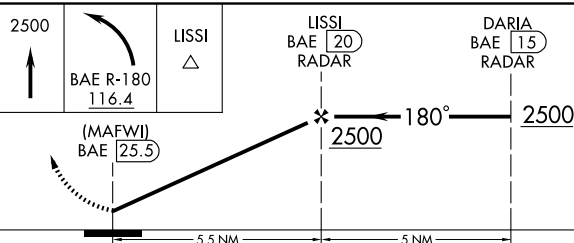

MIRL Rwy 11-29 ①
REIL Rwy 11 and 29 ①

CATEGORY	A	B	C	D
CIRCLING	1400-1 621 (700-1)	1400-1¼ 621 (700-1¼)	1440-1¾ 661 (700-1¾)	1440-2 661 (700-2)

FAF to MAP 5.5 NM					
Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

VOR/DME BUU	APP CRS	Rwy Idg	4300
114.5	282°	TDZE	779
Chan 92		Apt Elev	779

VOR RWY 29

BURLINGTON MUNI (BUU)

⚠ When local altimeter setting not received, use General Mitchell Intl altimeter setting and increase all MDAs 80 feet and increase S-29 and Circling Cats. B, C and D visibilities ¼ mile, and WEDIN Fix minimums S-29 and Circling Cats. C and D visibilities ¼ mile. Visibility reduction by helicopters NA.


MISSED APPROACH: Climbing left turn to 2500 in BUU VOR/DME holding pattern.

AWOS-3
114.50


MILWAUKEE APP CON
125.35 307.0

GCO
121.725

UNICOM
123.05 (CTAF)

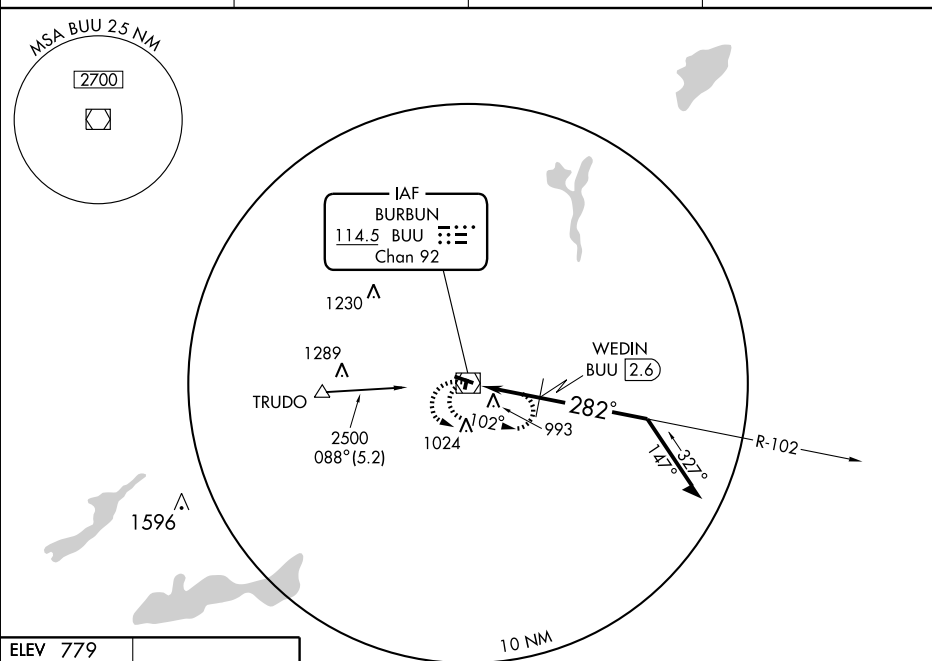

ELEV **779**

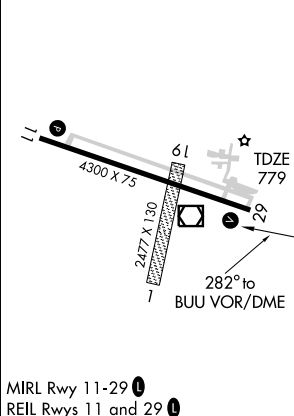


Knots	60	90	120	150	180
Min:Sec					

BURLINGTON, WISCONSIN

Amdt 8 08101

2500

BUU



114.5

VOR/DME

102°

2500

WEDIN BUU 2.6

282°

1460*

2.6 NM

Remain within 10 NM

*1540 when using General Mitchell Intl altimeter setting.

CATEGORY	A	B	C	D
S-29	1460-1	681 (700-1)	1460-2 681 (700-2)	1460-2¼ 681 (700-2¼)
CIRCLING	1460-1	681 (700-1)	1460-2 681 (700-2)	1460-2¼ 681 (700-2¼)

WEDIN FIX MINIMUMS

S-29	1300-1	521 (600-1)	1300-1½ 521 (600-1½)	1300-1¾ 521 (600-1¾)
CIRCLING	1340-1 561 (600-1)	1360-1 581 (600-1)	1360-1½ 581 (600-1½)	1380-2 601 (700-2)

BURLINGTON MUNI (BUU)

VOR RWY 29

42° 41' N-88° 18' W

BURLINGTON MUNI (BUU) 1 NW UTC-6(-5DT) N42°41.44' W88°18.28'

CHICAGO

779 B S4 FUEL 100LL, JET A OX 4 NOTAM FILE BUU

L-28H, A

RWY 11-29: H4300X75 (ASPH) S-20 MRL

IAP

RWY 11: REIL. PAPI(P2L)—GA 3.15° TCH 33'. Tree.

RWY 29: REIL. VASI(V2L)—GA 3.0° TCH 36'. Tree. Rgt tfc.

RWY 01-19: 2477X130 (TURF)

RWY 01: Trees. RWY 19: Road. Rgt tfc.

AIRPORT REMARKS: Attended 1400Z±-dusk. Fuel 24 hr self svc. Waterfowl on and invof arpt. Tfc departing Rwy 11 avoid overflight of city. ACTIVATE MRL Rwy 11-29; VASI Rwy 29 and PAPI Rwy 11 and REIL Rwy 11 and 29—CTAF. Asph twy 30' wide, except W 700' 35' wide. Rwy 01-19 marked with yellow/black wooden panels.

WEATHER DATA SOURCES: AWOS-3 BUU 114.5 (262) 757-0907.**COMMUNICATIONS:** CTAF/UNICOM 123.05

⑧ MILWAUKEE APP/DEP CON 125.35

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE MKE.

BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01' W88°17.06' 180° 25.6 NM to fld. 1080/2E.

HIWAS.

BURBON (T) VORW/DME 114.5 BUU Chan 92 N42°41.36' W88°18.11' at fld. 780/1W. AWOS-3. NOTAM FILE

GRB.

BURNETT CO (See SIREN)**CABLE UNION** (3CU) 2 SE UTC-6(-5DT) N46°11.71' W91°14.89'

GREEN BAY

1360 B FUEL 100LL NOTAM FILE GRB

L-14I

RWY 16-34: H3709X75 (ASPH) S-28 LIRL 0.4% up S

IAP

RWY 16: REIL. Tree. RWY 34: Trees.

RWY 08-26: 2840X200 (TURF)

RWY 08: Trees. RWY 26: Trees.

AIRPORT REMARKS: Unattended. For arpt manager after hrs call 715-794-2493. Rwy 08-26 CLOSED Nov 21-May 1. Rwy 08-26 marked with orange/white wooden A-frames. No heating units to start acft.

COMMUNICATIONS: CTAF/UNICOM 122.8

HAYWARD RCO 122.1R 113.4T (GREEN BAY RADIO)

MINNEAPOLIS CENTER APP/DEP CON 126.45

RADIO AIDS TO NAVIGATION: NOTAM FILE HYR.

HAYWARD (L) VOR/DME 113.4 HYR Chan 81 N46°01.14' W91°26.78' 035° 13.4 NM to fld. 1208/3E.

VOR portion unusable blo 10000'.

CALIN N44°34.15' W90°09.06' NOTAM FILE MFI.

GREEN BAY

NDB (LOM) 266 DU 338° 4.4 NM to Marshfield Muni.

CAMP LAKE (49C) 1 W UTC-6(-5DT) N42°32.00' W88°09.51'

CHICAGO

755 S4 TPA-1355(600) NOTAM FILE GRB

RWY 18-36: 2250X75 (TURF)

RWY 18: Building. RWY 36: Trees. Rgt tfc.

AIRPORT REMARKS: Attended Mon-Sat 1500-0400Z±. Ultralight activity on and invof arpt. Deer activity on and invof arpt. Arpt not plowed; confirm conditions with arpt manager 262-889-8187.

COMMUNICATIONS: CTAF 122.9**CAPITOL** (See BROOKFIELD)**CAPPY** N42°50.38' W87°54.78' NOTAM FILE MKE.


CHICAGO

NDB (LOM) 410 MK 008° 6.5 NM to General Mitchell Intl.

CARTER (See PULASKI)



APP CRS	Rwy Idg	3709
345°	TDZE	1360
	Apt Elev	1360

GPS RWY 34
CABLE UNION (3CU)


	Use Hayward altimeter setting.	MISSED APPROACH: Climb to 3200 then right turn direct CYETT WP and hold.
--	--------------------------------	--

MINNEAPOLIS CENTER
126.45 276.4

UNICOM
122.8 (CTAF)

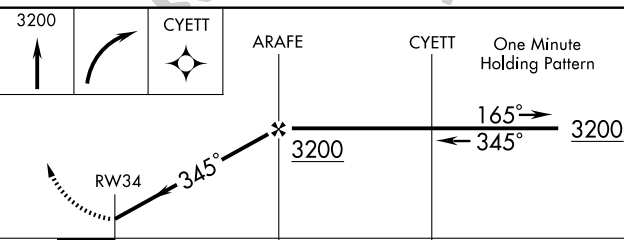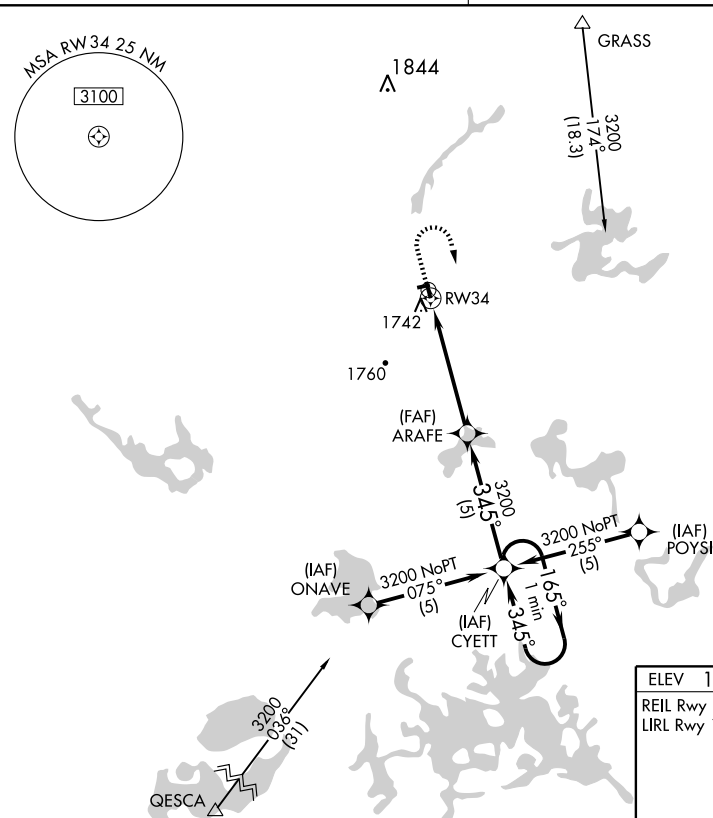

CATEGORY	A	B	C	D
S-34	2120-1 760 (800-1)	2120-1¼ 760 (800-1¼)	2120-2¼ 760 (800-2¼)	2120-2½ 760 (800-2½)
CIRCLING	2160-1 800 (800-1)	2160-1¼ 800 (800-1¼)	2160-2¼ 800 (800-2¼)	2160-2½ 800 (800-2½)

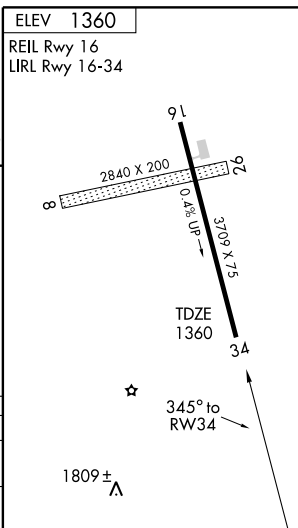


AIRPORT DIAGRAM

AFD-714 [USAF]

CAMP DOUGLAS, WISCONSIN

ATIS★ 120.475
VOLK TOWER ★
127.5 (CTAF) 239.25
GND CON
121.9 275.8

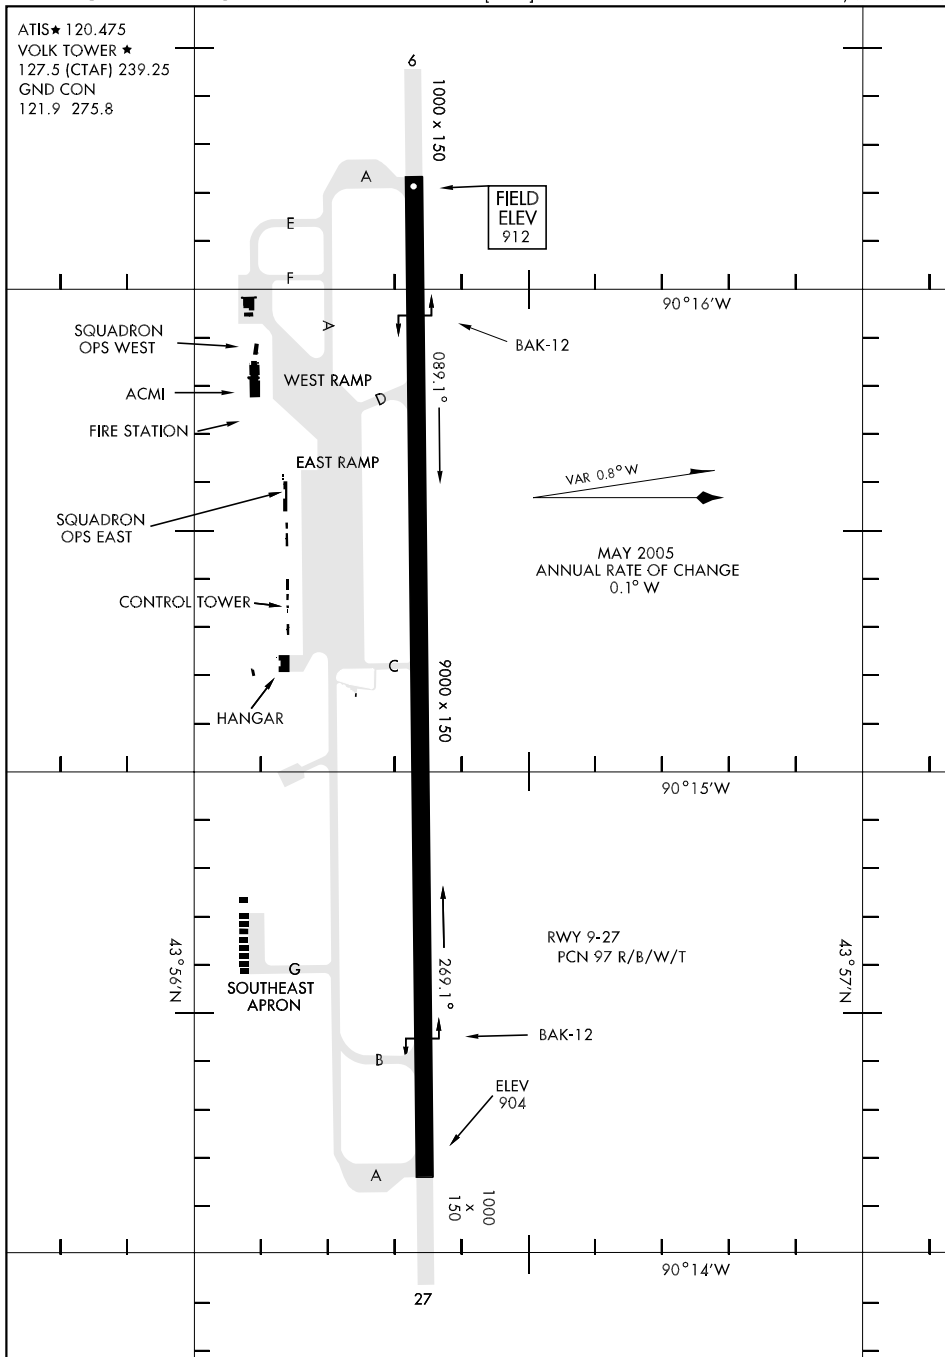

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

AIRPORT DIAGRAM

WGS DATUM

CAMP DOUGLAS, WISCONSIN

VOLK FIELD (VOK)

VIROQUA MUNI (Y51) 2 N UTC-6(-5DT) N43°34.76' W90°53.79'

CHICAGO

1292 B **FUEL** 100 NOTAM FILE GRB

L-28G

Rwy 11-29: H3346X60 (ASPH) S-12 HIRL 0.7% up SE

IAP

Rwy 29: Trees.

Rwy 02-20: 2555X90 (TURF) 1.0% up SW

Rwy 20: Trees.

AIRPORT REMARKS: Unattended. 24 hr fuel avbl. Rwy 02-20 CLOSED Nov 15 thru Apr 15. Rwy 02-20 has sharp 20' drop-off each end.


Rwy slopes downhill to the N approximately 1.5%. Rwy 02-20 marked with yellow cones. Rwy 11-29 HIRLS on low ints—increase ints on CTAF.

COMMUNICATIONS: CTAF 122.9

MINNEAPOLIS CENTER APP/DEP CON 128.6

RADIO AIDS TO NAVIGATION: NOTAM FILE LSE.

LA CROSSE (T) VORW/DME 108.4 LSE Chan 21 N43°52.57' W91°15.36' 137° 23.7 NM to fld. 650/2E.

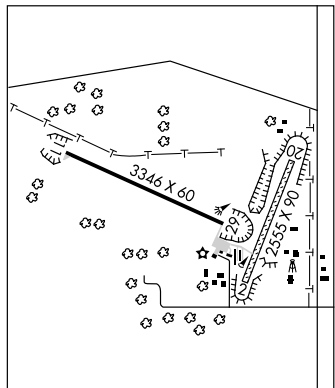

VOLK FLD (VOK) (KVOK) ANG 1N UTC-6(-5DT) N43°56.35' W90°15.19'

CHICAGO

912 B TPA—See Remarks NOTAM FILE GRB Not insp.

H-2K, L-28G

Rwy 09-27: H9000X150 (ASPH-CONC-GRVD) S-81, D-190, 2D-400 PCN 97 R/B/W/T HIRL

DIAP, AD

Rwy 09: MALSR. PAPI(P4L).

Rwy 27: ALSF1. PAPI(P4R). Rgt tfc.

ARRESTING GEAR/SYSTEM

Rwy 09 HOOK BAK-12B(B) (1260')

HOOK BAK-12B(B) (1250') **Rwy 27**

MILITARY SERVICE: LGT ACTIVATE-ALS, HIRL, PAPI Rwy 09-27-CTAF or 239.25. Rwy 27 PAPI NSTD located rgt side.

A-GEAR Normal BAK-12B(B) configuration: apch end down, dep end up; 20 min prior notice to reconnect apch end cable. **JASU** (AM32A-60A) 6(A/M32A-86) **FUEL** J8 Avbl limited, expect possible gnd delay for req exceeding 10,000 gal. **FLUID** LPOX LOX **TRAN ALERT** Extremely limited.

MILITARY REMARKS: Opr Mon-Fri 1400-2200Z except holidays, CLOSED other times except validated overseas or ANG mission, check NOTAM for current afld hrs. See FLIP AP/1 Supplementary Arpt Remarks.

RSTD Recommend use as emergency arpt only when rqr to land as soon as possible. PPR ctc Volk Fld DSN 871-1205, C608-427-1205. Issued PPR valid for ETA +/- 1 hr. Early/late arr/dep must be coordinated. After hr re-coordination or cancel will be passed to Base OPS standby personnel C608-343-0104. PPR must be received not later than 48 hours in advance of acft arrival or by 2200Z or Fri for the following Mon. Twy G ltd to F-16 acft or smaller and helicopter traffic. **CAUTION** FMQ-19 automated wx obsn avbl 24 hr, DSN 871-1066, C 608-427-1066. When wind is from S/SW expect possible Low Level Wind Shear 1 to 3 NM on final to Rwy 27. Due to tactical acft rqr, BAK-12 cable may be in position for Rwy 09-27 simultaneously. Twy E and F unlgtd, unlimited daytime VFR use. Follow Me rqr for day IFR and night IFR/VFR use. **TFC PAT** Left tfc Rwy 09.

TPA-Helicopter rectangular 1500(588). **MISC** First 1600' Rwy 09 and first 1600' Rwy 27 grooved concrete, mid 5800' grooved asphalt. Standard USAF RSRs applied. Base Ops DSN 871-1205, C608-427-1205.

WEATHER DATA SOURCES: ASOS-FMQ 19 (608) 427-1066

COMMUNICATIONS: CTAF 127.5 ATIS 120.475 257.85 PTD 372.2

Ⓡ **APP/DEP CON** 135.25 290.8 (Mon-Fri 1400-1600Z, except holidays, subject short notice change in support of NGB validated flying, check NOTAMS for current afld hrs), other time ctc

Ⓡ **CHICAGO CENTER APP/DEP CON** 133.3 257.92

TOWER 127.5 239.25 (Mon-Fri 1400-1600Z, except holidays, subject short notice change in support of NGB validated flying, check NOTAMS for current afld hrs.) **GND CON** 121.9 275.8

SHEBOYGAN RANGE 260.4

HARDWOOD RANGE 132.025 297.75 358.8

AIRSPACE: CLASS D svc Mon-Fri 1400-0600Z except holidays subject short notice change in support of NGB validated flying, other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE GRB.

(L) **TACAN** Chan 41 VOK (110.4) N43°56.57' W90°15.54' at fld. 961/OE. Unmonitored when twr clsd. No NOTAM MP Mon 1400-1530Z.

TACAN unusable byd 20NM blo 4,000'.

ILS 108.5 I-VOK Rwy 27. Class IE. Unmonitored when twr clsd. Back course unusable. No NOTAM MP: Localizer Mon 1930-2030Z; Glide slope Mon 2030-2130Z.

COMM/NAV/WEATHER REMARKS: Limited Special Rules Area svc avbl, ctc Radar Approach Control at DSN 871-1779, C608-427-1779.

TACAN VOK Chan 41	APCH CRS 277°	Rwy ldg TDZE 900 Arpt Elev 912
-----------------------------	-------------------------	--

JAL-714 [USAF]

VOLK FIELD (KVOK)


- V** * When ALS inop, increase CAT C RVR to 60 and vis to 1¼ miles, CAT DE vis to 1½ miles.
 ** Circling not authorized South of Rwy 9-27.



MISSED APPROACH: Climbing left turn to 3000 intercept VOK TACAN R-180 to MAXXX and hold.

ATIS 120.475	VOLK APP CON 135.25 290.8	VOLK TOWER ★ 127.5 0 (CTAF) 239.25 0	GND CON 121.9 275.8	CHICAGO CENTER 133.3 257.92
------------------------	-------------------------------------	---	-------------------------------	---------------------------------------

- *** When ALS inop, increase CAT C vis to 1½ miles, CAT D to 1¾ miles, and CAT E to 2 miles.

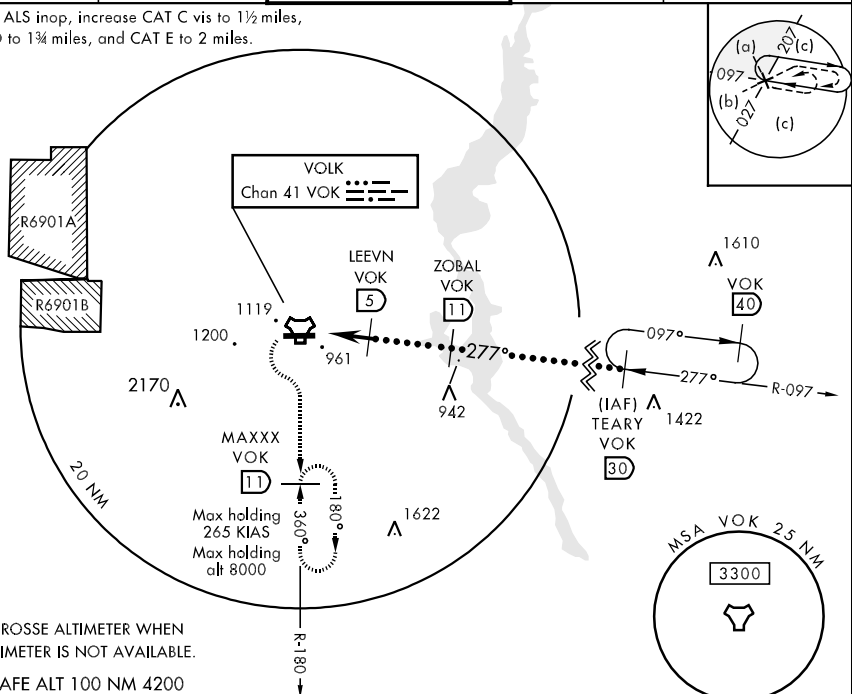


USE LA CROSSE ALTIMETER WHEN LOCAL ALTIMETER IS NOT AVAILABLE.

EMERG SAFE ALT 100 NM 4200

3000 VOK R-180	MAXXX VOK (11)		
TACAN	EEDEE (1.5)	LEEVN (5)	ZOBAL (11)
	2200	2700	FL180
	3.5 NM		2.94° TCH 53
TEARY (30)			
CATEGORY	C	D	E
S-27 *	1360/40 455 (500-¾)	1360/50 455 (500-1)	
CIRCLING **	1500-1½ 588 (600-1½)	1500-2 588 (600-2)	1580-2¼ 668 (700-2¼)
LA CROSSE ALTIMETER SETTING MINIMUMS			
S-27 ***	1500/50 595 (600-1)	1500/60 595 (600-1¼)	1500-1½ 595 (600-1½)
CIRCLING **	1640-2 728 (800-2)	1640-2¼ 728 (800-2¼)	1720-2¾ 808 (900-2¾)

ELEV 912



HIRL Rwy 9-27 0

LOC I-VOK 108.5	APCH CRS 269°	Rwy Idg TDZE Arprt Elev 9000 905 912
---------------------------	-------------------------	--

AL-714 [USAF]

VOLK FIELD (KVOK)


▼ * When ALS inop, increase CAT ABCDE RVR to 40 and vis to $\frac{3}{4}$ mile.
 ** When ALS inop, increase CAT AB RVR to 50 and vis to 1 mile,
 CAT CD RVR to 60 and vis to $1\frac{1}{4}$ miles, and CAT E vis to $1\frac{1}{2}$ miles.




MISSED APPROACH: Climb to 2200,
 then climbing left turn to 3300 to intercept
 the DLL R-297 to MAXXX and hold.

ATIS 120.475	VOLK APP CON 135.25 290.8	VOLK TOWER ★ 127.5 0 (CTAF) 239.25 0	GND CON 121.9 275.8	CHICAGO CENTER 133.3 257.92
------------------------	-------------------------------------	--	-------------------------------	---------------------------------------


*** Circling not authorized South of Rwy 9-27.

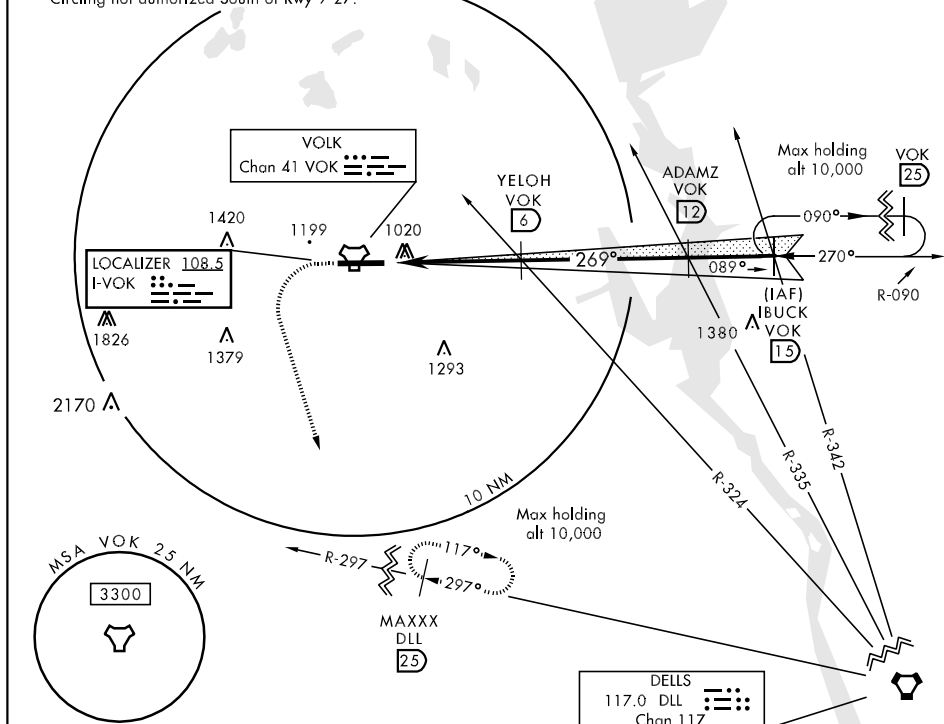

EMERG SAFE ALT 100 NM 4200

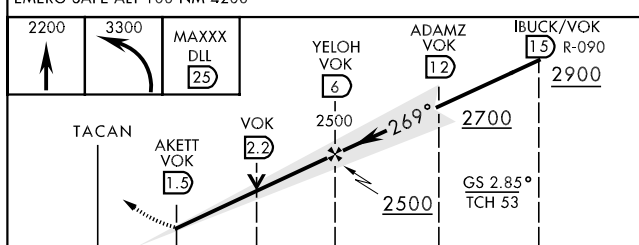

CATEGORY	A	B	C	D	E
S-ILS 27 *	1105/24	200	(200- $\frac{1}{2}$)		
S-LOC 27 **	1320/24	415 (500- $\frac{1}{2}$)	1320/40	415 (500- $\frac{3}{4}$)	1320/50
CIRCLING ***	1400-1	1500-1	1500-1 $\frac{1}{2}$	1500-2	1580-2 $\frac{1}{4}$
	488 (500-1)	588 (600-1)	588 (600-1 $\frac{1}{2}$)	588 (600-2)	668 (700-2 $\frac{1}{4}$)

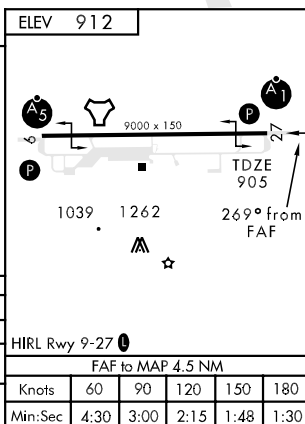

APCH CRS 089°	Rwy Idg TDZE Arpt Elev	9000 912 912
-------------------------	------------------------------	---

AL-714 [USAF]

VOLK FIELD (KVOK)

▼ Procedure not authorized when R-6901B active.
DME/DME RNP-0.3 NA.
RNAV-1.


MALSR




MISSED APPROACH: Climb to 4000 direct ZOGEL
and hold, continue climb-in-hold to 4000.

ATIS 120.475	VOLK APP CON 135.25 290.8	VOLK TOWER ★ 127.5 0 (CTAF) 239.25 0	GND CON 121.9 275.8	CHICAGO CENTER 133.3 257.92
------------------------	-------------------------------------	--	-------------------------------	---------------------------------------

GPS REQUIRED

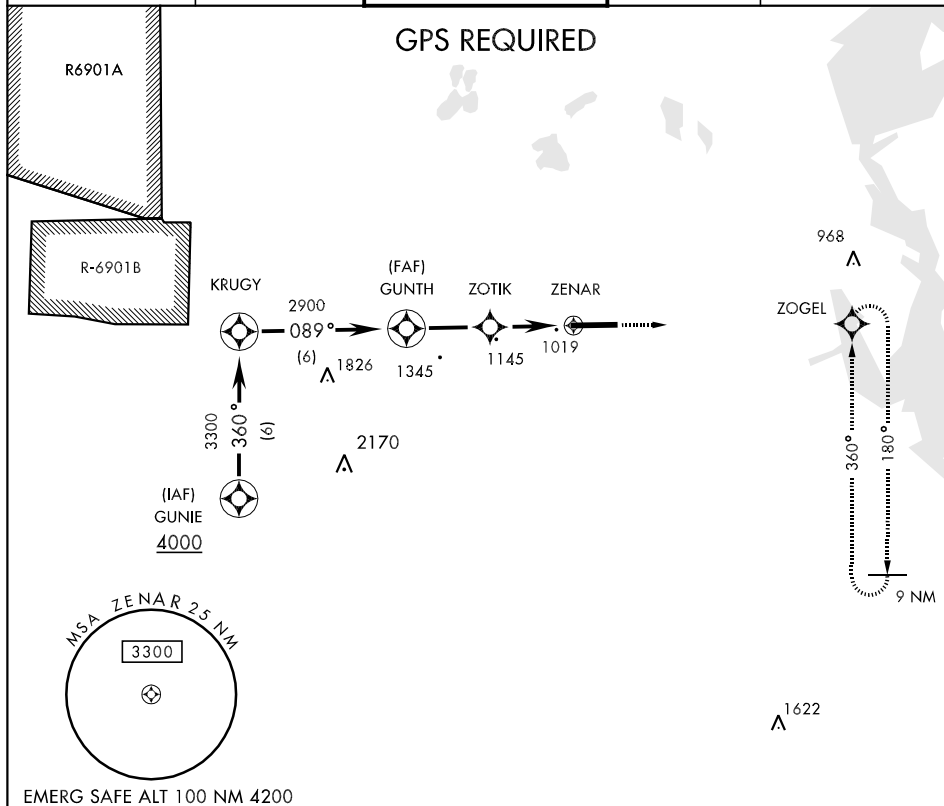

EMERG SAFE ALT 100 NM 4200

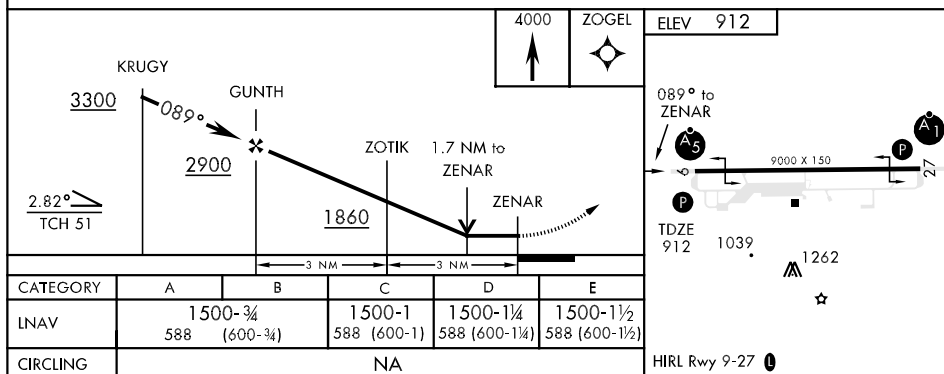


TACAN VOK Chan 41	APCH CRS 076°	Rwy Idg TDZE Arpt Elev 912	AL-714 [USAF]	VOLK FIELD (KVOK)
----------------------	------------------	----------------------------------	---------------	-------------------


<p>* When ALS inop, increase vis CAT AB to 1 mile, CAT C to 1½ mile, CAT D to 1¾ miles, CAT E to 2 miles.</p> <p>** Circling not authorized South of Rwy 9-27.</p>	<p>MALSR A5</p>	<p>MISSED APPROACH: Climb to 1900 then climbing right turn to 3000 intercept VOK R-180 to MAXXX and hold.</p>
--	---------------------	---

ATIS 120.475	VOLK APP CON 135.25 290.8	VOLK TOWER ★ 127.5 0 (CTAF) 239.25 0	GND CON 121.9 275.8	CHICAGO CENTER 133.3 257.92
-----------------	------------------------------	---	------------------------	--------------------------------


*** When ALS inop, increase vis CAT AB to 1 mile, CAT C to 2 miles, CAT D to 2¼ miles.

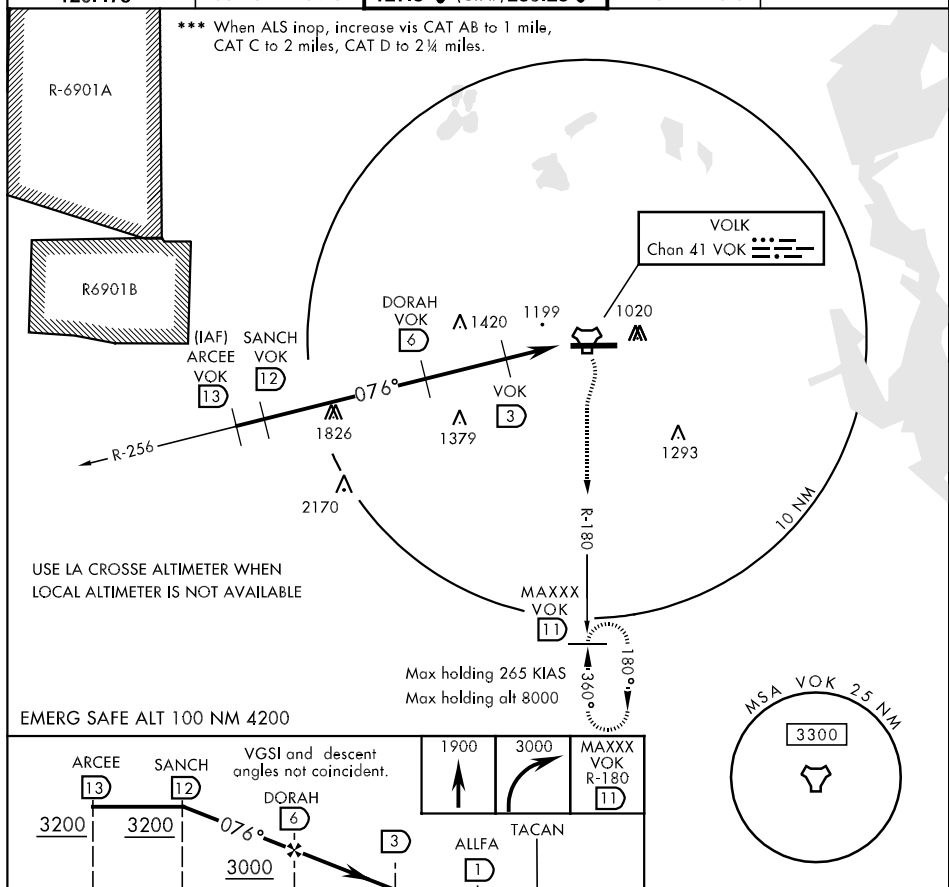

EMERG SAFE ALT 100 NM 4200

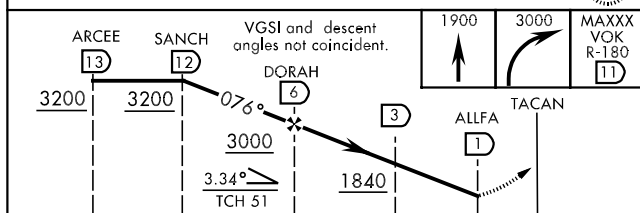

CATEGORY	A	B	C	D	E
S-9 *	1500-¾ 588 (600-¾)		1500-1 588 (600-1)	1500-1¼ 588 (600-1¼)	1500-1½ 588 (600-1½)
CIRCLING **	1500-1 588 (600-1)		1500-1½ 588 (600-1½)	1500-2 588 (600-2)	1580-2¼ 668 (700-2¼)
LA CROSSE ALTIMETER SETTING MINIMUMS					
S-9 ***	1640-¾ 728 (800-¾)		1640-1½ 728 (800-1½)	1640-1¾ 728 (800-1¾)	1640-2½ 728 (800-2½)
CIRCLING **	1640-1 728 (800-1)		1640-2 728 (800-2)	1640-2¼ 728 (800-2¼)	1720-2¾ 808 (900-2¾)



TACAN VOK	APCH CRS	Rwy Idg	9000
Chan 41	277°	TDZE	905
		Arpt Elev	912

AL-714 [USAF]

VOLK FIELD (KVOK)

T * When ALS inop, increase CAT AB RVR to 50 and vis to 1 mile, CAT C RVR to 60 and vis to 1¼ miles, and CAT DE to 1½ miles.
** Circling not authorized South of Rwy 9-27.

ALSF-1

MISSED APPROACH: Climbing left turn to 3000, intercept VOK TACAN R-180 to MAXXX and hold.

ATIS
120.475

VOLK APP CON
135.25 290.8

VOLK TOWER ★
5 L (CTAF) 239.25 L

	GND CON
121.9	275.8

CHICAGO CENTER
133.3 257.92

*** When ALS inop, increase CAT AB RVR to 50 and vis to 1 mile, CAT C to 1½ miles, CAT D to 1¾ miles, and CAT E to 2 miles.


R-6901A

R6901B

WHEN CONTROL TOWER CLOSED,
USE LA CROSSE ALTIMETER SETTING.

EMERG SAFE ALT 100 NM 4200

FIFV 912

HIRL Rwy 9-27 **L**[illegible]

CAMP DOUGLAS, WISCONSIN

43°56'N-90°16'W

VOLK FIELD (KVOK)

Amdt 2 09295

TACAN Y RWY 27

EC-3. 23 SEP 2010 to 21 OCT 2010

CASSVILLE MUNI (C74) 1 SE UTC−6(−5DT) N42°42.25' W90°57.88'

CHICAGO

627 NOTAM FILE GRB

L-28G

RWY 11-29: H3000X50 (ASPH) S-21, D-40 LIRL

RWY 11: Tree. Rgt tfc.

RWY 29: Thld dspcd 600'. Road.

AIRPORT REMARKS: Unattended. For winter condition and snow removal call arpt manager 608-725-5895. 1350' X20' twy W end Rwy 11.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE DBQ.

DUBUQUE (H) VORTACW 115.8 DBQ Chan 105 N42°24.09' W90°42.54' 324° 21.4 NM to fld. 1051/4E.

CENTRAL CO (See IOLA)

CENTRAL WISCONSIN (See MOSINEE)

CHETEK MUNI-SOUTHWORTH (Y23) 1 SE UTC−6(−5DT) N45°18.37' W91°38.17'

GREEN BAY

1055 B S2 **FUEL** 80, 100LL TPA—2055(1000) NOTAM FILE GRB

L-14I

RWY 17-35: H3400X60 (ASPH) MIRL

IAP

RWY 17: REIL. PAPI(P2L)—GA 4.0° TCH 22'. Thld dspcd 600'. Trees.

RWY 35: REIL. PAPI (P2L)—GA 3.0° TCH 29'. Road.

RWY 07-25: 1100X70 (TURF) 0.4% up E

RWY 07: Trees.

RWY 25: Trees.

AIRPORT REMARKS: Unattended. 24 hr self svc fuel. Rwy 07-25 not plowed; Rwy CLOSED Nov 15 thru Apr 15. Rwy 17-35 may not be plowed for 24 to 48 hrs after heavy snow fall or drifting snow. Rwy 07-25 thlds marked by yellow cones. MIRL Rwy 17-35 preset on low ints, to increase ints and ACTIVATE PAPI and REIL Rwy 17 and Rwy 35—CTAF.

COMMUNICATIONS: CTAF 122.9

RICE LAKE RCO 122.3 (GREEN BAY RADIO)

MINNEAPOLIS CENTER APP/DEP CON 125.3

RADIO AIDS TO NAVIGATION: NOTAM FILE RPD.

RICE LAKE (T) VORW/DME 110.0 RPD Chan 37 N45°24.91' W91°46.68' 136° 8.9 NM to fld. 1092/1E. OTS indcf.

CHILTON

FLYING FEATHERS (11Y) 2 NW UTC−6(5DT) N44°03.67' W88°11.70'

GREEN BAY

940 NOTAM FILE GRB

Not insp.

RWY 18-36: 1000X60 (TURF)

RWY 09-27: 500X20 (TURF)

AIRPORT REMARKS: Unattended.

COMMUNICATIONS: CTAF 122.9

CHIPPEWA VALLEY RGNL (See EAU CLAIRE)

CINDY GUNTLY MEML (See FRANKSVILLE)

APP CRS	Rwy Idg	2800
175°	TDZE	1055
	Apt Elev	1055

AL- 6935 (FAA)

RNAV (GPS) RWY 17

CHETEK MUNI-SOUTHWORTH (Y23)




IAF ARM APPROACH MODE PRIOR TO IAF.
NA GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA.
 Use Rice Lake altimeter setting.

MISSED APPROACH: Climb to 3200
 direct IJPUD WP and hold.

RICE LAKE AWOS-3
120.525

MINNEAPOLIS CENTER
125.3 335.6

CTAF
122.9

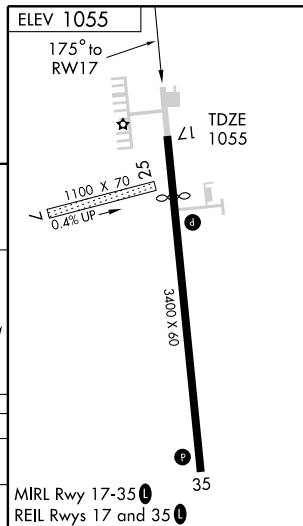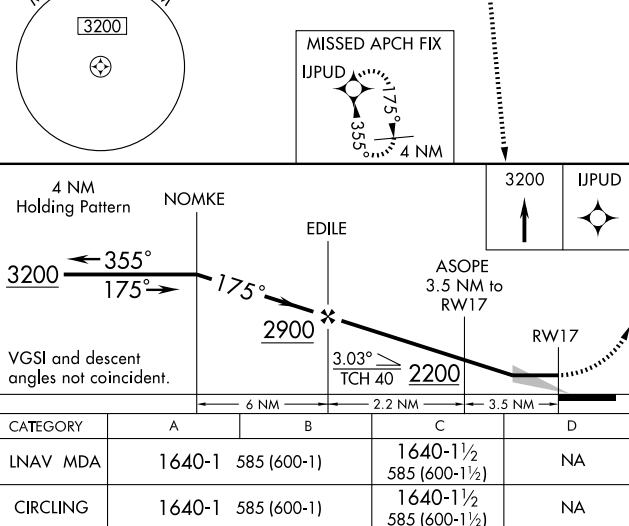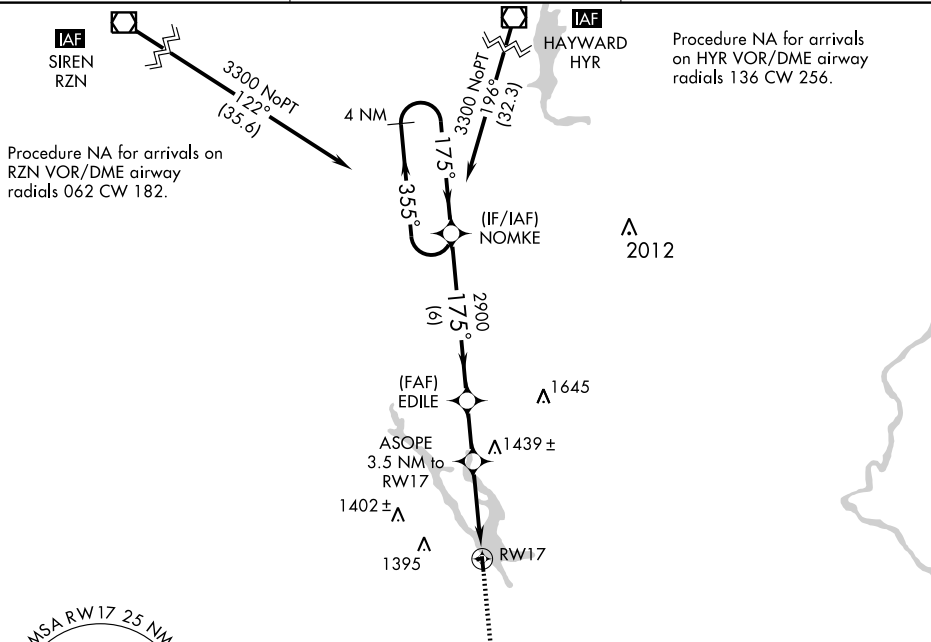

APP CRS	Rwy Idg	3400
355°	TDZE	1055
	Apt Elev	1055

AL- 6935 (FAA)

RNAV (GPS) RWY 35

CHETEK MUNI-SOUTHWORTH (Y23)




Use Rice Lake altimeter setting.
GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3200
direct NOMKE WP and hold.


RICE LAKE AWOS-3
120.525

MINNEAPOLIS CENTER
125.3 335.6


CTAF
122.90






Procedure NA for arrival
at BOSEN on V78 W bnd.



ELEV 1055

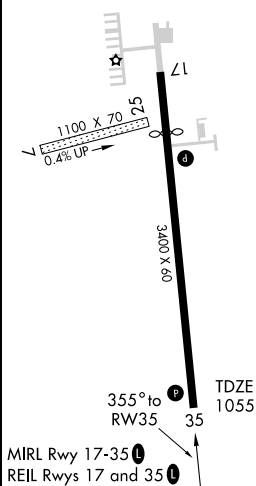

Procedure NA for arrivals
on EAU VORTAC airway
radials 276 CW 036.

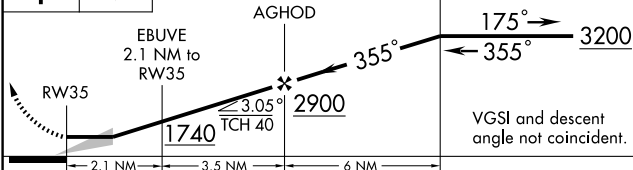

CATEGORY	A	B	C	D
LNAV MDA	1580-1	525 (600-1)	1580-1½ 525 (600-1½)	NA
CIRCLING	1640-1	585 (600-1)	1640-1½ 585 (600-1½)	NA

VOR/DME RPD 110.0 Chgn 37	APP CRS 136°	Rwy Idg TDZE Apt Elev	N/A N/A 1056
---	------------------------	-----------------------------	---

VOR/DME-A

CHETEK MUNI-SOUTHWORTH (Y23)


A NA

Use Rice Lake altimeter setting.

MISSED APPROACH: Climb to 2400 then climbing left turn to 3200 direct RPD VOR/DME and hold.

RICE LAKE AWOS-3
120,525

MINNEAPOLIS CENTER
125.3 335.6

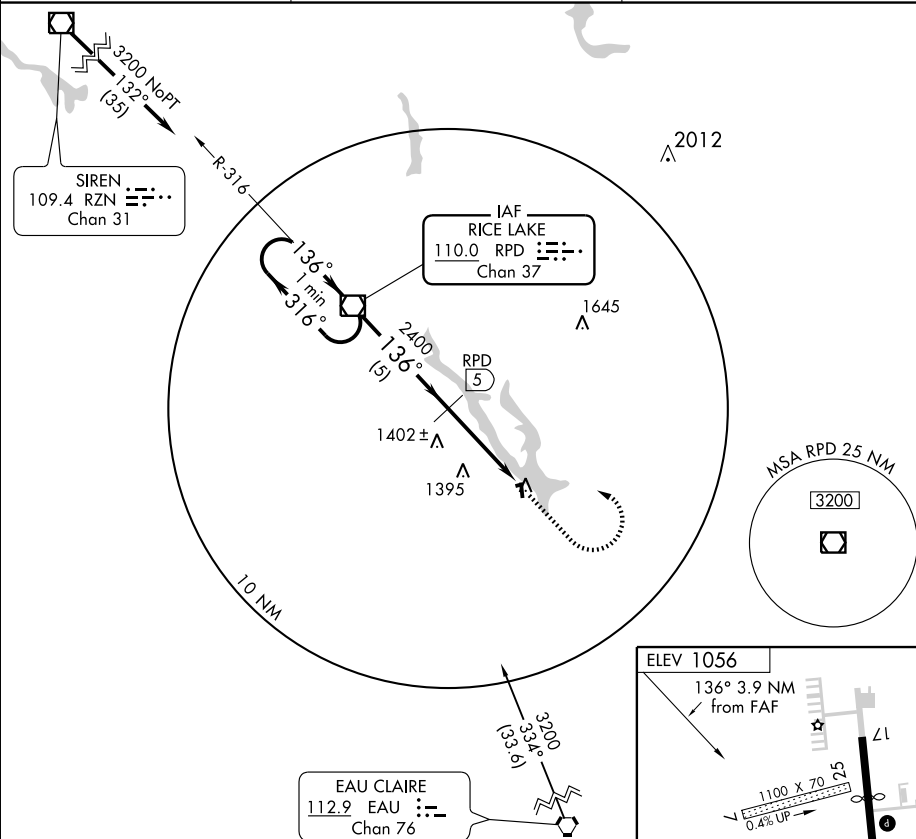CTAF
122.9 **L**

One Minute Holding Pattern


VOR/DME

2400

320

RPD

1100

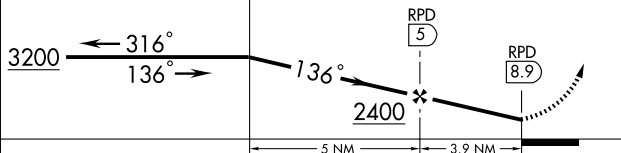

CATEGORY	A	B	C	D
CIRCLING	1680-1	622 (700-1)	1680-1 ³ / ₄ 622 (700-1 ³ / ₄)	NA

FIFV 1056

136° 3.9 NM
↙ from FAF

1100
0.4% UP

31

1

35

REIL Rwy 17 and 35 **L**
MIRL Rwy 17-35 **L**

CLINTONVILLE MUNI (CLI) 1 SE UTC-6(-5DT) N44°36.80' W88°43.84'

GREEN BAY

822 B S4 FUEL 100LL, JET A NOTAM FILE CLI

L-14J, 31A

RWY 14-32: H4600X75 (ASPH) S-30, D-55 MIRL

IAP

RWY 14: Trees.

RWY 32: REIL. PAPI(P4L)—GA 3.0' TCH 26'. Tree.

RWY 04-22: H3300X100 (ASPH) S-40, D-70 MIRL 0.4% up SW

RWY 04: Trees. RWY 22: Road.

RWY 09-27: 2000X170 (TURF)

RWY 09: Tree. RWY 27: Road.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z. Fuel: 24 hr self svc. Rwy 09-27 CLOSED from 1 Dec to 15 Apr, other times confirm condition with arpt manager at 715-823-7690. Deer, fox and birds on and in/ov arpt. 200' crane 6000' NW apch end Rwy 14. ACTIVATE MIRL Rwy 04-22 and Rwy 14-32 and REIL Rwy 32 and PAPI Rwy 32—CTAF. Rwy 09-27 thlds marked with white cones.

WEATHER DATA SOURCES: AWOS-3 120.675 (715) 823-7691.**COMMUNICATIONS:** CTAF/UNICOM 122.8

① GREEN BAY APP/DEP CON 126.3 (1130-0530Z)

① MINNEAPOLIS CENTER APP/DEP CON 125.55 (0530-1130Z)


GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE GRB.

GREEN BAY (H) VORTACW 115.5 GRB Chan 102 N44°33.31' W88°11.69' 278° 23.2 NM to fld. 767/1E.

HIWAS.

NDB (MHW) 209 CLI N44°37.13' W88°43.99' at fld. NOTAM FILE CLI.

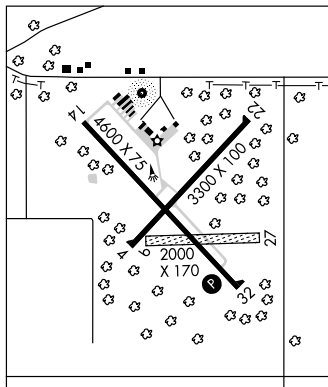**CODEE** N42°33.61' W88°01.73' NOTAM FILE ENW.

CHICAGO

NDB(LOM) 389 EN 066° 4.9 NM to Kenosha Rgnl.

CORNELL MUNI (2H3) 2 E UTC-6(-5DT) N45°09.93' W91°06.34'

GREEN BAY

1154 B S2 FUEL MOGAS NOTAM FILE GRB

RWY 09-27: H2420X45 (ASPH) LIRL (NSTD)

RWY 9: Road. RWY 27: Tree.

AIRPORT REMARKS: Attended 1400-2300Z. Confirm winter conditions and snow removal with arpt manager

715-239-3716. East 100' in poor condition; pavement cracked; heaving and grass growing in cracks. ACTIVATE

NSTD LIRL Rwy 09-27 and rotating bcn—UNICOM. LIRL OTS indef.

COMMUNICATIONS: CTAF/UNICOM 122.8**CRANDON/STEVE CONWAY MUNI** (Y55) 3 SW UTC-6(-5DT) N45°31.00' W88°56.01'

GREEN BAY

1646 B NOTAM FILE GRB

L-14J

RWY 11-29: H3100X75 (ASPH) S-12 LIRL

RWY 11: Trees. RWY 29: Road.

RWY 01-19: 2730X100 (TURF)


RWY 01: Road. RWY 19: Trees.

AIRPORT REMARKS: Unattended. Occasional deer on and in/ov arpt. LIRL Rwy 11-29 preset on low ints; to increase ints—CTAF. Rwy 01-19 marked by yellow cones.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE RHI.

RHINELANDER (L) VORTAC 109.2 RHI Chan 29 N45°38.03'

W89°27.47' 105° 23.2 NM to fld. 1590/2E. HIWAS.

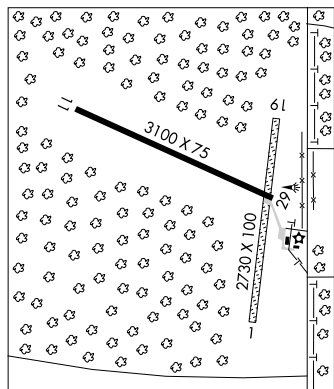

WAAS CH 86516 W04A	APP CRS 045°	Rwy Idg TDZE Apt Elev	3300 822 822
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

CLINTONVILLE MUNI (CLI)

⚠ Baro-VNAV NA when using Green Bay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Circling to Rwy 4-22 NA for Cat C. When local altimeter setting not received, use Green Bay altimeter setting and increase all DA/MDA 80 feet. Increase LPV all Cats visibility ¼ mile.

MISSED APPROACH:
Climb to 3000 direct
COPUV and hold.



AWOS-3
120.675

GREEN BAY APP CON ★
126.3 338.2

GCO
121.725

UNICOM
122.8 (CTAF) **0**

△ 1540

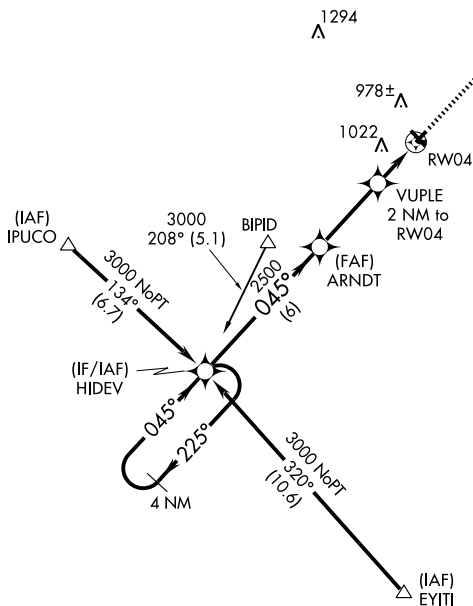

ELEV 822

4 NM
Holding Pattern

HIDEV

3000

225°
045°

ARNDT

VUPLE
2 NM to
RW04

*1480

RW04


GS 3.00°
TCH 40

2500

6 NM


3.1 NM

2 NM



*LNAV only



CATEGORY	A	B	C	D
LPV DA	1179-1¼	357 (400-1¼)		NA
LNAV/VNAV DA	1366-2	544 (600-2)		NA
LNAV MDA	1260-1	438 (500-1)		NA
CIRCLING	1340-1	518 (600-1)	1340-1½ 518 (600-1½)	NA



REIL Rwy 32 **0**
MIRL Rwy 4-22 and 14-32 **0**


RNAV (GPS) RWY 14

MISSED APPROACH:
Climb to 3000 direct
GIGKE and hold.

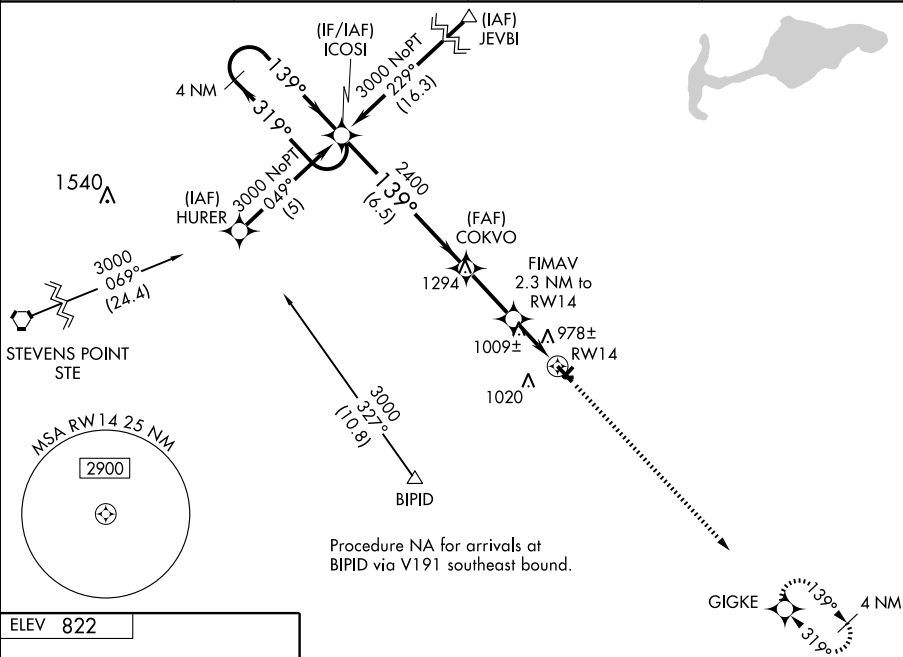
UNICOM
122.8 (CTAF) 

Procedure NA for arrivals at BIPID via V191 southeast bound.

ELEV 822



REIL Rwy 32 **L**
MIRL Rwy 4-22 and 14-32 **L**

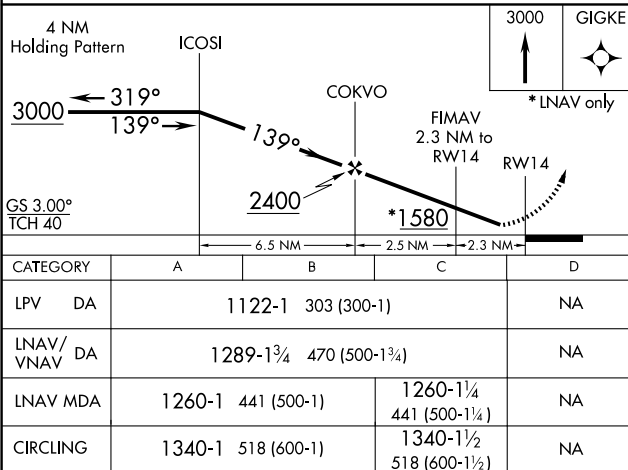CLINTONVILLE MUNI (CLI)
RNAV (GPS) RWY 14

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

WAAS CH 40316 W22A	APP CRS 225°	Rwy Idg TDZE Apt Elev	3300 821 822
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22

CLINTONVILLE MUNI (CLT)

Baro-VNAV NA when using Green Bay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Circling to Rwy 4-22 NA for Cat C. When local altimeter setting not received, use Green Bay altimeter setting and increase all DA/MDA 80 feet. Increase LPV and LNAV/VNAV all Cats visibility ¼ mile.


MISSED APPROACH:
Climb to 3000 direct
HIDEV and hold.

AWOS-3
120.675

GREEN BAY APP CON*
126.3 338.2

GCO
121.725


UNICOM
122.8 (CTAF) 0

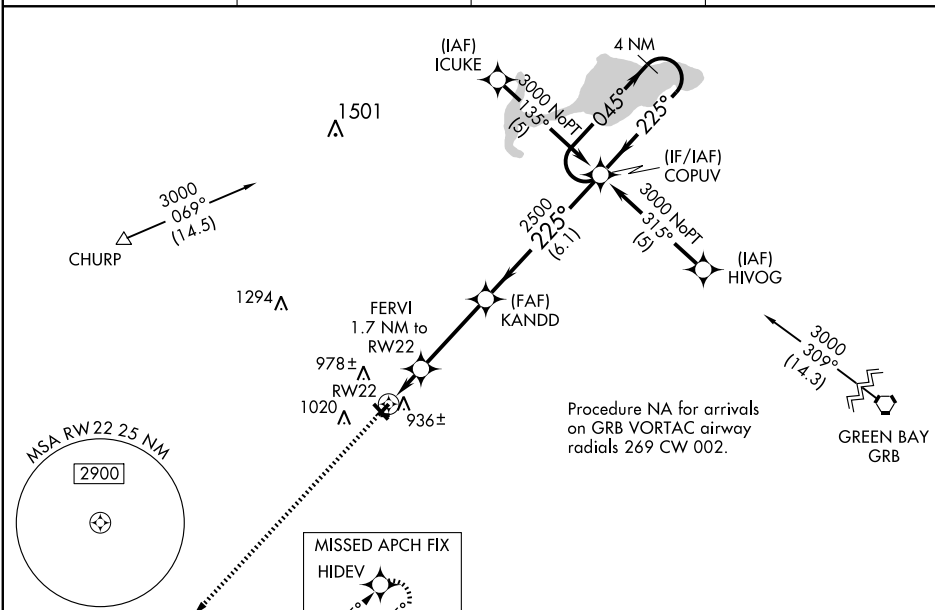

ELEV **822**

MISSED APCH FIX
HIDEV
045° 225°
4 NM

3000 HIDEV
*LNAV only

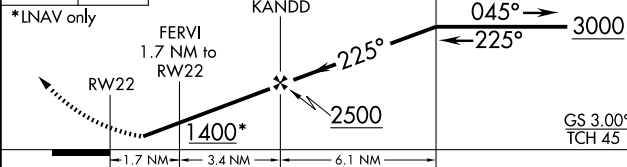

CATEGORY	A	B	C	D
LPV DA	1183-1¼	362 (400-1¼)	NA	
LNAV/VNAV DA	1236-1½	415 (500-1½)	NA	
LNAV MDA	1220-1	399 (400-1)	NA	
CIRCLING	1340-1	518 (600-1)	1340-1½ 518 (600-1½)	NA

REIL Rwy 32 0
MIRL Rwy 4-22 and 14-32 0

WAAS CH 87016 W32A	APP CRS 319°	Rwy Idg TDZE Apt Elev	4600 818 822
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 32

CLINTONVILLE MUNI (CLI)

⚠ Baro-VNAV NA when using Green Bay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Circling to Rwy 4-22 NA for Cat C. When local altimeter setting not received, use Green Bay altimeter setting and increase all DA/MDA 80 feet. Increase LPV and LNAV/VNAV all Cats and LNAV Cat C visibility ¼ mile.

MISSED APPROACH:
Climb to 3000 direct
ICSI and hold.



AWOS-3
120.675

GREEN BAY APP CON*
126.3 338.2


GCO
121.725

UNICOM
122.8 (CTAF) 0

MISSED APCH FIX

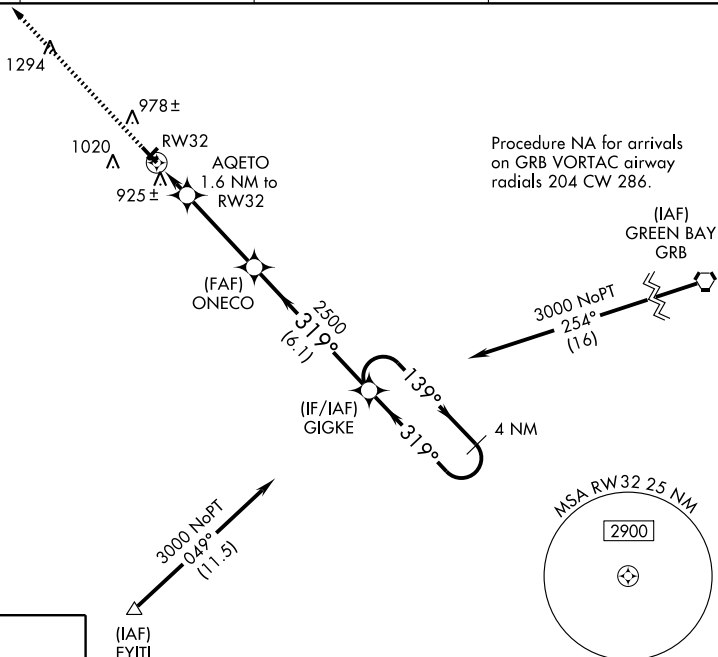

ELEV 822

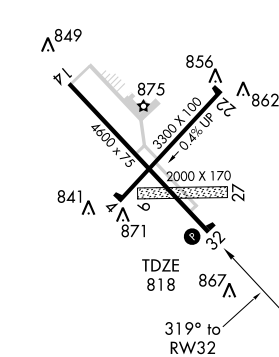

REIL Rwy 32 **0**
MRL Rwy 4-22 and 14-32 **0**

3000	ICSI	VGSI and RNAV glidepath not coincident.		GIGKE	4 NM Holding Pattern
*LNAV only		ONECO			
		1.6 NM to RW32			
		1360*		2500	
		1.6 NM	3.5 NM	6.1 NM	
CATEGORY	A	B	C	D	
LPV DA	1141-1¼	323 (400-1¼)		NA	
LNAV/VNAV DA	1225-1½	407 (500-1½)		NA	
LNAV MDA	1200-1	382 (400-1)		NA	
CIRCLING	1340-1	518 (600-1)	1340-1½ 518 (600-1½)	NA	

CRIVITZ MUNI (3D1) 3 SW UTC-6(-5DT) N45°12.85' W88°04.37'

GREEN BAY

731 B NOTAM FILE GRB

RWY 18-36: H2620X60 (ASPH) S-12 LIRL

RWY 18: Road. **RWY 36:** Road.

RWY 09-27: 1270X80 (TURF)

RWY 09: Trees. **RWY 27:** Trees.

AIRPORT REMARKS: Unattended. Deer on and invof arpt. Rwy 09-27 not plowed. Confirm snow removal for Rwy 18-36 with arpt manager 715-854-7075. ACTIVATE LIRL Rwy 09-27 and rotating bcn-5 clicks on 123.0.

COMMUNICATIONS: CTAF/UNICOM 122.8

CUMBERLAND

CUMBERLAND MUNI (UBE) 3 SE UTC-6(-5DT) N45°30.36' W91°58.87'

GREEN BAY

1241 B S4 **FUEL** 100LL, MOGAS NOTAM FILE GRB

RWY 09-27: H4050X75 (ASPH) MIRL

RWY 09: VASI(V2L)—GA 3.0° TCH 26'. Road.

RWY 27: REIL. VASI(V2L)—GA 3.0° TCH 29'. Road.

RWY 18-36: 2000X120 (TURF)

RWY 18: Road. **RWY 36:** Tree.

AIRPORT REMARKS: Unattended. 24 hr fuel avbl. Rwy 18-36 not plowed winter months. Rwy 18-36 marked with yellow cones. MIRL Rwy 09-27 preset on low ints to increase ints and ACTIVATE REIL Rwy 27—CTAF. VASI Rwy 27 opr 24 hrs.

COMMUNICATIONS: CTAF/UNICOM 122.8


RICE LAKE RCO 122.3 (GREEN BAY RADIO)

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE RPD.

RICE LAKE (T) VORW/DME 110.0 RPD Chan 37 N45°24.91'

W91°46.68' 301° 10.2 NM to fld. 1092/1E. OTS indef.

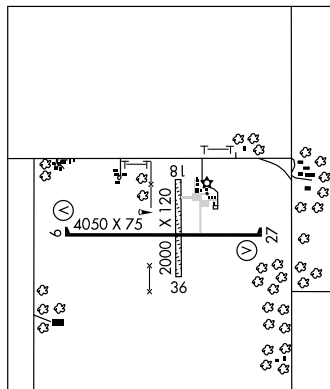

SILVER LAKE SPB (WN2) 5 NW UTC-6(-5DT) N45°35.07' W91°55.55'

GREEN BAY

1248 NOTAM FILE GRB

Not insp.

WATERWAY 18W-36W: 5000X200 (WATER)

SEAPLANE REMARKS: Unattended. No services avbl. Silver Lake may be frozen from Nov-Apr.

COMMUNICATIONS: CTAF 122.9

DANCI N44°45.62' W89°47.35' NOTAM FILE CWA.

GREEN BAY

NDB (LOM) 275 CW 079° 5.3 NM to Central Wisconsin.

DANE CO RGRL-TRUAX FLD (See MADISON)

APP CRS	Rwy Idg	4050
270°	TDZE	1238
	Apt Elev	1241

GPS RWY 27

CUMBERLAND MUNI (UBE)


NA Use Rice Lake altimeter setting.

MISSED APPROACH: Climb to 2000, then climbing right turn to 4000 direct QESCA WP and hold.


GCO
121.725

GREEN BAY RADIO
122.3

UNICOM
122.8 (CTAF)

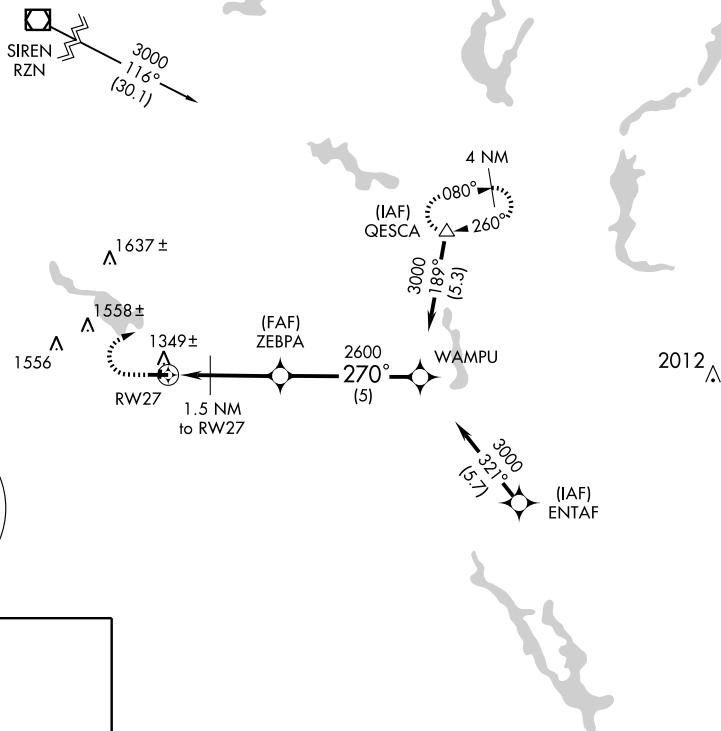

ELEV **1241**



	2000	4000	QESCA	
	1.5 NM to RW27	2.5 NM	5 NM	
CATEGORY	A	B	C	D
S-27	1660-1	422 (500-1)	1660-1½ 422 (500-1½)	NA
CIRCLING	1780-1 539 (600-1)	1800-1 559 (600-1)	1840-1½ 599 (600-1½)	NA

REIL Rwy 27 **0**
MIRL Rwy 9-27 **0**

VOR/DME RPD <u>110.0</u> Chan 37	APP CRS 302°	Rwy Idg N/A TDZE N/A Apt Elev 1241
--	------------------------	---

VOR/DME-A
CUMBERLAND MUNI (UBE)


ANA

Use Rice Lake altimeter setting.


MISSED APPROACH: Climb to 2500 then climbing right turn to 3200 direct RPD VOR/DME and hold.

GCO
121.725

GREEN BAY RADIO
122.3

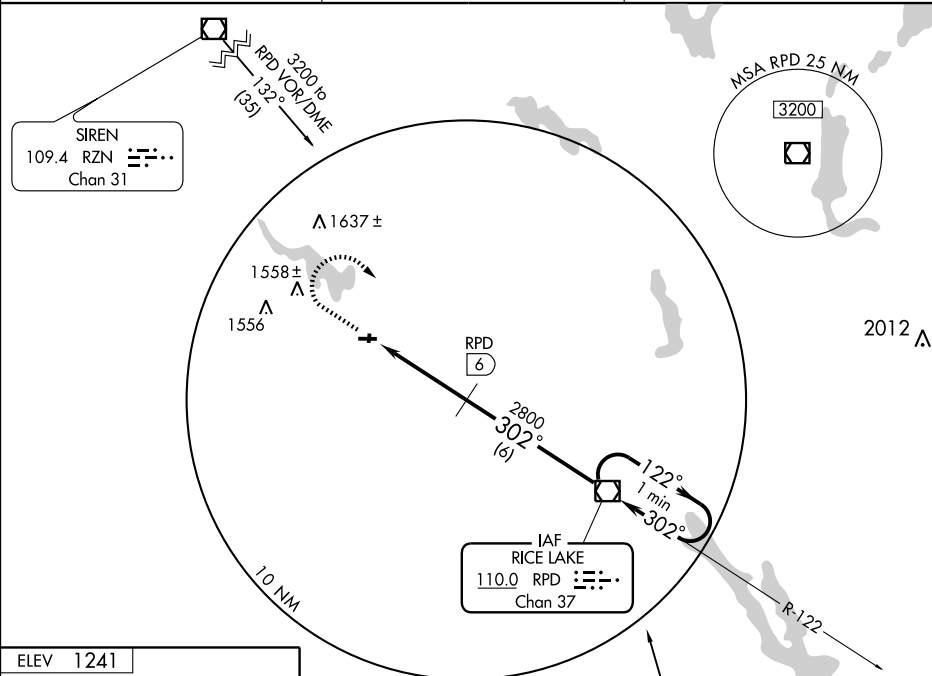
UNICOM
122.8 (CTAF) **L**

ELEV 1241



REIL Rwy 27 **L**
MIRL Rwy 9-27 **L**

EAU CLAIRE
2.9 EAU
Chan 76

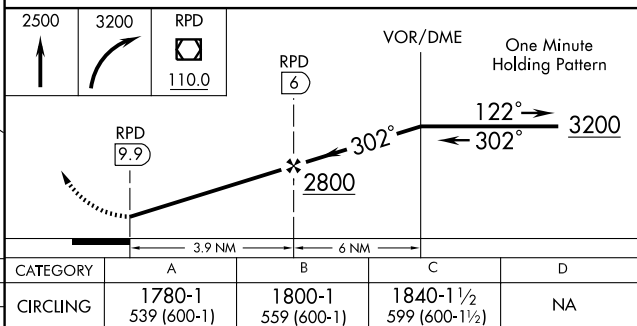

CUMBERLAND, WISCONSIN

Orig-A 05104

CUMBERLAND MUNI (UBE)

VOR/DME-A

45°30'N-91° 59'W

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

DELAVER

LAKE LAWN (C59) 2 E UTC-6(-5DT) N42°38.05' W88°36.07'

981 B NOTAM FILE GRB

RWY 18-36: H4423X80 (ASPH) MIRL 0.3% up N

RWY 18: REIL. Thld dsplcd 320'. Tree.

RWY 36: Thld dsplcd 300'. Tree.

AIRPORT REMARKS: Unattended. Arpt CLOSED for ngt ops. Rwy 18-36
CLOSED 15 Nov-31 Mar. Rwy 18-36 numerous large cracks and
vegetation growing through pavement entire length. Low wing acft
avoid south twy, 25' from twy centerline to 3' fence. Rwy 18-36
MIRL OTS indef. Rwy 18 REIL OTS indef.

COMMUNICATIONS: CTAF 122.9


① ROCKFORD APP/DEP CON 121.0

RADIO AIDS TO NAVIGATION: NOTAM FILE FEP.

JANESVILLE (L) VOR/DME 114.3 JVL Chan 90 N42°33.48'

W89°06.32' 075° 22.8 NM to fld. 931/3E.

NDB (MHW) 404 LVV N42°41.93' W88°35.59' 185° 3.9 NM to
fld. NOTAM FILE GRB. OTS indef.

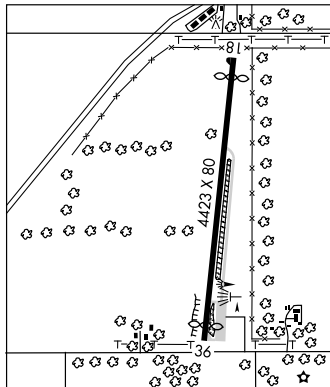

CHICAGO

L-28H

IAP

DELLS N43°33.05' W89°45.82' NOTAM FILE DLL.

(H) VORTAC 117.0 DLL Chan 117 187° 1.8 NM to Baraboo Wisconsin Dells. 1020/3E.

RCO 122.1R 117.0T (GREEN BAY RADIO)

CHICAGO

H-2K, 5D, L-28G

DEPRE N44°23.91' W88°07.97' NOTAM FILE GRB.

NDB (MHW/LOM) 332 SG 004° 5.2 NM to Austin Straubel Intl. LOM unmonitored.

CHICAGO

L-31A

DODGE CO (See JUNEAU)

DOOR CO CHERRYLAND (See STURGEON BAY)

DOUGY N45°50.07' W89°43.83' NOTAM FILE ARV.

NDB (MHW/LOM) 236 DO 001° 5.6 NM to Lakeland/Noble F. Lee Meml Fld. NDB unmonitored.

GREEN BAY

L-14J

DRUMMOND

EAU CLAIRE LAKES (5G4) 10 W UTC-6(-5DT) N46°20.93' W91°29.90'

1214 NOTAM FILE GRB

RWY 18-36: 2290X70 (TURF)

RWY 18: Trees. RWY 36: Fence.

AIRPORT REMARKS: Attended dalgt hrs. Arpt CLOSED to wheeled acft Nov 15 thru Mar 31. 62' antenna 150' right and
340' from thld Rwy 36. 10' depression 40'-400' from Rwy 36 thld 125' left. Rwy 18 end marked with tires. Rwy
36 end marked with silver/yellow A-frames, Rwy 18-36 marked with white reflectors along both edges.

COMMUNICATIONS: CTAF 122.9

GREEN BAY

APP CRS
187°

Rwy ldg **4103**
TDZE **978**
Apt Elev **981**

RNAV (GPS) RWY 18

DELAVAN/LAKE LAWN (C59)




GPS or RNP-0.3 Required, DME/DME RNP-0.3 NA.
Obtain local altimeter setting on CTAF; when not received, use Rockford altimeter setting.

MISSED APPROACH: Climb to 3000
direct CANIK WP and hold.

ROCKFORD APP CON
121.0 327.0

CTAF
122.9

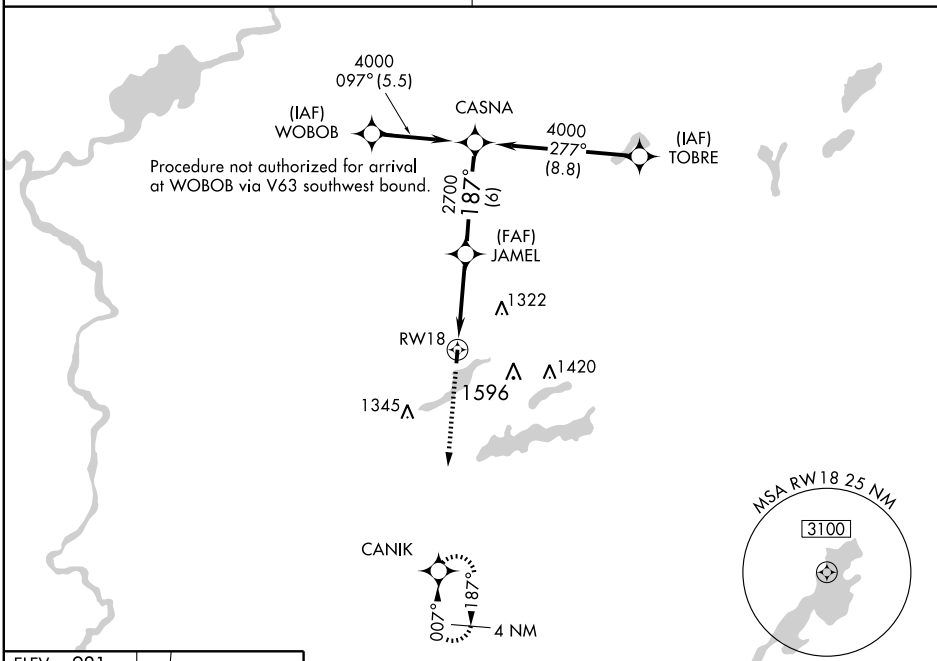

ELEV 981

Rwy 18 ldg 4103'
Rwy 36 ldg 4123'

187° to RW18

TDZE 978

81

4423 x 80

0.3% UP


36

★
A 1099


REIL Rwy 18
MIRL Rwy 18-36

DELAVAN, WISCONSIN

Orig-A 08157



* VDP not authorized when using
Rockford altimeter setting.

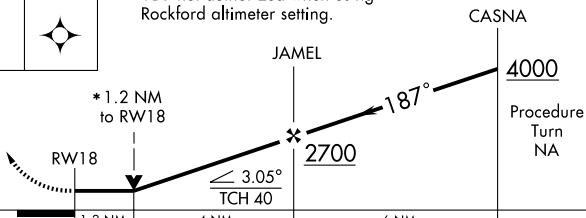

CATEGORY	A	B	C	D
LNAV MDA	1420-1	442 (500-1)	1420-1½ 442 (500-1½)	1420-1½ 442 (500-1½)
CIRCLING	1420-1 439 (500-1)	1440-1 459 (500-1)	1440-1½ 459 (500-1½)	1540-2 559 (600-2)
ROCKFORD ALTIMETER SETTING MINIMUMS				
LNAV MDA	1540-1	562 (600-1)	1540-1½ 562 (600-1½)	1540-1¾ 562 (600-1¾)
CIRCLING	1540-1	559 (600-1)	1540-1½ 559 (600-1½)	1580-2 599 (600-2)

DELAVAN/LAKE LAWN (C59)

RNAV (GPS) RWY 18

42°38'N-88°36'W

APP CRS
007°

Rwy ldg **4123**
TDZE **981**
Apt Elev **981**

RNAV (GPS) RWY 36
DELAVAN/LAKE LAWN (C59)




GPS or RNP-0.3 Required, DME/DME RNP-0.3 NA.
Obtain local altimeter setting on CTAF; when not received, use Rockford altimeter setting.

MISSED APPROACH: Climb to 4000
direct CASNA WP and hold.


ROCKFORD APP CON
121.0 327.0

CTAF
122.9

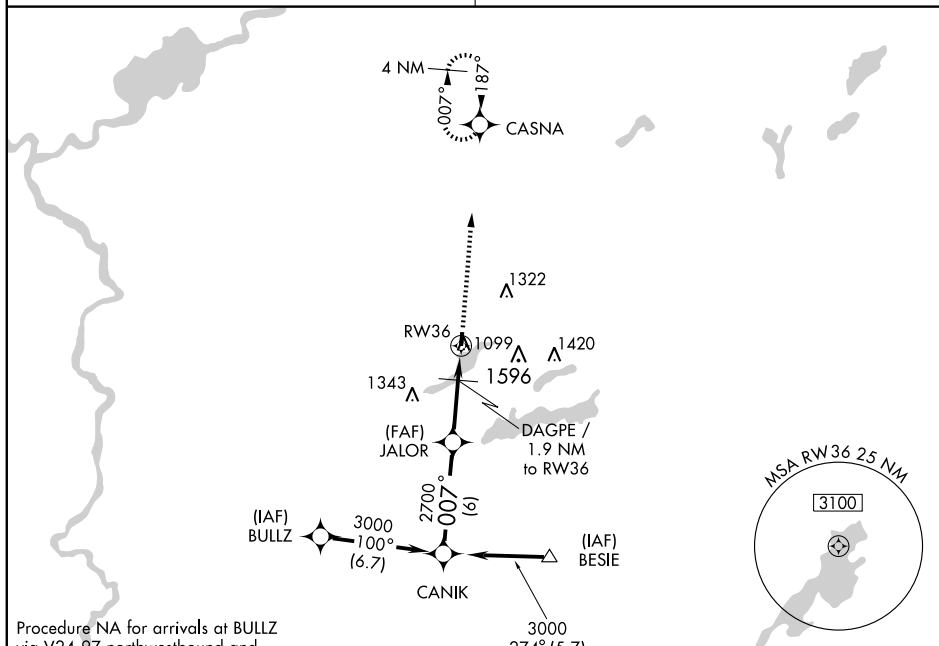

Procedure NA for arrivals at BULLZ
via V24-97 northwestbound and
arrivals at BESIE via V228 southeastbound.

CANIK 3000 Procedure Turn NA 007° #1680 when using Rockford altimeter setting. 6 NM JALOR 2700 3.05° TCH 40 #1560 3.3 NM DAGPE / 1.9 NM to RW36 *1 NM to RW36 RW36 0.9 NM 1 NM				*VDP not authorized when using Rockford altimeter setting. 4000 CASNA	
CATEGORY	A	B	C	D	
LNAV MDA	1340-1 359 (400-1)				1340-1¼ 359 (400-1¼)
CIRCLING	1400-1 419 (500-1)	1440-1 459 (500-1)	1440-1½ 459 (500-1½)	1540-2 559 (600-2)	
ROCKFORD ALTIMETER SETTING MINIMUMS					
LNAV MDA	1460-1 479 (500-1)	1460-1¼ 479 (500-1¼)	1460-1½ 479 (500-1½)	1460-1½ 479 (500-1½)	
CIRCLING	1520-1 539 (600-1)	1520-1½ 539 (600-1½)	1580-2 599 (600-2)	1580-2 599 (600-2)	

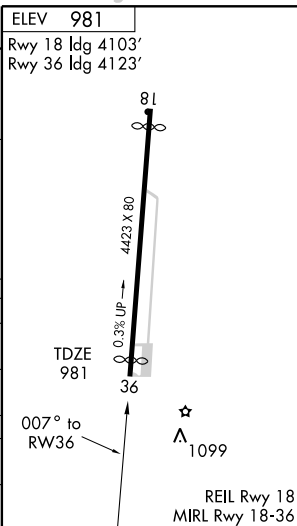

EAGLE RIVER UNION (EGV) 0 NW UTC-6(-5DT) N45°55.94' W89°16.10'

GREEN BAY

1642 B S4 FUEL 100LL, JET A NOTAM FILE EGV

H-2K, L-14J

RWY 04-22: H5000X76 (ASPH) S-12.5 MIRL

IAP

RWY 04: REIL. PAPI(P4L). Trees.

RWY 22: REIL. PAPI(P4L)—GA 3.0° TCH 34'. Pole.

RWY 13-31: H3400X60 (ASPH) MIRL

RWY 13: Tree.

RWY 31: Tree.

AIRPORT REMARKS: Attended Jun-Aug 1500-0200Z†, Sep-May 1500-2300Z†. For attendant other hrs call 715-477-1548/479-4105/891-0987/891-5612. Ultralight activity on and in/ovf arpt. REIL Rwy 22 OTS indef.

ACTIVATE MIRL Rwy 04-22 and MIRL Rwy 13-31 and REIL Rwy 04 and Rwy 22 and twy lghts—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.325 (715) 479-1465.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RHINELANDER RCO 122.1R 109.2T (GREEN BAY RADIO)

① MINNEAPOLIS CENTER APP/DEP CON 133.65

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE RHI.

RHINELANDER (L) VORTAC 109.2 RHI Chan 29 N45°38.03' W89°27.47' 022° 19.6 NM to fld. 1590/02E.

HIWAS.

NDB (MHW) 341 EGV N45°55.96' W89°15.79' at fld. NOTAM FILE EGV.

ILS/DME 110.7 I-LBJ Chan 44 Rwy 04. LOC only. DME unusable byd 20° left of course.

HELIPAD H1: 60X60 (CONC)

HELIPORT REMARKS: Helipad H1 perimeter lghts.

EAST TROY MUNI (57C) 2 NE UTC-6(-5DT) N42°47.83' W88°22.36'

CHICAGO

860 B S4 FUEL 100LL, JET A, MOGAS NOTAM FILE GRB

L-28H, A

RWY 08-26: H3900X75 (ASPH) S-12 MIRL 0.4% up E

IAP

RWY 08: REIL. PAPI(P2L)—GA 3.0° TCH 43'. Road.

RWY 26: REIL. Trees.

RWY 18-36: 2446X75 (TURF) 0.4% up N

RWY 18: Tree.

RWY 36: Road.

AIRPORT REMARKS: Attended 1430Z†-dusk. After hrs svc call 262-642-2755 or 262-745-8706. Fuel avbl 24 hrs with credit card. Parachute Jumping. Rwy 18-36 be alert: not plowed 15 Oct-15 May. Ultralights activity on and in/ovf arpt. Noise abatement procedures in effect; contact arpt manager at 262-642-4374. MIRL Rwy 08-26 is preset on low ints; to ACTIVATE higher ints and REIL Rwy 08 and 26 and PAPI Rwy 08—CTAF. Rwy 18-36 thlds marked with wooden A-frames in an L layout painted orange and white.

COMMUNICATIONS: CTAF/UNICOM 123.0


① MILWAUKEE APP/DEP CON 125.35

GCO 121.725 (MILWAUKEE CLNC and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE MKE

BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01'

W88°17.06' 190° 19.6 NM to fld. 1080/2E. HIWAS.

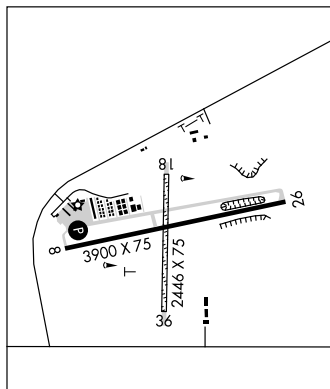**EAU CLAIRE** N44°53.86' W91°28.71' NOTAM FILE EAU.

GREEN BAY

(L) VORTACW 112.9 EAU Chan 76 183° 2NM to Chippewa Valley Rgnl. 804/4E.

H-2I, L-14I

HIWAS. DME unusable byd 30NM below 3500'.

RCO 123.6 122.65 (GREEN BAY RADIO)

LOC/DME I-LBJ 110.7 Chan 44	APP CRS 047°	Rwy Idg TDZE Apt Elev	5000 1642 1642
---	------------------------	-----------------------------	---

LOC/DME RWY 4

EAGLE RIVER UNION (EGV)

NA If local altimeter setting not received, use Minocqua-Woodruff altimeter setting and increase all MDAs 60 feet.
Visibility reduction by helicopters NA.


MISSED APPROACH: Climb to 2100 then climbing left turn to 3500 via heading 015° and RHI R-021 to CUSAS/RHI 25 DME and hold.

AWOS-3
118.325


MINNEAPOLIS CENTER
133.65 281.5

GCO
121.725


UNICOM
122.8 (CTAF) **0**

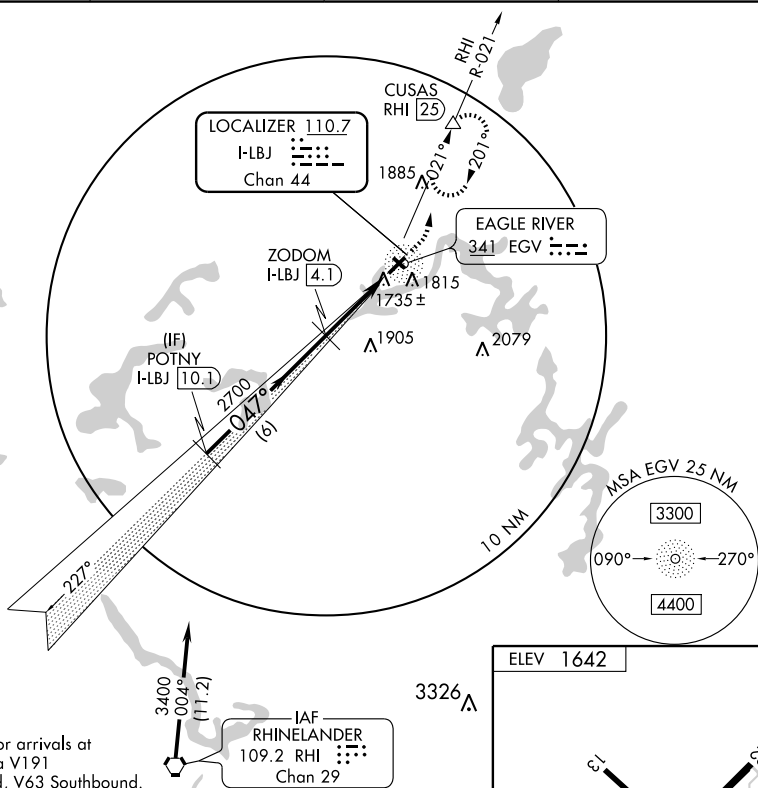

Procedure NA for arrivals at RHI VORTAC via V191 Southeast bound, V63 Southbound.

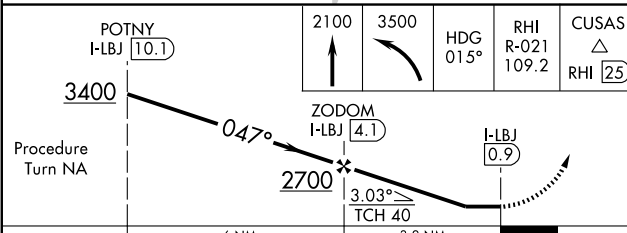

CATEGORY	A	B	C	D
S-4	2000-1	358 (400-1)		2000-1¼ 358 (400-1¼)
CIRCLING	2120-1 478 (500-1)		2120-1½ 478 (500-1½)	2200-2 558 (600-2)

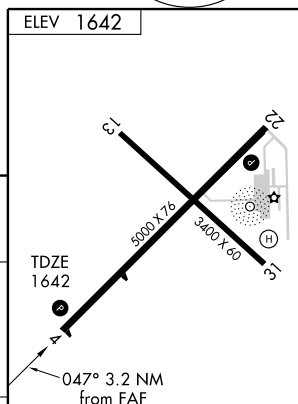

REIL Rwy 4 and 22 **0**
MIRL Rwy 4-22 and 3-31 **0**

NDB EGV 341	APP CRS 217°	Rwy Idg TDZE Apt Elev	5000 1642 1642
-----------------------	------------------------	-----------------------------	---





NDB RWY 22

EAGLE RIVER UNION (EGV)

▼ If local altimeter setting not received, use Minocqua-Woodruff
altimeter setting and increase all MDAs 60 feet.
▲ Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 3400 then
right turn direct EGV NDB and hold.

AWOS-3 118.325	MINNEAPOLIS CENTER 133.65 281.5	GCO 121.725	UNICOM 122.8 (CTAF) 0
--------------------------	---	-----------------------	--

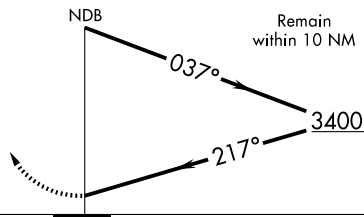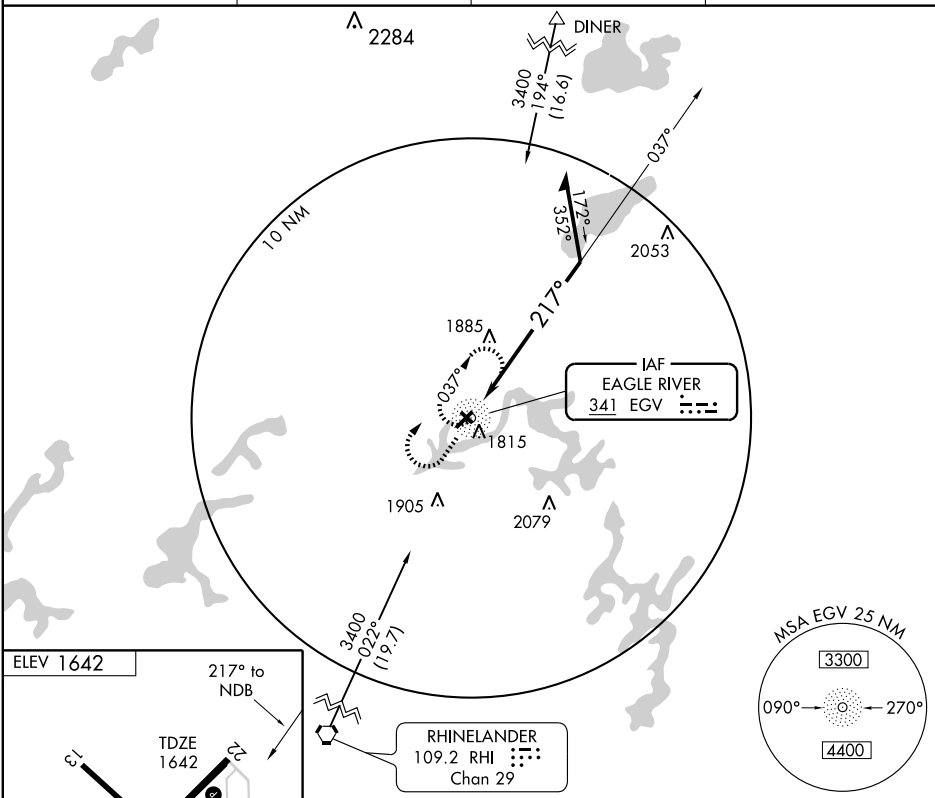

CATEGORY	A	B	C	D
S-22	2420-1 778 (800-1)	2420-1¼ 778 (800-1¼)	2420-2¼ 778 (800-2¼)	2420-2½ 778 (800-2½)
CIRCLING	2420-1 778 (800-1)	2420-1¼ 778 (800-1¼)	2420-2¼ 778 (800-2¼)	2420-2½ 778 (800-2½)

WAAS CH 82002 W04A	APP CRS 047°	Rwy Idg TDZE Apt Elev	5000 1642 1642
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

EAGLE RIVER UNION (EGV)

▽ DME/DME RNP-0.3 NA. Baro-VNAV NA when using Minocqua-Woodruff altimeter setting
△ If local altimeter setting not received, use Minocqua-Woodruff altimeter setting and increase all DAs/MDAs 60 feet. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18° C (0° F) or above 44° C (112° F). Visibility reduction for helicopters NA.


MISSED APPROACH: Climb to 3500 direct HOVKI and via 010° track to CUSAS and hold.

AWOS-3
118.325

MINNEAPOLIS CENTER
133.65 281.5


GCO
121.725

UNICOM
122.8 (CTAF) ①

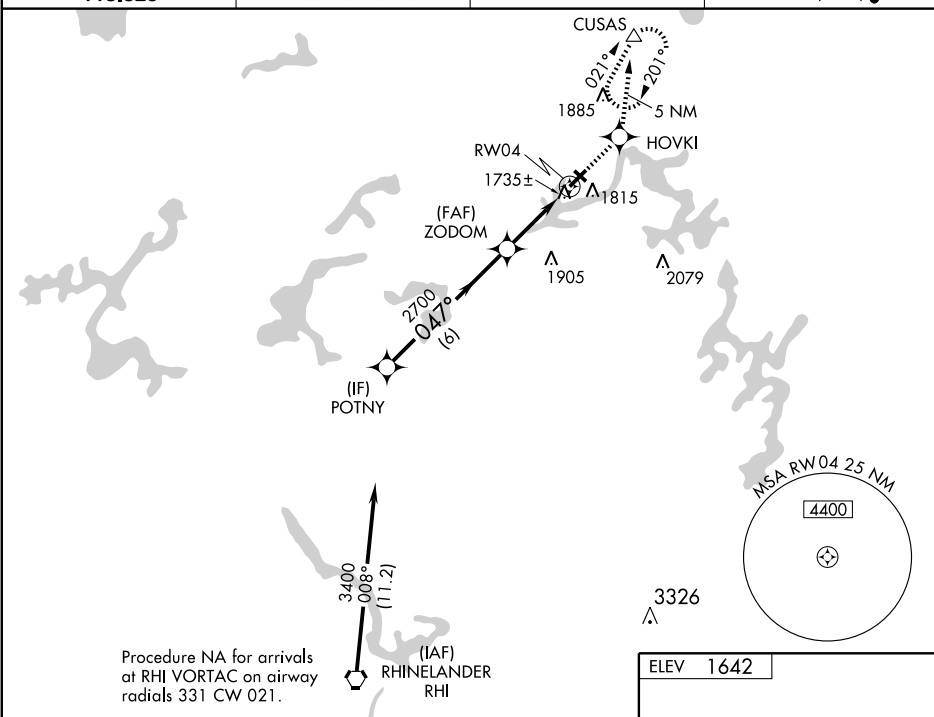


Procedure NA for arrivals at RHI VORTAC on airway radials 331 CW 021.

3500	HOVKI	010° TRK	CUSAS
------	-------	----------	-------

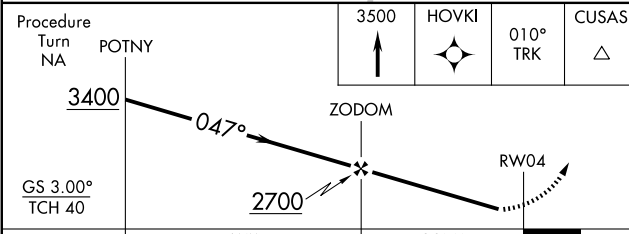

CATEGORY	A	B	C	D
LPV DA	1970-1¼		328 (400-1¼)	
LNAV/VNAV DA	2005-1¼		363 (400-1¼)	
LNAV MDA	2080-1 438 (500-1)		2080-1¼ 438 (500-1¼)	2080-1½ 438 (500-1½)
CIRCLING	2120-1¼ 478 (500-1¼)		2120-1½ 478 (500-1½)	2200-2 558 (600-2)

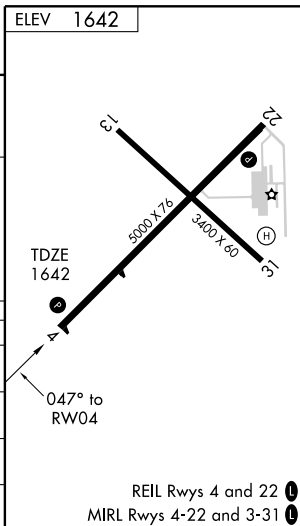

REIL Rwy 4 and 22 ①
MIRL Rwy 4-22 and 3-31 ①


WAAS CH 99304 W22A	APP CRS 227°	Rwy Idg TDZE 1642 Apt Elev 1642	5000 1642
--	------------------------	---	----------------------------

RNAV (GPS) RWY 22

EAGLE RIVER UNION (EGV)

<p>▼ If local altimeter setting not received, use Minocqua-Woodruff altimeter setting and increase all DAs 47 feet and all MDAs 60 feet. Baro-VNAV NA when using Minocqua-Woodruff altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18° C (0° F) or above 45° C (113° F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.</p>	<p>MISSED APPROACH: Climb to 3500 direct ZODEM and via 201° track to RHI VORTAC and hold.</p>
--	---

AWOS-3 118.325	MINNEAPOLIS CENTER 133.65 281.5	GCO 121.725	UNICOM 122.8 (CTAF) ①
--------------------------	---	-----------------------	---------------------------------

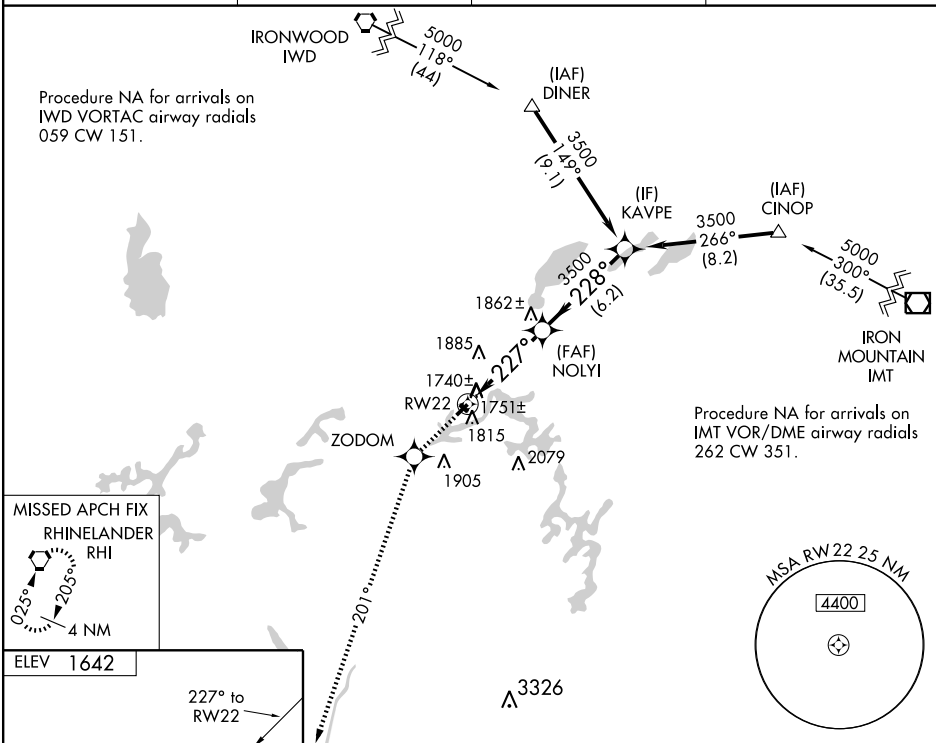

REIL Rwy 22

MIRL Rwy 4-22 and 3-31

CATEGORY	A	B	C	D
LPV DA	2012-1¼	370 (400-1¼)		
LNAV/VNAV DA	2038-1½	396 (400-1½)		
LNAV MDA	2040-1	398 (400-1)		2040-1¼ 398 (400-1¼)
CIRCLING	2120-1	478 (500-1)	2120-1½ 478 (500-1½)	2200-2 558 (600-2)

EAGLE RIVER, WISCONSIN

Orig 09351

45° 56'N-89° 16'W

EAGLE RIVER UNION (EGV)

RNAV (GPS) RWY 22

VORTAC RHI	APP CRS	Rwy Idg	5000
109.2	021°	TDZE	1642
Chan 29		Apt Elev	1642

VOR/DME RWY 4

EAGLE RIVER UNION (EGV)



MISSED APPROACH: Climb to 3500 then left turn via RHI R-021 to JAYME and hold.

AWOS-3
118.325

MINNEAPOLIS CENTER
133.65 281.5

GCO
121.725

UNICOM
122.8 (CTAF) 0

NoPT for arrivals on RHI
VORTAC airway radials
107 CW 301.

R-201

IAF
RHINELANDER
109.2 RHI
Chan 29

One Minute
Holding Pattern

VORTAC

JAYME
RHI 14

3500 ← 201°
021° → 021°

3500

3500

RHI R-021
109.2


JAYME
RHI 14

RHI
19.2

14 NM 5.2 NM

CATEGORY	A	B	C	D
S-4	2260-1	618 (700-1)	2260-1¾ 618 (700-1¾)	2260-2 618 (700-2)
CIRCLING	2260-1	618 (700-1)	2260-1¾ 618 (700-1¾)	2260-2 618 (700-2)

ELEV 1642



REIL Rwy 4 and 22 0
MIRL Rwy 4-22 and 3-31 0

APP CRS	Rwy Idg	3900
081°	TDZE	851
	Apt Elev	860

GPS RWY 8

EAST TROY MUNI (57C)




T Use Milwaukee (General Mitchell Intl)
A NA altimeter setting.

MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct TRUDO WP and hold.

GCO
121.725

MILWAUKEE APP CON
125.35 307.0

UNICOM
123.0 (CTAF) 0

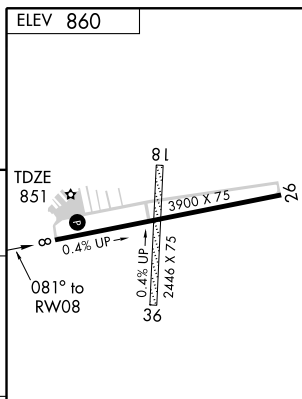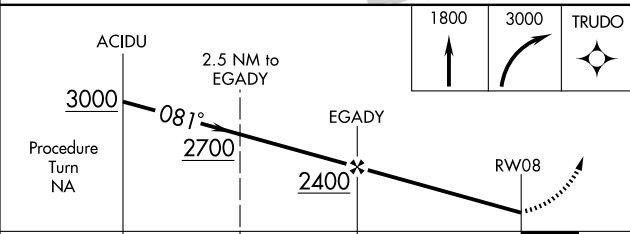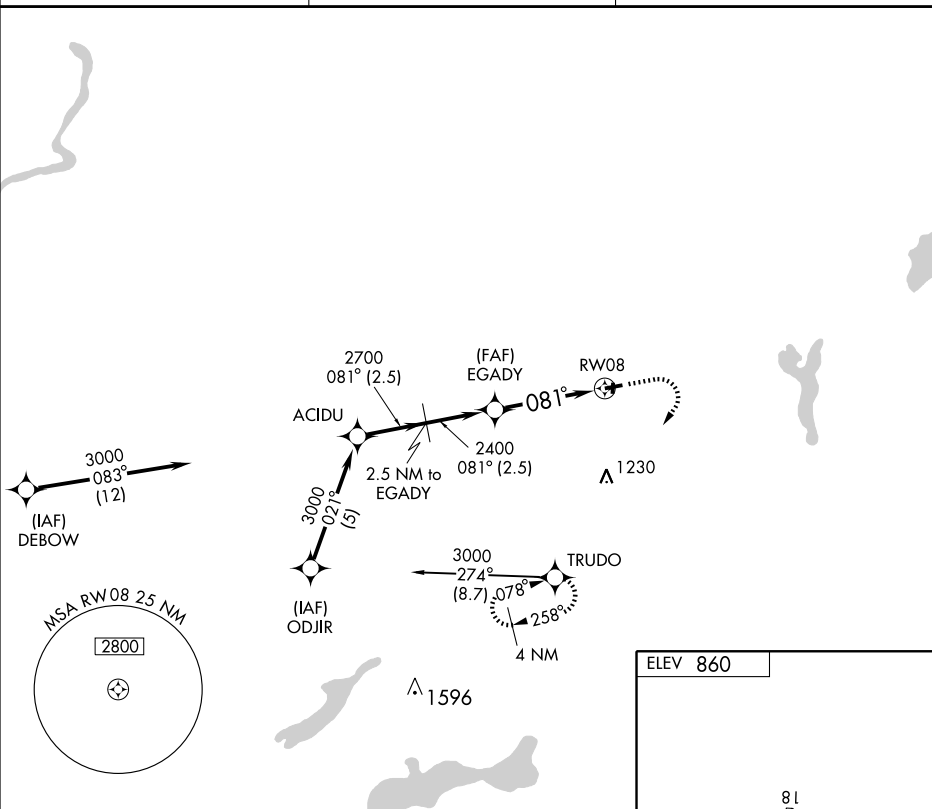

CATEGORY	A	B	C	D
S-8	1380-1 529 (600-1)		1380-1½ 529 (600-1½)	1380-1¾ 529 (600-1¾)
CIRCLING	1380-1 520 (600-1)		1380-1½ 520 (600-1½)	1420-2 560 (600-2)

MIRL Rwy 8-26
 REIL Rwy 8 and 26

APP CRS **261°**
Rwy ldg **3900**
TDZE **860**
Apt Elev **860**

GPS RWY 26
EAST TROY MUNI (57C)

T Use Milwaukee (General Mitchell Intl)
A NA altimeter setting.





MISSED APPROACH: Climb to 1800 then climbing
left turn to 3000 direct TRUDO Int and hold.

GCO
121.725


MILWAUKEE APP CON
125.35 307.0

UNICOM
123.0 (CTAF) 0

A 1630

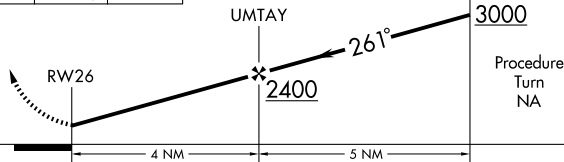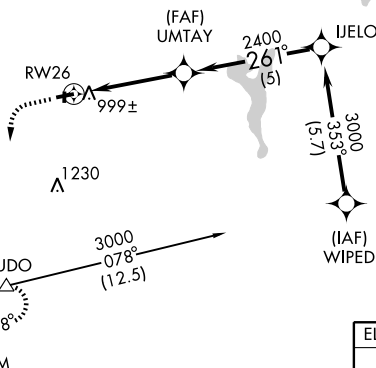

CATEGORY	A	B	C	D
S-26	1340-1 480 (500-1)		1340-1¼ 480 (500-1¼)	1340-1½ 480 (500-1½)
CIRCLING	1380-1 520 (600-1)		1380-1½ 520 (600-1½)	1420-2 560 (600-2)



MIRL Rwy 8-26 **0**
REIL Rwy 8 and 26 **0**

VORTAC BAE 116.4 Chan 111	APP CRS 190°	Rwy Idg TDZE Apt Elev	N/A N/A 860
---	------------------------	-----------------------------	--------------------------

VOR or GPS-A
EAST TROY MUNI (57C)


Obtain local altimeter setting on CTAF; when not received, use Milwaukee (General Mitchell) altimeter setting.
ADF OR DME REQUIRED

MISSED APPROACH: Climb to 2500 then left turn via BAE R-190 to BITTN Int/15 DME and hold.

GCO
121.725


MILWAUKEE APP CON
125.35 307.0

UNICOM
123.0 (CTAF) 0

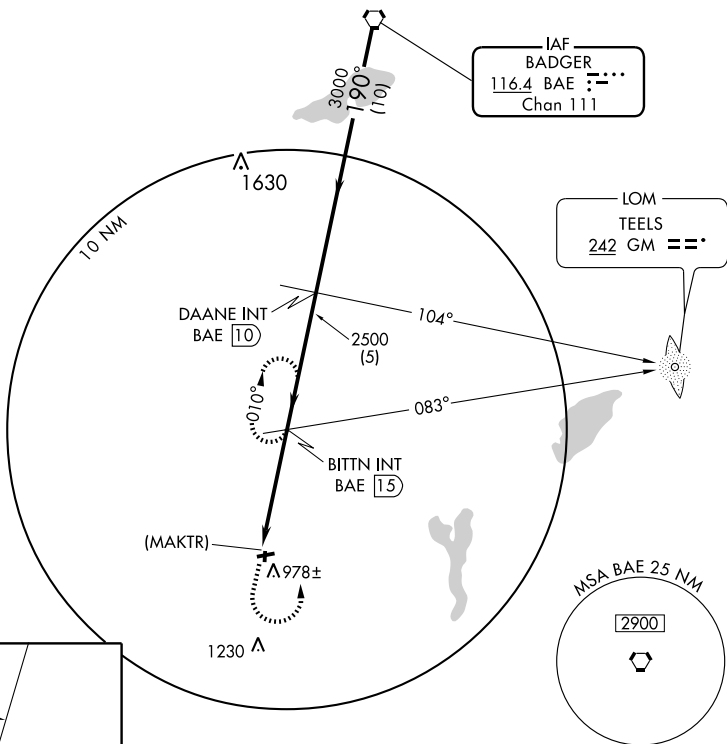

ELEV 860

190° 4.4 NM
from FAF





MIRL Rwy 8-26
REIL Rwy 8 and 26

FAF to MAP 4.4 NM

Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

EAST TROY, WISCONSIN

Orig 10210

2500 ↑	BAE R-190 	BITTN INT	DAANE INT BAE 10	VORTAC	
(MAKTR) BAE 19.4 	BITTN INT BAE 15	2500	3000 190°	3000 Procedure Turn NA	
4.4 NM		5 NM		10 NM	
CATEGORY	A		B	C	D
CIRCLING	1340-1 480 (500-1)		1340-1½ 480 (500-1½)		NA
MILWAUKEE (GENERAL MITCHELL) ALTIMETER SETTING MINIMUMS					
CIRCLING	1460-1 600 (600-1)		1460-1½ 600 (600-1½)		NA

MILWAUKEE (GENERAL MITCHELL) ALTIMETER SETTING MINIMUMS

EAST TROY MUNI (57C)

VOR or GPS-A

42°48'N-88°22'W


10210

AIRPORT DIAGRAM

EAU CLAIRE/CHIPPEWA VALLEY RGNL (EAU)
AL-937 (FAA) EAU CLAIRE, WISCONSINASOS 119.675
EAU CLAIRE TOWER★
118.575
GND CON
120.925

D

EC-3, 23 SEP 2010 to 21 OCT 2010

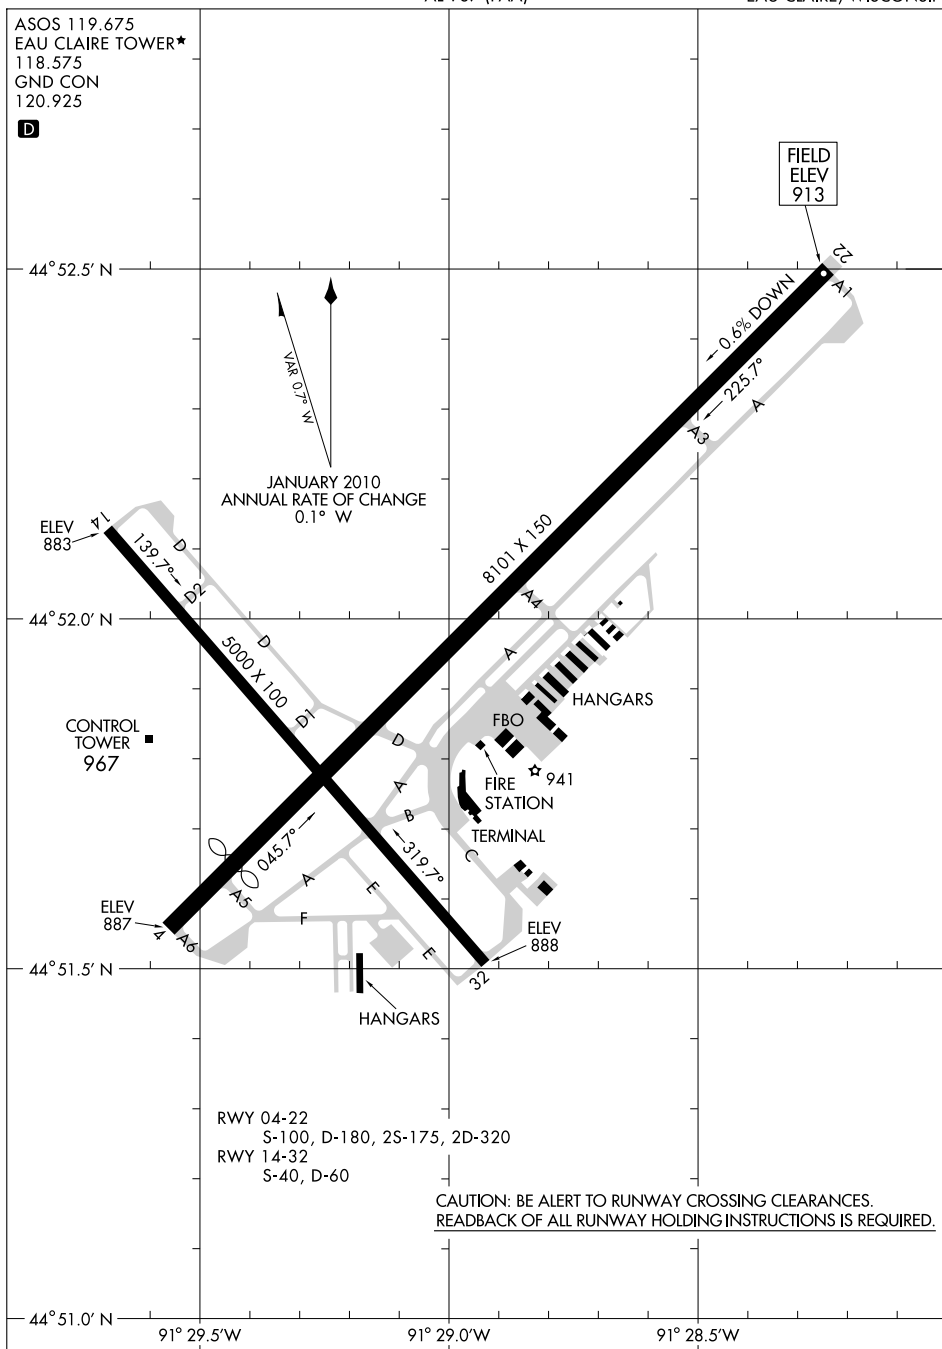

EC-3, 23 SEP 2010 to 21 OCT 2010

AIRPORT DIAGRAM

EAU CLAIRE, WISCONSIN
EAU CLAIRE/CHIPPEWA VALLEY RGNL (EAU)

10210

EAU CLAIRE

CHIPPEWA VALLEY RGNL

(EAU) 3 N UTC-6(-5DT) N44°51.95' W91°29.06'

913 B S4 FUEL 100LL, JET A OX 4 TPA-1913(1000) Class I, ARFF Index A
NOTAM FILE EAU

RWY 04-22: H8101X150 (CONC-TRTD-WC) S-100, D-180, 2S-175, 2D-320 HIRL

RWY 04: REIL. PAPI(P4L)—GA 3.0° TCH 44'. Thld dsplcd 801'.

Road.

RWY 22: MALSR. PAPI(P4L)—GA 3.0° TCH 50'. 0.6% down.

RWY 14-32: H5000X100 (ASPH-CONC) S-40, D-60 MIRL

RWY 14: REIL. PAPI(P4L)—GA 3.0° TCH 43'. Trees.

RWY 32: PAPI(P4L)—GA 4.0° TCH 70'. Tree.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 04: TORA-8101 TODA-8101 ASDA-8101 LDA-7301

RWY 22: TORA-7301 TODA-7301 ASDA-7301 LDA-7301

AIRPORT REMARKS: Attended 1300-0300Z†. Arpt condition unmonitored 0500-1000Z†. ARFF not avbl 24 hrs. PPR for unscheduled air carrier ops with more than 9 passenger seats; ctc arpt manager 715-839-6241. Air carrier ops with more than 9 passenger seats not authorized in excess of 15 minutes before or after scheduled arrival/dep times without PPR with arpt manager and confirmation ARFF is avbl prior to ldg or tkf. HIRL Rwy 04-22 preset on low ints, to incr ints and ACTIVATE MIRL Rwy 14-32, PAPI Rwy 14, Rwy 32, and Rwy 22, REIL Rwy 04 and Rwy 14, MALSR Rwy 22—CTAF. PAPI Rwy 04 opr 24 hours.

WEATHER DATA SOURCES: ASOS 119.675 (715) 832-7990. HIWAS 112.9 EAU.

COMMUNICATIONS: CTAF 118.575 UNICOM 122.95

EAU CLAIRE RCO 123.6 122.65 (GREEN BAY RADIO)

® MINNEAPOLIS CENTER APP/DEP CON 125.3

TOWER 118.575 (1130-0230Z†) GND CON 120.925


AIRSPACE: CLASS D svc 1130-0230Z† other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE EAU.

EAU CLAIRE (L) VORTACW 112.9 EAU Chan 76 N44°53.86' W91°28.71' 183° 1.9 NM to fld. 804/4E. HIWAS

MAGGS NDB (LOM) 239 EA N44°56.69' W91°22.42' 224° 6.7 NM to fld. Unmonitored.

ILS/DME 109.5 I-EAU Chan 32 Rwy 22. LOM MAGGS NDB. BC unusable byd 10 NM blo 2500'.

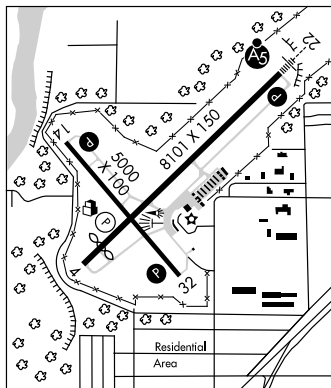

EAU CLAIRE LAKES

(See DRUMMOND)

EDGERTON

JANA (58C) 3 N UTC-6(-5DT) N42°52.37' W89°04.54'

CHICAGO

842 FUEL 100LL NOTAM FILE GRB

RWY 18-36: 2305X135 (TURF) LIRL (NSTD)

RWY 18: Tree. RWY 36: Brush.

AIRPORT REMARKS: Attended irregularly. Parachute Jumping. For NSTD LIRL Rwy 18-36 call 608-884-3403/3521.

Rwy 18-36 NSTD LIRL with reflectors; orange reflectors indicating last 1000' of rwy both directions. Rwy 18-36 marked by pairs of red metal A-frames; ends of stopways marked with 3 red metal A-frames on centerline.

COMMUNICATIONS: CTAF 122.9

ELROY MUNI (60C) 2 S UTC-6(-5DT) N43°42.38' W90°15.46'

CHICAGO

944 TPA-1744(800) NOTAM FILE GRB

RWY 06-24: 3085X100 (GRVL-TURF) LIRL (NSTD)

RWY 06: Trees. RWY 24: Tree. Rgt tfc.

AIRPORT REMARKS: Unattended. Rwy 06-24 2550' by 34' GRVL superimposed on turf rwy; surface patchy and rough.

Tall bluffs and trees located on both sides of rwy. Rwy 06-24 NSTD LIRL thld lgts, all green lenses.

COMMUNICATIONS: CTAF 122.9

LOC/DME I-EAU
109.5
Chgn **32**

APP CRS
224°

Rwy Idg	7301
TDZE	913
Apt Elev	913

7301
913
913

ILS or LOC RWY 22

EAU CLAIRE/CHIPPEWA VALLEY RGNL (EAU)

T For inoperative MALSR when using Rice Lake altimeter setting, increase S-ILS 22 visibility to 1 mile all Cats. When local altimeter setting not received, use Rice Lake altimeter setting and increase DA 109 feet and all MDA 120 feet, increase S-LOC 22 Cat. C and D and Circling Cat. D visibility $\frac{1}{4}$ mile and increase Circling Cat. C visibility $\frac{1}{2}$ mile.

MALSR


MISSED APPROACH: Climb to 1600 then climbing right turn to 2900 direct EA LOM and hold.

ASOS
119.675


MINNEAPOLIS CENTER
125-3 335-6

EAU CLAIRE TOWER ★
118-575 (CTAF) 

GND CON
120-925

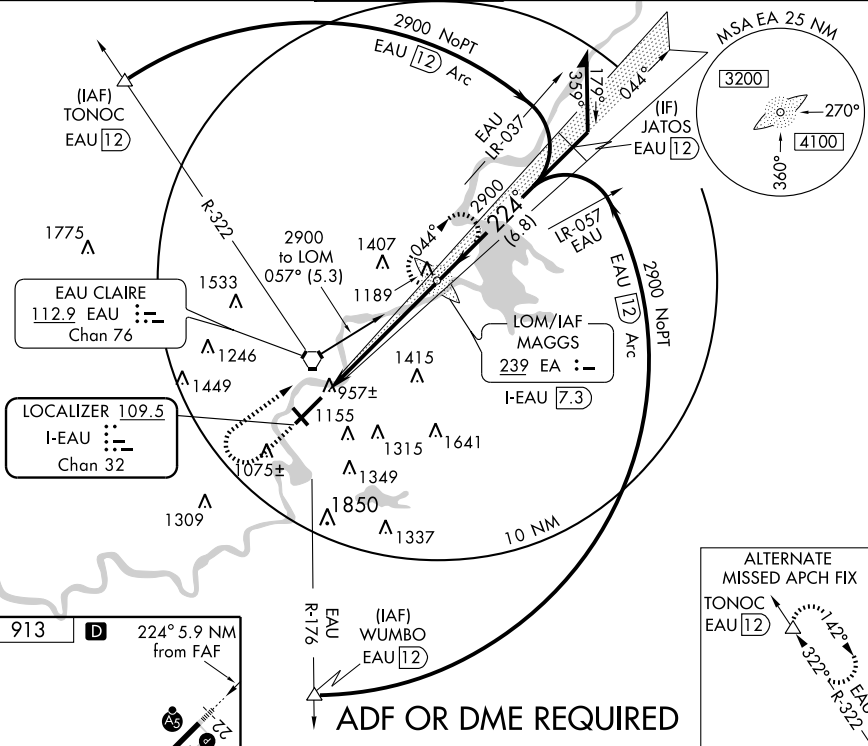UNICOM
122.95

ELEV 913	D 224° 5.9 NM from FAF
----------	----------------------------------



960 ± 70
HIRL Rwy 4-22
MIRL Rwy 14-32
REIL Rwy 4 and 14

FAF to MAP 5.9 NM					
Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

EAU CLAIRE, WISCONSIN
Amdt 8A 10098

EAU CLAIRE/CHIPPEWA VALLEY RGNL (EAU)

44° 52' N-91° 29' W

ILS or LOC RWY 22

LOC/DME I-EAU
109.5
 Chan **32**

APP CRS
044°

Rwy Idg **7301**
 TDZE **889**
 Apt Elev **913**

LOC/DME BC RWY 4
 EAU CLAIRE/CHIPPEWA VALLEY RGNL (EAU)

ADF REQUIRED. When local altimeter setting not received, use Rice Lake altimeter setting and increase all MDA 120 feet, increase S-4 Cats. C and D and Circling Cat. C visibility ½ mile, increase Circling Cat. D ¼ mile.

MISSED APPROACH: Climb to 2900 direct EA LOM and hold.


ASOS
119.675

MINNEAPOLIS CENTER
125.3 335.6

EAU CLAIRE TOWER ★
118.575 (CTAF) 0

GND CON
120.925

UNICOM
122.95

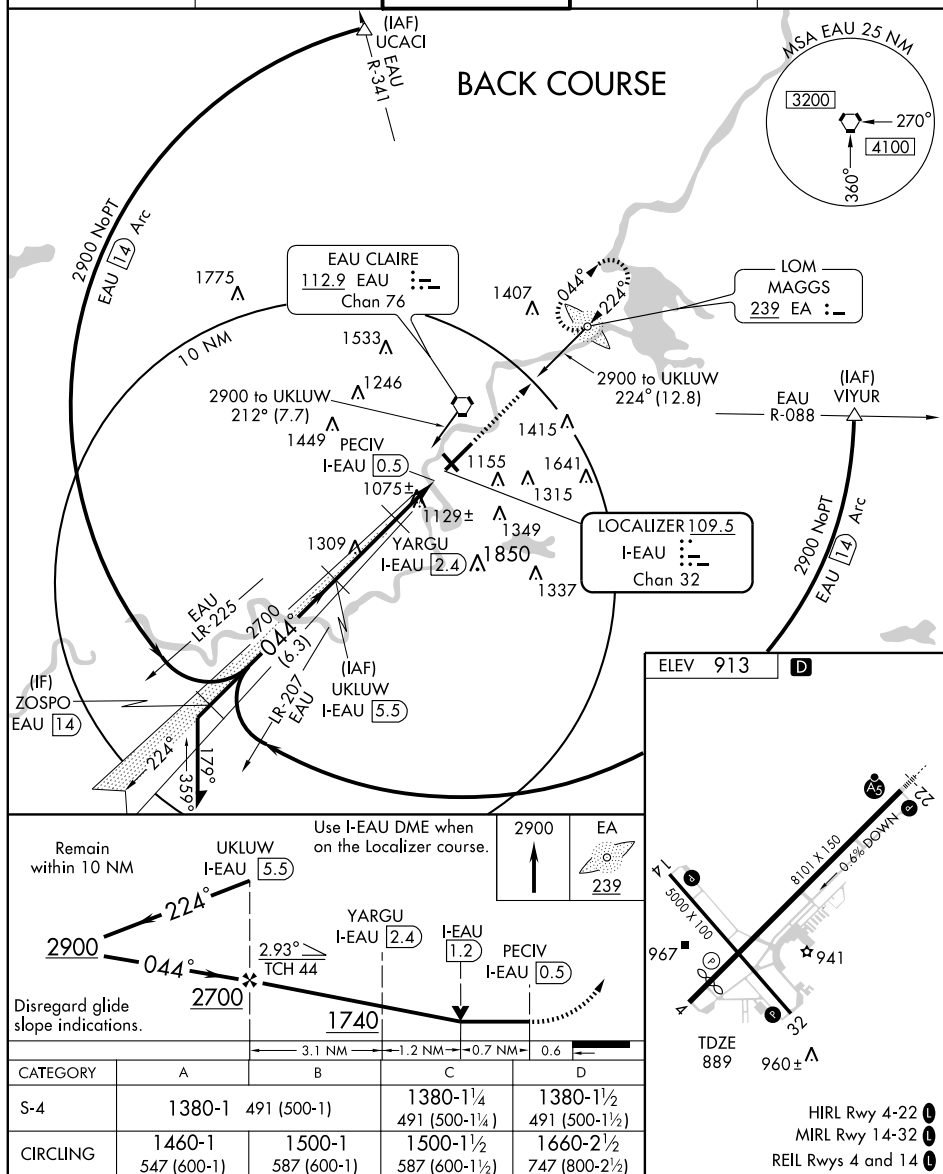

LOM EA	APP CRS	Rwy Idg	7301
<u>239</u>	224°	TDZE	913
		Apt Elev	913

NDB RWY 22

EAU CLAIRE/CHIPPEWA VALLEY RGNL (EAU)

▼ When local altimeter setting not received, use Rice Lake altimeter setting and increase all MDAs 120 feet, increase S-22 Cats. C/D and Circling Cat. C visibility $\frac{1}{2}$ mile, increase Circling Cat. D visibility $\frac{1}{4}$ mile.

MALSR




MISSED APPROACH: Climb to 3000 then right turn direct EA LOM and hold.

ASOS
119.675

MINNEAPOLIS CENTER
125.3 335.6

EAU CLAIRE TOWER ★
118.575 (CTAF) L

GND CON
120.925

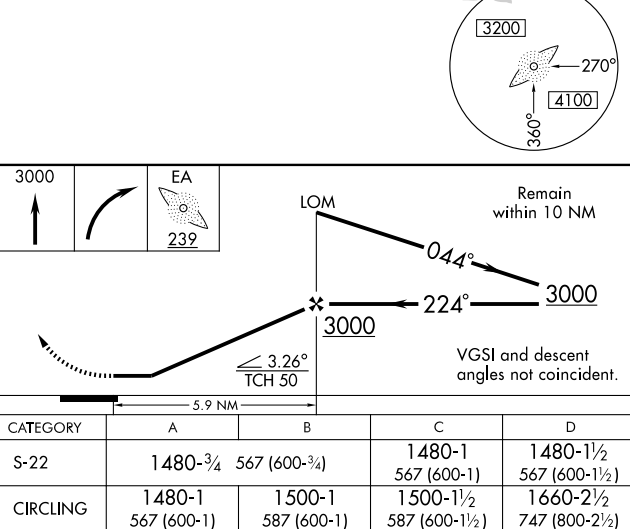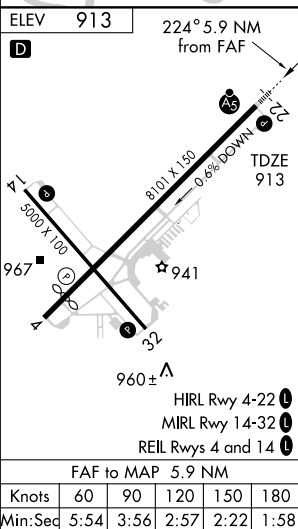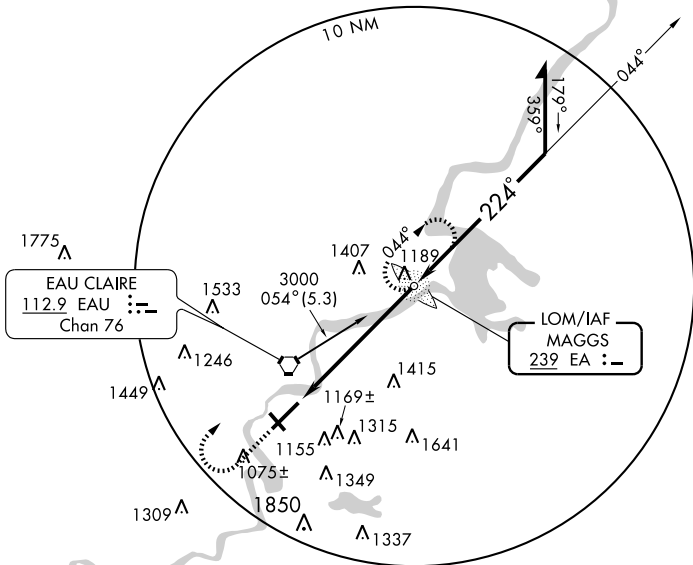UNICOM
122.95

EAU CLAIRE, WISCONSIN
Amdt 7 10042

EAU CLAIRE/CHIPPEWA VALLEY RGNL (EAU)

NDB RWY 22

44° 52' N-91° 29' W

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

RNAV (GPS) RWY 4

EAU CLAIRE/ CHIPPEWA VALLEY RGNL (EAU)

MISSED APPROACH: Climb to 3000 direct IROKE and hold.

UNICOM
122.95

D

Diagram illustrating the intersection of three runways:

- Runway 4-22 (HIRL):** 5000 x 100, oriented 044° to RW04.
- Runway 14-32 (MRL):** 8101 x 150, oriented 0.6% DOWN.
- Runway 4 and 14 (REIL):** 960±.

Key features and labels:

- TDZE 889:** Threshold Crossing Height.
- 967:** Elevation or distance marker.
- 941:** Elevation or distance marker.
- 960±:** Elevation or distance marker.

Legend:

- HIRL Rwy 4-22
- MRL Rwy 14-32
- REIL Rwy 4 and 14

CATEGORY		A	B	C	D
LPV	DA	1089-3/4 200 (200-3/4)			
LNAV/ VNAV	DA	1422-2 533 (600-2)			
LNAV	MDA	1380-1 491 (500-1)		1380-1 1/4 491 (500-1 1/4)	1380-1 1/2 491 (500-1 1/2)
CIRCLING		1460-1 547 (600-1)	1500-1 587 (600-1)	1500-1 1/2 587 (600-1 1/2)	1660-2 1/2 747 (800-2 1/2)

EAU CLAIRE/CHIPPEWA VALLEY RGNL (EAU)
W RNAV (GPS) RWY 4

EC-3, 23 SEP 2010 to 21 OCT 2010

WAAS
CH 87006
W22A

APP CRS
224°

Rwy Idg	7301
TDZE	913
Apt Elev	913

RNAV (GPS) RWY 22

EAU CLAIRE/CHIPPEWA VALLEY RGNL (EAU)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). When local altimeter not received, use Rice Lake altimeter and increase all MDAs 120 feet, increase LPV all Cats. visibility ¼ mile, **▲** LNAV/VNAV all Cats. visibility ½ mile, LNAV Cat. C and D visibility ¼ mile, Circling Cat. C ½ mile and Cat. D ¼ mile. Baro-VNAV and VDP NA when using Rice Lake altimeter setting. DME/DME RNP-0.3 NA.

MALSR




MISSED APPROACH:
Climb to 3000 direct
UKLUW and via 140°
track to WUMBO and
hold.

ASOS
119.675


MINNEAPOLIS CENTER
125.3 335.6

EAU CLAIRE TOWER ★
118.575 (CTAF) L


GND CON
120.925

UNICOM
122.95


Procedure NA for arrivals
at GEP VORTAC on airway
radials 026 CW 103.

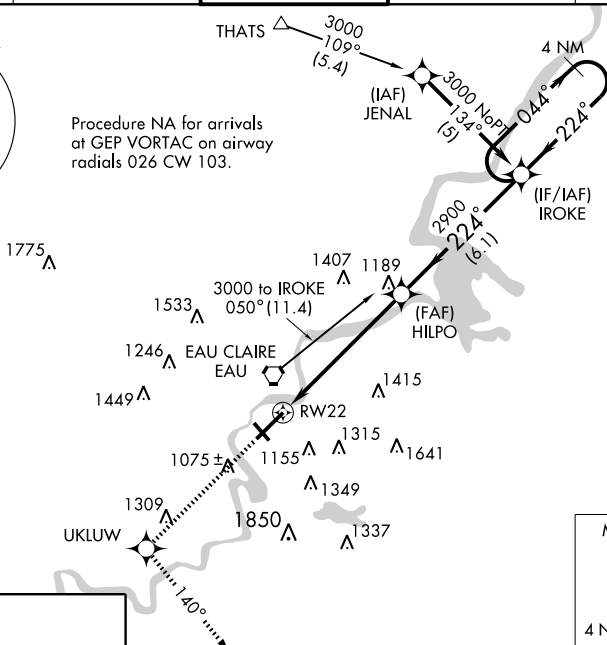


MISSED APCH FIX



ELEV 913

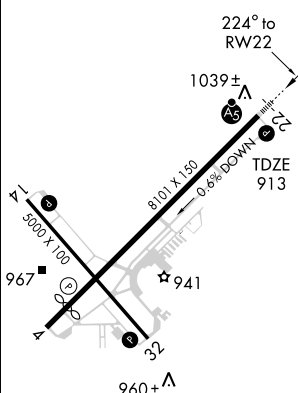HIRL Rwy 4-22

MIRL Rwy 14-32 **L**

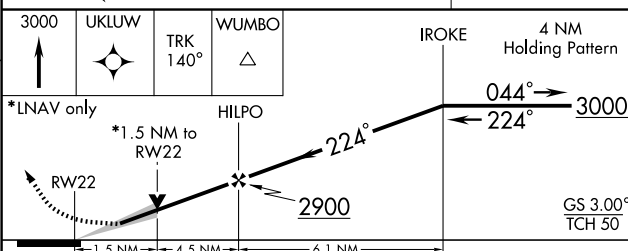REIL Rwy 4 and 14 

CATEGORY	A	B	C	D
LPV DA	1183-1/2	270 (300-1/2)		
LNAV/ VNAV DA	1309-3/4	396 (400-3/4)		
LNAV MDA	1440-1/2	527 (600-1/2)	1440-1 527 (600-1)	1440-1 1/4 527 (600-1 1/4)
CIRCLING	1460-1 547 (600-1)	1500-1 587 (600-1)	1500-1/2 587 (600-1 1/2)	1660-2 1/2 747 (800-2 1/2)

EAU CLAIRE, WISCONSIN

Orig 10042

EAU CLAIRE/CHIPPEWA VALLEY RGNL (EAU)

44° 52' N-91° 29' W

RNAV (GPS) RWY 22

VORTAC EAU 112.9 Chan 76	APP CRS 184°	Rwy ldg TDZE Apt Elev 913	N/A N/A 913
--	------------------------	---	--------------------------

VOR-A
EAU CLAIRE/CHIPPEWA VALLEY RGNL (EAU)

Visibility reduction by helicopters NA. When local altimeter setting not received, use Rice Lake altimeter setting and increase all MDA 120 feet, increase Circling Cat. A and B visibility ½ mile and Cat. C visibility ½ mile.

MISSED APPROACH: Climb to 2900 then left turn direct EAU VORTAC and hold.






ASOS
119.675

MINNEAPOLIS CENTER
125.3 335.6

EAU CLAIRE TOWER ★
118.575 (CTAF) 0

GND CON
120.925

UNICOM
122.95

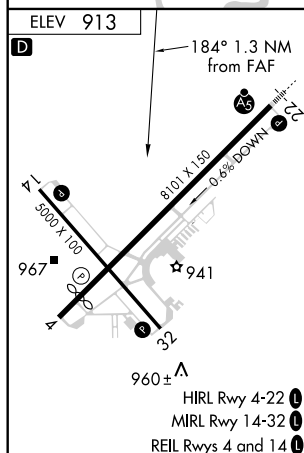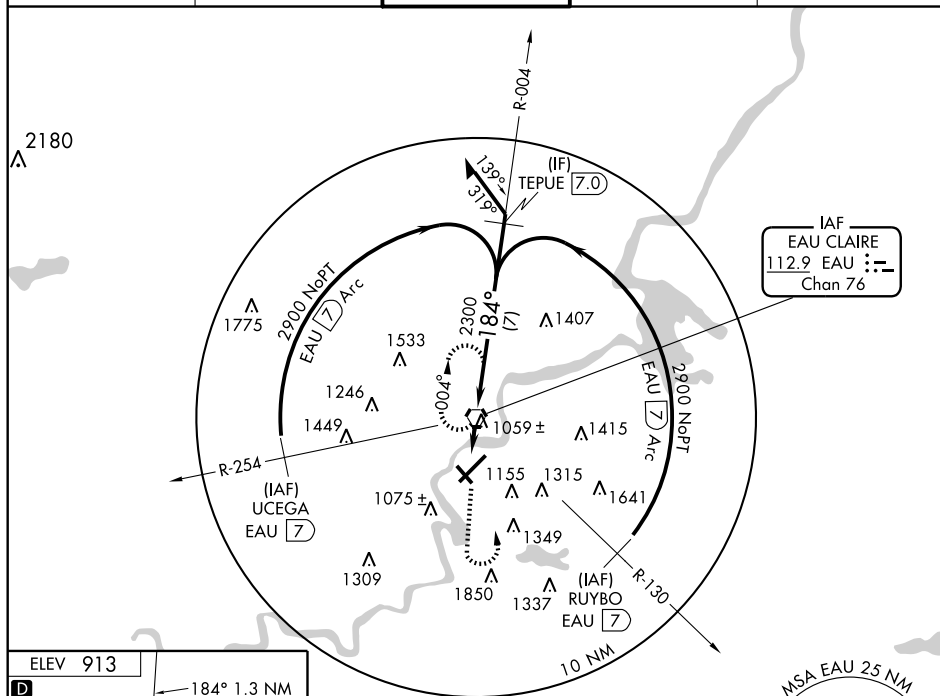

FAF to MAP 1.3 NM					
Knots	60	90	120	150	180
Min:Sec	1:18	0:52	0:39	0:31	0:26

CATEGORY	A	B	C	D
CIRCLING	1780-1 867 (900-1)	1780-1½ 867 (900-1½)	1780-2½ 867 (900-2½)	1820-3 907 (1000-3)

EAU CLAIRE, WISCONSIN

Amdt 22 10042

EAU CLAIRE/CHIPPEWA VALLEY RGNL (EAU)

44° 52'N-91° 29'W

VOR-A

EPHRAIM—FISH CREEK (3D2) 1 SW UTC—6(—5DT) N45°08.12' W87°11.15' **GREEN BAY**
 773 B S2 FUEL 100LL NOTAM FILE GRB **L-31B**
Rwy 14-32: H2700X60 (ASPH) S—12.5 MIRL 0.5% up NE **IAP**
Rwy 14: PAPI(P2L)—GA 3.5° TCH 24'. Trees. **Rwy 32:** PAPI(P2L)—GA 3.0° TCH 25'. Trees.
Rwy 01-19: 1980X80 (TURF)
Rwy 01: Trees. **Rwy 19:** Trees.
AIRPORT REMARKS: Attended on call. For fuel Mon—Fri 1600–2100Z† call 920–868–1714. Other hrs call 920–495–0775/493–1714. Rwy 01–19 slopes immediately down to South—cannot see one end from the other. Rwy 14–32 400' turf twy on NE end. Rwy 01–19 ends and edges marked with yellow barrels. **ACTIVATE MIRL** Rwy 14–32, PAPI Rwy 14 and Rwy 32—CTAF.
COMMUNICATIONS: CTAF/UNICOM 123.0
 Ⓡ **GREEN BAY APP/DEP CON** 119.5 (1130–0530Z†) Ⓡ **MINNEAPOLIS CENTER APP/DEP CON** 127.65 (0530–1130Z†)
RADIO AIDS TO NAVIGATION: NOTAM FILE MNM.
MENOMINEE (L) VOR DME 109.6 MNM CHAN 83 N45°10.81' W87°38.83' 098° 19.8 NM to fld. 650/00E.

FALLS N43°46.13' W87°50.93' NOTAM FILE SBM. **CHICAGO**
 (L) **VOR/DME** 110.0 FAH Chan 37 at Sheboygan Co Meml. 744/2W. **ASOS** **L-28H**
 VOR unusable 018°–045° byd 12 NM and 046°–017° byd 31 NM blo 3000'.
 DME unusable 320°–340° byd 25 NM blo 3000'.
RCO 122.1R 110.0T (GREEN BAY RADIO)

FAMIS N44°26.43' W88°14.38' NOTAM FILE GRB. **GREEN BAY**
NDB (LOM) 356 GR 063° 5.4 NM to Austin Straubel Intl. Unmonitored.

FICHY N44°45.36' W87°26.95' NOTAM FILE SUE. **GREEN BAY**
NDB (LOM) 224 II 016° 5.4 NM to Door Co Cherryland. Unmonitored.

FOND DU LAC CO (FLD) 1 W UTC—6(—5DT) N43°46.27' W88°29.31' **CHICAGO**
 808 B S4 FUEL 100LL, JET A1 TPA—1808(1000) NOTAM FILE FLD **H-2K, L-28H**
Rwy 18-36: H5941X100 (ASPH) D-60 HIRL **IAP**
Rwy 18: REIL. PAPI(P4L)—GA 3.0° TCH 48'. Trees. Rgt tfc.
Rwy 36: MALSR. PAPI(P4L)—GA 3.0° TCH 33'. Trees.
Rwy 09-27: H3602X75 (ASPH) S-22 MIRL 0.6% up W
Rwy 09: Trees. Rgt tfc. **Rwy 27:** Road.
AIRPORT REMARKS: Attended 1400Z†—dusk. For attendant after hrs call 920–922–6000. Rwy 36 is for left tfc only. HIRL Rwy 18–36 preset on low ints; to incr ints and **ACTIVATE MIRL** Rwy 09–27, REIL Rwy 18; PAPI Rwy 18 and Rwy 36 and MALSR Rwy 36—CTAF.
WEATHER DATA SOURCES: ASOS 134.0 (920) 922–4444.
COMMUNICATIONS: CTAF/UNICOM 123.05
RCO 122.5 (GREEN BAY RADIO)
 Ⓡ **MILWAUKEE APP/DEP CON** 127.0
RADIO AIDS TO NAVIGATION: NOTAM FILE OSH.
OSHKOSH (L) VORTAC 111.8 OSH Chan 55 N43°59.43' W88°33.36' 165° 13.5 NM to fld. 780/2E.
ILS/DME 108.3 I-FLD Chan 20 Rwy 36 LOC only.

FORT ATKINSON MUNI (61C) 3 NE UTC—6(—5DT) N42°57.79' W88°49.06' **CHICAGO**
 800 B FUEL 100LL TPA—1800(1000) NOTAM FILE GRB **L-28H**
Rwy 03-21: H3801X60 (ASPH) S-12 MIRL **IAP**
Rwy 03: Trees. **Rwy 21:** PAPI(P2L)—GA 3.0° TCH 30'. Tree.
AIRPORT REMARKS: Unattended. Parachute Jumping. Fuel avbl PPR call 920–563–7760. Ultralight activity on and invov arpt. Rwy 03–21 pilots req to fly rwy heading and climb to 1400' MSL before turning east. MIRL Rwy 03–21 preset on low ints, to **ACTIVATE** higher ints and PAPI Rwy 21—CTAF.
COMMUNICATIONS: CTAF 122.9
 Ⓡ **MADISON APP/DEP CON** 120.1 (1200–0500Z†) Ⓡ **CHICAGO CENTER APP/DEP CON** 133.3 (0500–1200Z†).
RADIO AIDS TO NAVIGATION: NOTAM FILE MKE.
BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01' W88°17.06' 247° 25.2 NM to fld. 1080/2E. **HIWAS.**

FOX RIVER (See ROCHESTER)

FRANKS SPB (See LAC DU FLAMBEAU)



APP CRS 320°	Rwy Idg TDZE Apt Elev	2700 762 773
------------------------	-----------------------------	---

GPS RWY 32
EPHRAIM-FISH CREEK (3D2)

A NA Use Menominee, MI altimeter setting.

MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 direct MNM VOR/DME and hold.

GREEN BAY APP CON ★
119.5 338.2

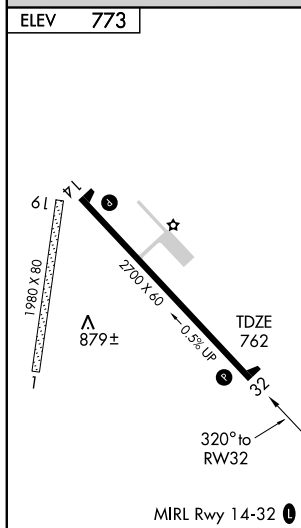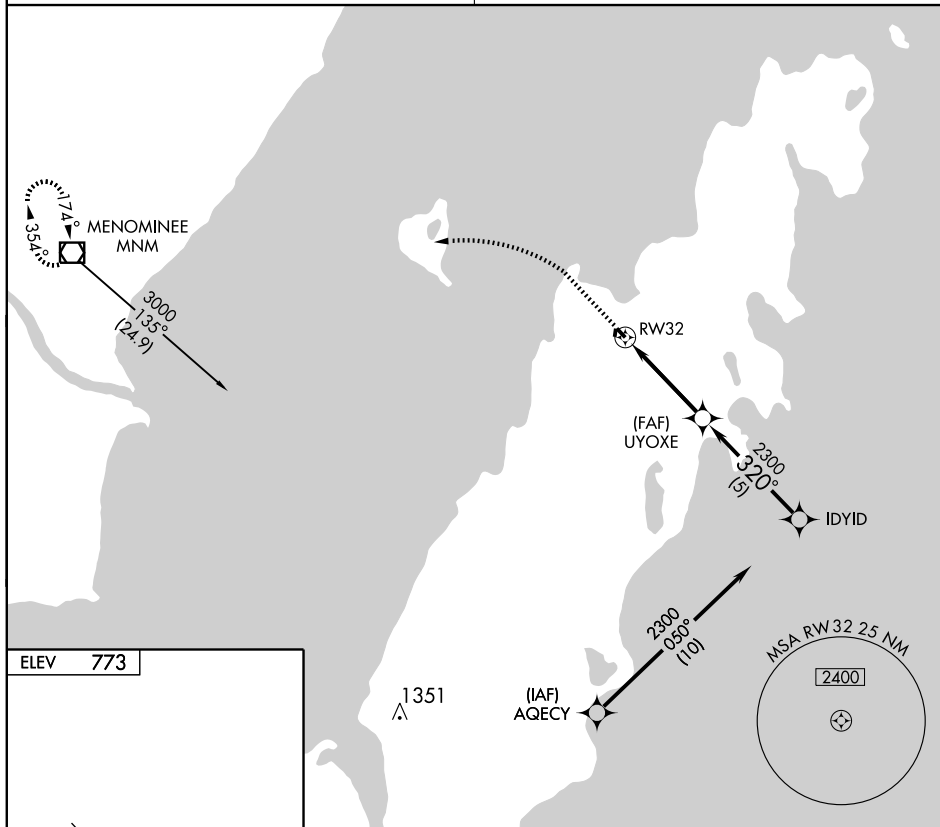UNICOM
123.0 (CTAF) **L**

CATEGORY	A	B	C	D
S-32	1200-1	438 (500-1)	1200-1¼ 438 (500-1¼)	NA
CIRCLING	1260-1	487 (500-1)	1260-1½ 487 (500-1½)	NA

EPHRAIM—FISH CREEK (3D2) 1 SW UTC—6(—5DT) N45°08.12' W87°11.15' **GREEN BAY**
 773 B S2 FUEL 100LL NOTAM FILE GRB **L-31B**
Rwy 14-32: H2700X60 (ASPH) S—12.5 MIRL 0.5% up NE **IAP**
Rwy 14: PAPI(P2L)—GA 3.5° TCH 24'. Trees. **Rwy 32:** PAPI(P2L)—GA 3.0° TCH 25'. Trees.
Rwy 01-19: 1980X80 (TURF)
Rwy 01: Trees. **Rwy 19:** Trees.
AIRPORT REMARKS: Attended on call. For fuel Mon—Fri 1600–2100Z† call 920–868–1714. Other hrs call 920–495–0775/493–1714. Rwy 01–19 slopes immediately down to South—cannot see one end from the other. Rwy 14–32 400' turf twy on NE end. Rwy 01–19 ends and edges marked with yellow barrels. **ACTIVATE MIRL** Rwy 14–32, PAPI Rwy 14 and Rwy 32—CTAF.
COMMUNICATIONS: CTAF/UNICOM 123.0
 Ⓡ **GREEN BAY APP/DEP CON** 119.5 (1130–0530Z†) Ⓡ **MINNEAPOLIS CENTER APP/DEP CON** 127.65 (0530–1130Z†)
RADIO AIDS TO NAVIGATION: NOTAM FILE MNM.
MENOMINEE (L) VOR DME 109.6 MNM CHAN 83 N45°10.81' W87°38.83' 098° 19.8 NM to fld. 650/00E.

FALLS N43°46.13' W87°50.93' NOTAM FILE SBM. **CHICAGO**
 (L) **VOR/DME** 110.0 FAH Chan 37 at Sheboygan Co Meml. 744/2W. **ASOS** **L-28H**
 VOR unusable 018°–045° byd 12 NM and 046°–017° byd 31 NM blo 3000'.
 DME unusable 320°–340° byd 25 NM blo 3000'.
RCO 122.1R 110.0T (GREEN BAY RADIO)

FAMIS N44°26.43' W88°14.38' NOTAM FILE GRB. **GREEN BAY**
NDB (LOM) 356 GR 063° 5.4 NM to Austin Straubel Intl. Unmonitored.

FICHY N44°45.36' W87°26.95' NOTAM FILE SUE. **GREEN BAY**
NDB (LOM) 224 II 016° 5.4 NM to Door Co Cherryland. Unmonitored.

FOND DU LAC CO (FLD) 1 W UTC—6(—5DT) N43°46.27' W88°29.31' **CHICAGO**
 808 B S4 FUEL 100LL, JET A1 TPA—1808(1000) NOTAM FILE FLD **H-2K, L-28H**
Rwy 18-36: H5941X100 (ASPH) D-60 HIRL **IAP**
Rwy 18: REIL. PAPI(P4L)—GA 3.0° TCH 48'. Trees. Rgt tfc.
Rwy 36: MALSR. PAPI(P4L)—GA 3.0° TCH 33'. Trees.
Rwy 09-27: H3602X75 (ASPH) S-22 MIRL 0.6% up W
Rwy 09: Trees. Rgt tfc. **Rwy 27:** Road.
AIRPORT REMARKS: Attended 1400Z†—dusk. For attendant after hrs call 920–922–6000. Rwy 36 is for left tfc only. HIRL Rwy 18–36 preset on low ints; to incr ints and **ACTIVATE MIRL** Rwy 09–27, REIL Rwy 18; PAPI Rwy 18 and Rwy 36 and MALSR Rwy 36—CTAF.
WEATHER DATA SOURCES: ASOS 134.0 (920) 922–4444.
COMMUNICATIONS: CTAF/UNICOM 123.05
RCO 122.5 (GREEN BAY RADIO)
 Ⓡ **MILWAUKEE APP/DEP CON** 127.0
RADIO AIDS TO NAVIGATION: NOTAM FILE OSH.
OSHKOSH (L) VORTAC 111.8 OSH Chan 55 N43°59.43' W88°33.36' 165° 13.5 NM to fld. 780/2E.
ILS/DME 108.3 I-FLD Chan 20 Rwy 36 LOC only.

FORT ATKINSON MUNI (61C) 3 NE UTC—6(—5DT) N42°57.79' W88°49.06' **CHICAGO**
 800 B FUEL 100LL TPA—1800(1000) NOTAM FILE GRB **L-28H**
Rwy 03-21: H3801X60 (ASPH) S-12 MIRL **IAP**
Rwy 03: Trees. **Rwy 21:** PAPI(P2L)—GA 3.0° TCH 30'. Tree.
AIRPORT REMARKS: Unattended. Parachute Jumping. Fuel avbl PPR call 920–563–7760. Ultralight activity on and invov arpt. Rwy 03–21 pilots req to fly rwy heading and climb to 1400' MSL before turning east. MIRL Rwy 03–21 preset on low ints, to **ACTIVATE** higher ints and PAPI Rwy 21—CTAF.
COMMUNICATIONS: CTAF 122.9
 Ⓡ **MADISON APP/DEP CON** 120.1 (1200–0500Z†) Ⓡ **CHICAGO CENTER APP/DEP CON** 133.3 (0500–1200Z†).
RADIO AIDS TO NAVIGATION: NOTAM FILE MKE.
BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01' W88°17.06' 247° 25.2 NM to fld. 1080/2E. **HIWAS.**

FOX RIVER (See ROCHESTER)

FRANKS SPB (See LAC DU FLAMBEAU)

LOC/DME I-FLD 108.3 Chan 20	APP CRS 358°	Rwy Idg 5940 TDZE 795 Apt Elev 808
---	------------------------	---

LOC/DME RWY 36
FOND DU LAC COUNTY (FLD)

T
A NA
If local altimeter setting not received, use Oshkosh altimeter setting and increase all MDAs 40 feet. Visibility reduction by helicopters NA.
For inoperative MALSR, increase S-36 Cats. A-C visibility to 1 mile.

MALSR

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct OSH VORTAC and hold.

ASOS


134.0

MILWAUKEE APP CON

127.0 263.075


UNICOM

123.05 (CTAF) L

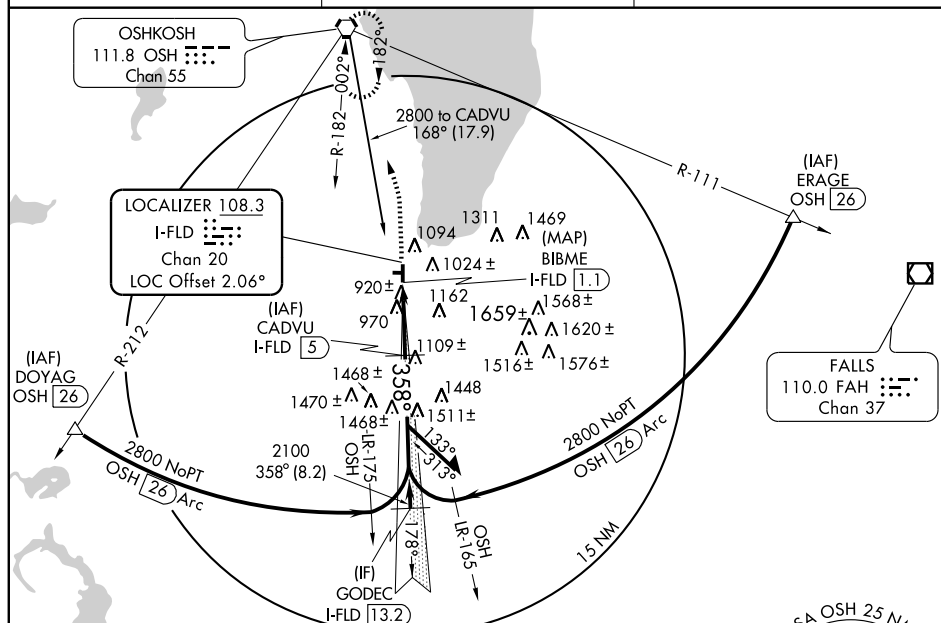

ELEV 808

MIRL Rwy 9-27 **L**
REIL Rwy 18 **L**
HIRL Rwy 18-36 **L**

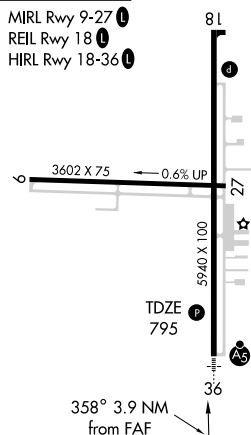


80 N-PT
3.1
(27.9)

IAF
BADGER
116.4 BAE
Chan 111

MSA OSH 25 NM

2600

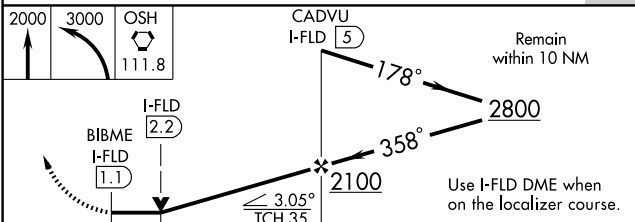

	1.1	2.8 NM			
CATEGORY	A	Δ	B	C	D
S-36	1180- $\frac{3}{4}$ 385 (400- $\frac{3}{4}$)				
CIRCLING	1420-1 612 (700-1)			1420-1 $\frac{3}{4}$ 612 (700-1 $\frac{3}{4}$)	1420-2 612 (700-2)

FOND DU LAC, WISCONSIN
Orig 10098

43° 46' N-88° 29' W

FOND DU LAC COUNTY (FLD)
LOC/DME RWY 36

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

WAAS CH 93800 W36A	APP CRS 360°	Rwy Idg TDZE 5940 Apt Elev 795 808
--	------------------------	--

RNAV (GPS) RWY 36

FOND DU LAC COUNTY (F.L.D.)

▼ If local altimeter setting not received, use Wittman Rgnl altimeter setting and increase all DAs/MDAs 40 feet. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (117°F). VDP
 ▲ NA when using Wittman Rgnl altimeter setting. DME/DME RNP-0.3 NA. For inoperative MALSR, increase LPV all Cats. visibility to 1¼ mile. Baro-VNAV NA when using Wittman Rgnl altimeter setting.

MALSR




MISSED APPROACH: Climb to 3000 direct WHITEY and via 270° track to LNDAH and via 229° track to BADAN and hold.

ASOS
134.0


MILWAUKEE APP CON
127.0 263.075

UNICOM
123.05 (CTAF) 0

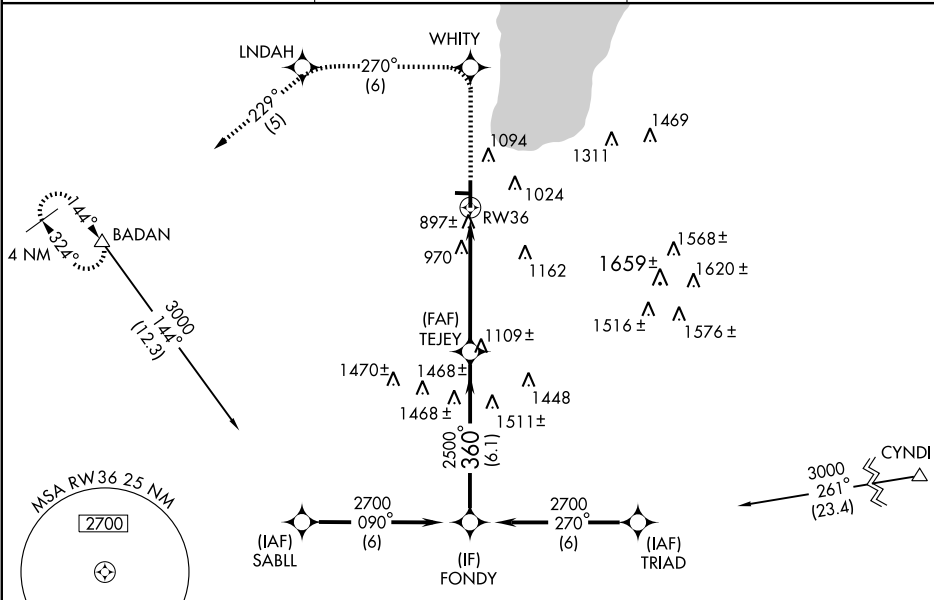

ELEV 808

	FONDY 2700	3000 WHITEY	TRK 270°	LNDAH	TRK 229°	BADAN
	360°					
	2500					
	6.1 NM	3.7 NM	1.4 NM			
CATEGORY	A	B	C	D		
LPV DA	1125-¾ 330 (400-¾)					
LNAV/VNAV DA	1171-¾ 376 (400-¾)					
LNAV MDA	1280-½ 485 (500-½)	1280-¾ 485 (500-¾)	1280-1 485 (500-1)			
CIRCLING	1420-1 612 (700-1)	1420-1¾ 612 (700-1¾)	1420-2 612 (700-2)			

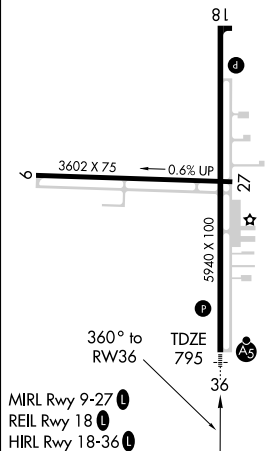

VOR/DME or GPS RWY 18
FOND DU LAC COUNTY (FLD)

CATEGORY	A	B	C	D
S-18	1360-1	570 (600-1)	1360-1½ 570 (600-1½)	1360-1¾ 570 (600-1¾)
CIRCLING	1420-1	612 (700-1)	1420-1¾ 612 (700-1¾)	1420-2 612 (700-2)

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

VORTAC OSH 111.8 Chan 55	APP CRS 346°	Rwy Idg TDZE Apt Elev	5940 795 809
--	------------------------	-----------------------------	---

VOR/DME RWY 36


FOND DU LAC COUNTY (FLD)

	MALSR 	MISSED APPROACH: Climbing left turn to 2700 via OSH R-166 to BAGOE 20 DME and hold.

ASOS
134.0



MILWAUKEE APP CON
127.0 263.075

UNICOM
123.05 (CTAF) 0

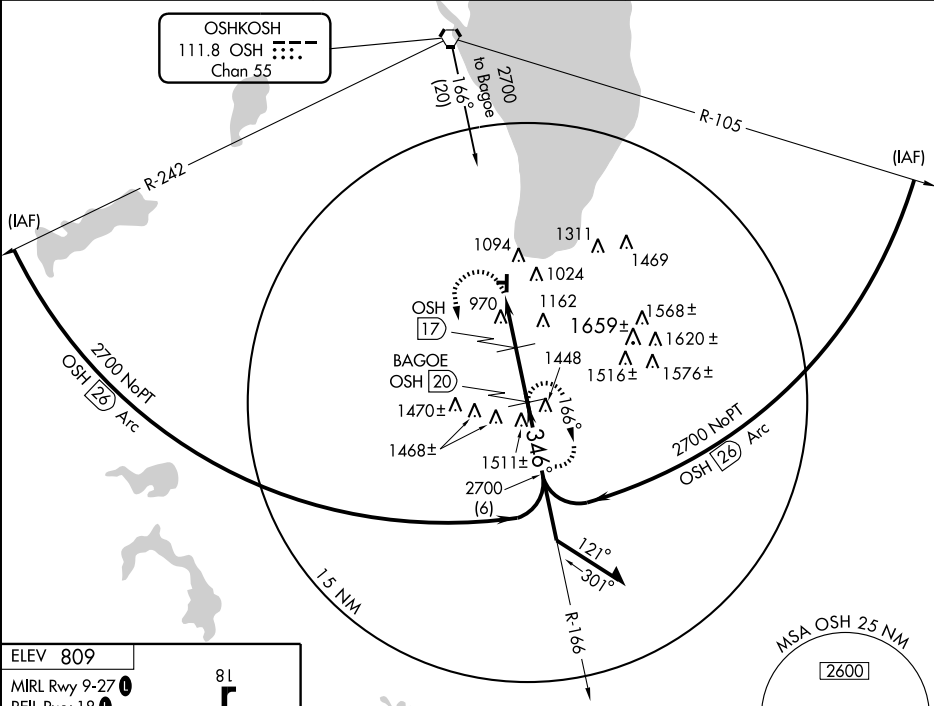

ELEV 809

MIRL Rwy 9-27
REIL Rwy 18
HIRL Rwy 18-36

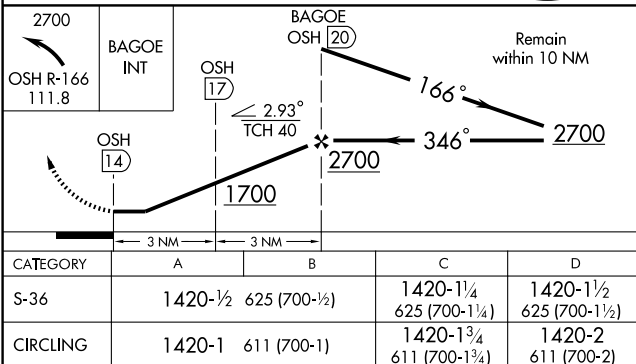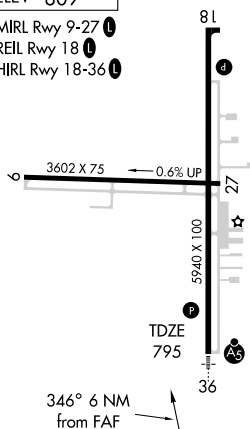

EPHRAIM—FISH CREEK (3D2) 1 SW UTC—6(—5DT) N45°08.12' W87°11.15' **GREEN BAY**
 773 B S2 FUEL 100LL NOTAM FILE GRB **L-31B**
Rwy 14-32: H2700X60 (ASPH) S—12.5 MIRL 0.5% up NE **IAP**
Rwy 14: PAPI(P2L)—GA 3.5° TCH 24'. Trees. **Rwy 32:** PAPI(P2L)—GA 3.0° TCH 25'. Trees.
Rwy 01-19: 1980X80 (TURF)
Rwy 01: Trees. **Rwy 19:** Trees.
AIRPORT REMARKS: Attended on call. For fuel Mon—Fri 1600–2100Z† call 920–868–1714. Other hrs call 920–495–0775/493–1714. Rwy 01–19 slopes immediately down to South—cannot see one end from the other. Rwy 14–32 400' turf twy on NE end. Rwy 01–19 ends and edges marked with yellow barrels. **ACTIVATE MIRL** Rwy 14–32, PAPI Rwy 14 and Rwy 32—CTAF.
COMMUNICATIONS: CTAF/UNICOM 123.0
 Ⓡ **GREEN BAY APP/DEP CON** 119.5 (1130–0530Z†) Ⓡ **MINNEAPOLIS CENTER APP/DEP CON** 127.65 (0530–1130Z†)
RADIO AIDS TO NAVIGATION: NOTAM FILE MNM.
MENOMINEE (L) VOR DME 109.6 MNM CHAN 83 N45°10.81' W87°38.83' 098° 19.8 NM to fld. 650/00E.

FALLS N43°46.13' W87°50.93' NOTAM FILE SBM. **CHICAGO**
 (L) **VOR/DME** 110.0 FAH Chan 37 at Sheboygan Co Meml. 744/2W. **ASOS** **L-28H**
 VOR unusable 018°–045° byd 12 NM and 046°–017° byd 31 NM blo 3000'.
 DME unusable 320°–340° byd 25 NM blo 3000'.
RCO 122.1R 110.0T (GREEN BAY RADIO)

FAMIS N44°26.43' W88°14.38' NOTAM FILE GRB. **GREEN BAY**
NDB (LOM) 356 GR 063° 5.4 NM to Austin Straubel Intl. Unmonitored.

FICHY N44°45.36' W87°26.95' NOTAM FILE SUE. **GREEN BAY**
NDB (LOM) 224 II 016° 5.4 NM to Door Co Cherryland. Unmonitored.

FOND DU LAC CO (FLD) 1 W UTC—6(—5DT) N43°46.27' W88°29.31' **CHICAGO**
 808 B S4 FUEL 100LL, JET A1 TPA—1808(1000) NOTAM FILE FLD **H-2K, L-28H**
Rwy 18-36: H5941X100 (ASPH) D-60 HIRL **IAP**
Rwy 18: REIL. PAPI(P4L)—GA 3.0° TCH 48'. Trees. Rgt tfc.
Rwy 36: MALSR. PAPI(P4L)—GA 3.0° TCH 33'. Trees.
Rwy 09-27: H3602X75 (ASPH) S-22 MIRL 0.6% up W
Rwy 09: Trees. Rgt tfc. **Rwy 27:** Road.
AIRPORT REMARKS: Attended 1400Z†—dusk. For attendant after hrs call 920–922–6000. Rwy 36 is for left tfc only. HIRL Rwy 18–36 preset on low ints; to incr ints and **ACTIVATE MIRL** Rwy 09–27, REIL Rwy 18; PAPI Rwy 18 and Rwy 36 and MALSR Rwy 36—CTAF.
WEATHER DATA SOURCES: ASOS 134.0 (920) 922–4444.
COMMUNICATIONS: CTAF/UNICOM 123.05
RCO 122.5 (GREEN BAY RADIO)
 Ⓡ **MILWAUKEE APP/DEP CON** 127.0
RADIO AIDS TO NAVIGATION: NOTAM FILE OSH.
OSHKOSH (L) VORTAC 111.8 OSH Chan 55 N43°59.43' W88°33.36' 165° 13.5 NM to fld. 780/2E.
ILS/DME 108.3 I-FLD Chan 20 Rwy 36 LOC only.

FORT ATKINSON MUNI (61C) 3 NE UTC—6(—5DT) N42°57.79' W88°49.06' **CHICAGO**
 800 B FUEL 100LL TPA—1800(1000) NOTAM FILE GRB **L-28H**
Rwy 03-21: H3801X60 (ASPH) S-12 MIRL **IAP**
Rwy 03: Trees. **Rwy 21:** PAPI(P2L)—GA 3.0° TCH 30'. Tree.
AIRPORT REMARKS: Unattended. Parachute Jumping. Fuel avbl PPR call 920–563–7760. Ultralight activity on and invov arpt. Rwy 03–21 pilots req to fly rwy heading and climb to 1400' MSL before turning east. MIRL Rwy 03–21 preset on low ints, to **ACTIVATE** higher ints and PAPI Rwy 21—CTAF.
COMMUNICATIONS: CTAF 122.9
 Ⓡ **MADISON APP/DEP CON** 120.1 (1200–0500Z†) Ⓡ **CHICAGO CENTER APP/DEP CON** 133.3 (0500–1200Z†).
RADIO AIDS TO NAVIGATION: NOTAM FILE MKE.
BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01' W88°17.06' 247° 25.2 NM to fld. 1080/2E. **HIWAS.**

FOX RIVER (See ROCHESTER)

FRANKS SPB (See LAC DU FLAMBEAU)

A NA


Use Watertown Muni altimeter setting.
GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3200 direct GISPE WP and hold.

MADISON APP CON ★
120.1 350.3

CTAF

122.9 L

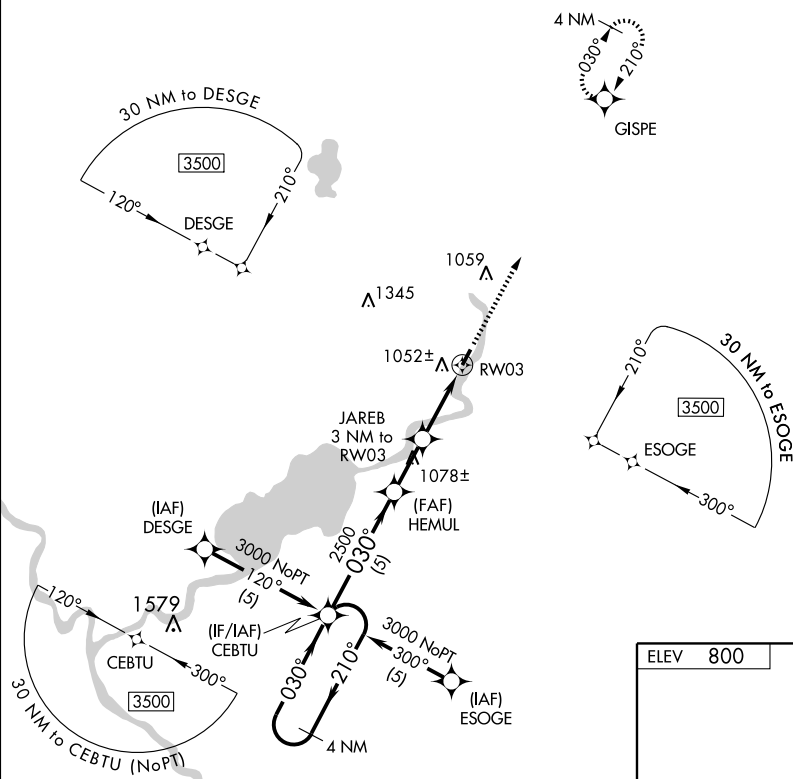

4 NM
Holding Pattern

CEBTU

CATEGORY	A	B	C	D
INAV MDA	1340-1	540 (600-1)	1340-1½ 540 (600-1½)	NA
CIRCLING	1400-1	600 (700-1)	1400-1½ 600 (700-1½)	NA

ELEV 800

TDZ
80C

MIRL Rwy 3-21 **L**

APP CRS	Rwy Idg	3801
210°	TDZE	800
	Apt Elev	800




RNAV (GPS) RWY 21
FORT ATKINSON MUNI (61C)

ANA

Use Watertown Muni altimeter setting.
GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3200 direct CEBTU WP and hold.

MADISON APP CON ★
120.1 350.3

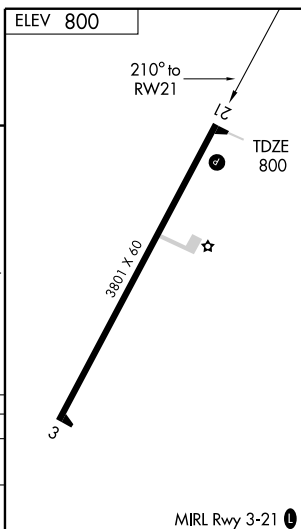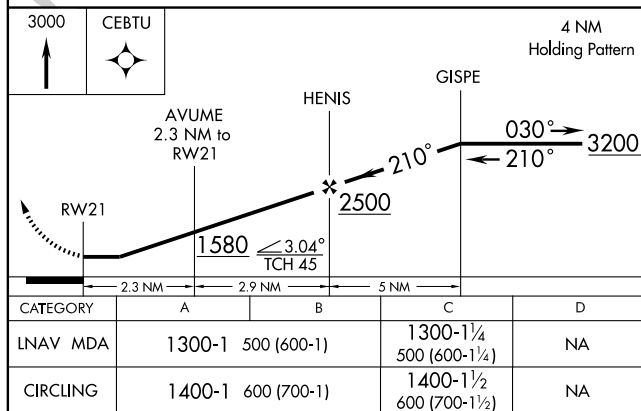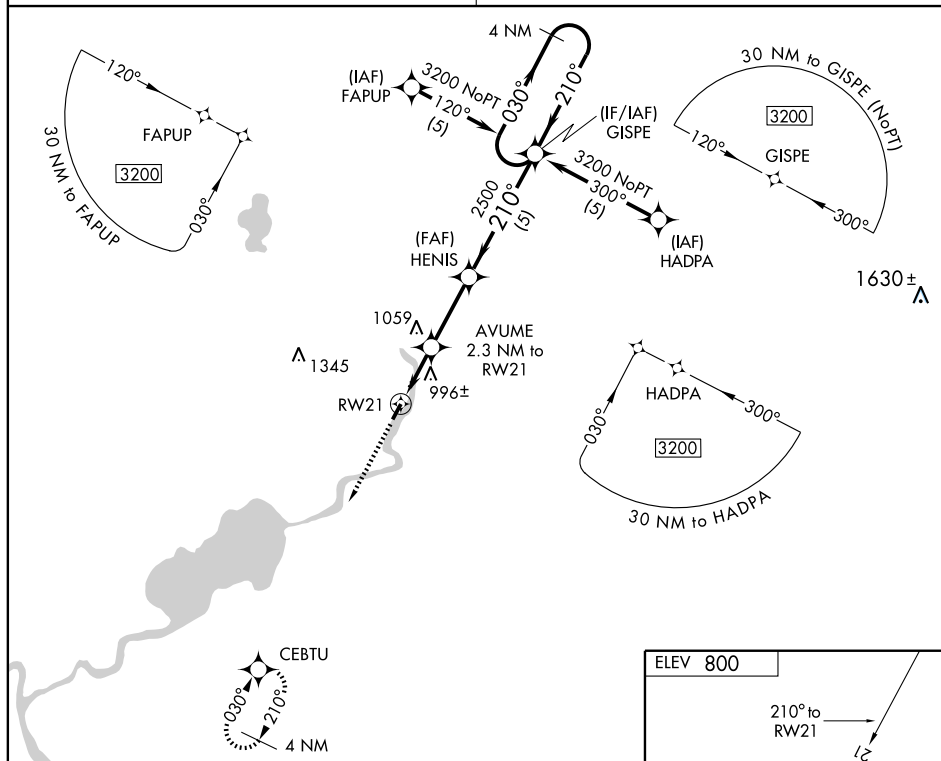CTAF
122.9 **L**

VORTAC BAE <u>116.4</u> Chan 111	APP CRS 247°	Rwy Idg TDZE Apt Elev	N/A N/A 800
--	------------------------	-----------------------------	--


VOR-A
FORT ATKINSON MUNI (61C)

A NA



Use Watertown altimeter setting.
ADF or DME REQUIRED.

MISSED APPROACH: Climb to 2500 then right turn via BAE R-247 to SLUGR Int and hold.

MADISON APP CON ★
120.1 350.3

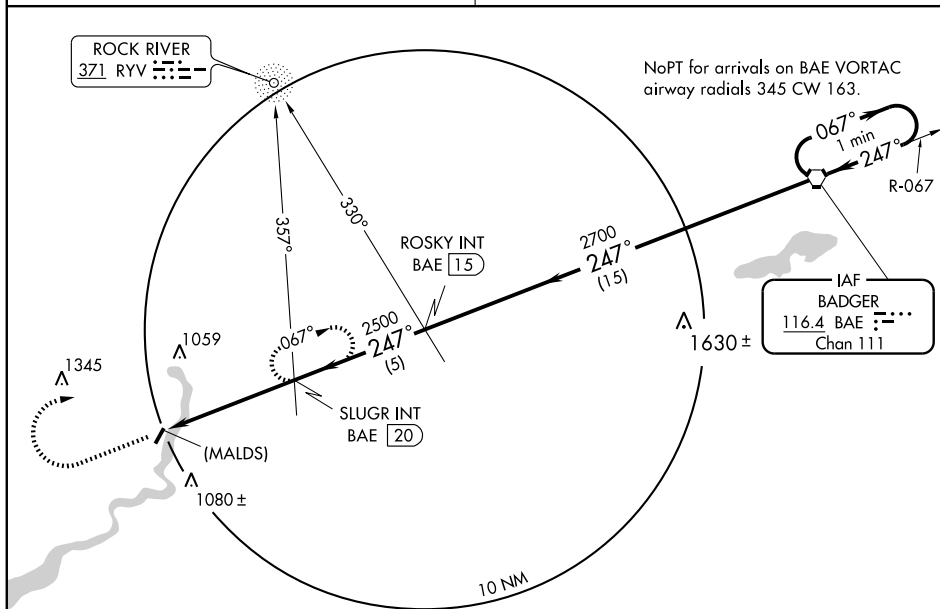CTAF
122.9 **L**

ELEV	800
------	-----

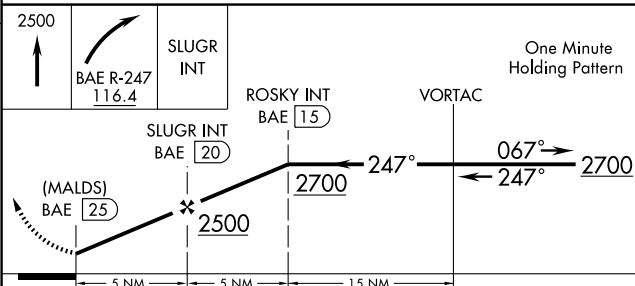MIRL Rwy 3-21 **L**

FAF to MAP 5 NM							CATEGORY	A	B	C	D
Knots	60	90	120	150	180		1420-1	1420-1 $\frac{1}{4}$	1420-1 $\frac{3}{4}$		
Min:Sec	5:00	3:20	2:30	2:00	1:40		620 (700-1)	620 (700-1 $\frac{1}{4}$)	620 (700-1 $\frac{3}{4}$)		NA

FORT ATKINSON, WISCONSIN

Orig-B 06103

42°58'N - 88°49'W

FORT ATKINSON MUNI (61C)

VOR-A

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

FRANKSVILLE

CINDY GUNTLY MEML (62C) 7 NW UTC-6(-5DT) N42°49.42' W88°05.67'

CHICAGO

790 S4 FUEL 100LL, MOGAS TPA—1790(1000) NOTAM FILE GRB

RWY 01-19: 2425X70 (TURF) LIRL (NSTD).

RWY 01: Tree. RWY 19: Tree.

RWY 18-36: 1200X80 (TURF)

RWY 18: Trees. RWY 36: Tree.

AIRPORT REMARKS: Attended Mon-Fri 1430-0000Z, Sat 1700-0000Z. Rwy 18 and Rwy 19 ground drops off rapidly at S end. Rwy 18-36 rough and undulating rolling terrain. ACTIVATE NSTD LIRL Rwy 01-19—CTAF. Rwy 01-19 NSTD LIRL has two pairs of lgts each end.

COMMUNICATIONS: CTAF 122.9

FRIENDSHIP (ADAMS)

ADAMS CO LEGION FLD (63C) 1 E UTC-6(-5DT) N43°57.67' W89°47.28'

CHICAGO

976 B FUEL 100LL NOTAM FILE GRB

L-28G

RWY 15-33: H3400X60 (ASPH) S-12.5 MIRL 0.3% up SE

IAP

RWY 15: REIL. PAPI(P2L). Trees.

RWY 33: REIL. PAPI(P2L). Trees.

RWY 08-26: 2825X100 (TURF)

RWY 08: Trees. RWY 26: Trees.

AIRPORT REMARKS: Unattended. Fuel avbl 24 hrs with credit card.

Ultralight activity at arpt. Rwy 08-26 CLOSED Dec 1-Apr 1. Acft departing Rwy 15 turn to a heading of 180° after takeoff. Rwy 08-26 marked with 3' white cones. ACTIVATE MIRL Rwy 15-33 and REIL Rwy 15 and Rwy 33—CTAF.


COMMUNICATIONS: CTAF 122.9

VOLK APP/DEP CON 135.25 (1300-2100Z)

CHICAGO CENTER/APP DEP CON 133.3 (2100-1300Z)

RADIO AIDS TO NAVIGATION: NOTAM FILE DLL.

DELLS (H) VORTAC 117.0 DLL Chan 117 N43°33.05' W89°45.82'. 355° 24.6 NM to fld. 1020/3E.

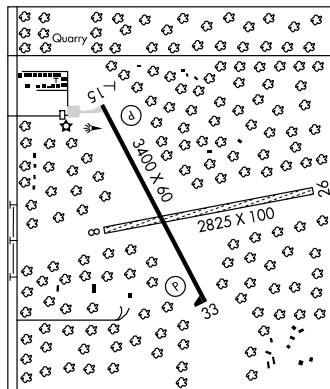

GAMIE N44°09.75' W88°35.10' NOTAM FILE ATW.

GREEN BAY

NDB (LOM) 230 AT 028° 6.4 NM to Outagamie Co.

GENERAL MITCHELL INTL (See MILWAUKEE)

GENOA CITY

VINCENT (64C) 3 NE UTC-6(-5DT) N42°31.10' W88°18.02'

CHICAGO

880 TPA—1680(800) NOTAM FILE GRB

RWY 09-27: 1775X130 (TURF)

RWY 09: Trees. RWY 27: Road.

AIRPORT REMARKS: Unattended. Rwy 09-27 W end rises +15'.

COMMUNICATIONS: CTAF/UNICOM 122.8

GILBERT FIELD (See RIO)

GRAND GENEVA RESORT (See LAKE GENEVA)

APP CRS 334°	Rwy Idg TDZE Apt Elev	3400 976 976
------------------------	-----------------------------	---


RNAV (GPS) RWY 33

FRIENDSHIP (ADAMS) / ADAMS COUNTY LEGION FIELD (63C)


T
A NA
GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.
Use Baraboo Wisconsin Dells altimeter setting.

MISSED APPROACH: Climb to 2000 then climbing right turn to 2800 direct ULHUV WP and hold.


VOLK APP CON★
135.25 290.8

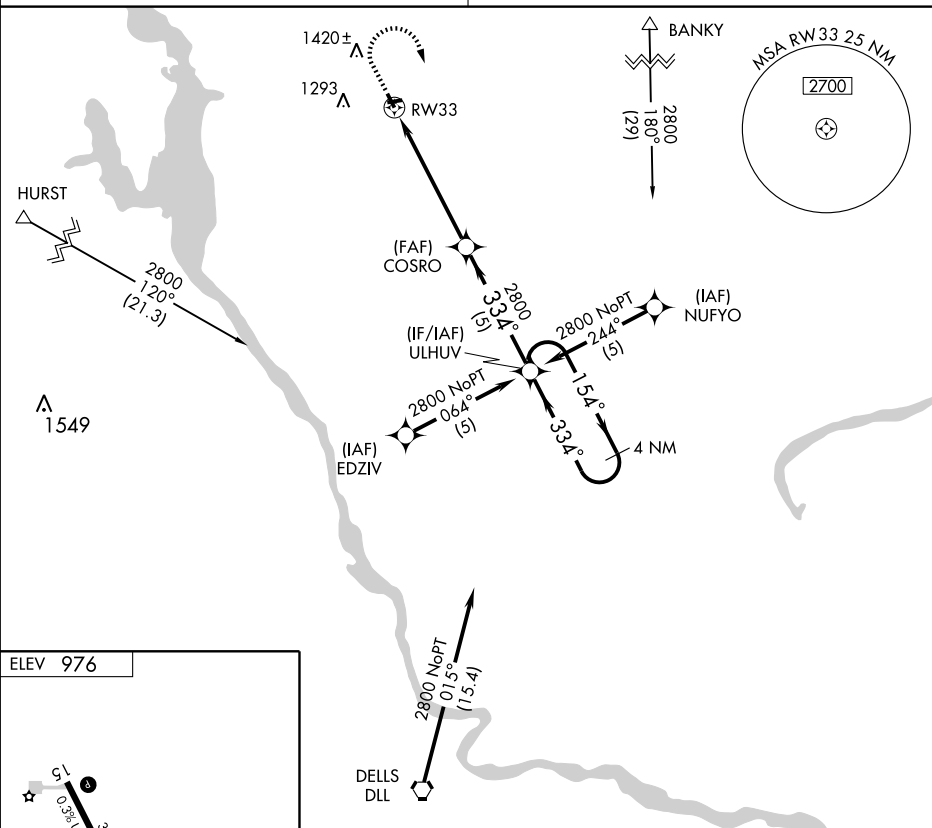CTAF
122.9 L

ELEV 976

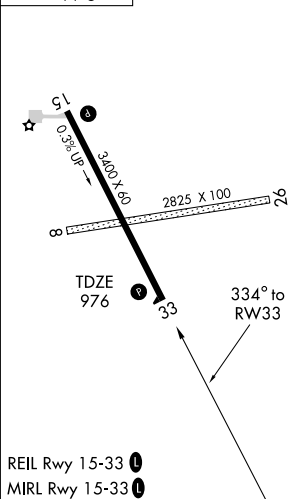

REIL Rwy 15-33 **L**
MIRL Rwy 15-33 **L**

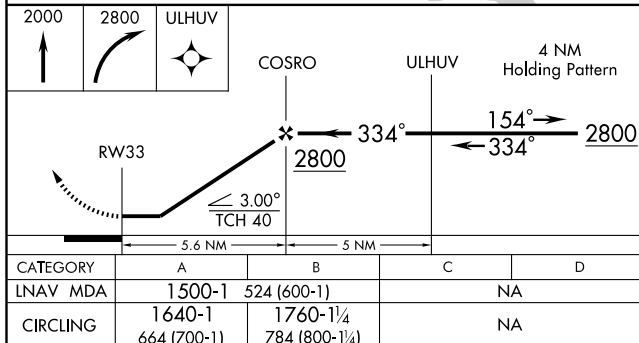

FRIENDSHIP (ADAMS), WISCONSIN
Orig 08325

FRIENDSHIP (ADAMS) / ADAMS COUNTY LEGION FIELD (63C)
43° 58' N-89° 47' W PNAV (GPS) PWY 33

RNAV (GPS) RWY 33

GRANTSBURG MUNI (GTG) 2 NE UTC-6(-5DT) N45°47.88' W92°39.86'

927 B TPA-1727(800) NOTAM FILE GRB

RWY 05-23: 3315X120 (TURF)

RWY 05: Trees. **RWY 23:** Trees.

RWY 12-30: H3000X60 (ASPH) MIRL

RWY 30: Trees.

AIRPORT REMARKS: Unattended. Rwy 05-23 CLOSED Nov 1-Apr 15.

Deer and waterfowl on and invof arpt. ACTIVATE MIRL Rwy 12-30-CTAF. Water twr lctd 5060' southwest Rwy 05, 1100' MSL/182'AGL. Rwy 05-23 marked by yellow cones.

COMMUNICATIONS: CTAF 122.9

SIREN RCO 122.1R 109.4T (GREEN BAY RADIO)

MINNEAPOLIS CENTER APP/DEP CON 121.05


RADIO AIDS TO NAVIGATION: NOTAM FILE RZN.

SIREN (L) VOR/DME 109.4 RZN Chan 31 N45°49.23' W92°22.47' 262° 12.2 NM to fld. 987/2E. **HIWAS.**

GREEN BAY

L-14I

IAF

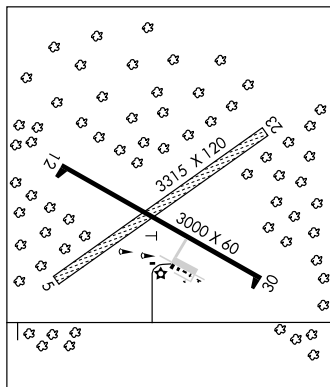

GREEN BAY N44°33.31' W88°11.69' NOTAM FILE GRB.

(H) VORTACW 115.5 GRB Chan 102 146° 5.1 NM to

Austin Straubel Intl. 767/1E. **HIWAS.**

RCO 122.55 122.2 (GREEN BAY RADIO)

GREEN BAY

H-2K, L-31A

VOR/DME RZN 109.4 Chan 31	APP CRS 262°	Rwy Idg TDZE Apt Elev	N/A N/A 927
---	------------------------	-----------------------------	--

VOR/DME or GPS-A

GRANTSBURG MUNI (GTG)




Use Cambridge, MN altimeter setting.

MISSED APPROACH: Climbing right turn to 2500 direct RZN VOR/DME and hold.

MINNEAPOLIS CENTER
121.05 397.9

CTAF
122.9 0



(IHERE)
RZN **7.3**

2500
262°
(7.3)

082°
1 min
262°

R-082


IAF
SIREN
109.4 RZN
Chan 31

NoPT for arrival on
RZN VOR/DME airway
radials 005 CW 143.


10 NM

1778

ELEV 927



MIRL Rwy 12-30



(IHERE)
RZN **7.3**

VOR/DME

One Minute
Holding Pattern

(MAHOS)
RZN **11.9**

262°
2500

082°
2500

4.6 NM 7.3 NM

Knots	60	90	120	150	180
Min:Sec					

CATEGORY	A	B	C	D
CIRCLING	1480-1	553 (600-1)	1480-1½ 553 (600-1½)	NA

AIRPORT DIAGRAM

AL-873 (FAA)

GREEN BAY/AUSTIN STRAUBEL INTL (GRB)
GREEN BAY, WISCONSIN

ATIS
124.1
GREEN BAY TOWER ★
118.7 257.8
GND CON
121.9
CLNC DEL
121.75

D

FIELD
ELEV
695

HOLD
SHORT
AREA

NORTH
RAMP

HANGARS

TERMINAL

TITLETOWN

JET AIR
MAINT

ELEV
681

FIRE
STATION

EAST RAMP

AIR
CARRIER
RAMP

TWR/BCN
796

7700 X 150

GENERAL AVIATION
HANGAR COMPLEX

LAHSO

LAHSO

LAHSO

ELEV
692

8701 X 150

HOT
CARGO
AREA

1/8 3.6° W

JANUARY 2010
ANNUAL RATE OF CHANGE
0.1° W

RWY 06-24

S-90, D-160, 2S-175, 2D-260

RWY 18-36

S-95, D-165, 2S-175, 2D-275

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

ELEV
684

88° 08.0'W

88° 07.5'W

88° 07.0'W

AIRPORT DIAGRAM

GREEN BAY, WISCONSIN
GREEN BAY/AUSTIN STRAUBEL INTL (GRB)

10210

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

GREEN BAY

AUSTIN STRAUBEL INTL (GRB) 7 SW UTC-6(-5DT) N44°29.08' W88°07.78'

GREEN BAY

695 B S4 FUEL 100LL, JET A OX 1, 3 LRA ARFF Index—See Remarks
NOTAM FILE GRB

H-2K, L-31A

IAP, AD

RWY 18-36: H8701X150 (CONC-GRVD) S-95, D-165, 2S-175, 2D-275 HIRL

RWY 18: REIL. PAPI(P4R)—GA 3.0° TCH 54'. Thld displcd 499'. Road.

Rgt tfc.

RWY 36: MALSR. PAPI(P4L)—GA 3.0° TCH 50'.

RWY 06-24: H7700X150 (CONC-GRVD) S-90, D-160, 2S-175,
2D-260 HIRL

RWY 06: MALSR. PAPI(P4L)—GA 3.0° TCH 38'.

RWY 24: PAPI(P4L)—GA 3.0° TCH 50'. Tower.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 18	06-24	2692
RWY 24	18-36	6050
RWY 36	06-24	4932

RUNWAY DECLARED DISTANCE INFORMATION

RWY 18: TORA-8701 TODA-8701 ASDA-8701 LDA-8201

RWY 36: TORA-8201 TODA-8201 ASDA-8201 LDA-8701

AIRPORT REMARKS: Attended 1100-0400Z†. Deer and birds on and in/ovf
arpt. Request voluntary compliance in avoiding noise sensitiveareas N and E of arpt between midnight and 6 a.m. Rwy 18 touch
and go tfc to use rgt tfc during hrs when twr clsd. Twys N and E notavbl for air carrier ops with more than 30 passenger seats. Class I, ARFF Index C. ARFF index D available with
prior permission call arpt manager at 920-498-4820. Rwy 06 touchdown runway visual range avbl. Rwy 36
touchdown runway visual range avbl. When twr is clsd the preferred rwy is preset on low or med ints; to
increase ints and ACTIVATE HIRL Rwy 06-24 and Rwy 18-36; MALSR Rwy 06, Rwy 36, REIL Rwy 18 and PAPI
Rwy 18—CTAF. Flight Notification Service (ADCUS) available.

WEATHER DATA SOURCES: ASOS (920) 494-7140. HIWAS 115.5 GRB. LLWAS.

COMMUNICATIONS: CTAF 118.7 ATIS 124.1 UNICOM 122.95

GREEN BAY RCO 122.55 122.2 (GREEN BAY RADIO)

① GREEN BAY APP CON 119.4 (1130-0530Z†) ① GREEN BAY DEP CON 126.55 (1130-0530Z†)

① MINNEAPOLIS CENTER APP/DEP CON 125.55 (0530-1130Z†)

GREEN BAY TOWER 118.7 (1130-0530Z†) GND CON 121.9 CLNC DEL 121.75

AIRSPACE: CLASS C svc 1130-0530Z† ctc APP CON other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE GRB. VHF/DF ctc GREEN BAY RADIO.

GREEN BAY (H) VORTACW 115.5 GRB Chan 102 N44°33.31' W88°11.69' 146° 5.1 NM to fld. 767/1E.
HIWAS.


FAMIS NDB (LOM) 356 GR N44°26.43' W88°14.38' 063° 5.4 NM to fld. LOM unmonitored.

DEPRE NDB (MHW/LOM) 332 SG N44°23.91' W88°07.97' 004° 5.2 NM to fld. LOM unmonitored.

ILS/DME 109.5 I-GRB Chan 32 Rwy 06 Class IE. LOM FAMIS NDB. LOC/GS/LOM unmonitored.

ILS 109.9 I-SGZ Rwy 36 Class IE. LOM DEPRE NDB. LOC/GS/LOM unmonitored.

ASR (1130-1730Z†)

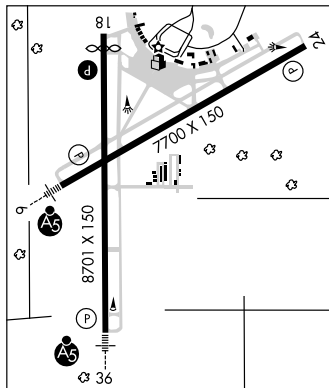

GUTZMER'S TWIN OAKS (See WHITEWATER)

HAHN SKY RANCH (See WEST BEND)

HARTFORD MUNI (HXF) 2 NW UTC-6(-5DT) N43°20.95' W88°23.48'

CHICAGO

1069 B S4 FUEL 100LL, MOGAS TPA—See Remarks NOTAM FILE GRB

L-28H

RWY 11-29: H3000X75 (ASPH) S-8 MIRL

IAP

RWY 11: Road. Rwy 29: Trees.

RWY 18-36: 2259X215 (TURF)

RWY 18: Road.

AIRPORT REMARKS: Unattended. Glider and ultralight activity on arpt. Slight downhill slope ldg Rwy 18. Rwy 36 +78'
water twr 3885' from apch end. TPA for ultralight acft 1569(500). Rgt tfc pattern ultralight and glider acft. Rwy
18-36 thld marked with orange and white wooden A-frames.

COMMUNICATIONS: CTAF/UNICOM 123.0

① MILWAUKEE APP/DEP CON 125.35

RADIO AIDS TO NAVIGATION: NOTAM FILE MKE.

BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01' W88°17.06' 339° 14.7 NM to fld. 1080/2E.

HIWAS.

WEST BEND (T) VOR 109.8 BJB N43°25.32' W88°07.52' 251° 12.4 NM to fld. NOTAM FILE ETB.

NDB (MHW) 200 HXF N43°20.86' W86°23.71' at fld.

LOC/DME I-GRB 109.5 Chan 32	APP CRS 062°	Rwy Idg TDZE Apt Elev	7700 692 695
---	------------------------	-----------------------------	---

ILS or LOC RWY 6

GREEN BAY/AUSTIN STRAUBEL INTL (GRB)





* RVR 1800 authorized with
the use of FD or AP or HUD to DA.




MISSED APPROACH: Climb to 1400 then climbing left turn
to 2500 direct GRB VORTAC and hold.

ATIS 124.1	GREEN BAY APP CON* 119.4 338.2	GREEN BAY TOWER* 118.7 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.75	UNICOM 122.95
----------------------	--	--	-------------------------	---------------------------	-------------------------

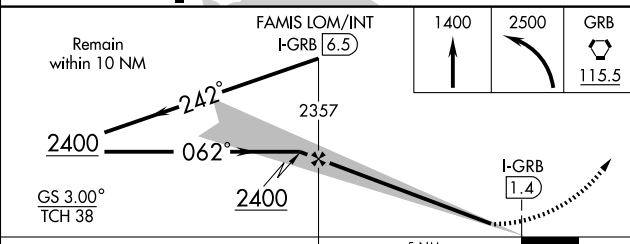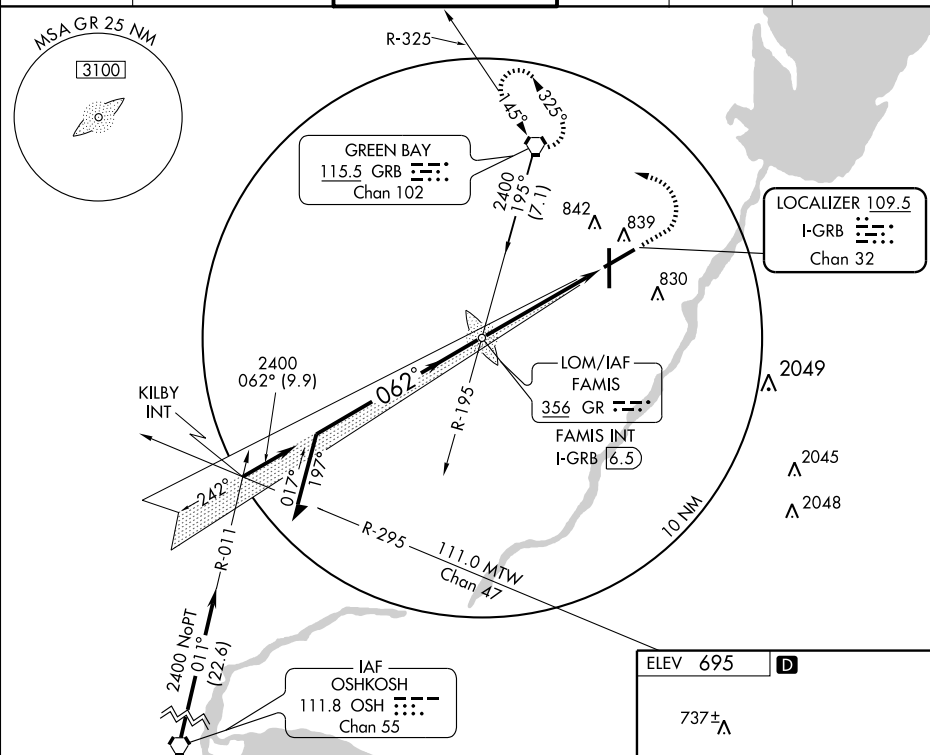

CATEGORY	A	B	C	D
S-ILS 6	* 892/24 200 (200-½)			
S-LOC 6	1100/24 408 (500-½)			1100/40 408 (500-¾)
CIRCLING	1200-1 505 (600-1)		1200-1½ 505 (600-1½)	1260-2 565 (600-2)

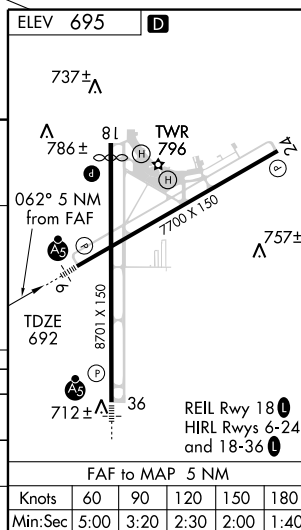

LOC I-SGZ 109.9	APP CRS 002°	Rwy Idg TDZE Apt Elev 684 695
---------------------------	------------------------	---

ILS or LOC RWY 36


GREEN BAY/AUSTIN STRAUBEL INTL (GRB)

V For inoperative MALSR, increase S-LOC 36 MAZTT fix minimums Cat D visibility to RVR 5000.
NA **RVR 1800 authorized with the use of FD or AP or HUD to DA.
ASR





MISSED APPROACH: Climb to 1400 then climbing left turn to 2500 direct GRB VORTAC and hold.

ATIS 124.1	GREEN BAY APP CON ★ 119.4 338.2	GREEN BAY TOWER ★ 118.7 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.75	UNICOM 122.95
----------------------	---	--	-------------------------	---------------------------	-------------------------

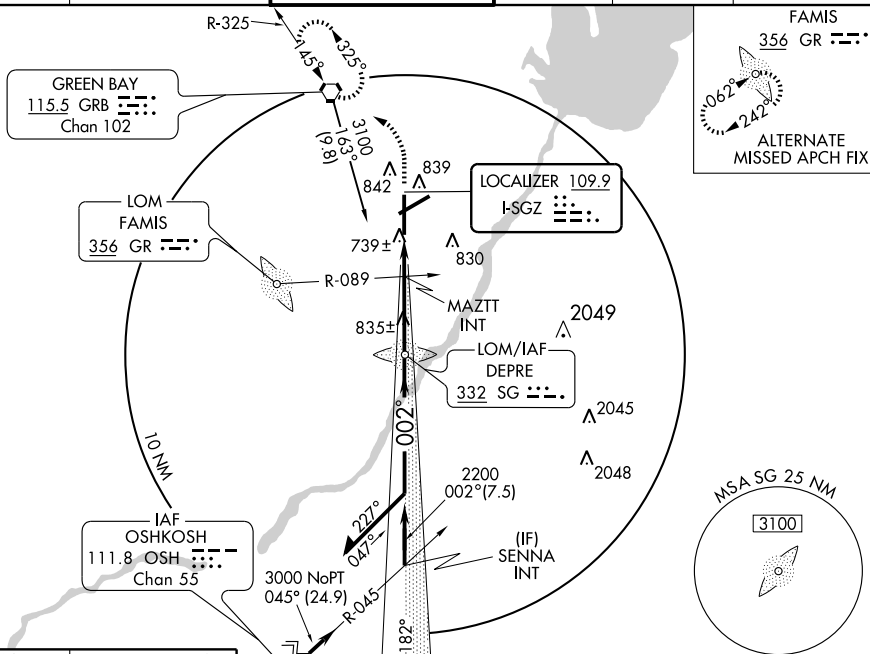

ELEV 695 **D** REIL Rwy 18 **1**
 HIRL Rwy 6-24 and 18-36 **1**

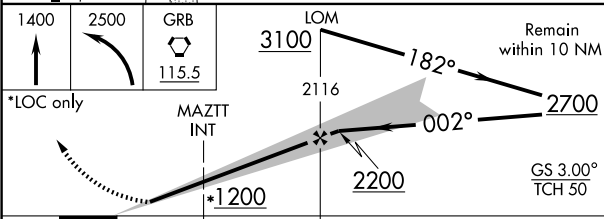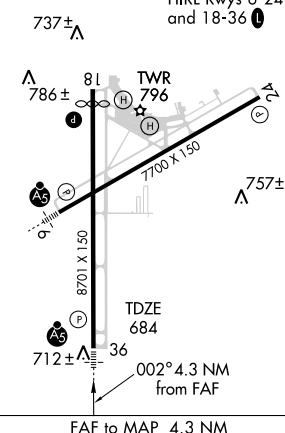

CATEGORY	A	B	C	D
S-ILS 36	**884/24		200 (200-½)	
S-LOC 36	1200/24	516 (600-½)	1200/50 516 (600-1)	1200/60 516 (600-1¼)
CIRCLING	1200-1	505 (600-1)	1200-1½ 505 (600-1½)	1260-2 565 (600-2)
MAZTT FIX MINIMUMS				
S-LOC 36	980/24	296 (300-½)	980/40 296 (300-¾)	
CIRCLING	1200-1	505 (600-1)	1200-1½ 505 (600-1½)	1260-2 565 (600-2)

LAND AND HOLD SHORT OPERATIONS (LAHSO)

LAHSO is an acronym for "Land and Hold Short Operations." These operations include landing and holding short of an intersection runway, an intersecting taxiway, or other predetermined points on the runway other than a runway or taxiway. Measured distance represents the available landing distance on the landing runway, in feet.

Specific questions regarding these distances should be referred to the air traffic manager of the facility concerned. The Aeronautical Information Manual contains specific details on hold-short operations and markings.

CITY/AIRPORT	LDG RWY	HOLD-SHORT POINT	MEASURED DISTANCE
ALTON/ST. LOUIS, IL			
ST. LOUIS RGNL (ALN)	29	17-35	6,850 feet
	35	11-29	5,100 feet
APPLETON, WI			
OUTAGAMIE COUNTY RGNL (ATW)	03	12-30	3,300 feet
	21	12-30	4,100 feet
	30	03-21	3,400 feet
BLOOMINGTON/NORMAL, IL			
CENTRAL IL REGL ARPT AT			
BLOOMINGTON-NORMAL (BMI)	02	11-29	4,600 feet
	11	02-20	6,200 feet
CARBONDALE-MURPHYSBORO, IL			
SOUTHERN ILLINOIS (MDH)	06	18L-36R	3,100 feet
	24	18R-36L	3,800 feet
	36R	06-24	3,000 feet
CHAMPAIGN-URBANA, IL			
UNIVERSITY OF ILLINOIS-WILLARD (CMI)	04	14L-32R	3,600 feet
	14L	04-22	3,550 feet
	18	04-22	4,100 feet
	22	18-36	4,700 feet
	32R	04-22	4,050 feet
	36	14L-32R	3,950 feet
CHICAGO, IL			
CHICAGO-O'HARE INTL (ORD)	09R	14L-32R	6,100 feet
	10	TWY S	12,156 feet
	22R	09R-27L	6,050 feet
	27L	04L-22R	5,700 feet
CHICAGO/AURORA, IL			
AURORA MUNI (ARR)	09	18-36	3,450 feet
	15	09-27	3,900 feet
	27	15-33	4,000 feet
CHICAGO/PROSPECT HEIGHTS/ WHEELING, IL			
CHICAGO EXECUTIVE (PWK)	16	12-30	3,623 feet
DECATUR, IL			
DECATUR (DEC)	06	12-30	4,800 feet
	12	06-24	4,450 feet
	18	06-24	4,450 feet
	24	12-30	3,000 feet
	24	18-36	8,000 feet
	30	18-36	5,050 feet
	36	12-30	4,800 feet

(SEE CONTINUATION PAGE FOR MORE LISTINGS)

LAND AND HOLD SHORT OPERATIONS (LAHSO)
(CONTINUED)

CITY/AIRPORT	LDG RWY	HOLD-SHORT POINT	MEASURED DISTANCE
GREEN BAY, WI			
AUSTIN STRAUBEL INTL (GRB)	18	06-24	2,692 feet
	24	18-36	6,050 feet
	36	06-24	4,932 feet
MADISON, WI			
DANE COUNTY RGNL- TRUAX FIELD (MSN)	03	14-32	3,400 feet
	18	03-21	4,850 feet
	21	18-36	6,450 feet
	32	18-36	5,300 feet
	36	14-32	7,050 feet
MARION, IL			
WILLIAMSON COUNTY RGNL (MWA)	20	11-29	6,650 feet
	29	02-20	4,650 feet
MOSINEE, WI			
CENTRAL WISCONSIN (CWA)	26	17-35	7,300 feet
	35	08-26	5,000 feet
ROCKFORD, IL			
CHICAGO/ROCKFORD INTL (RFD)	01	07-25	6,000 feet
	07	01-19	8,800 feet
SPRINGFIELD, IL			
ABRAHAM LINCOLN CAPITAL (SPI)	04	13-31	3,200 feet
	22	13-31	4,150 feet
	31	04-22	3,350 feet
	36	13-31	3,000 feet

LOC/DME I-GRB 109.5 Chan 32	APP CRS 242°	Rwy Idg TDZE Apt Elev	7700 682 695
---	------------------------	-----------------------------	---




LOC BC RWY 24

GREEN BAY/AUSTIN STRAUBEL INTL (GRB)



MISSED APPROACH: Climb to 1500 then climbing right turn to 2500 direct GRB VORTAC and hold.

ATIS 124.1	GREEN BAY APP CON ★ 119.4 338.2	GREEN BAY TOWER ★ 118.7 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.75	UNICOM 122.95
----------------------	---	--	-------------------------	---------------------------	-------------------------

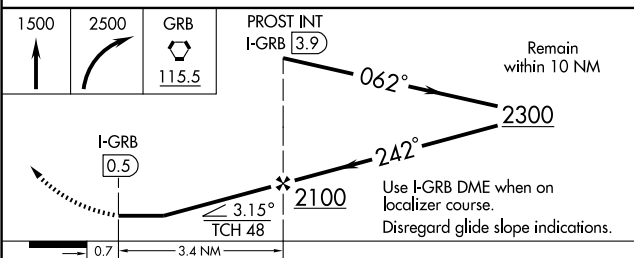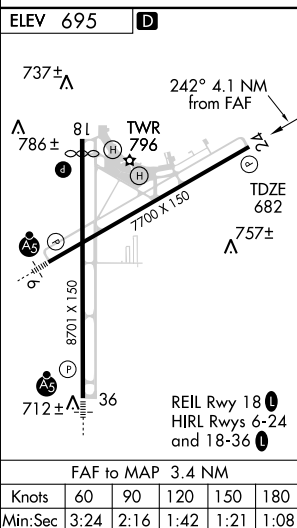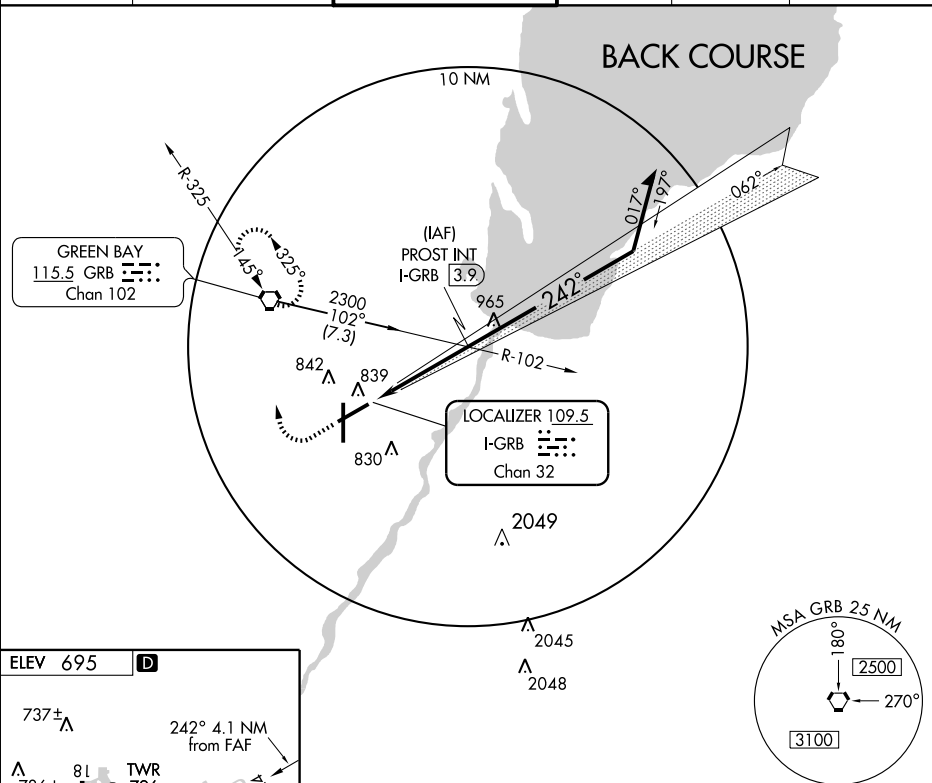

CATEGORY	A	B	C	D
S-24	1100-1 418 (500-1)		1100-1½ 418 (500-1½)	
CIRCLING	1200-1 505 (600-1)		1200-1½ 505 (600-1½)	1260-2 565 (600-2)

WAAS CH 63015 W06A	APP CRS 062°	Rwy Idg TDZE Apt Elev	7700 692 695
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

GREEN BAY/AUSTIN STRAUBEL INTL (GRB)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. For inoperative MALS/R, increase ASR LNAV/VNAV Cat D visibility to RVR 5000 and LNAV Cat D visibility to RVR 6000.

MALS/R



MISSED APPROACH: Climb to 2500 direct HAMRO and hold.

ATIS
124.1


GREEN BAY APP CON★
119.4 338.2

GREEN BAY TOWER★
118.7 (CTAF) 0 257.8


GND CON
121.9

CLNC DEL
121.75

UNICOM
122.95

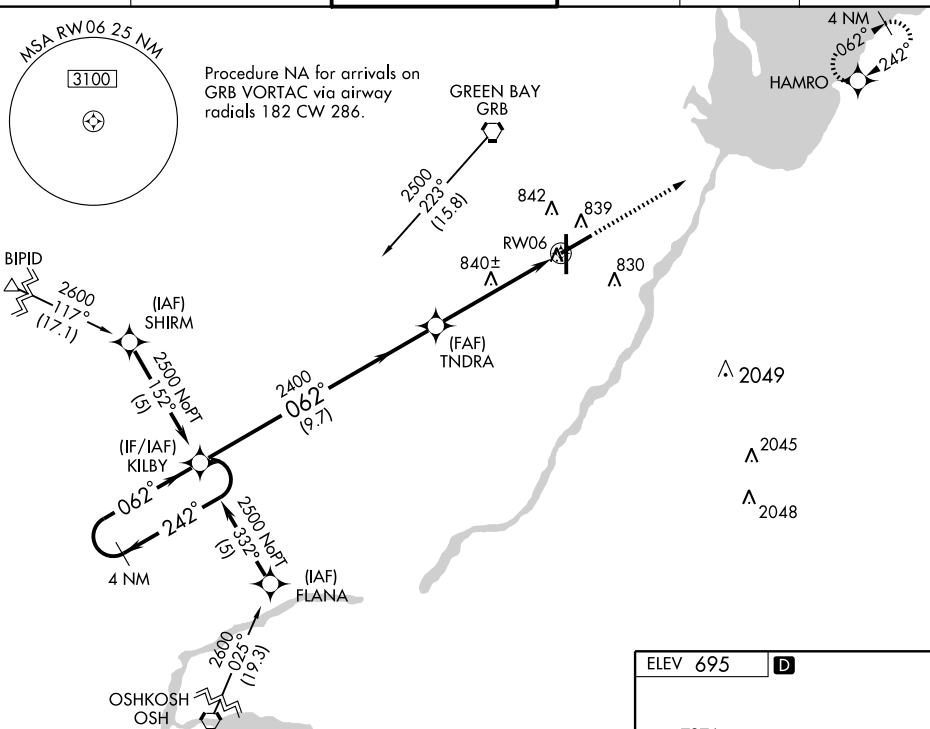


4 NM
Holding Pattern

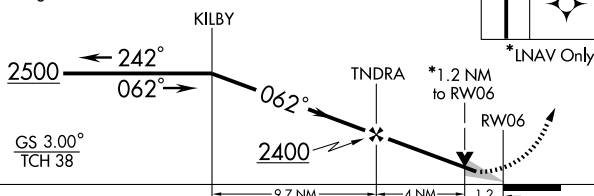

ELEV 695

D

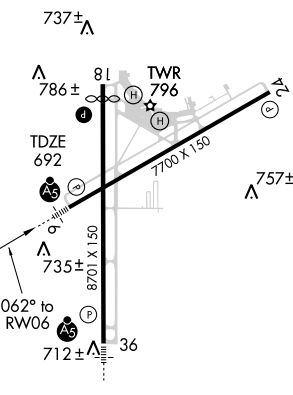

REIL Rwy 18
HIRL Rwy 6-24 and 18-36

WAAS CH 42802 W18A	APP CRS 182°	Rwy Idg 8202 TDZE 695 Apt Elev 695
--	------------------------	---

RNAV (GPS) RWY 18

GREEN BAY/AUSTIN STRAUBEL INTL (GRB)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 47° C (117° F). DME/DME RNP-0.3 NA.


MISSED APPROACH: Climb to 2500
direct SENNA and hold.

ATIS
124.1

GREEN BAY APP CON★
119.4 338.2



GREEN BAY TOWER ★
118.7 (CTAF) 257.8

GND CON
121,9

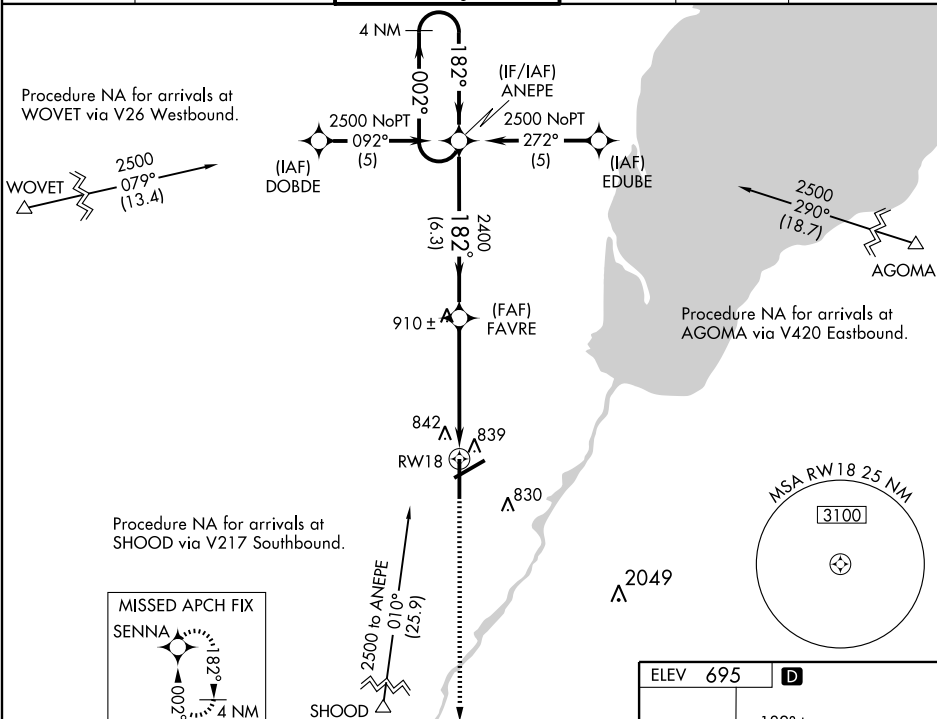CLNC DEL
121.75UNICOM
122.95

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

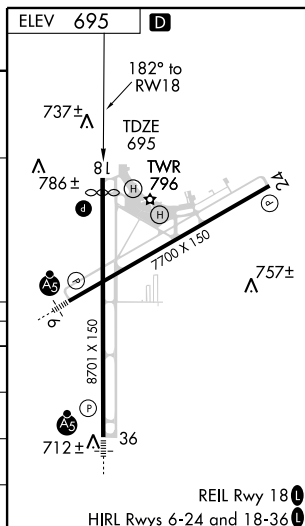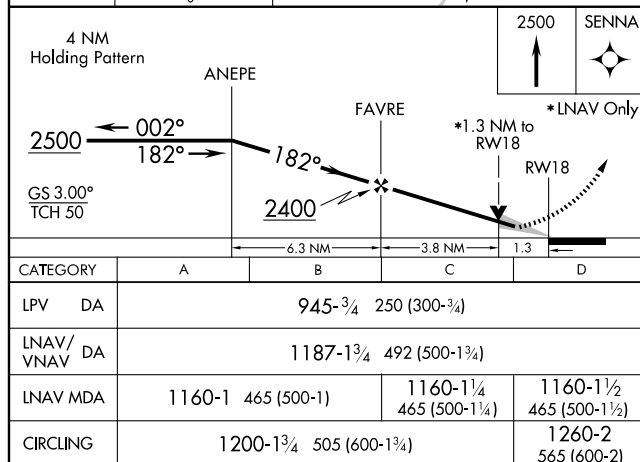

GREEN BAY, WISCONSIN
Amdt 1 09295

44°29'N - 88°08'W

GREEN BAY/ AUSTIN STRAUBEL INTL (GRB)

RNAV (GPS) RWY 18

WAAS CH 99515 W24A	APP CRS 242°	Rwy Idg TDZE Apt Elev	7700 681 695
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 24

GREEN BAY/AUSTIN STRAUBEL INTL (GRB)





For uncompensated Baro-VNAV systems, LNAV/VNAV
NA below -16° C (4° F) or above 47° C (116° F).
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2500 direct KILBY
and hold.



ATIS 124.1	GREEN BAY APP CON ★ 119.4 338.2	GREEN BAY TOWER ★ 118.7 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.75	UNICOM 122.95
----------------------	---	--	-------------------------	---------------------------	-------------------------

Procedure NA for arrivals at
SPRYS via V9 Northbound.


Procedure NA for arrivals at
BECKY via V55 Westbound.

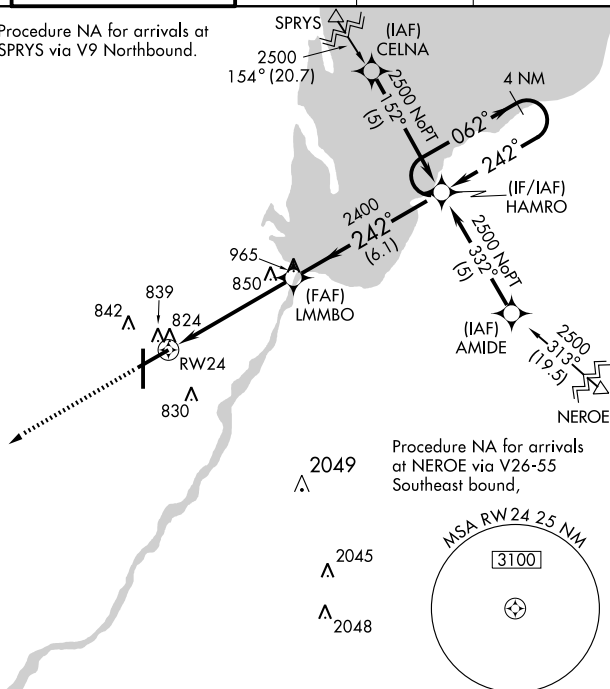

ELEV 695

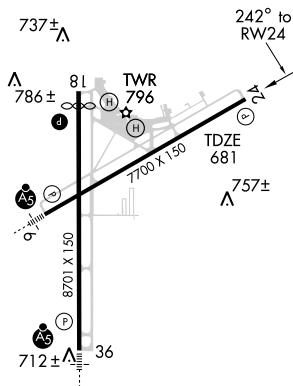

* LNAV Only



CATEGORY	A	B	C	D
LPV DA	970-1 289 (300-1)			
LNAV/VNAV DA	1143-1½ 462 (500-1½)			
LNAV MDA	1100-1	419 (500-1)	1100-1¼	419 (500-1¼)
CIRCLING	1200-1	505 (600-1)	1200-1½ 505 (600-1½)	1260-2 565 (600-2)

WAAS CH 42902 W36A	APP CRS 002°	Rwy Idg TDZE Apt Elev	8701 684 695
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 36

GREEN BAY/AUSTIN STRAUBEL INTL (GRB)



ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below
-16°C (4°F) or above 47°C (116°F).
DME/DME RNP-0.3 NA.
Inoperative table does not apply to LNAV Cat. D.

MALSR

MISSED APPROACH: Climb to
2500 direct ANEPE and hold.

ATIS 124.1	GREEN BAY APP CON* 119.4 338.2	GREEN BAY TOWER* 118.7 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.75	UNICOM 122.95
----------------------	--	---	-------------------------	---------------------------	-------------------------

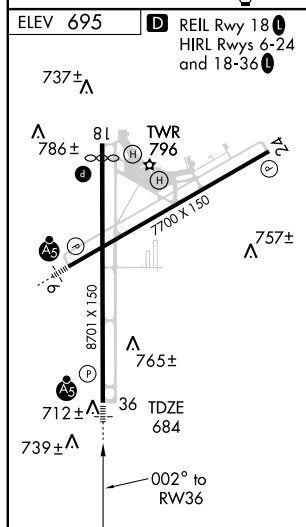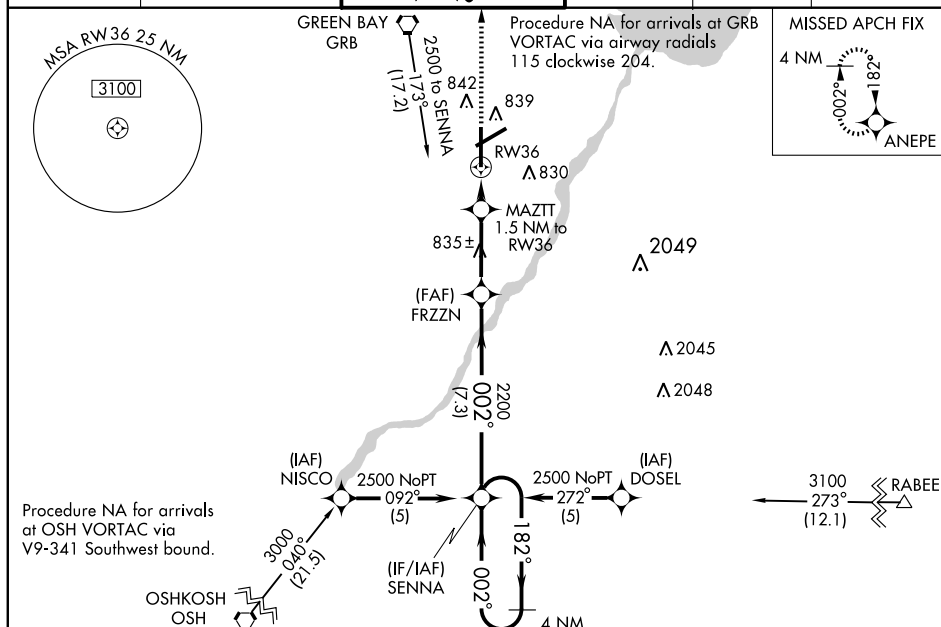

2500 ANEPE		4 NM Holding Pattern	
* LNAV only		MAZTT 1.5 NM to RW36	
* 0.9 NM to RW36		* 1.200	
0.9 0.6 NM 3.1 NM 7.3 NM		182° 002° 2500	
CATEGORY		A B C D	
LPV DA		884/24 200 (200-½)	
LNAV/VNAV DA		1097/50 413 (500-1)	
LNAV MDA		1020/24 336 (400-½)	
CIRCLING		1200-1 505 (600-1)	
		1200-1½ 505 (600-1½)	
		1260-2 565 (600-2)	

GREEN BAY, WISCONSIN
Amdt 3 09267

GREEN BAY/AUSTIN STRAUBEL INTL (GRB)
44° 29' N - 88° 08' W
RNAV (GPS) RWY 36

VORTAC GRB 115.5 Chan 102	APP CRS 145°	Rwy Idg TDZE Arpt Elev	N/A N/A 695
---	------------------------	------------------------------	--





VOR-A

GREEN BAY/AUSTIN STRAUBEL INTL (GRB)

▼
ASR

MISSED APPROACH: Climb to 1500 then climbing
right turn to 2500 direct GRB VORTAC and hold.

ATIS 124.1	GREEN BAY APP CON ★ 119.4 338.2	GREEN BAY TOWER ★ 118.7 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.75	UNICOM 122.95
----------------------	---	--	-------------------------	---------------------------	-------------------------

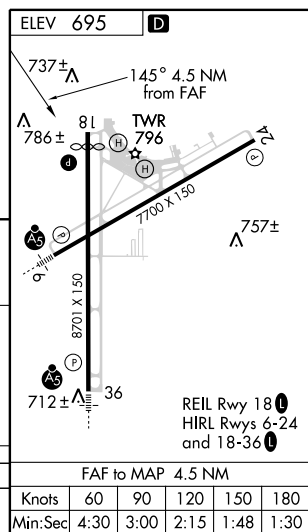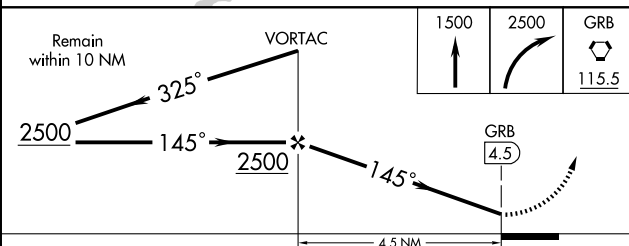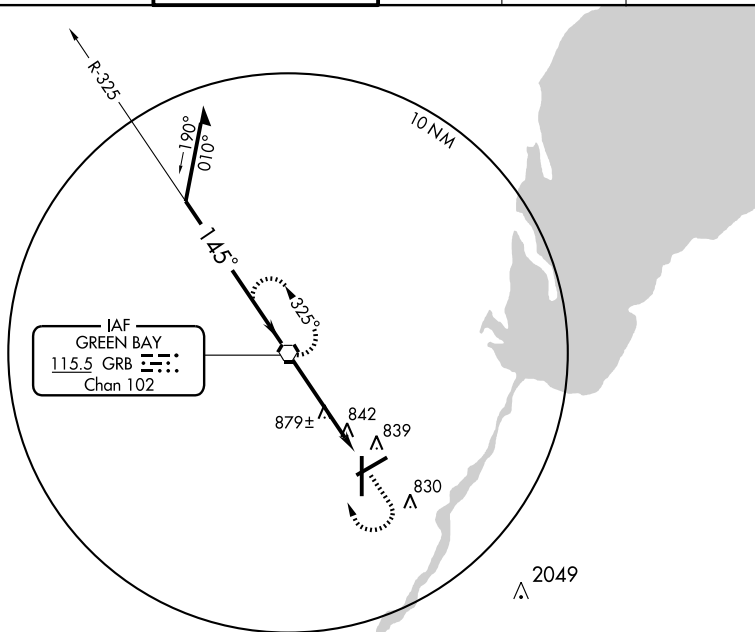

CATEGORY	A	B	C	D	FAF to MAP 4.5 NM					
CIRCLING	1200-1 505 (600-1)		1200-1½ 505 (600-1½)	1260-2 565 (600-2)	Knots	60	90	120	150	180
					Min:Sec	4:30	3:00	2:15	1:48	1:30

GREEN BAY, WISCONSIN
Orig-A 09071

GREEN BAY/AUSTIN STRAUBEL INTL (GRB)

44° 29'N - 88° 08'W

VOR-A



EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010


VORTAC GRB 115.5 Chan 102	APP CRS 333°	Rwy Idg TDZE Apt Elev	8701 684 695
---	------------------------	-----------------------------	---

VOR/DME or TACAN RWY 36


GREEN BAY/AUSTIN STRAUBEL INTL (GRB)

 ASR Inoperative table does not apply.	 MALSR	MISSED APPROACH: Climb to 3000 direct GRB VORTAC then via GRB VORTAC R-333 to TIBBS/GRB 10 DME and hold.
---	--	---

ATIS 124.1	GREEN BAY APP CON * 119.4 338.2	GREEN BAY TOWER * 118.7 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.75	UNICOM 122.95
-----------------------------	--	---	--------------------------------	----------------------------------	--------------------------------

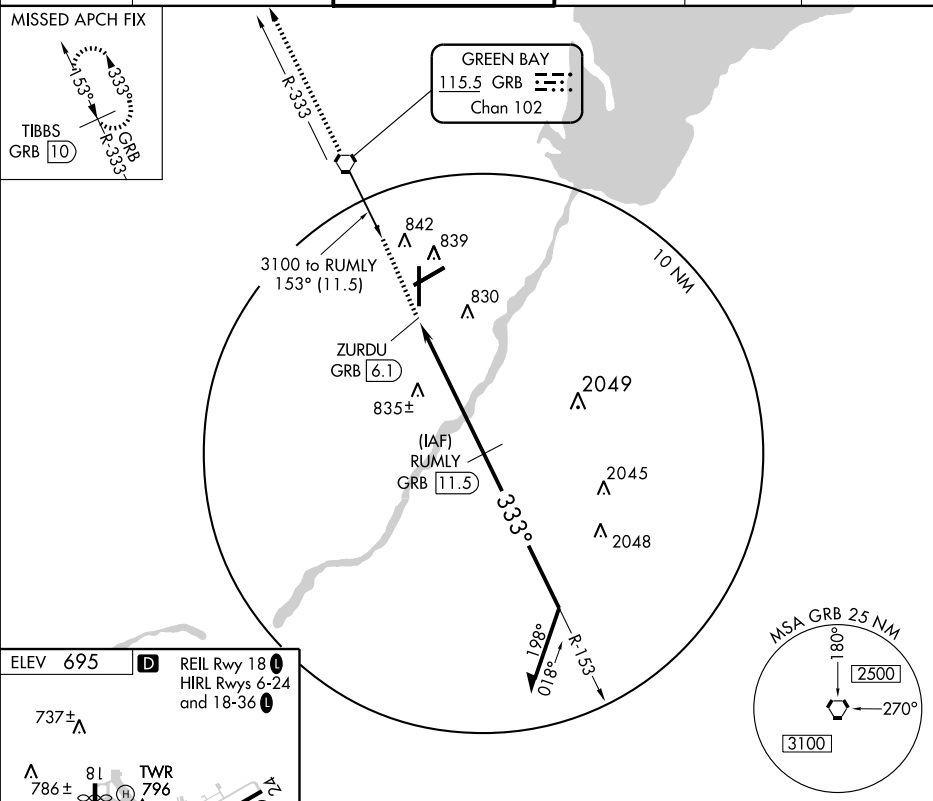

ELEV 695	D REIL Rwy 18 HIRL Rwy 6-24 and 18-36
-----------------	---

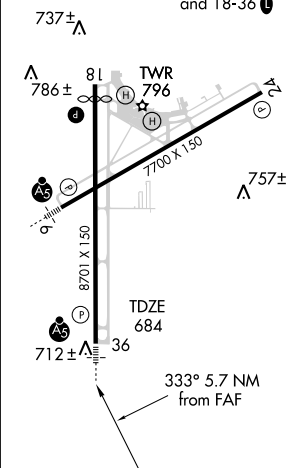

3000	GRB 115.5	GRB R-333	TIBBS GRB 10	RUMLY GRB 11.5	Remain within 10 NM
3100	ZURDU GRB 6.1	GRB 6.9	2600	153°	333°
0.4	0.8 NM	4.6 NM	3.06°	TCH 50	
CATEGORY	A	B	C	D	
S-36	1100/50 416 (500-1)				
CIRCLING	1200-1	505 (600-1)	1200-1½ 505 (600-1½)	1260-2 565 (600-2)	

GREEN BAY

AUSTIN STRAUBEL INTL (GRB) 7 SW UTC-6(-5DT) N44°29.08' W88°07.78'

GREEN BAY

695 B S4 FUEL 100LL, JET A OX 1, 3 LRA ARFF Index—See Remarks
NOTAM FILE GRB

H-2K, L-31A

IAP, AD

RWY 18-36: H8701X150 (CONC-GRVD) S-95, D-165, 2S-175, 2D-275 HIRL

RWY 18: REIL. PAPI(P4R)—GA 3.0° TCH 54'. Thld displcd 499'. Road.

Rgt tfc.

RWY 36: MALSR. PAPI(P4L)—GA 3.0° TCH 50'.

RWY 06-24: H7700X150 (CONC-GRVD) S-90, D-160, 2S-175,
2D-260 HIRL

RWY 06: MALSR. PAPI(P4L)—GA 3.0° TCH 38'.

RWY 24: PAPI(P4L)—GA 3.0° TCH 50'. Tower.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 18	06-24	2692
RWY 24	18-36	6050
RWY 36	06-24	4932

RUNWAY DECLARED DISTANCE INFORMATION

RWY 18: TORA-8701 TODA-8701 ASDA-8701 LDA-8201

RWY 36: TORA-8201 TODA-8201 ASDA-8201 LDA-8701

AIRPORT REMARKS: Attended 1100-0400Z†. Deer and birds on and in/ovf
arpt. Request voluntary compliance in avoiding noise sensitiveareas N and E of arpt between midnight and 6 a.m. Rwy 18 touch
and go tfc to use rgt tfc during hrs when twr clsd. Twys N and E notavbl for air carrier ops with more than 30 passenger seats. Class I, ARFF Index C. ARFF index D available with
prior permission call arpt manager at 920-498-4820. Rwy 06 touchdown runway visual range avbl. Rwy 36
touchdown runway visual range avbl. When twr is clsd the preferred rwy is preset on low or med ints; to
increase ints and ACTIVATE HIRL Rwy 06-24 and Rwy 18-36; MALSR Rwy 06, Rwy 36, REIL Rwy 18 and PAPI
Rwy 18—CTAF. Flight Notification Service (ADCUS) available.

WEATHER DATA SOURCES: ASOS (920) 494-7140. HIWAS 115.5 GRB. LLWAS.

COMMUNICATIONS: CTAF 118.7 ATIS 124.1 UNICOM 122.95

GREEN BAY RCO 122.55 122.2 (GREEN BAY RADIO)

① GREEN BAY APP CON 119.4 (1130-0530Z†) ① GREEN BAY DEP CON 126.55 (1130-0530Z†)

① MINNEAPOLIS CENTER APP/DEP CON 125.55 (0530-1130Z†)

GREEN BAY TOWER 118.7 (1130-0530Z†) GND CON 121.9 CLNC DEL 121.75

AIRSPACE: CLASS C svc 1130-0530Z† ctc APP CON other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE GRB. VHF/DF ctc GREEN BAY RADIO.

GREEN BAY (H) VORTACW 115.5 GRB Chan 102 N44°33.31' W88°11.69' 146° 5.1 NM to fld. 767/1E.
HIWAS.


FAMIS NDB (LOM) 356 GR N44°26.43' W88°14.38' 063° 5.4 NM to fld. LOM unmonitored.

DEPRE NDB (MHW/LOM) 332 SG N44°23.91' W88°07.97' 004° 5.2 NM to fld. LOM unmonitored.

ILS/DME 109.5 I-GRB Chan 32 Rwy 06 Class IE. LOM FAMIS NDB. LOC/GS/LOM unmonitored.

ILS 109.9 I-SGZ Rwy 36 Class IE. LOM DEPRE NDB. LOC/GS/LOM unmonitored.

ASR (1130-1730Z†)

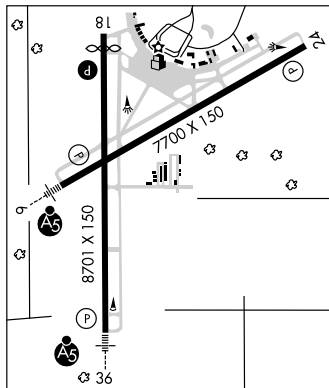

GUTZMER'S TWIN OAKS (See WHITEWATER)

HAHN SKY RANCH (See WEST BEND)

HARTFORD MUNI (HXF) 2 NW UTC-6(-5DT) N43°20.95' W88°23.48'

CHICAGO

1069 B S4 FUEL 100LL, MOGAS TPA—See Remarks NOTAM FILE GRB

L-28H

RWY 11-29: H3000X75 (ASPH) S-8 MIRL

IAP

RWY 11: Road. Rwy 29: Trees.

RWY 18-36: 2259X215 (TURF)

RWY 18: Road.

AIRPORT REMARKS: Unattended. Glider and ultralight activity on arpt. Slight downhill slope ldg Rwy 18. Rwy 36 +78'
water twr 3885' from apch end. TPA for ultralight acft 1569(500). Rgt tfc pattern ultralight and glider acft. Rwy
18-36 thld marked with orange and white wooden A-frames.

COMMUNICATIONS: CTAF/UNICOM 123.0

① MILWAUKEE APP/DEP CON 125.35

RADIO AIDS TO NAVIGATION: NOTAM FILE MKE.

BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01' W88°17.06' 339° 14.7 NM to fld. 1080/2E.

HIWAS.

WEST BEND (T) VOR 109.8 BJB N43°25.32' W88°07.52' 251° 12.4 NM to fld. NOTAM FILE ETB.

NDB (MHW) 200 HXF N43°20.86' W86°23.71' at fld.

VOR BJB	APP CRS	Rwy Idg	N/A
109.8	251°	TDZE	N/A
		Apt Elev	1070



VOR or GPS-A
HARTFORD MUNI (HXF)

A NA Obtain West Bend altimeter setting on CTAF 122.8; when not received, use Milwaukee (General Mitchell) altimeter setting.


MISSED APPROACH: Climb to 2100 then climbing right turn to 2800 via BJB R-251 direct BJB VOR and hold.

MILWAUKEE APP CON
125.35 307.0

UNICOM
123.0 (CTAF)

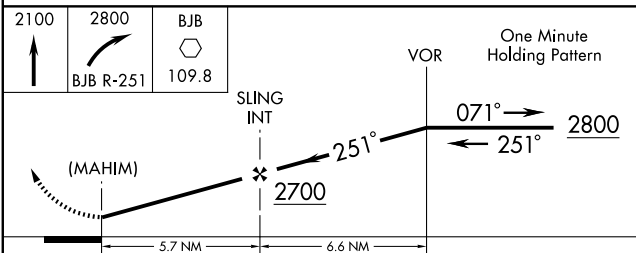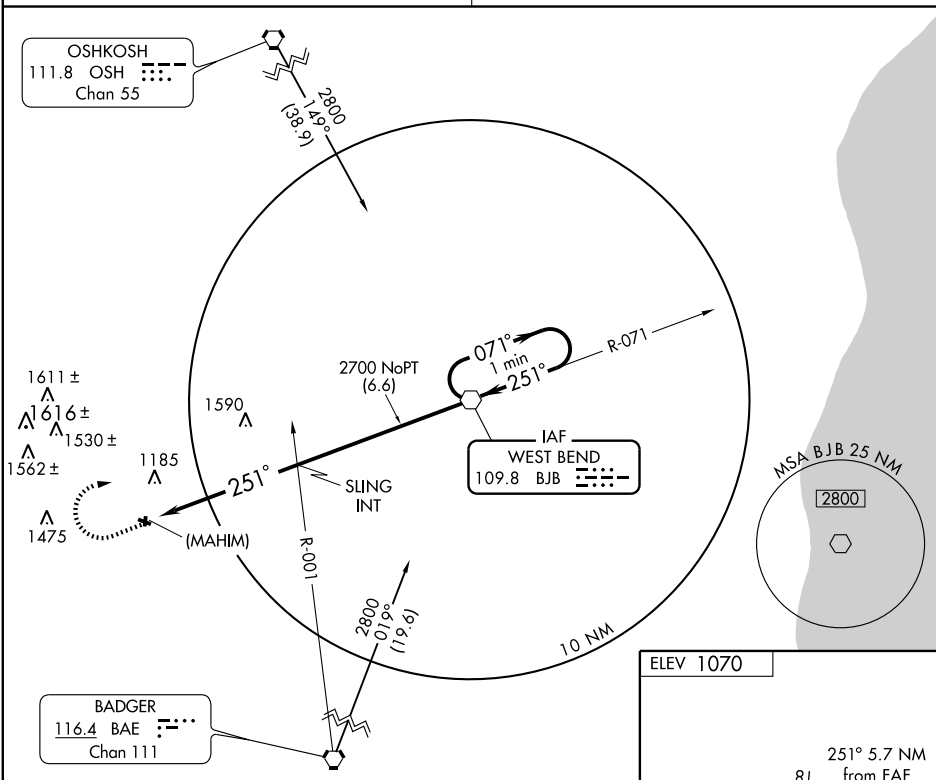

CATEGORY	A	B	C	D
CIRCLING	1600-1	530 (600-1)	1600-1½ 530 (600-1½)	NA
MILWAUKEE (GENERAL MITCHELL) ALTIMETER SETTING MINIMUMS				
CIRCLING	1700-1	630 (700-1)	1700-1¼ 630 (700-1¼)	NA

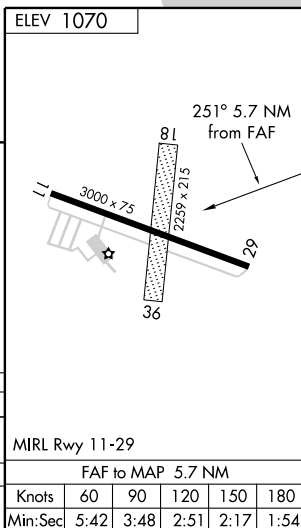

290

WISCONSIN

HAYWARD

N46°01.14' W91°26.78'

NOTAM FILE HYR.

GREEN BAY

(L) VOR/DME 113.4

HYR

Chan 81

at Sawyer Co. 1208/3E.

ASOS

L-141

VOR portion unusable blo 10000'.

DME portion unusable; 160°-050° blo 4000' byd 20 NM; 051°-160° blo 9000' byd 13 NM.

RCO 122.1R 113.4T (GREEN BAY RADIO)

HAYWARD

SAWYER CO

(HYR)

2 NE

UTC-6(-5DT)

N46°01.52' W91°26.66'

GREEN BAY

1216

B

FUEL 100LL, JET A

NOTAM FILE HYR

H-21, L-141

RWY 02-20: H5002X100 (ASPH)

S-40, D-65, 2S-82

MIRL

IAP

RWY 02: REIL. PAPI (P4L)—GA 3.0° TCH 38'. Road.

RWY 20: REIL. PAPI(P4L). GA 3.0° TCH 36'. Trees.

RWY 16-34: 1090X110 (TURF)

RWY 16: Trees.

RWY 34: Trees.

AIRPORT REMARKS: Attended Jun-Sep Mon-Sat 1300-0100Z‡, Sun 1400-0100Z‡, Oct-May Mon-Sat 1300-2300Z‡, Sun 1400-0100Z‡. Rwy 16-34 CLOSED Dec 1 thru Apr 15. Deer on and infov arpt. ACTIVATE MIRL Rwy 02-20, PAPI Rwys 02, 20, REIL Rwy 02 and 20—CTAF. Rwy 20 PAPI OTS indef. Rwy 16-34 thlds marked with orange steel A-frames.

WEATHER DATA SOURCES: ASOS 113.4 HYR (715) 634-6138.

COMMUNICATIONS: CTAF/UNICOM 122.8

HAYWARD RCO 122.1R 113.4T (GREEN BAY RADIO)

MINNEAPOLIS CENTER APP/DEP CON 126.45

RADIO AIDS TO NAVIGATION: NOTAM FILE HYR.

HAYWARD (L) VOR/DME 113.4

HYR

Chan 81

N46°01.14' W91°26.78'

at fld. 1208/3E.

ASOS.

SEELEY NDB (MHW) 344

SLY

N46°06.73' W91°23.08'

205° 5.8 NM to fld. NOTAM FILE GRB.

NDB unusable beyond 15 NM.

ILS/DME 108.5

I-HTY

Chan 22

Rwy 20.

LOC only.

HILLSBORO

JOSHUA SANFORD FLD

(HBW)

1 NE

UTC-6(-5DT)

N43°39.40' W90°19.69'

CHICAGO

938

NOTAM FILE GRB

L-28G

RWY 05-23: H3070X46 (ASPH)

LIRL (NSTD)

RWY 05: Thld dsplcd 733'. Fence.

RWY 23: Trees.

AIRPORT REMARKS: Unattended. Birds on and infov arpt. Rwy 05 thld lgts black (obscured) and green. Rwy 23 thld lgts located 245' from relocated thld. ACTIVATE LIRL Rwy 05-23—CTAF.

COMMUNICATIONS: CTAF 122.9

CHICAGO CENTER APP/DEP CON 133.3

RADIO AIDS TO NAVIGATION: NOTAM FILE GRB.

LONE ROCK (L) VORW/DME 112.8

LNR

Chan 75

N43°17.66' W90°07.99'

339°

23.3 NM to fld.

HORLICK

N42°45.73' W87°48.88'

NOTAM FILE RAC.

CHICAGO

(T) VORW/DME 117.7

HRK

Chan 124

HRK

at John H. Batten. 669/2W.

ASOS

L-28H, A

VOR portion unusable 090°-213°.

IOLA

CENTRAL CO

(68C)

4 E

UTC-6(-5DT)

N44°30.33' W89°01.51'

GREEN BAY

876

S4

TPA—1876(1000)

NOTAM FILE GRB

RWY 04-22: 2530X60 (TURF)

RWY 04: Trees.

RWY 22: Tree.

RWY 09-27: 1800X120 (TURF)

RWY 09: Trees.

RWY 27: Tree.

RWY 13-31: 1745X130 (TURF)

RWY 13: Trees.

RWY 31: Trees.

AIRPORT REMARKS: Unattended. Arpt CLOSED to wheeled acft when rwys covered with snow or ice. Ski tfc use Rwy 04-22 only. Deer on and infov arpt. Rwy 04-22 marked with yellow barrels. Rwy 09-27 marked with yellow cones. Rwy 13-31 marked with yellow barrels.

COMMUNICATIONS: CTAF 122.9

IOWA COUNTY

(See MINERAL POINT)

J. DOUGLAS BAKE MEML

(See OCONTO)

JANA

(See EDGERTON)

LOC/DME I-HTY 108.5 Chan 22	APP CRS 205°	Rwy Idg TDZE Apt Elev	5002 1216 1216
---	------------------------	-----------------------------	---

LOC/DME RWY 20

HAYWARD/SAWYER COUNTY (HYR)



▼
▲ NA
Visibility reduction by helicopters NA. When local altimeter setting not received, use John F Kennedy Memorial altimeter setting and increase all MDA 160 feet. Increase S-20 Cat C visibility ¼ mile, Circling Cat B ½ mile and Circling Cat C ½ mile.

MISSED APPROACH: Climb to 2200 then climbing right turn to 3300 on heading 060° and I-HTY northeast course to OBBEY/I-HTY 6.3 DME and hold.

ASOS
113.4

MINNEAPOLIS CENTER
126.45 276.4

UNICOM
122.8 (CTAF) ①

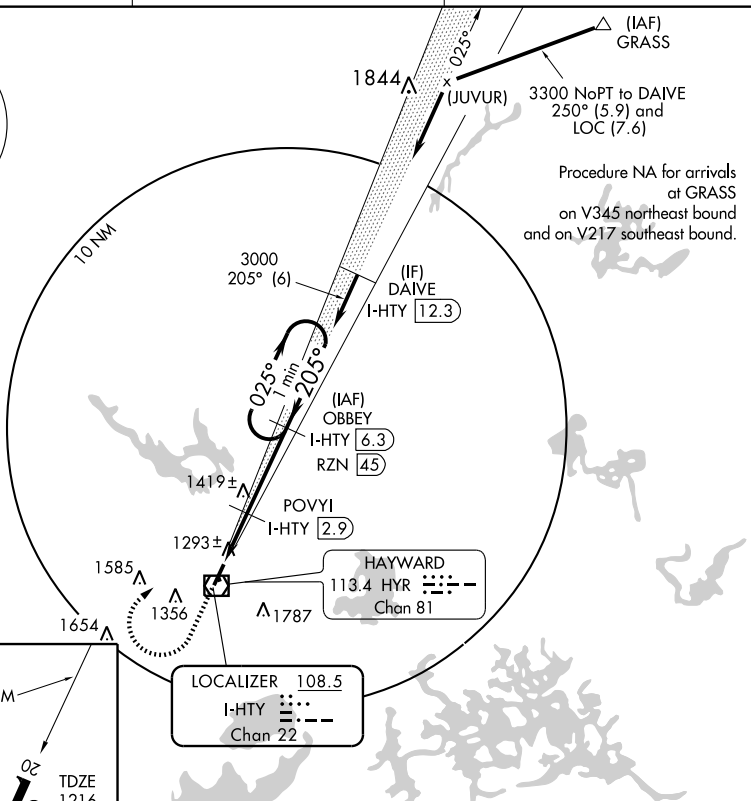


SIREN
109.4 RZN Chan 31

ELEV 1216

205° 5.4 NM
from FAF

TDZE
1216



REIL Rwy 2 and 20 ①
MIRL Rwy 2-20 ①

2200	3300	I-HTY NE CRS	OBBEY I-HTY 6.3	OBBEY I-HTY 6.3	One Minute Holding Pattern
↑	hdg 060°				
		POVYI RW20 I-HTY 0.9	I-HTY 2.9	025° → 3300	
			205°	← 205°	
			1900	3000	
			≤ 3.06° TCH 36		
		2 NM	3.4 NM		
CATEGORY	A	B	C	D	
S-20	1560-1	344 (400-1)		1560-1¼ 344 (400-1¼)	
CIRCLING	1880-1	664 (700-1)	2000-2¼ 784 (800-2¼)	2120-3 904 (1000-3)	


WAAS CH 90400 W02A	APP CRS 025°	Rwy Idg TDZE 1214 Apt Elev 1216
--	------------------------	---

RNAV (GPS) RWY 2

HAYWARD/SAWYER COUNTY (HYR)

<p>Baro-VNAV NA when using John F. Kennedy Memorial altimeter setting. DME/DME RNP-0.3 NA.</p> <p>If local altimeter setting not received, use John F. Kennedy Memorial altimeter setting and increase all DAs/MDAs 160 feet. Visibility reduction by helicopters NA.</p> <p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (116°F).</p>	<p>MISSED APPROACH: Climb to 3300 direct DAIVE and hold.</p>
---	---

ASOS 113.4	MINNEAPOLIS CENTER 126.45 276.4	UNICOM 122.8 (CTAF) 1
----------------------	---	--

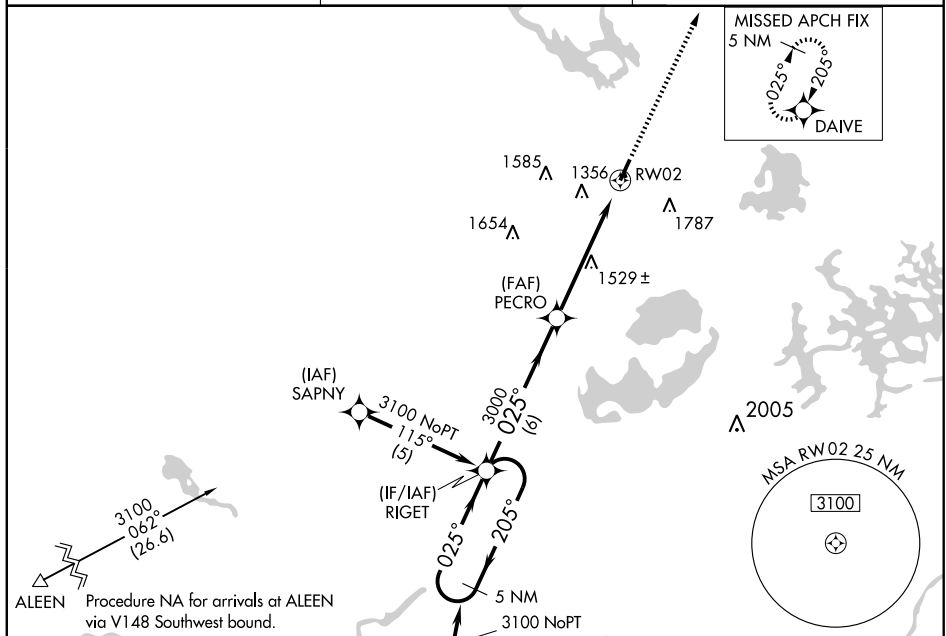

CATEGORY	A	B	C	D
LPV DA	1514-1 300 (300-1)			
LNAV/VNAV DA	1916-2	702 (700-2)	1916-2¼ 702 (700-2¼)	
LNAV MDA	1780-1 566 (600-1)	1780-1½ 566 (600-1½)	1780-1¾ 566 (600-1¾)	
CIRCLING	1880-1 664 (700-1)	2000-2¼ 784 (800-2¼)	2120-3 904 (1000-3)	

WAAS CH 49000 W20A	APP CRS 205°	Rwy Idg TDZE Apt Elev	5002 1216 1216
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 20

HAYWARD/SAWYER COUNTY (HYR)


Baro-VNAV NA when using John F. Kennedy Memorial altimeter setting. If local altimeter setting not received, use John F. Kennedy Memorial altimeter setting and increase all DAs/MDAs 160 feet. Visibility reduction by helicopters NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (116°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3100 direct RIGET and hold.


ASOS
113.4

MINNEAPOLIS CENTER
126.45 276.4


UNICOM
122.8 (CTAF) 1

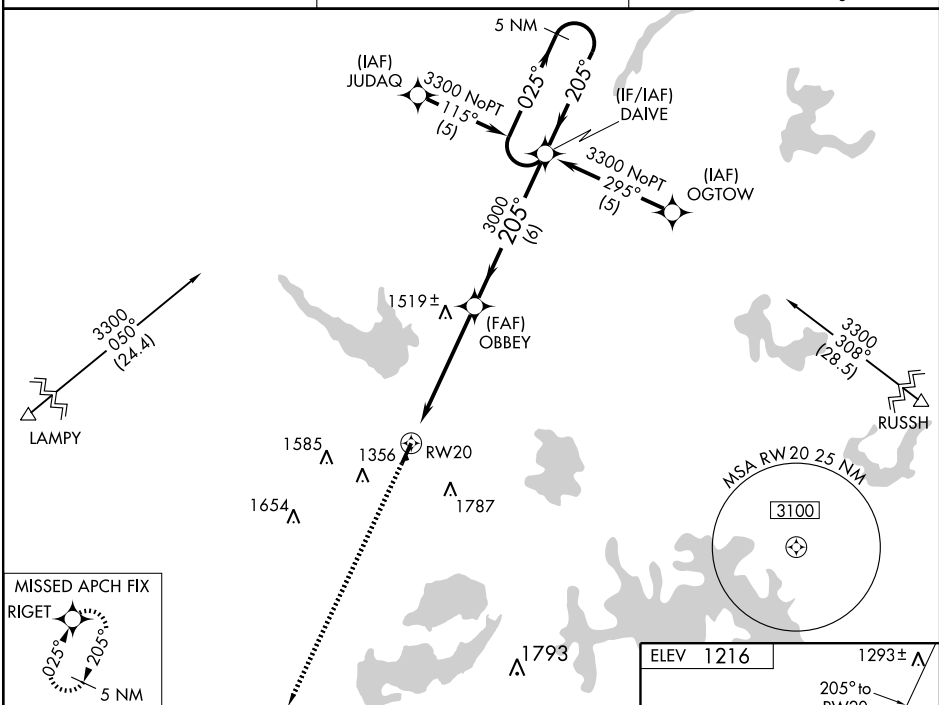

3100 RIGET



CATEGORY	A	B	C	D
LPV DA	1511-1 295 (300-1)			
LNAV/VNAV DA	1750-2 534 (600-2)			
LNAV MDA	1780-1 564 (600-1)	1780-1½ 564 (600-1½)	1780-1¾ 564 (600-1¾)	
CIRCLING	1880-2 664 (700-2)	2000-2¼ 784 (800-2¼)	2120-3 904 (1000-3)	

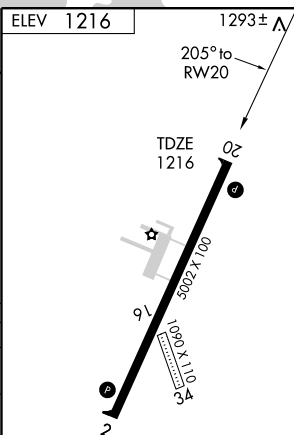

REIL Rwy 2 and 20 1
MIRL Rwy 2-20 1

- 42° 36.5' N

--	--

89°02.0'W

JANESVILLE, WISCONSIN
JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)

EC-3. 23 SEP 2010 to 21 OCT 2010

JANESVILLE N42°33.48' W89°06.32' NOTAM FILE FEP.

(L) **VOR/DME** 114.3 JVL Chan 90 035° 4.7 NM to Southern Wisconsin Rgnl. 931/3E.

VOR portion unusable 001°–089°, 282°–360° byd 30 NM blo 3000'.

DME unusable 130°–150° byd 30 NM blo 4000'.

RCO 122.1R 114.3T (GREEN BAY RADIO)

CHICAGO

L-28H

JANESVILLE

SOUTHERN WISCONSIN RGNL (JVL) 3 SW UTC-6(-5DT) N42°37.22' W89°02.49'

808 B S4 **FUEL** 100LL, JET A TPA—1808(1000) Class IV, ARFF Index A

NOTAM FILE JVL

RWY 14-32: H7301X150 (CONC) S-85, D-190, 2S-175, 2D-400 HIRL

RWY 14: REIL, PAPI(P4L)—GA 3.0° TCH 60'.

RWY 32: MALSR. VASI(V4L)—GA 3.0° TCH 51'.

RWY 04-22: H6700X150 (ASPH) S-95, D-130, 2S-165, 2D-230 HIRL

RWY 04: MALSR. PAPI(P4L)—GA 3.0° TCH 43'.

RWY 22: REIL VASI(V4L)—GA 3.0° TCH 60'. Tree.

RWY 18-36: H5003X75 (ASPH) S-40, D-50, 2D-80 MIRL

RWY 18: Road.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 04: TORA-6700 TODA-6700 ASDA-6700 LDA-6700

RWY 14: TORA-7301 TODA-7301 ASDA-7301 LDA-7301

RWY 18: TORA-5003 TODA-5003 ASDA-5003 LDA-5003

RWY 22: TORA-6700 TODA-6700 ASDA-6700 LDA-6700

RWY 32: TORA-7301 TODA-7301 ASDA-7301 LDA-7301

RWY 36: TORA-5003 TODA-5003 ASDA-5003 LDA-5003

AIRPORT REMARKS: Attended continuously. Closed to scheduled air carrier ops with greater than 9 passenger seats and unscheduled air carrier ops greater than 30 passenger seats. 90-day PPR, call 608-757-5768. Lgt sport acft with cruise speed of 60 mph or less enter tfc pat at 500' AGL. Rwy 32 and Rwy 36 apch ends are closely aligned. Verify correct rwy and compass heading prior to departure. When twr clsd HIRL Rwy 04-22 preset on low ints; to incr ints and ACTIVATE MALSR Rwy 04 and Rwy 32, PAPI Rwy 04, HIRL Rwy 14-32, MIRL Rwy 18-36, REIL Rwy 14, PAPI Rwy 14 and VASI Rwy 32—CTAF. VASI Rwy 22 opr 24 hrs.

WEATHER DATA SOURCES: AWOS-3 (608) 758-1723. LAWRS (1200-0300Z†).

COMMUNICATIONS: CTAF 118.8 ATIS 128.25 UNICOM 122.95

JANESVILLE RCO 122.1R 114.3T (GREEN BAY RADIO)

Ⓡ **ROCKFORD APP/DEP CON** 121.0 **CLNC DEL** 121.65 (when twr clsd)

JANESVILLE TOWER 118.8 (1200-0300Z†) **GND CON/CLNC DEL** 121.65 (1200-0300Z†)


AIRSPACE: CLASS D svc 1200-0300Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE FEP.

JANESVILLE (L) VOR/DME 114.3 JVL Chan 90 N42°33.48' W89°06.32' 034° 4.7 NM to fld. 931/3E.

ILS 109.1 I-JVL Rwy 04. Class IE.

ILS/DME 111.35 I-REE Chan 50(Y) Rwy 32. Class IE. ILS/DME unmonitored.

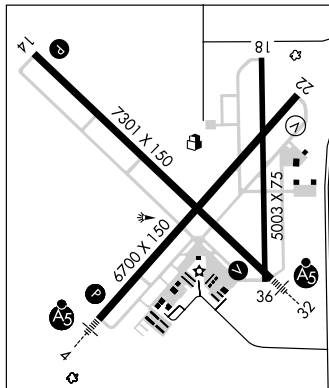

JOHN F KENNEDY MEML (See ASHLAND)

JOHN H. BATTEN (See RACINE)

JUNEAU N43°25.74' W88°42.13' NOTAM FILE UNU.

NDB (MHW) 344 UNU at Dodge Co.

CHICAGO

L-28H

HOT SPOTS

An "airport surface hot spot" is a location on an aerodrome movement area with a history or potential risk of collision or runway incursion, and where heightened attention by pilots/drivers is necessary.

A "hot spot" is a runway safety related problem area on an airport that presents increased risk during surface operations. Typically it is a complex or confusing taxiway/taxiway or taxiway/runway intersection. The area of increased risk has either a history of or potential for runway incursions or surface incidents, due to a variety of causes, such as but not limited to: airport layout, traffic flow, airport marking, signage and lighting, situational awareness, and training. Hot spots are depicted on airport diagrams as open circles or polygons designated as "HS 1", "HS 2", etc. and tabulated in the list below with a brief description of each hot spot. Hot spots will remain charted on airport diagrams until such time the increased risk has been reduced or eliminated.

CITY/AIRPORT	HOT SPOT	DESCRIPTION*
ALTON/ST. LOUIS, IL		
ST. LOUIS RGNL (ALN)	HS 1	Twy C and Rwy 11, rwy in close proximity of ramp.
	HS 2	Twy A and Rwy 17-35, rwy in close proximity of ramp.
CHAMPAIGN-URBANA, IL		
UNIVERSITY OF ILLINOIS- WILLARD (CMI)	HS 1	Rwy 18 hold short line set back on Twy C.
	HS 2	Complex twy/twy int.
	HS 3	Rwy 36 hold short lines proximity on Twy B and Twy B2.
CHICAGO, IL		
CHICAGO-O'HARE INTL (ORD)	HS 1	Twy R between Rwy 09R-27L and Rwy 04L-22R.
	HS 2	Rwy 27L and Rwy 04L-22R.
	HS 3	Twy B to Twy H int close proximity to Rwy 09R-27L.
	HS 4	Rwy 09R-27L and Twy A1.
	HS 5	Int of Twy U5 and Twy U in close proximity to Rwy 09R-27L.
	HS 6	Twy U and Twy H close proximity to Rwy 09R-27L.
	HS 7	Twy T10 and Twy M.
	HS 8	Twy S5 and Rwy 04R.
	HS 9	Int of Twy E, Twy G and Twy Z close proximity of rws.
	HS 10	Landing Rwy 27R first available turn off is Twy C1 6500' from Rwy 27R thr.
	HS 11	Rwy 14 R and Rwy 10-28. Rwy 14R now ends north of active Rwy 10-28. Rwy 10-28 arrivals - There is no exit from Rwy 10-28 onto Rwy 14R.
CHICAGO, IL		
MIDWAY INTL (MDW)	HS 1	Displaced thr Rwy 04L. Twy W turn onto Rwy 04L.
	HS 2	Int of Rwy 04L and Twy F.
	HS 3	Rwy 31L hold short line on Twy K.
	HS 4	Rwy 31R hold short line set back on Twy Y terminal side.
	HS 5	Int of Rwy 04R and Twy F.
CHICAGO/PROSPECT HEIGHTS/ WHEELING, IL		
CHICAGO EXECUTIVE (PWK)	HS 1	Complex int in close proximity of rws.
	HS 2	Twy int in close proximity of Rwy 06.
	HS 3	Rwy 06 hold short line set back on Twy T.
	HS 4	Rwy 06 hold short line set back and close to Hangar 4 ramp.
JANESVILLE, WI		
SOUTERN WISCONSIN RGNL (JVL)	HS 1	Rwy 32 and Rwy 36 apch ends are closely aligned and may be confused when lining up for departure.
LA CROSSE, WI		
LA CROSSE MUNI (LSE)	HS 1	Rwy 36 hold position set back on Twy F.

(SEE CONTINUATION PAGE FOR MORE LISTINGS)

HOT SPOTS

(CONTINUED)

CITY/AIRPORT	HOT SPOT	DESCRIPTION*
MILWAUKEE, WI		
GENERAL MITCHELL INTL (MKE)	HS 1	Twy E and Twy V at Rwy 19R and Rwy 25R.
	HS 2	Twy M and Rwy 01L-19R.
MOLINE, IL		
QUAD CITY INTL (MLI)	HS 1	Twys in close proximity to Rwy 23.
	HS 2	Wrong rwy departure risk.
	HS 3	Non-standard Rwy 13-31 hold position.
	HS 4	Confusing twy int.
	HS 5	Hold lines for Twy L appear abruptly.
SPRINGFIELD, IL		
ABRAHAM LINCOLN		
CAPITAL (SPI)	HS 1	Complex rwy/rwy int.

*See appropriate A/FD, Alaska or Pacific Supplement HOT SPOT table for additional information.

LOC I-JVL 109.1	APP CRS 044°	Rwy ldg TDZE Apt Elev	6700 805 808
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 4




JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)

When control tower closed, obtain local altimeter setting on UNICOM;
when not received use Rockford altimeter setting and increase all
DH/MDA's 80 feet. Circling not authorized at night to Rwy 18.

MALSR
AS

MISSED APPROACH: Climb to 1700
then climbing right turn to 3100 direct
JVL VOR/DME and hold.

ATIS 128.25	ROCKFORD APP CON 121.0 327.0	JANESVILLE TOWER ★ 118.8(CTAF) 225.4	GND CON 121.65	CLNC DEL 121.65	UNICOM 122.95
-----------------------	--	--	--------------------------	---------------------------	-------------------------

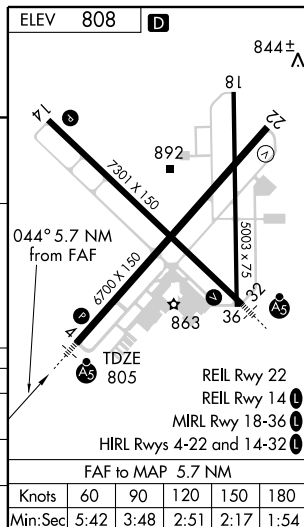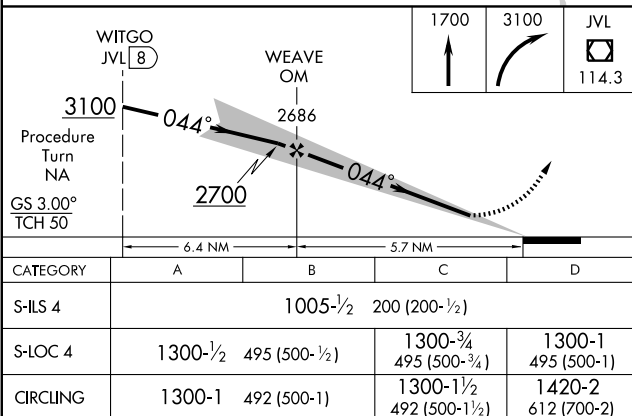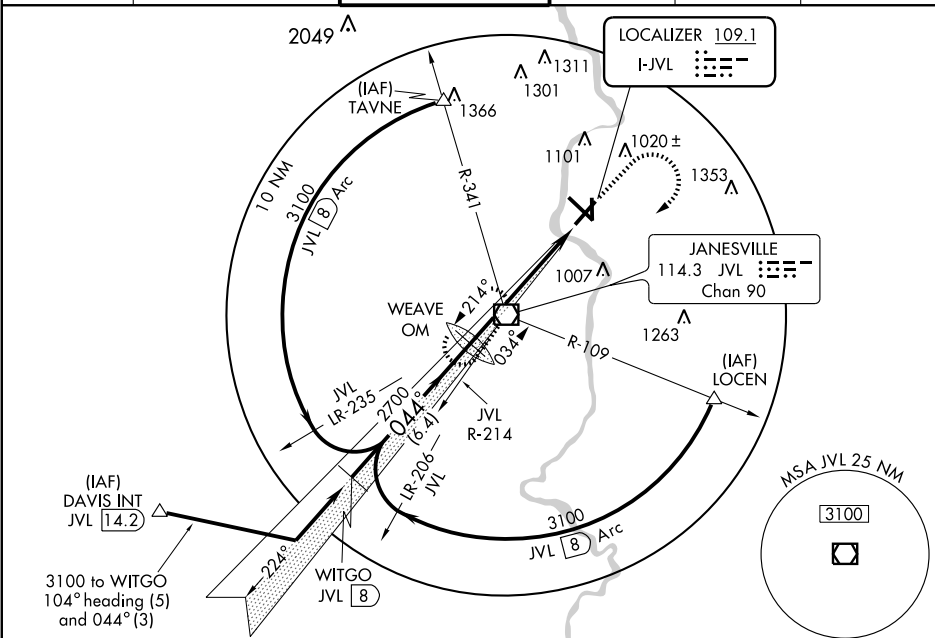

LOC/DME I-REE 111.35 Chan 50 (Y)	APP CRS 316°	Rwy Idg TDZE Apt Elev	7301 806 808
--	------------------------	-----------------------------	---

ILS or LOC RWY 32

JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)

When local altimeter setting not received, use Rockford Intl altimeter setting; increase DA to 1075, increase all MDAs 80 feet, increase FOGAS FIX minimums S-LOC 32 Cat. D and circling Cat. D visibility $\frac{1}{4}$ mile. VDP NA when using Rockford Intl altimeter setting.


For inoperative MALSRs, increase FOGAS FIX minimums S-LOC 32, Cats. A, B, and C to 1 mile. Inoperative table does not apply to S-ILS-32. Circling to Rwy 18 NA at night.

MALSR




MISSED APPROACH: Climb to 1700 then climbing left turn to 3100 via heading 100° and I-REE SE course to TIRRO INT/13.1 DME and hold.


ATIS 128.25	ROCKFORD APP CON 121.0 327.0	JANESVILLE TOWER ★ 118.8 (CTAF) 0 225.4	GND CON 121.65	CLNC DEL 121.65	UNICOM 122.95
-----------------------	--	--	--------------------------	---------------------------	-------------------------

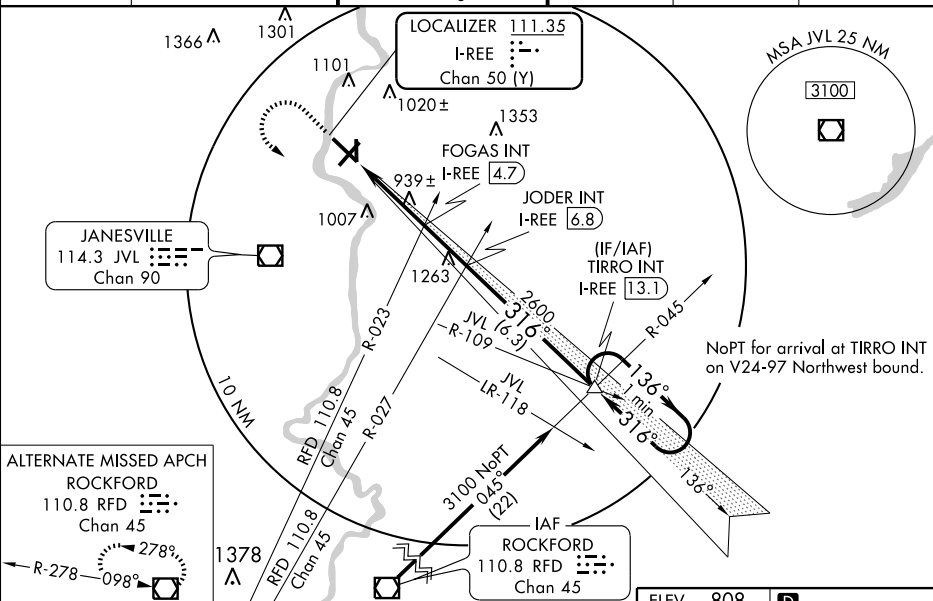

ALTERNATE MISSED APCH
ROCKFORD
110.8 RFD
Chan 45

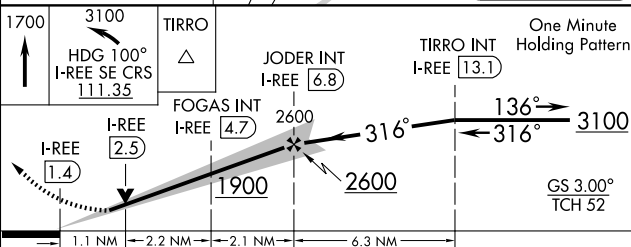

CATEGORY	A	B	C	D
S-ILS 32	1006- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)			
S-LOC 32	1900- $\frac{3}{4}$ 1094 (1100- $\frac{3}{4}$)	1900-1 1094 (1100-1)	1900-2 $\frac{1}{2}$ 1094 (1100-2 $\frac{1}{2}$)	
CIRCLING	1900-1 $\frac{1}{4}$ 1092 (1100-1 $\frac{1}{4}$)	1900-1 $\frac{1}{2}$ 1092 (1100-1 $\frac{1}{2}$)	1900-3 1092 (1100-3)	
FOGAS FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 32	1200- $\frac{3}{4}$ 394 (400- $\frac{3}{4}$)			
CIRCLING	1260-1 452 (500-1)	1280-1 $\frac{1}{2}$ 472 (500-1 $\frac{1}{2}$)	1420-2 612 (700-2)	

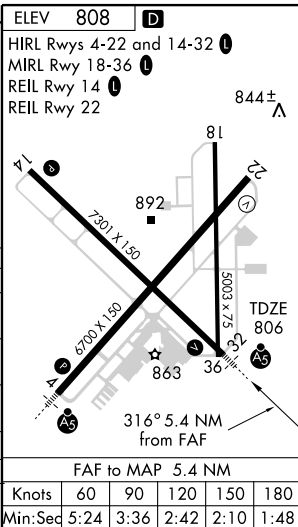

WAAS CH 82617 W04A	APP CRS 043°	Rwy Idg TDZE Apt Elev	6700 806 808
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)




▼ Circling to Rwy 18 NA at night. Baro-VNAV NA when using Rockford altimeter setting.
 ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. VDP NA with Rockford altimeter setting. When local altimeter setting not received, use Rockford altimeter setting and increase all DA 69 feet and all MDA 80 feet; increase LNAV/VNAV all Cats visibility ¼ mile and Circling Cat D visibility ¼ mile. For inoperative MALSR, when using Rockford altimeter setting increase LPV all Cats visibility to 1 mile.



MISSED APPROACH:
Climb to 3100 direct
OTLEE and hold.

ATIS 128.25	ROCKFORD APP CON 121.0 327.0	JANESVILLE TOWER ★ 118.8 (CTAF) 0 225.4	GND CON 121.65	CLNC DEL 121.65	UNICOM 122.95
-----------------------	--	---	--------------------------	---------------------------	-------------------------

Procedure NA for arrivals at TAYNE
via V9-177 Northbound.

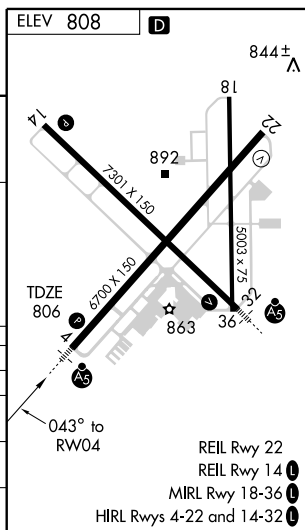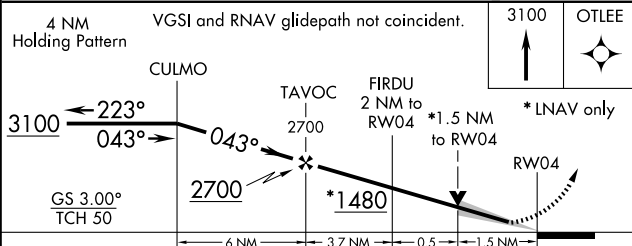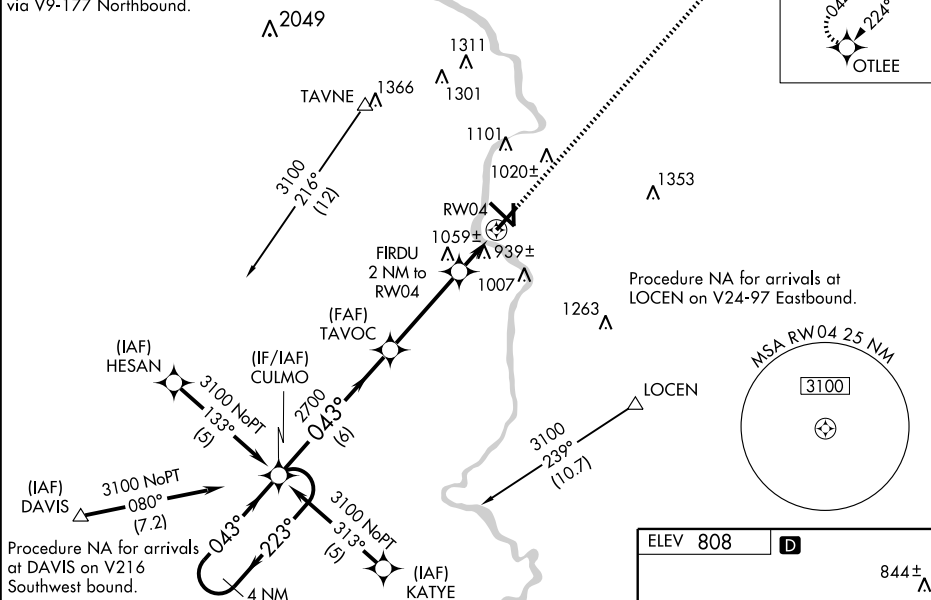

CATEGORY	A	B	C	D
LPV DA		1006-½	200 (200-½)	
LNAV/VNAV DA		1245-1	439 (500-1)	
LNAV MDA	1320-½ 514 (600-½)		1320-1 514 (600-1)	1320-1¼ 514 (600-1¼)
CIRCLING	1320-1 512 (600-1)		1320-1½ 512 (600-1½)	1420-2 612 (700-2)

JANESVILLE, WISCONSIN

Amdt 1 03JUN10

JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)

42°37'N-89°02'W

RNAV (GPS) RWY 4



WAAS CH 86617 W14A	APP CRS 135°	Rwy Idg TDZE Apt Elev	7301 803 808
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 14

JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)

<p>▼ Circling to Rwy 18 NA at night. Baro-VNAV NA when using Rockford altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Rockford altimeter setting and increase all DA 69 feet and all MDA 80 feet; increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C and D and Circling Cat D visibility ¼ mile. VDP NA with Rockford altimeter setting.</p>	<p>MISSED APPROACH: Climb to 3100 direct TIRRO and hold.</p>
---	--

ATIS 128.25	ROCKFORD APP CON 121.0 327.0	JANESVILLE TOWER ★ 118.8 (CTAF) 0 225.4	GND CON 121.65	CLNC DEL 121.65	UNICOM 122.95
-----------------------	--	---	--------------------------	---------------------------	-------------------------

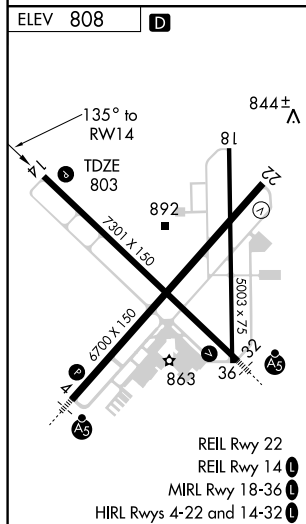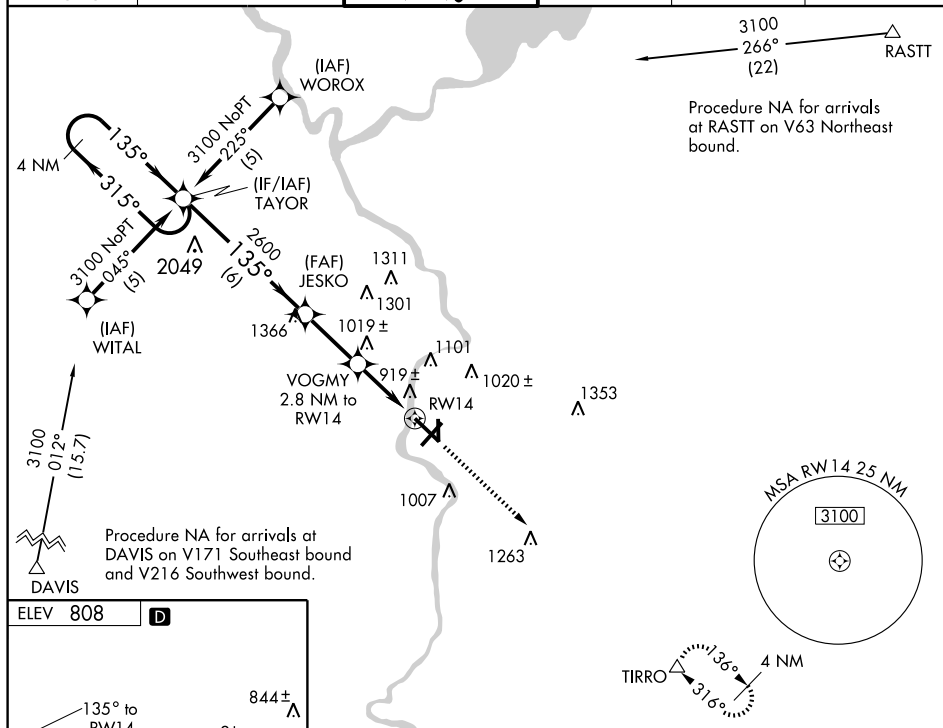

	4 NM	TAYOR	JESKO	VOGMY	2.8 NM to RWY 14	*1.3 NM to RWY 14	*1.3 NM to RWY 14	*1.3 NM to RWY 14
	3100	315°	135°	2600	1740	1740	1740	1740
	GS 3.00°	TCH 60						
CATEGORY	A	B	C	D				
LPV DA		1003-¾	200 (200-¾)					
LNAV/VNAV DA		1222-1½	419 (500-1½)					
LNAV MDA	1280-1	477 (500-1)	1280-1¼	477 (500-1¼)	1280-1½	477 (500-1½)		
CIRCLING	1280-1	472 (500-1)	1280-1½	472 (500-1½)	1420-2	612 (700-2)		

JANESVILLE, WISCONSIN

Amdt 1 03JUN10

JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)

42°37'N - 89°02'W

RNAV (GPS) RWY 14

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

WAAS CH 40417 W22A	APP CRS 224°	Rwy Idg 6700 TDZE 805 Apt Elev 808
--	------------------------	---



RNAV (GPS) RWY 22

JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)


Circling to Rwy 18 NA at night. Baro-VNAV NA when using Rockford altimeter setting. For
 uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F).
 DME/DSC RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not
 received, use Rockford altimeter setting and increase all DA 69 feet and all MDA 80 feet; increase
 LPV all Cats visibility, LNAV/VNAV all Cats visibility and Circling Cat D visibility ¼ mile.
 VDP NA with Rockford altimeter setting.

MISSED APPROACH:
Climb to 3100 direct
CULMO and hold.

ATIS 128.25	ROCKFORD APP CON 121.0 327.0	JANESVILLE TOWER ★ 118.8 (CTAF) 0 225.4	GND CON 121.65	CLNC DEL 121.65	UNICOM 122.95
----------------	---------------------------------	--	-------------------	--------------------	------------------

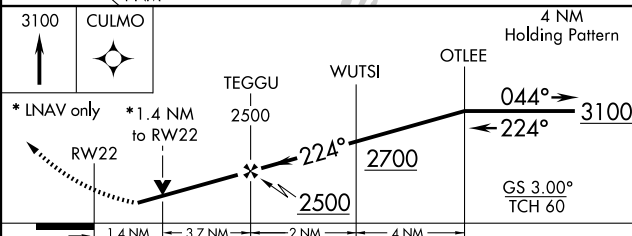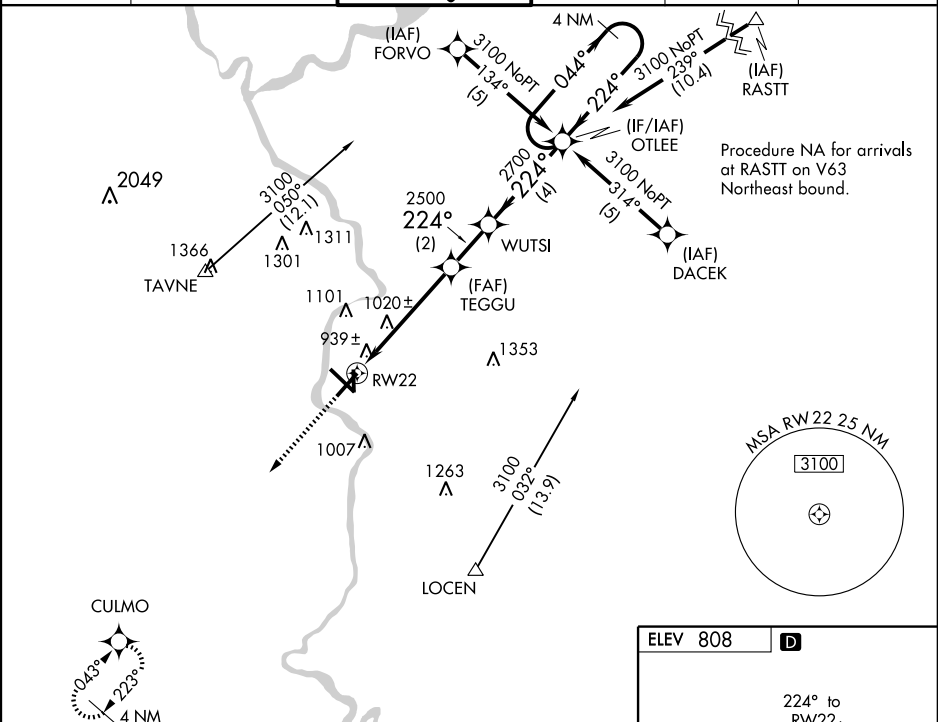

CATEGORY	A	B	C	D
LPV DA	1120-1 315 (400-1)			
LNAV/ VNAV DA	1244-1½ 439 (500-1½)			
LNAV MDA	1320-1 515 (600-1)	1320-1½ 515 (600-1½)	1320-1¾ 515 (600-1¾)	
CIRCLING	1320-1 512 (600-1)	1320-1½ 512 (600-1½)	1420-2 612 (700-2)	

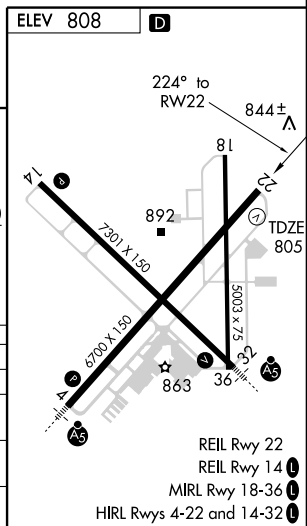

JANESVILLE, WISCONSIN

Amdt 1 03JUN10

JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)

42° 37' N-89° 02' W

RNAV (GPS) RWY 22

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

APP CRS **316°**
Rwy ldg **7301**
TDZE **806**
Apt Elev **808**

RNAV (GPS) RWY 32




JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)

▼ **▲** NA Baro-VNAV NA below -17° C (3° F). Baro-VNAV and VDP NA with Rockford altimeter setting. DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV Cat. A/B/C visibility to 1. When control tower closed, obtain local altimeter setting on UNICOM; when not received use Rockford altimeter setting and increase all DA/MDAs 80 feet. Circling not authorized at night to Rwy 18.



MISSED APPROACH:
Climb to 3100 direct
TAYOR WP and hold.

ATIS 128.25	ROCKFORD APP CON 121.0 327.0	JANESVILLE TOWER ★ 118.8 (CTAF) 0 225.4	GND CON 121.65	CLNC DEL 121.65	UNICOM 122.95
-----------------------	--	---	--------------------------	---------------------------	-------------------------

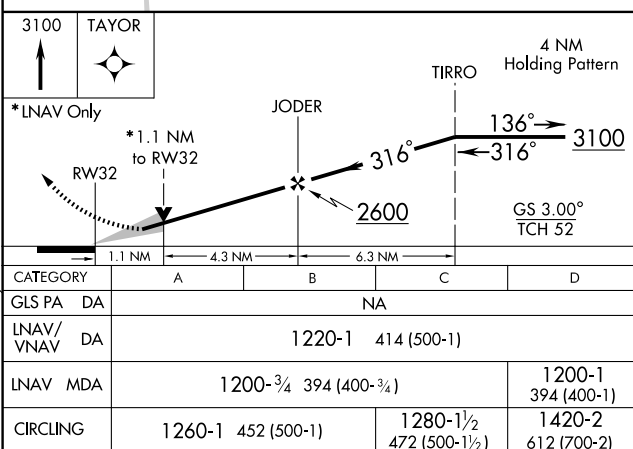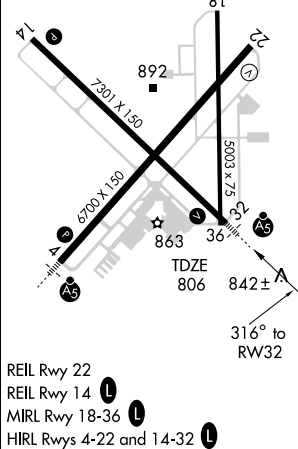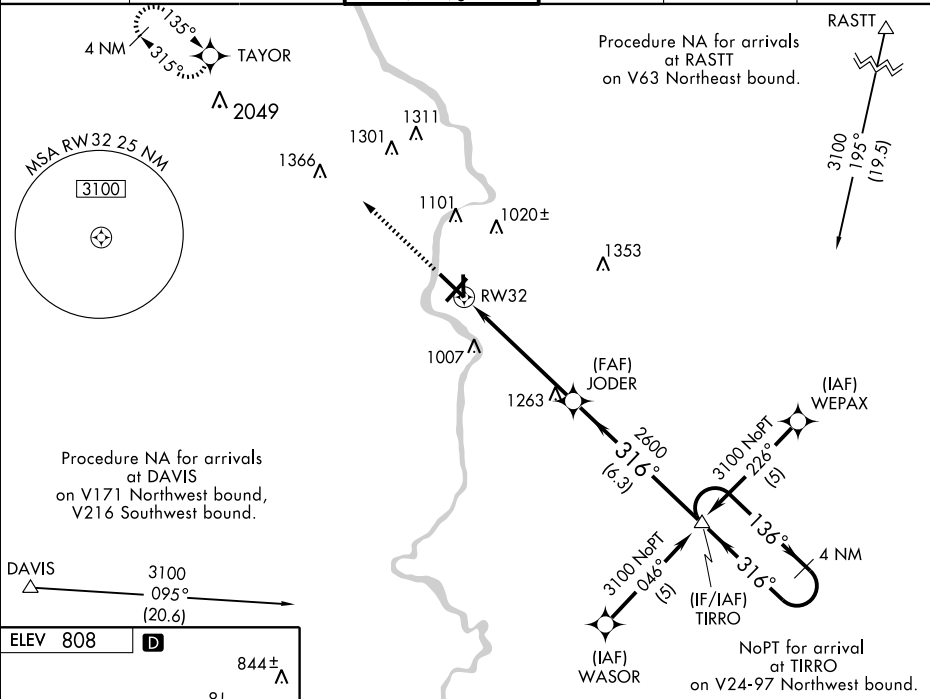

JANESVILLE, WISCONSIN

Orig-A 01JUL10

JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)

42°37'N- 89°02'W

RNAV (GPS) RWY 32

VOR/DME JVL 114.3 Chan 90	APP CRS 215°	Rwy Idg 6700 TDZE 805 Apt Elev 808
---	------------------------	---

VOR/DME RWY 22

JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)

T When control tower closed, obtain local altimeter setting on UNICOM; when not received, use Rockford altimeter setting and increase all MDAs 80 feet. Circling not authorized at night to Rwy 18.

MISSED APPROACH: Climb to 3100
direct JVL VOR/DME and hold.




ATIS
128.25

ROCKFORD APP CON
121.0 327.0

JANESVILLE TOWER ★
118.8 (CTAF) **L** 225.4

GND CON
121.65

CLNC DEL
121,65

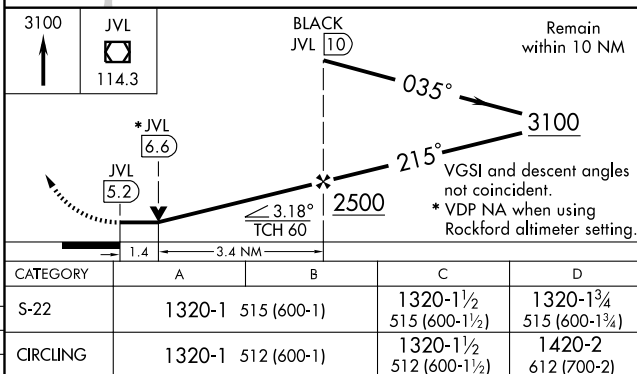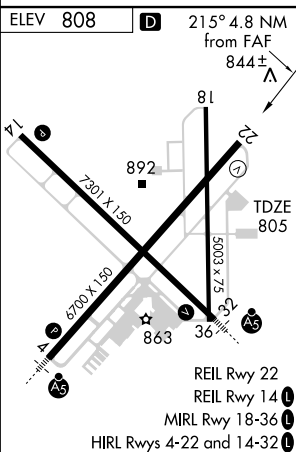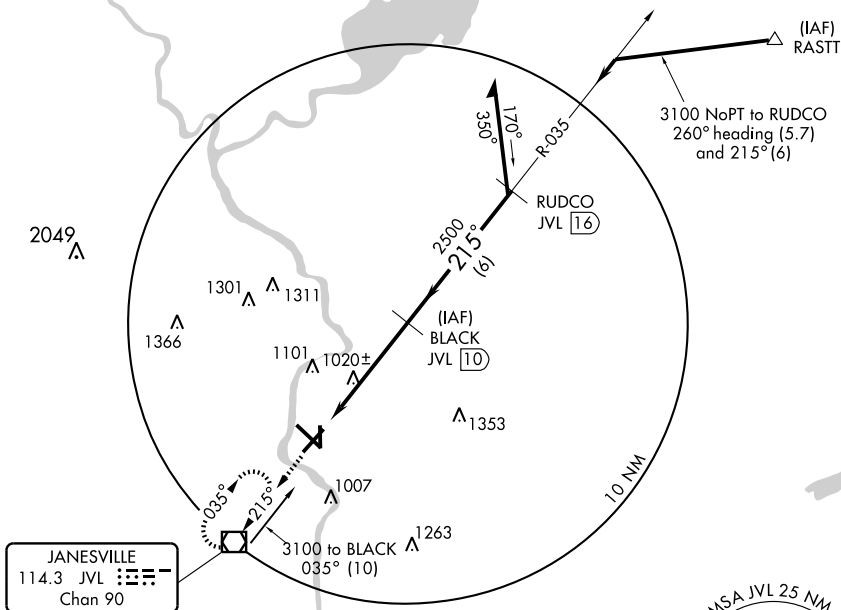UNICOM
122.95

JANESVILLE, WISCONSIN
Amdt 1 10098

JANESV
42° 37'N-89° 02'W

VOR/DME RWY 22

EC-3, 23 SEP 2010 to 21 OCT 2010

VOR/DME JVL 114.3 Chan 90	APP CRS 034°	Rwy Idg 6700 TDZE 805 Apt Elev 808
---	------------------------	---

VOR RWY 4

JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)

T When control tower closed, obtain local altimeter setting on UNICOM; when not received use Rockford altimeter setting and increase all MDAs 80 feet. For inoperative MALSR, increase S-4 Cat. D visibility ¼ mile. Circling not authorized at night to Rwy 18.




MISSED APPROACH: Climb to 1700, then climbing right turn to 3100 direct JVL VOR/DME and hold.

ATIS
128.25

ROCKFORD APP CON
121.0 327.0

JANESVILLE TOWER ★
18.8 (CTAF) L 225.4

GND CON
121.65

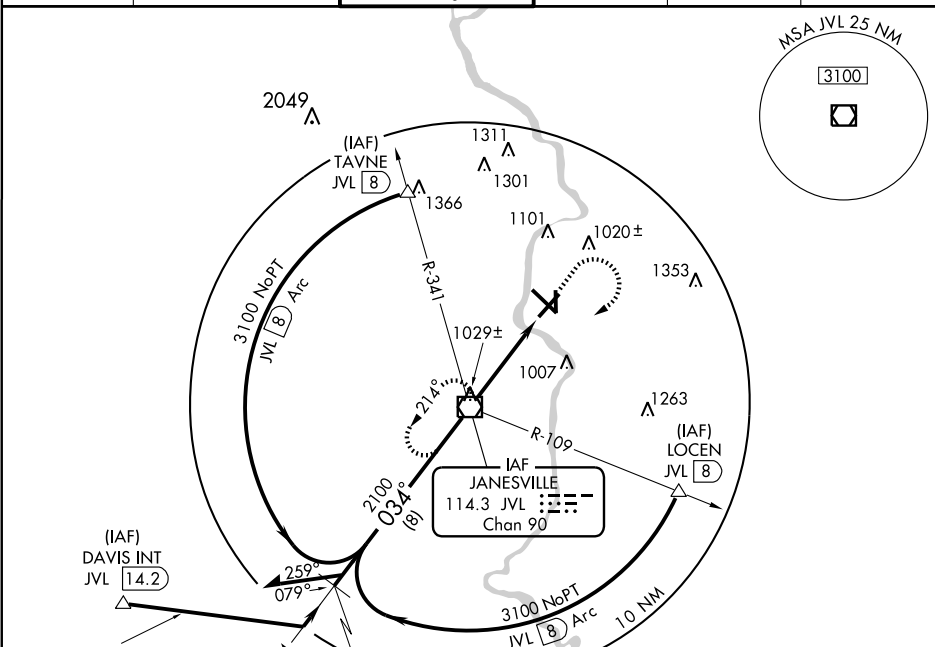CLNC DEL
121.65UNICOM
122.95

EC-3. 23 SEP 2010 to 21 OCT 2010

Remain within 10 NM

VOR/DME

1700

3100

IV

54

1

3100


3

* IV

* VDP NA when using Rockford altimeter setting.

			← 2.9 NM →		← 1.2 →			
CATEGORY	A		B		C		D	
S-4	1220- $\frac{1}{2}$ 415 (500- $\frac{1}{2}$)				1220- $\frac{3}{4}$ 415 (500- $\frac{3}{4}$)		1220-1 415 (500-1)	
CIRCLING	1260-1 452 (500-1)				1280- $\frac{1}{2}$ 472 (500- $\frac{1}{2}$)		1420-2 612 (700-2)	

ELEV 808	D
HIRL Rwy 4-22 and 14-32	L
MIRL Rwy 18-36	L
REIL Rwy 14	L
REIL Rwy 22	844± Λ



FAF to MAP 4.1 NM					
Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22

JANESVILLE, WISCONSIN
Amdt 27 10098

JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)

42° 37'N-89° 02'W

VOR RWY 4

JUNEAU

DODGE CO (UNU) 1.7 E UTC-6(-5DT) N43°25.59' W88°42.23'

CHICAGO

934 B S4 FUEL 100LL, JET A NOTAM FILE UNU

H-5E, L-28H

RWY 08-26: H5060X100 (ASPH) MIRL 0.9% up NE

IAP

RWY 08: PAPI(P4L)—GA 3.0° TCH 25'. Trees.

RWY 26: MALSF. PAPI(P4L)—GA 3.0° TCH 34'. Tree.

RWY 02-20: H4029X75 (ASPH) S-12.5 MIRL

RWY 02: REIL. PAPI(P2L)—GA 3.0° TCH 26'. P-line.

RWY 20: REIL. PAPI(P2L)—GA 3.0° TCH 25'. Tree.

AIRPORT REMARKS: Attended 1300-0200Z†. Numerous Geese on and in/ovf arpt. Irregular ultralight activity on and in/ovf arpt. Mowing ops Mon-Fri with flashing lgts after dark. 302' paved safety area on W end of Rwy 08-26.

29' Twy E end of Rwy 08-26. MIRL Rwy 08-26 preset low ints; to increase ACTIVATE—CTAF. ACTIVATE MIRL Rwy 02-20; REIL Rwy 02 and Rwy 20—CTAF. Rwy 26 MALSF not certified for IFR.

WEATHER DATA SOURCES: AWOS-3 119.075 (920) 386-5682.

COMMUNICATIONS: CTAF/UNICOM 122.7

Ⓡ **MADISON APP/DEP CON** 119.15 (1200-0500Z‡)

Ⓡ **CHICAGO CENTER APP/DEP CON** 133.3 (0500-1200Z‡)

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE MKE.

BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01' W88°17.06' 313° 26.1 NM to fld.1080/2E. HIWAS.

JUNEAU NDB (MHW) 344 UNU N43°25.74' W88°42.13' at fld. NOTAM FILE UNU.

ILS/DME 109.55 I-JNE Chan 32Y Rwy 26. LOC only. LOC/DME unmonitored when FBO closed.

KENNEDY N46°33.18' W90°54.87' NOTAM FILE ASX.

GREEN BAY

NDB (MHW) 254 ENY at John F. Kennedy Mem. Unmonitored 0000-1200Z‡.

L-14I

KENOSHA RGNL (ENW) 4 W UTC-6(-5DT) N42°35.74' W87°55.67'

CHICAGO

742 B S4 FUEL 100LL, JET A OX 1, 2 LRA NOTAM FILE ENW

H-5E, L-28H, A

RWY 07L-25R: H5499X100 (CONC-GRVD) S-62, D-73, 2S-85, 2D-135 HIRL 0.5% up SW

IAP, AD

RWY 07L: MALSR.

RWY 25R: REIL. PAPI (P4L)—GA 3.0° TCH 45'. Tree. Rgt tfc.

RWY 15-33: H4440X100 (CONC-GRVD) S-62, D-73, 2S-86, 2D-135 HIRL

RWY 15: REIL. VASI(V4L)—GA 3.5° TCH 45'. Trees.

RWY 33: VASI(V4L)—GA 3.0° TCH 41'.

RWY 07R-25L: H3302X75 (ASPH-CONC) S-40,

D-48 MIRL 0.7% up SW

RWY 07R: PAPI(P4L)—GA 3.25° TCH 25'. Road. Rgt tfc.

RWY 25L: PAPI(P4L)—GA 3.25° TCH 25'. Road.

AIRPORT REMARKS: Attended 1300-0300Z†. Deer and birds on and in/ovf arpt. Rwy 07R-25L is CLOSED to jet acft and acft weighing more than 12,500 lbs when Rwy 07L-25R is open. 440' radio twr 2.6 NM southeast of arpt ½ NM left of Rwy 33 centerline. Crane 190' 1.5 NM southeast of arpt, ops SR-SS. When twr clsd HIRL Rwy 07L-25R preset on low ints; to increase ints and ACTIVATE HIRL Rwy 15-33, MIRL Rwy 07R-25L, VASI Rwy 33, PAPI Rwy 25R, Rwy 07R and Rwy 25L, REIL Rwy 15 and Rwy 25R, MALSR Rwy 07L—CTAF. VASI Rwy 15 opr 24 hrs.

WEATHER DATA SOURCES: ASOS 127.175 (262) 652-7730.

COMMUNICATIONS: CTAF 118.6 ATIS 127.175 UNICOM 122.95

RCO 123.6R 109.2T (GREEN BAY RADIO)

Ⓡ **MILWAUKEE APP/DEP CON** 119.65 **CLNC DEL** 118.6 (0300-1300Z‡)

TOWER 118.6 (1300-0300Z‡) **GND CON** 121.875

AIRSPACE: CLASS D 1300-0300Z‡ other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE IKK.

NORTHBROOK (H) VORW/DME 113.0 OBK Chan 77 N42°13.29' W87°57.11' 005° 22.5 NM to fld. 758/2W.


(T) VOR/DME 109.2 ENW Chan 29 N42°35.94' W87°55.90' at fld. 734/02W. NOTAM FILE ENW.

VOR unusable 232°-295°.

CODEE NDB (LOM) 389 EN N42°33.61' W88°01.73' 067° 5.0 NM to fld.

ILS 109.35 I-ENW Rwy 07L Class IB. LOM CODEE NDB. Glide slope unusable byd 3° left of course.

ILS unmonitored when twr closed.

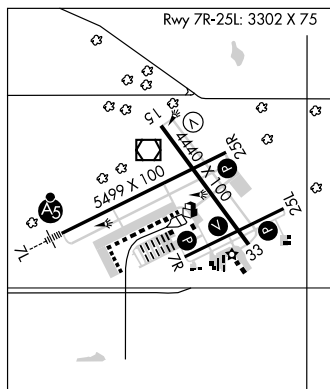

KETTLE MORAIN N43°25.51' W88°07.63' NOTAM FILE ETB.

CHICAGO

NDB (MHW) 329 LLE at West Bend Muni. Unmonitored. SHUTDOWN.

L-28H

KICKAPOO N43°39.31' W90°19.99' NOTAM FILE GRB.

CHICAGO

NDB (MHW) 251 HBW at Joshua Sanford Fld. Unmonitored. VFR only. NDB OTS indef.

LOC/DME I-JNE
109.55
 Chan **32** (Y)

APP CRS
261°

Rwy Idg **5060**
 TDZE **934**
 Apt Elev **934**

LOC RWY 26
 JUNEAU/ DODGE COUNTY (UNU)

▼ If local altimeter setting not received, use Dane County
 Rgnl-Truax Field altimeter setting and increase all
 MDAs 100 feet. Inoperative table does not apply.
 Visibility reduction by helicopters NA.

MALSF




MISSED APPROACH: Climb to 2800 then
 climbing right turn to 3000 via BAE VORTAC
 R-302 to RANDO Int/BAE 39.4 DME and hold.

AWOS-3
119.075


MADISON APP CON
119.15 343.7

GCO
121.725

UNICOM
122.7 (CTAF) **0**

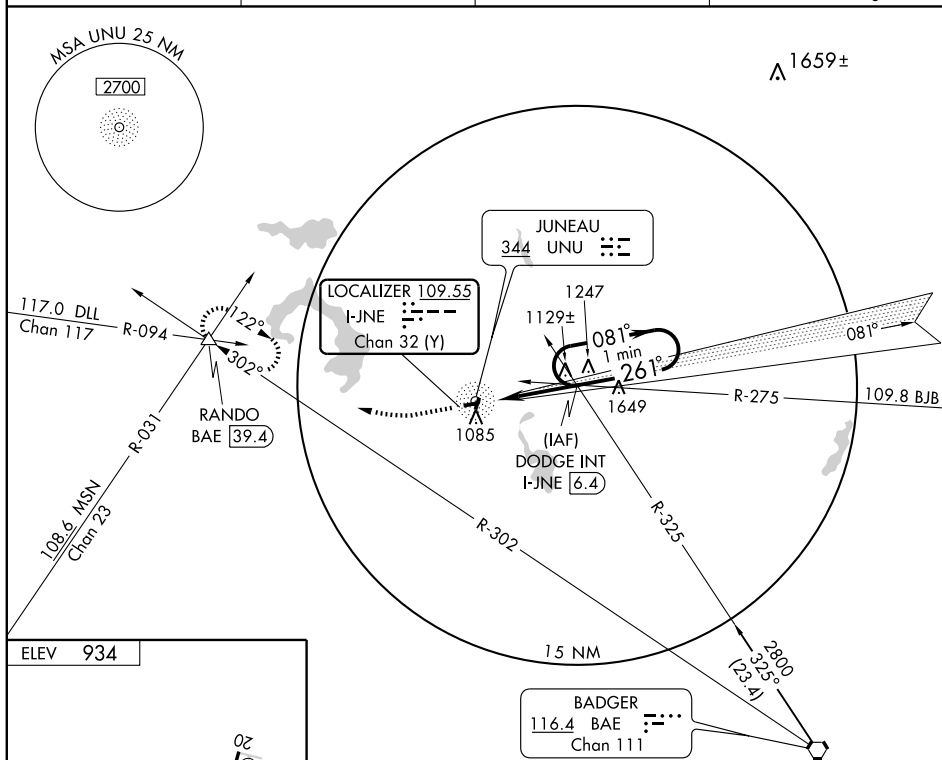

ELEV 934



REIL Rwy 2 and 20 **0**
 MIRL Rwy 8-26 and 2-20 **0**

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

JUNEAU, WISCONSIN

Amdt 1 10210

<div>2800 ↑</div> <div>3000 ↗</div> <div>BAE R-302</div>		<div>RANDO INT BAE <u>39.4</u></div>		<div>DODGE INT I-JNE <u>6.4</u></div> <div>One Minute Holding Pattern</div>		
<div>I-JNE <u>1.1</u></div> <div>↙</div>		<div>↗ 261°</div> <div>↘ 3.04°</div> <div>TCH 34</div> <div>5.4 NM</div>		<div>081° →</div> <div>← 261°</div> <div>2700</div>		
CATEGORY	A		B		C	D
S-26	1380-1 446 (500-1)		1380-1¼ 446 (500-1¼)		NA	
CIRCLING	1440-1 506 (600-1)		1440-1½ 506 (600-1½)		NA	

JUNEAU/ DODGE COUNTY (UNU)

43°26'N-88°42'W

LOC RWY 26

NDB UNU 344	APP CRS 010°	Rwy Idg TDZE Apt Elev	4029 933 934
-----------------------	------------------------	-----------------------------	---

NDB RWY 2

JUNEAU/ DODGE COUNTY (UNU)

▼ If local altimeter setting not received, use Dane County
 ▲ Rgnl-Truax Field altimeter setting and increase all
 MDAs 100 feet. Visibility reduction by helicopters NA.



MISSED APPROACH: Climb to 2000 then climbing
 right turn to 2700 direct UNU NDB and hold.

AWOS-3
119.075

MADISON APP CON
119.15 343.7

GCO
121.725

UNICOM
122.7 (CTAF) **0**

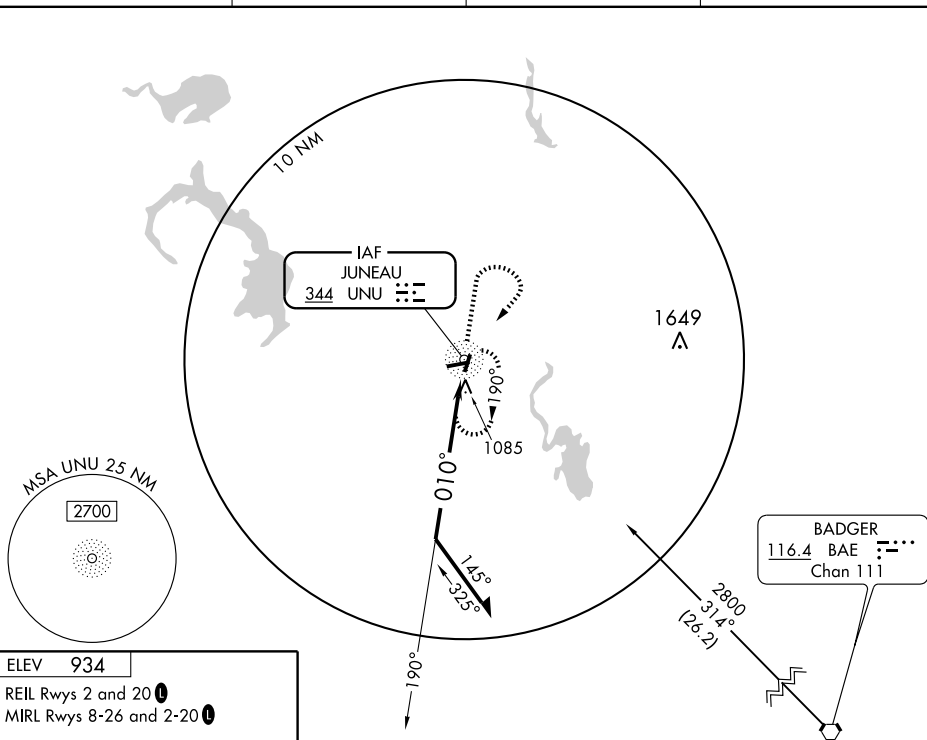ELEV **934**REIL Rwy 2 and 20 **0**MIRL Rwy 8-26 and 2-20 **0**

Remain
 within 10 NM

2700

NDB

190°

010°

2000

2700

UNU

CATEGORY

A

B

C

D

S-2

1500-1 567 (600-1)

1500-1½
567 (600-1½)

NA

CIRCLING

1500-1 566 (600-1)

1500-1½
566 (600-1½)

NA

NDB UNU 344	APP CRS 209°	Rwy Idg TDZE Apt Elev	4029 934 934
-----------------------	------------------------	-----------------------------	---

NDB RWY 20

JUNEAU/ DODGE COUNTY(UNU)

▼ If local altimeter setting not received, use Dane County Rgnl-Truax
 ▲ Field altimeter setting and increase all MDAs 100 feet.
 ▲ Visibility reduction by helicopters NA.


MISSED APPROACH: Climb to 2000 then
 climbing right turn to 2700 direct UNU NDB
 and hold.

AWOS-3
119.075

MADISON APP CON
119.15 343.7



GCO
121.725

UNICOM
122.7 (CTAF) **1**

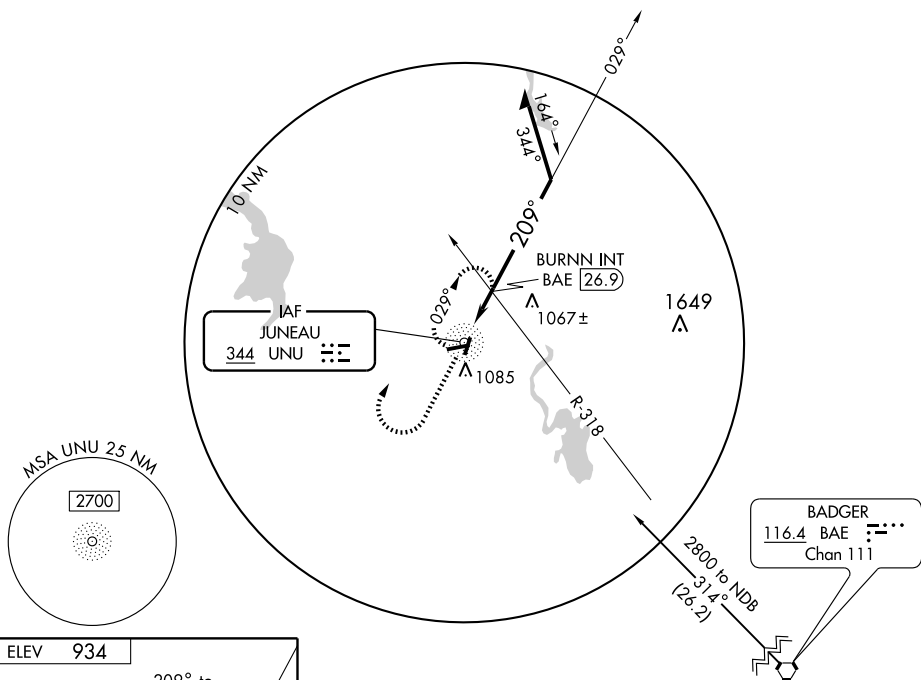ELEV **934**

209° to
 UNU NDB

TDZE
 934

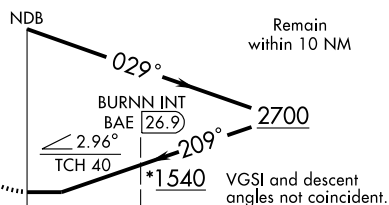

CATEGORY	A	B	C	D
S-20	1540-1	606 (700-1)	1540-1¾ 606 (700-1¾)	NA
CIRCLING	1540-1	606 (700-1)	1540-1¾ 606 (700-1¾)	NA
BURNN FIX MINIMUMS				
S-20	1420-1	486 (500-1)	1420-1¼ 486 (500-1¼)	NA
CIRCLING	1440-1	506 (600-1)	1440-1½ 506 (600-1½)	NA

REIL Rwy 2 and 20 **1**
 MIRL Rwy 8-26 and 2-20 **1**

JUNEAU, WISCONSIN

Orig 10210

JUNEAU/ DODGE COUNTY(UNU)

43°26'N-88°42'W

NDB RWY 20

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

WAAS CH 87107 W02A	APP CRS 018°	Rwy Idg TDZE 933 Apt Elev 934
--	------------------------	---

RNAV (GPS) RWY 2

JUNEAU/DODGE COUNTY (UNU)



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 54° C (130° F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Dane County Rgnl-Truax Field altimeter setting and increase all DA/MDA 100 feet, increase all visibilities ½ mile. VDP and Baro-VNAV NA when using Dane County Rgnl-Truax Field altimeter setting. Visibility reduction by helicopters NA.


MISSED APPROACH:
Climb to 3000 direct NUNEF and hold.

AWOS-3
119.075

MADISON APP CON
119.15 343.7

GCO
121.725


UNICOM
122.7 (CTAF) 0

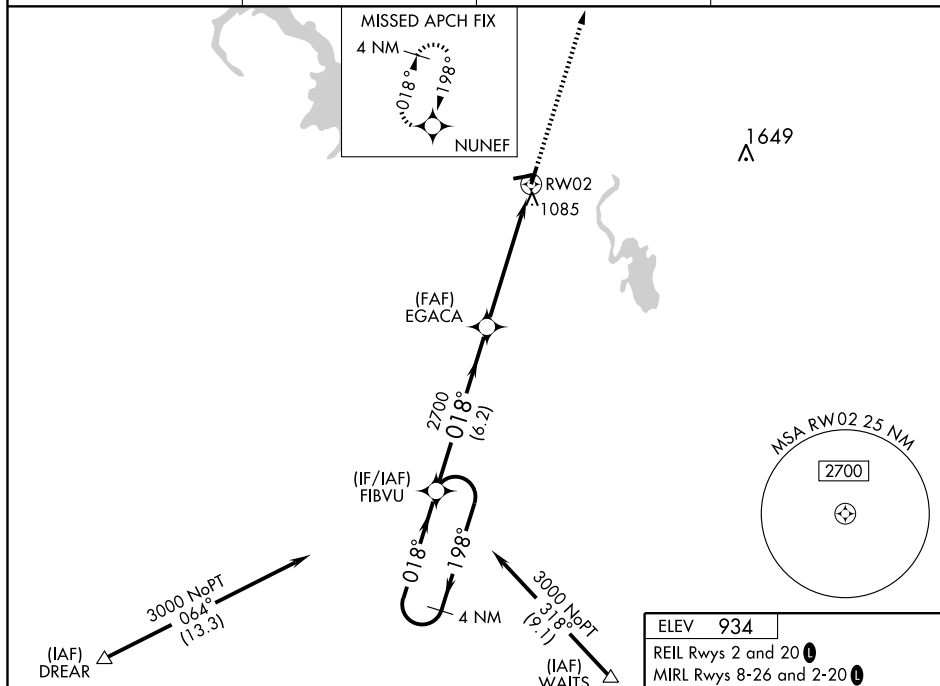


ELEV **934**

REIL Rwy 2 and 20 **0**

MIRL Rwy 8-26 and 2-20 **0**

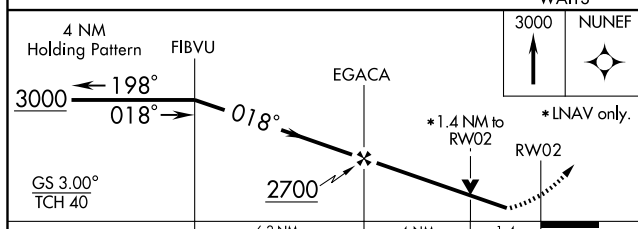

CATEGORY	A	B	C	D
LPV DA	1189-1 256 (300-1)			NA
LNAV/VNAV DA	1432-1 3/4 499 (500-1 3/4)			NA
LNAV MDA	1400-1 467 (500-1)	1400-1 1/4 467 (500-1 1/4)		NA
CIRCLING	1440-1 506 (600-1)	1440-1 1/2 506 (600-1 1/2)		NA

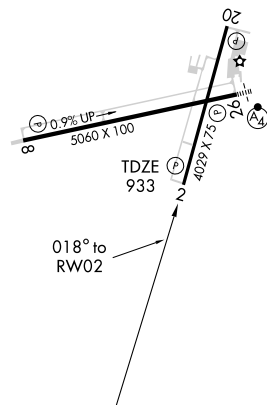

APP CRS 081°	Rwy Idg 5060
	TDZE 913
	Apt Elev 934

RNAV (GPS) RWY 8

JUNEAU/DODGE COUNTY(UNU)

▼ DME/DME RNP-0.3 NA. If local altimeter setting not received, use Dane County Rgnl-Truax Field altimeter setting and increase all MDAs 100 feet.
▲ VDP NA when using Dane County Rgnl-Truax Field altimeter setting.

MISSED APPROACH: Climb to 3000 direct CORIR and hold.


AWOS-3
119.075

MADISON APP CON
119.15 343.7



GCO
121.725

UNICOM
122.7 (CTAF) 0

Procedure NA for arrivals
at RANDO
via V9-341 northeast bound,
and via V170 northwest bound.

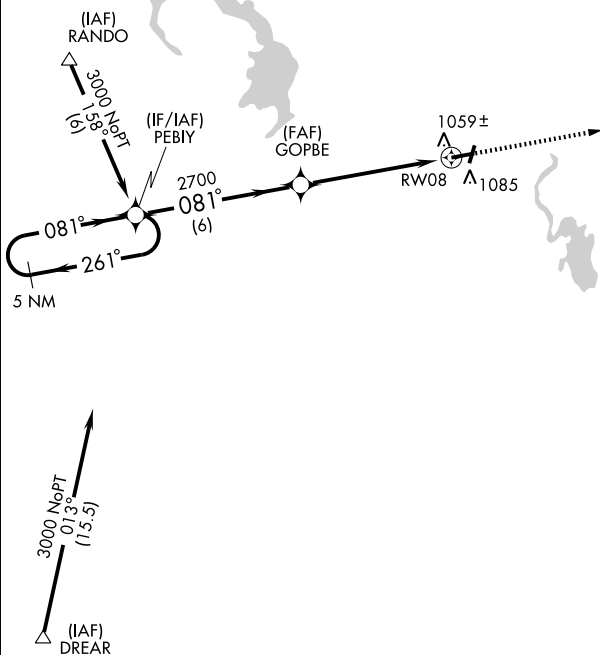

ELEV 934

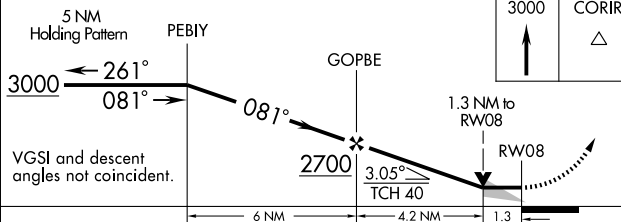

CATEGORY	A	B	C	D
RNAV MDA	1320-1	407 (400-1)	1320-1¼ 407 (400-1¼)	NA
CIRCLING	1440-1	506 (600-1)	1440-1½ 506 (600-1½)	NA

REIL Rwy 2 and 20 0
MIRL Rwy 8-26 and 2-20 0

APP CRS 261°	Rwy Idg TDZE Apt Elev	5060 934 934
------------------------	-----------------------------	---

RNAV (GPS) RWY 26

JUNEAU/DODGE COUNTY(UNU)

⚠ If local altimeter setting not received, use Dane County Rgnl-Truax Field altimeter setting and increase all MDAs 100 feet. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Inoperative table does not apply.

MALSF




MISSED APPROACH: Climb to 3000 direct PEBIY and hold.

AWOS-3
119.075


MADISON APP CON
119.15 343.7

GCO
121.725

UNICOM
122.7 (CTAF) **0**

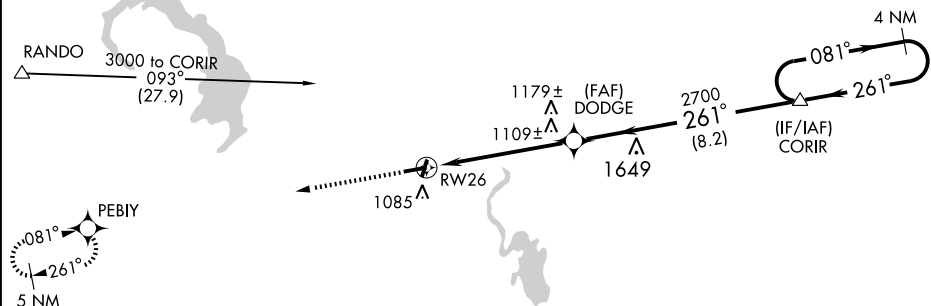

ELEV 934



REIL Rwy 2 and 20 **0**
MIRL Rwy 8-26 and 2-20 **0**



JUNEAU, WISCONSIN

Orig 10210

43°26'N-88°42'W

JUNEAU/DODGE COUNTY(UNU)

RNAV (GPS) RWY 26

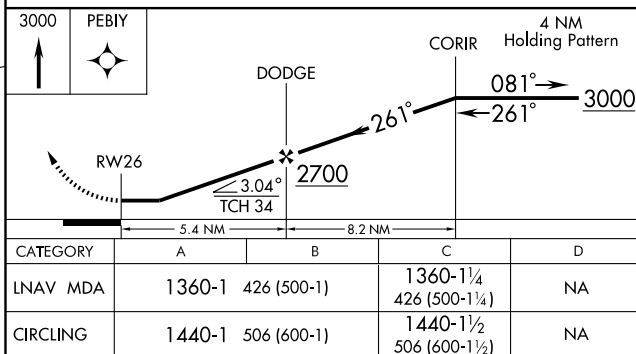

CATEGORY	A	B	C	D
LNNAV MDA	1360-1	426 (500-1)	1360-1¼ 426 (500-1¼)	NA
CIRCLING	1440-1	506 (600-1)	1440-1½ 506 (600-1½)	NA

AIRPORT DIAGRAM

AL-5449 (FAA)


KENOSHA RGNL (E,N,W)
KENOSHA, WISCONSIN

ATIS
127.175
KENOSHA TOWER ★
118.6 353.6
GND CON
121.875

VAR 3.3° W
JANUARY 2010
ANNUAL RATE OF CHANGE
0.1° W

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

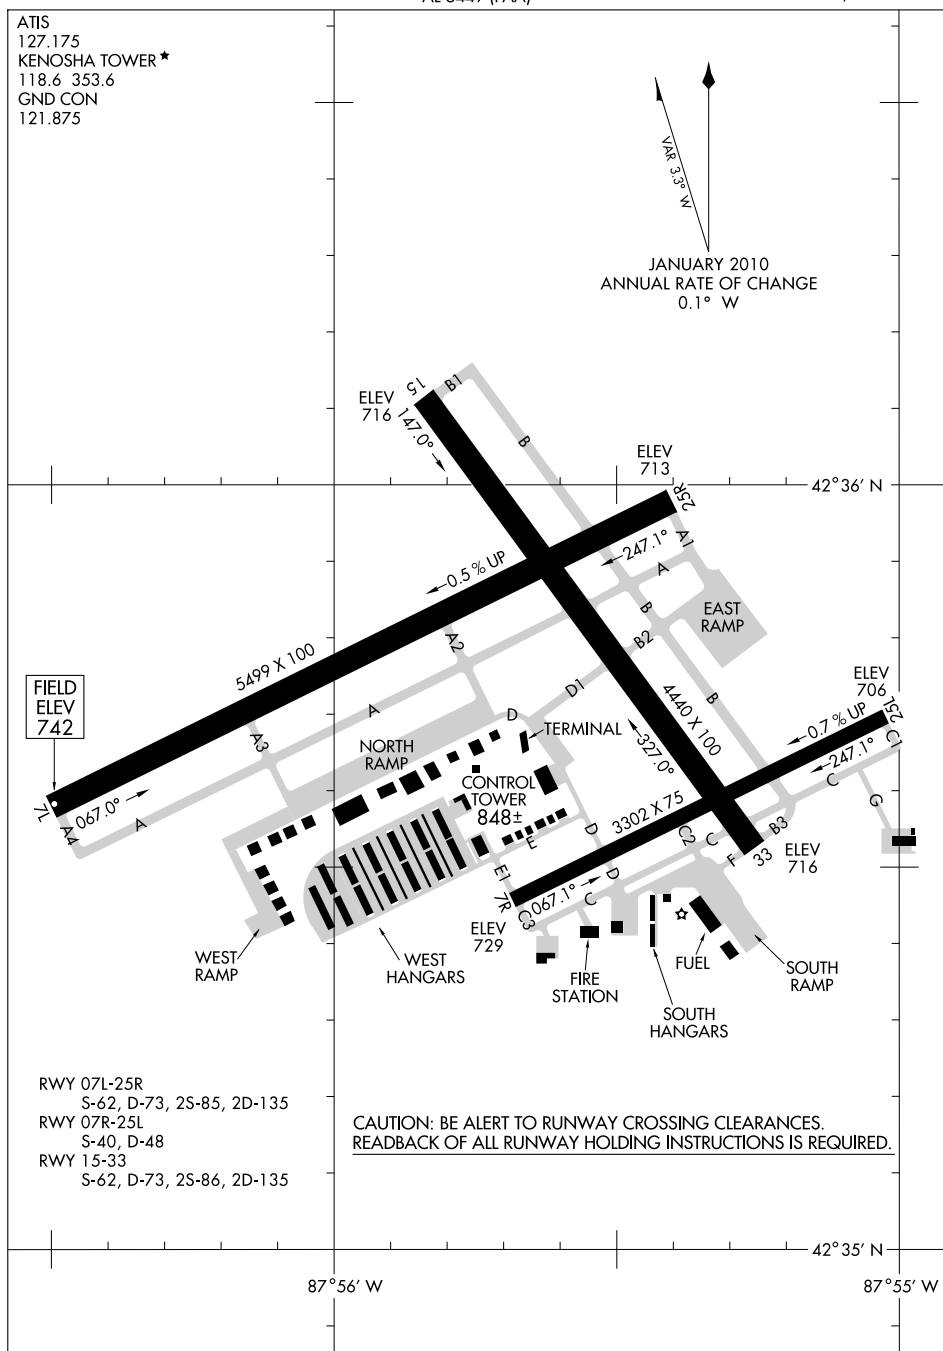

AIRPORT DIAGRAM

10210

KENOSHA, WISCONSIN
KENOSHA RGNL (E,N,W)

JUNEAU

DODGE CO (UNU) 1.7 E UTC-6(-5DT) N43°25.59' W88°42.23'

CHICAGO

934 B S4 FUEL 100LL, JET A NOTAM FILE UNU

H-5E, L-28H

RWY 08-26: H5060X100 (ASPH) MIRL 0.9% up NE

IAP

RWY 08: PAPI(P4L)—GA 3.0° TCH 25'. Trees.

RWY 26: MALSF. PAPI(P4L)—GA 3.0° TCH 34'. Tree.

RWY 02-20: H4029X75 (ASPH) S-12.5 MIRL

RWY 02: REIL. PAPI(P2L)—GA 3.0° TCH 26'. P-line.

RWY 20: REIL. PAPI(P2L)—GA 3.0° TCH 25'. Tree.

AIRPORT REMARKS: Attended 1300-0200Z†. Numerous Geese on and in/ovf arpt. Irregular ultralight activity on and in/ovf arpt. Mowing ops Mon-Fri with flashing lgts after dark. 302' paved safety area on W end of Rwy 08-26.

29' Twy E end of Rwy 08-26. MIRL Rwy 08-26 preset low ints; to increase ACTIVATE—CTAF. ACTIVATE MIRL Rwy 02-20; REIL Rwy 02 and Rwy 20—CTAF. Rwy 26 MALSF not certified for IFR.

WEATHER DATA SOURCES: AWOS-3 119.075 (920) 386-5682.

COMMUNICATIONS: CTAF/UNICOM 122.7

Ⓡ **MADISON APP/DEP CON** 119.15 (1200-0500Z‡)

Ⓡ **CHICAGO CENTER APP/DEP CON** 133.3 (0500-1200Z‡)

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE MKE.

BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01' W88°17.06' 313° 26.1 NM to fld.1080/2E. HIWAS.

JUNEAU NDB (MHW) 344 UNU N43°25.74' W88°42.13' at fld. NOTAM FILE UNU.

ILS/DME 109.55 I-JNE Chan 32Y Rwy 26. LOC only. LOC/DME unmonitored when FBO closed.

KENNEDY N46°33.18' W90°54.87' NOTAM FILE ASX.

GREEN BAY

NDB (MHW) 254 ENY at John F. Kennedy Mem. Unmonitored 0000-1200Z‡.

L-14I

KENOSHA RGNL (ENW) 4 W UTC-6(-5DT) N42°35.74' W87°55.67'

CHICAGO

742 B S4 FUEL 100LL, JET A OX 1, 2 LRA NOTAM FILE ENW

H-5E, L-28H, A

RWY 07L-25R: H5499X100 (CONC-GRVD) S-62, D-73, 2S-85, 2D-135 HIRL 0.5% up SW

IAP, AD

RWY 07L: MALSR.

RWY 25R: REIL. PAPI (P4L)—GA 3.0° TCH 45'. Tree. Rgt tfc.

RWY 15-33: H4440X100 (CONC-GRVD) S-62, D-73, 2S-86, 2D-135 HIRL

RWY 15: REIL. VASI(V4L)—GA 3.5° TCH 45'. Trees.

RWY 33: VASI(V4L)—GA 3.0° TCH 41'.

RWY 07R-25L: H3302X75 (ASPH-CONC) S-40, D-48 MIRL 0.7% up SW

RWY 07R: PAPI(P4L)—GA 3.25° TCH 25'. Road. Rgt tfc.

RWY 25L: PAPI(P4L)—GA 3.25° TCH 25'. Road.

AIRPORT REMARKS: Attended 1300-0300Z†. Deer and birds on and in/ovf arpt. Rwy 07R-25L is CLOSED to jet acft and acft weighing more than 12,500 lbs when Rwy 07L-25R is open. 440' radio twr 2.6 NM southeast of arpt ½ NM left of Rwy 33 centerline. Crane 190' 1.5 NM southeast of arpt, ops SR-SS. When twr clsd HIRL Rwy 07L-25R preset on low ints; to increase ints and ACTIVATE HIRL Rwy 15-33, MIRL Rwy 07R-25L, VASI Rwy 33, PAPI Rwy 25R, Rwy 07R and Rwy 25L, REIL Rwy 15 and Rwy 25R, MALSR Rwy 07L—CTAF. VASI Rwy 15 opr 24 hrs.

WEATHER DATA SOURCES: ASOS 127.175 (262) 652-7730.

COMMUNICATIONS: CTAF 118.6 ATIS 127.175 UNICOM 122.95

RCO 123.6R 109.2T (GREEN BAY RADIO)

Ⓡ **MILWAUKEE APP/DEP CON** 119.65 **CLNC DEL** 118.6 (0300-1300Z‡)

TOWER 118.6 (1300-0300Z‡) **GND CON** 121.875

AIRSPACE: CLASS D 1300-0300Z‡ other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE IKK.

NORTHBROOK (H) VORW/DME 113.0 OBK Chan 77 N42°13.29' W87°57.11' 005° 22.5 NM to fld. 758/2W.


(T) VOR/DME 109.2 ENW Chan 29 N42°35.94' W87°55.90' at fld. 734/02W. NOTAM FILE ENW.

VOR unusable 232°-295°.

CODEE NDB (LOM) 389 EN N42°33.61' W88°01.73' 067° 5.0 NM to fld.

ILS 109.35 I-ENW Rwy 07L Class IB. LOM CODEE NDB. Glide slope unusable byd 3° left of course.

ILS unmonitored when twr closed.

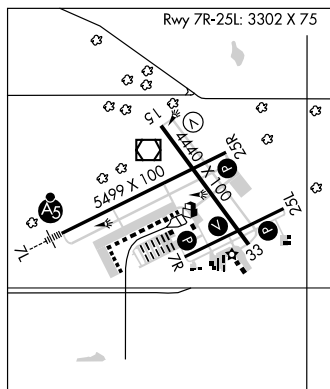

KETTLE MORAIN N43°25.51' W88°07.63' NOTAM FILE ETB.

CHICAGO

NDB (MHW) 329 LLE at West Bend Muni. Unmonitored. SHUTDOWN.

L-28H

KICKAPOO N43°39.31' W90°19.99' NOTAM FILE GRB.

CHICAGO

NDB (MHW) 251 HBW at Joshua Sanford Fld. Unmonitored. VFR only. NDB OTS indef.

LOC I-ENW 109.35	APP CRS 066°	Rwy Idg TDZE Apt Elev	5499 742 742
----------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 7L


KENOSHA RGNL (ENW)

ADF Required. When local altimeter setting not received, use Waukegan Rgnl altimeter setting and increase all DA 27 feet and all MDA 40 feet.






MISSED APPROACH: Climb to 2500 then left turn direct EN LOM and hold.

ATIS 127.175	MILWAUKEE APP CON 119.65 317.725	KENOSHA TOWER ★ 118.6 (CTAF) 353.6	GND CON 121.875	UNICOM 122.95
------------------------	--	--	---------------------------	-------------------------



ADF REQUIRED

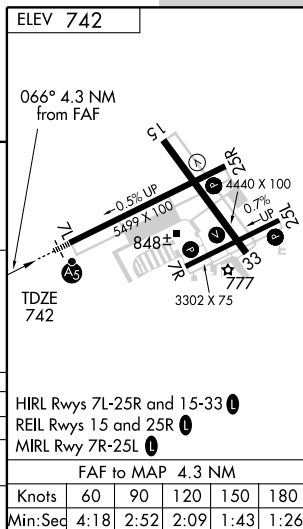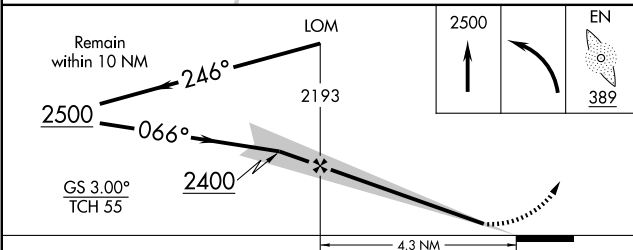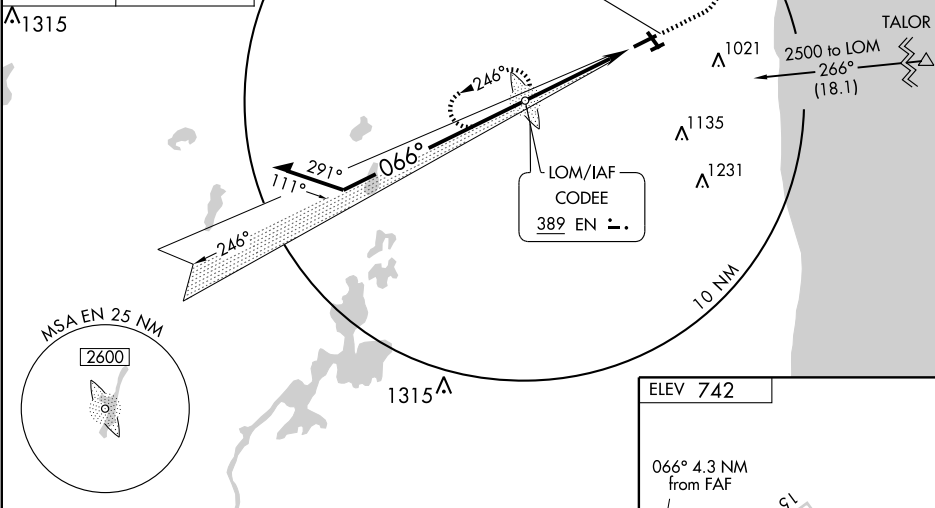

CATEGORY	A	B	C	D
S-ILS 7L	942-½ 200 (200-½)			
S-LOC 7L	1180-½ 438 (500-½)	1180-¾ 438 (500-¾)	1180-1 438 (500-1)	
CIRCLING	1200-1 458 (500-1)	1200-1½ 458 (500-1½)	1340-2 598 (600-2)	

WAAS CH 50314 W07A	APP CRS 066°	Rwy Idg 5499 TDZE 742 Apt Elev 742
--	------------------------	---

RNAV (GPS) RWY 7L

KENOSHA RGNL (ENW)

⚠ For inoperative MALSR, increase LNAV Cat D visibility to 1¼ mile.
⚠ Baro-VNAV NA when using Waukegan Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Waukegan Rgnl altimeter setting and increase all DA 27 feet and all MDA 40 feet.



MALSR

MISSED APPROACH:
 Climb to 3000 direct BOCIJ and left turn via track 333° to NOVAC and via track 258° to VEENA and hold.


ATIS
127.175

MILWAUKEE APP CON
119.65 317.725



KENOSHA TOWER ★
118.6 (CTAF) 353.6

GND CON
121.875

UNICOM
122.95

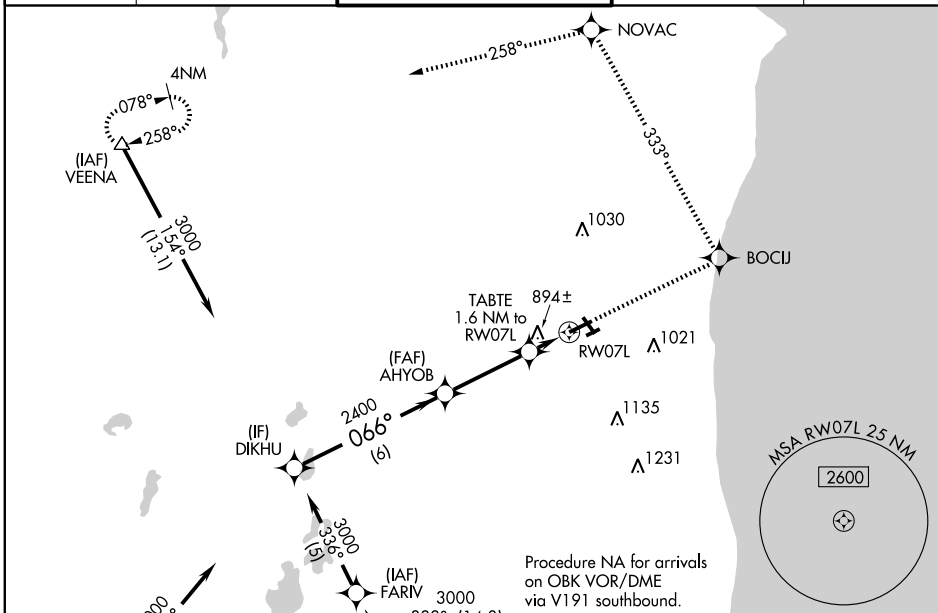

ELEV 742

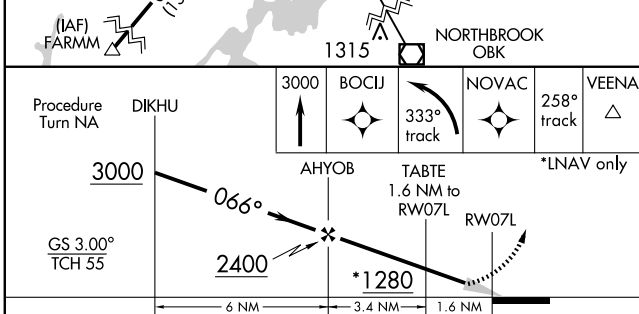

CATEGORY	A	B	C	D
LPV DA	942-½		200 (200-½)	
LNAV/VNAV DA	1179-1		437 (500-1)	
LNAV MDA	1160-½	418 (500-½)	1160-¾ 418 (500-¾)	1160-1 418 (500-1)
CIRCLING	1200-1	458 (500-1)	1200-½ 458 (500-½)	1340-2 598 (600-2)

HIRL Rwy 7L-25R and 15-33 **①**
 REIL Rwy 15 and 25R **①**
 MIRL Rwy 7R-25L **①**

APP CRS	Rwy Idg	4440
146°	TDZE	721
	Apt Elev	742

RNAV (GPS) RWY 15

KENOSHA RGNL (E,N,W)

▼ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
▲ When local altimeter setting not received, use Waukegan Rgnl altimeter setting and increase all MDA 40 feet and increase LNAV Cats C/D visibility ¼ mile.

MISSED APPROACH:
 Climbing right turn to 3000
 direct VEENA and hold.



ATIS
127.175

MILWAUKEE APP CON
119.65 317.725

KENOSHA TOWER ★
118.6 (CTAF) 0 353.6

GND CON
121.875

UNICOM
122.95

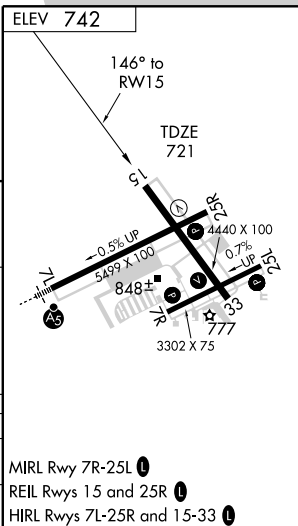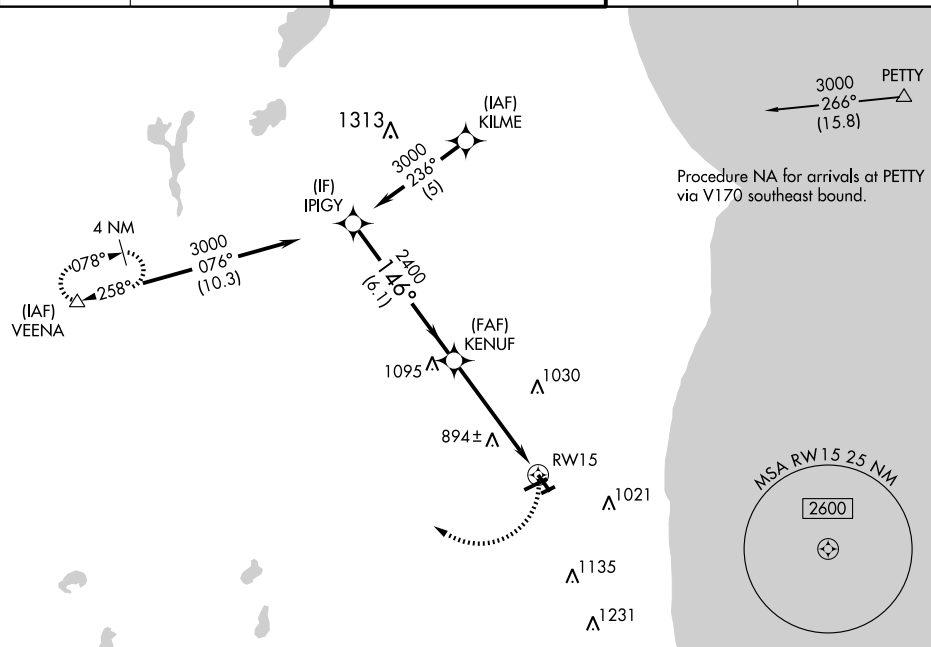

CATEGORY	A		B		C		D	
	1200-1		479 (500-1)		1200-1¼ 479 (500-1¼)		1200-1½ 479 (500-1½)	
CIRCLING	1200-1		458 (500-1)		1200-1½ 458 (500-1½)		1340-2 598 (600-2)	

KENOSHA, WISCONSIN

Orig 10098

42°36'N-87°56'W

KENOSHA RGNL (E,N,W)

RNAV (GPS) RWY 15

WAAS CH 49014 W25A	APP CRS 246°	Rwy Idg TDZE 732 Apt Elev 742
--	------------------------	---

RNAV (GPS) RWY 25R

KENOSHA RGNL (E\N\W)

▼ Baro-VNAV NA when using Waukegan Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F).
▲ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Waukegan Rgnl altimeter setting and increase all DA 27 feet and all MDA 40 feet and increase LNAV Cat C visibility ¼ mile.

MISSED APPROACH:
Climb to 3000 direct AHYOB and via track 310° to VEENA and hold.


ATIS
127.175

MILWAUKEE APP CON
119.65 317.725


KENOSHA TOWER ★
118.6 (CTAF) 353.6

GND CON
121.875

UNICOM
122.95

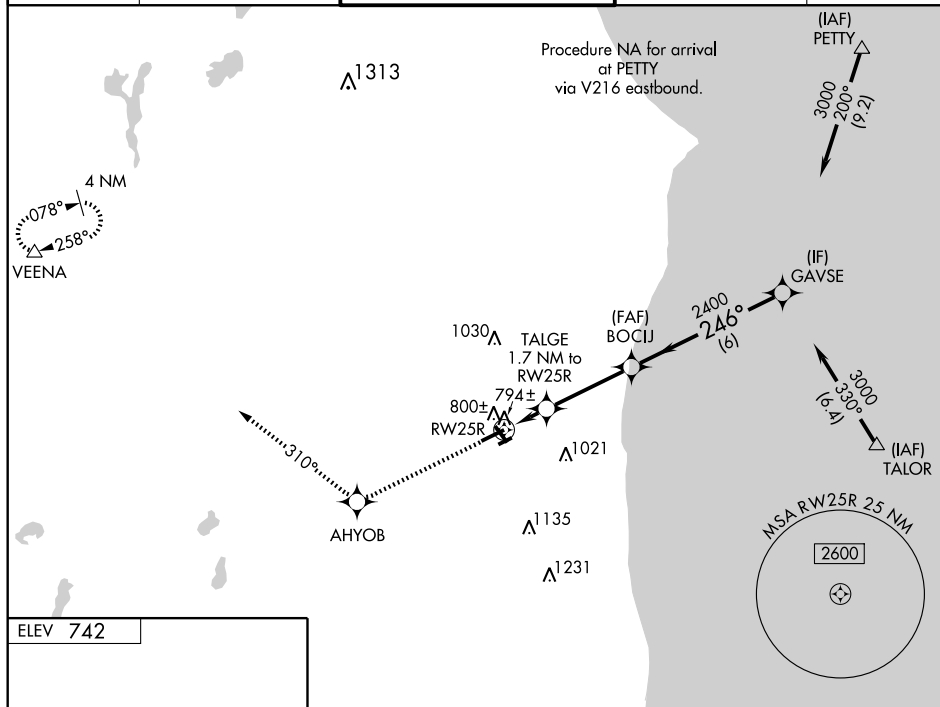

ELEV 742



3000	AHYOB	310° track	VEENA	GAVSE
*LNAV only				
TALGE 1.7 NM to RW25R BOCIJ 246° 2400 3000 Procedure Turn NA GS 3.00° TCH 45				
CATEGORY	A B C D			
LPV DA	982-1 250 (300-1)			
LNAV/VNAV DA	1064-1½ 332 (400-1½)			
LNAV MDA	1100-1 368 (400-1)			
CIRCLING	1200-1 458 (500-1) 1200-1½ 458 (500-1½) 1340-2 598 (600-2)			

MIRL Rwy 7R-25L
 REIL Rws 15 and 25R
 HIRL Rws 7L-25R and 15-33

KENOSHA, WISCONSIN
 Orig 10098

42°36'N-87°56'W

KENOSHA RGNL (E\N\W)

RNAV (GPS) RWY 25R

APP CRS 326°	Rwy Idg TDZE Apt Elev	4440 721 742
------------------------	-----------------------------	---

RNAV (GPS) RWY 33
KENOSHA RGNL(ENW)

T	DME/DME RNP-0.3 NA.
A	When local altimeter setting is not received, use Waukegan Rgnl altimeter setting and increase all MDA 40 feet. VDP NA when using Waukegan Rgnl altimeter setting.



MISSED APPROACH: Climb to 3000 direct KENUF and via track 281° to VEENA and hold.


ATIS
127.175

MILWAUKEE APP CON
119.65 317.725

KENOSHA TOWER ★
118.6(CTAF) **L** 353.6

GND CON
121.875

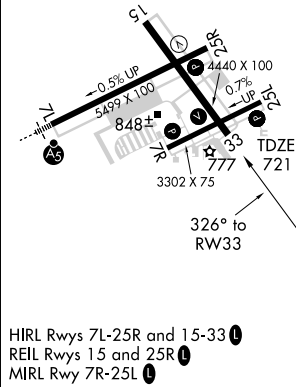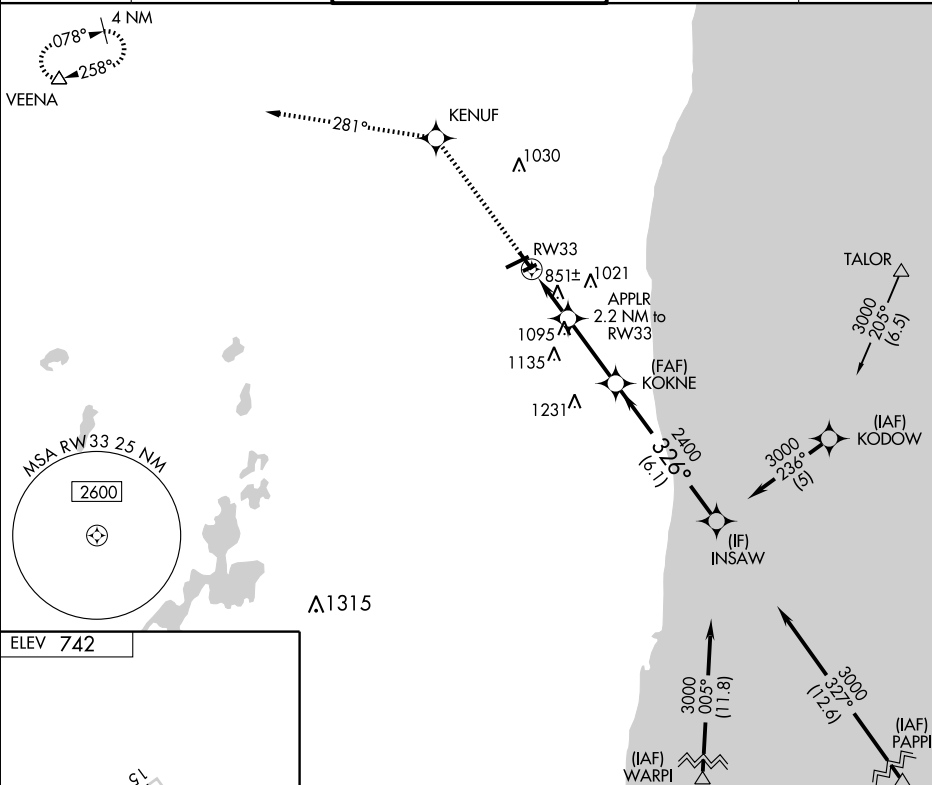UNICOM
122.95

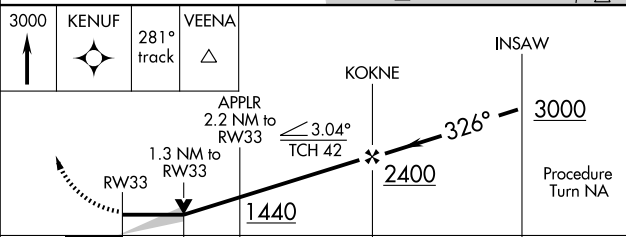3000 ↑	KENUF ✦	281° track	VEENA △				
APPLR 2.2 NM to RW33 1.3 NM to RW33 3.04° TCH 42				KOKNE	INSAW	3000	Procedure Turn NA
1.3 0.9 2.9 NM 6.1 NM				1440	2400	326°	
CATEGORY	A		B		C	D	
LNAV MDA	1160-1	439 (500-1)	1160-1¼ 439 (500-1¼)		1160-1½ 439 (500-1½)	1160-1½ 439 (500-1½)	
CIRCLING	1200-1	458 (500-1)	1200-1½ 458 (500-1½)		1340-2 598 (600-2)	1340-2 598 (600-2)	

VEENA TWO ARRIVAL (VEENA.VEENA2)


MILWAUKEE, WISCONSIN

MILWAUKEE APP CON
126.5 307.0
GENERAL MITCHELL ATIS
126.4
TIMMERMAN ATIS
128.3
WAUKEGAN ATIS
132.4
KENOSHA ATIS
127.175
WAUKESHA ATIS
118.875

BADGER
116.4 BAE
Chan 111

JANESVILLE
114.3 JVL
Chan 90
N42° 33.48' - W89° 06.32'
L-28

JOLIET
112.3 JOT
Chan 70
N41° 32.79' - W88° 19.10'
L-28, H-5

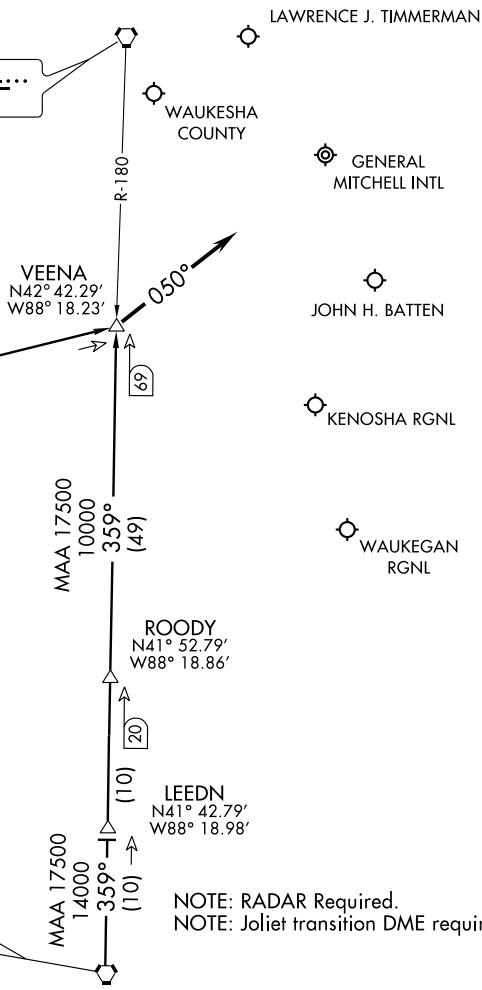

NOTE: Chart not to scale.

JANESVILLE TRANSITION (JVL.VEENA2): From over JVL VOR/DME via JVL R-073 to VEENA INT. Thence

JOLIET TRANSITION (JOT.VEENA2): From over JOT VORTAC via JOT R-359 to VEENA INT. Thence

. . . . Depart VEENA INT heading 050° for initial vector to final approach.

LOST COMMUNICATIONS: From VEENA INT proceed direct IAF for destination airport.

VOR/DME ENW 109.2 Chan 29	APP CRS 159°	Rwy Idg TDZE 721 Apt Elev 742
---	------------------------	---

VOR RWY 15

KENOSHA RGNL (ENW)

▼ Visibility reduction by helicopters NA.
▲ When local altimeter setting not received, use Waukegan Rgnl altimeter setting and increase all MDA 40 feet and increase S-15 Cats C/D visibility ¼ mile.

MISSED APPROACH: Climbing right turn to 2500 in ENW VOR/DME holding pattern, continue climb-in-hold to 2500.




ATIS
127.175

MILWAUKEE APP CON
119.65 317.725

KENOSHA TOWER ★
118.6 (CTAF) 353.6

GND CON
121.875

UNICOM
122.95

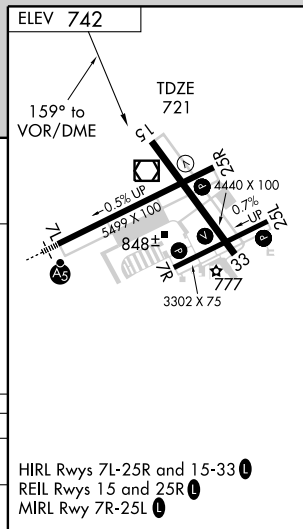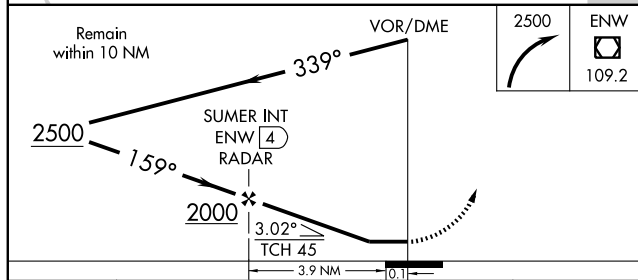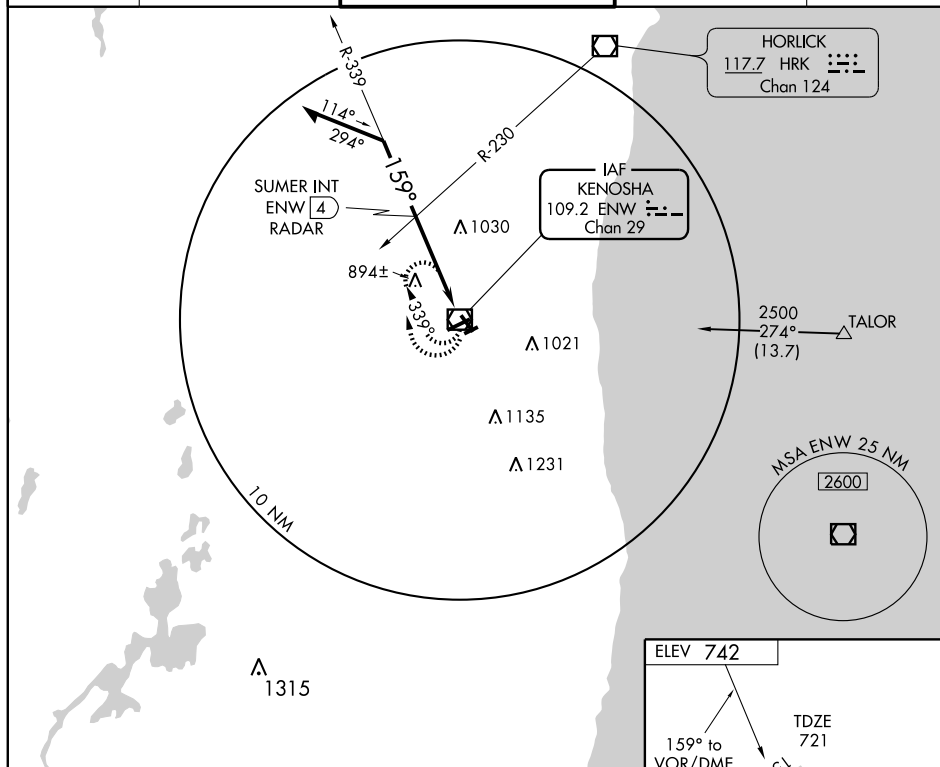

CATEGORY	A	B	C	D
S-15	1200-1 479 (500-1)		1200-1¼ 479 (500-1¼)	1200-1½ 479 (500-1½)
CIRCLING	1200-1 458 (500-1)		1200-1½ 458 (500-1½)	1340-2 598 (600-2)

HIRL Rwy 7L-25R and 15-33
 REIL Rwy 15 and 25R
 MIRL Rwy 7R-25L

VOR/DME ENW 109.2 Chan 29	APP CRS 256°	Rwy Idg TDZE 732 Apt Elev 742
---	------------------------	---

VOR RWY 25R

KENOSHA RGNL (ENW)

⚠ Visibility reduction by helicopters NA. When local altimeter setting not received, use Waukegan Rgnl altimeter setting and increase all MDA 40 feet and increase S-25R Cats C/D visibility $\frac{1}{4}$ mile.

MISSED APPROACH: Climbing right turn to 2500 in ENW VOR/DME holding pattern, continue climb-in-hold to 2500.


ATIS
127.175

MILWAUKEE APP CON
119.65 317.725


KENOSHA TOWER ★
118.6 (CTAF) 353.6

GND CON
121.875

UNICOM
122.95

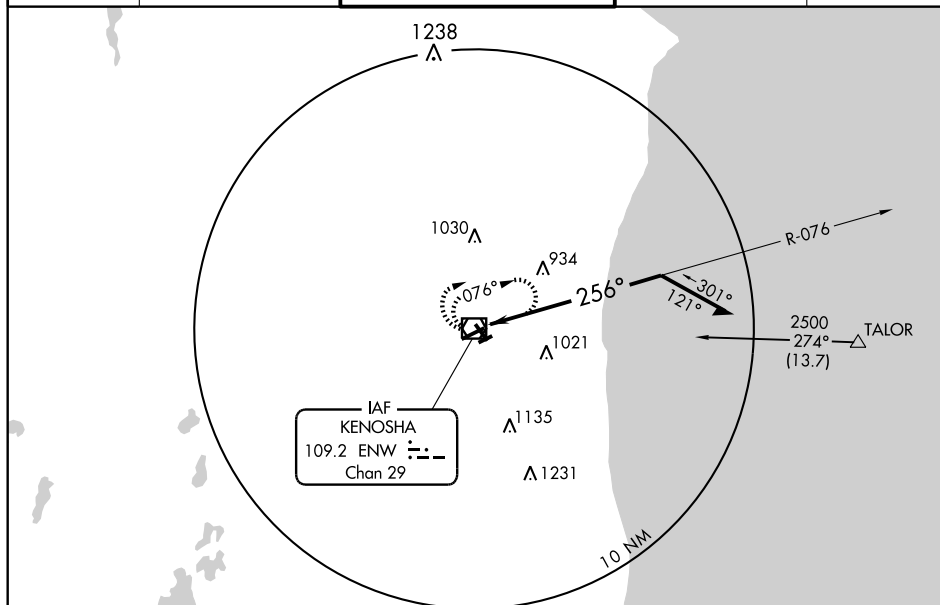

ELEV **742**




HIRL Rws 7L-25R and 15-33
REIL Rws 15 and 25R
MIRL Rwy 7R-25L

2500 ENW
109.2

VOR/DME

Remain within 10 NM

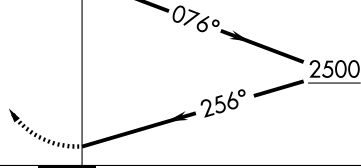

CATEGORY	A	B	C	D
S-25R	1300-1	568 (600-1)	1300-1½ 568 (600-1½)	1300-1¾ 568 (600-1¾)
CIRCLING	1300-1	558 (600-1)	1300-1½ 558 (600-1½)	1340-2 598 (600-2)

KENOSHA, WISCONSIN
Amdt 1 10098

42°36'N-87°56'W


KENOSHA RGNL (ENW)
VOR RWY 25R

AIRPORT DIAGRAM

AL-219 (FAA)

LA CROSSE MUNI (LSE)
LA CROSSE, WISCONSIN

EC-3, 23 SEP 2010 to 21 OCT 2010

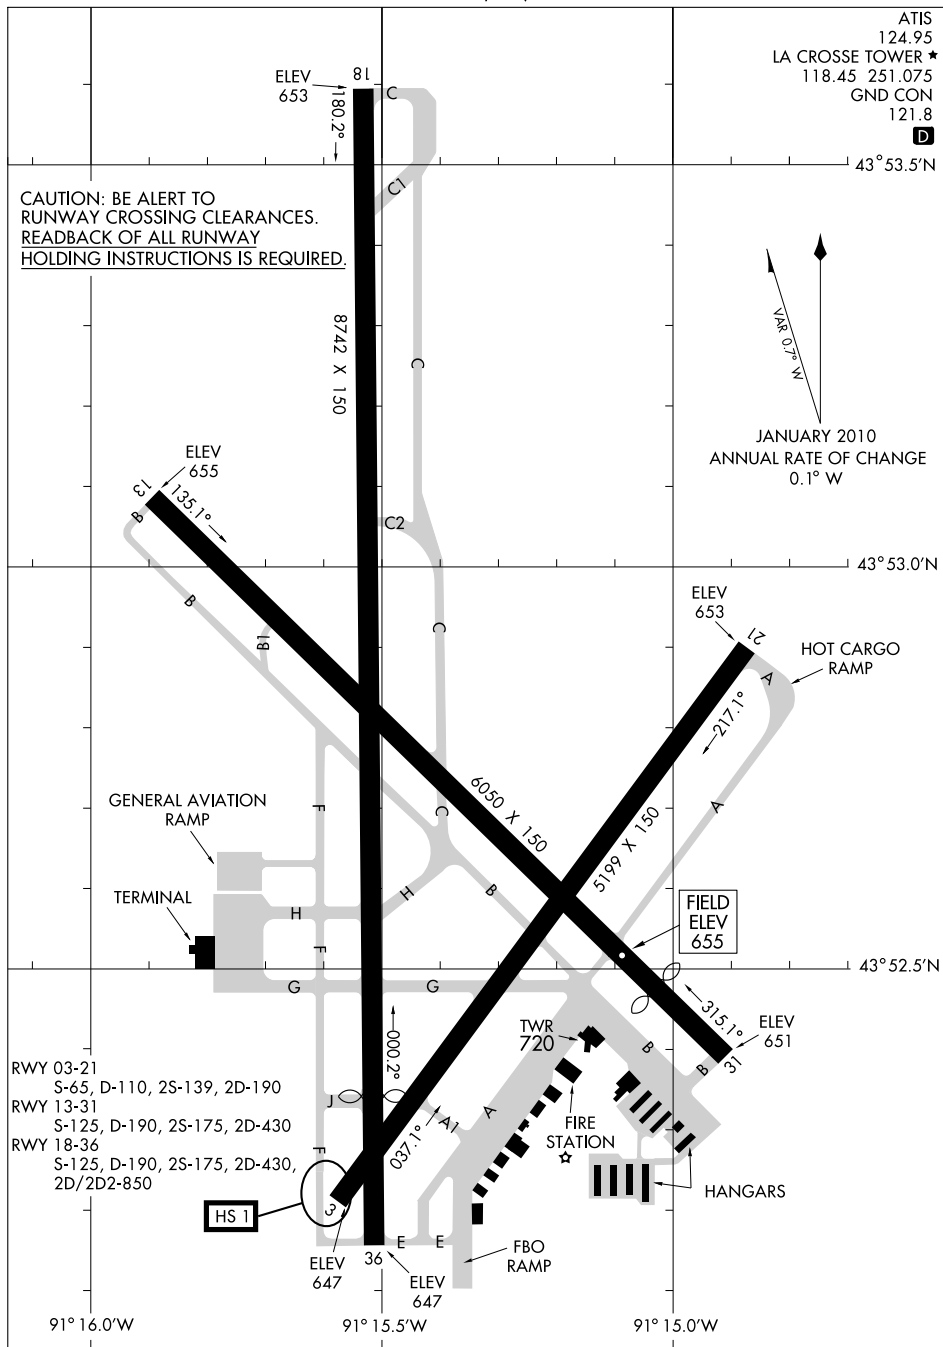

EC-3, 23 SEP 2010 to 21 OCT 2010

AIRPORT DIAGRAM

LA CROSSE, WISCONSIN
LA CROSSE MUNI (LSE)

KINGS LAND O' LAKES (See LAND O' LAKES)

KOOKY N44°12.95' W88°23.94' NOTAM FILE ATW.
 NDB (MHW/LOM) 407 AQ 298° 5.8 NM to Outagamie Co Rgnl. Unmonitored.

GREEN BAY
 L-28H

LA CROSSE MUNI (LSE) 4 NW UTC-6(-5DT) N43°52.76' W91°15.40'
 655 B S4 FUEL 100LL, JET A Class I, ARFF Index B NOTAM FILE LSE
RWY 18-36: H8742X150 (CONC-GRVD) S-125, D-190, 2S-175, 2D-430, 2D/2D2-850 HIRL
RWY 18: MALSR. PAPI(P4L)—GA 3.0° TCH 55'.
RWY 36: REIL. VASI(V4L)—GA 3.0° TCH 28'. Thld displcd 1131'.
 Tree.
RWY 13-31: H6050X150 (ASPH-GRVD) S-125, D-190, 2S-175,
 2D-430 HIRL
RWY 13: REIL. VASI(V4L)—GA 3.0° TCH 32'. Trees.
RWY 31: VASI(V4L)—GA 3.6° TCH 59'. Thld displcd 739'. Tower.
RWY 03-21: H5199X150 (ASPH) S-65, D-110, 2S-139,
 2D-190 HIRL
RWY 03: PAPI(P4L)—GA 4.0° TCH 40'. Pole.
RWY 21: PAPI(P4L)—GA 4.0° TCH 40'. Ground.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 13: TORA-5300 TODA-5300 ASDA-5300 LDA-5300
RWY 18: TORA-8742 TODA-8742 ASDA-8536 LDA-8536
RWY 31: TORA-6050 TODA-6050 ASDA-6050 LDA-5300
RWY 36: TORA-8742 TODA-8742 ASDA-8557 LDA-7426

AIRPORT REMARKS: Attended 1200-0300Z†. For attendant other hrs
 call 608-783-8359. Rwy 36 and Rwy 03 apch ends are closely
 aligned. Verify correct rwy and compass heading prior to
 departure. Deer, waterfowl and other birds on and in/ovf arpt. Heavy concentrations of waterfowl spring and fall.
 Twr 1390' AGL 6 NM southwest. Numerous twrs up to 836' AGL 4 NM southeast. When twr clsd HIRL Rwy
 13-31 preset low inst; to increase ints and ACTIVATE HIRL Rws 18-36 and 03-21; REIL Rws 13 and 36;
 MALSR Rwy 18—CTAF.

WEATHER DATA SOURCES: ASOS (608) 781-9067.

COMMUNICATIONS: CTAF 118.45 ATIS 124.95 UNICOM 122.95

RCO 122.2 122.35 (GREEN BAY RADIO)

MINNEAPOLIS CENTER APP/DEP CON 128.6

TOWER 118.45 (1200-0300Z†) GND CON 121.8

AIRSPACE: CLASS D svc 1200-0300Z† other times CLASS E.


RADIO AIDS TO NAVIGATION: NOTAM FILE LSE.

(T) VOR/DME 108.4 LSE Chan 21 N43°52.57' W91°15.36' at fld. 650/2E.

VOR/DME unusable 100°-150° and 230°-060° byd 20 NM blo 3300'.

MINDI NDB (LOM) 272 LS N44°00.24' W91°15.65' 177° 7.5 NM to fld.

ILS 111.1 I-LSE Rwy 18. Class IT. LOM MINDI NDB. ILS unmonitored when twr clsd.

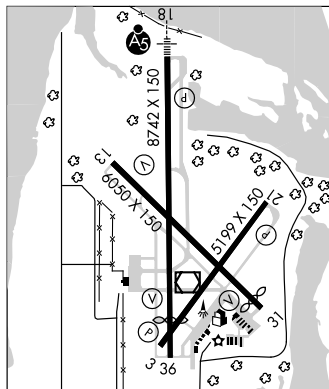

LAC DU FLAMBEAU

FRANKS SPB (4P5) 7 SW UTC-6(-5DT) N45°53.00' W90°00.01'

1650 FUEL 80 NOTAM FILE GRB

WATERWAY N-S: 9000X1000 (WATER)

WATERWAY E-W: 2640X1000 (WATER)

SEAPLANE REMARKS: Attended May-Oct dawn-dusk. Dock in poor condition. Call ahead to ensure fuel avbl.

COMMUNICATIONS: CTAF 122.9

GREEN BAY

HOT SPOTS

An "airport surface hot spot" is a location on an aerodrome movement area with a history or potential risk of collision or runway incursion, and where heightened attention by pilots/drivers is necessary.

A "hot spot" is a runway safety related problem area on an airport that presents increased risk during surface operations. Typically it is a complex or confusing taxiway/taxiway or taxiway/runway intersection. The area of increased risk has either a history of or potential for runway incursions or surface incidents, due to a variety of causes, such as but not limited to: airport layout, traffic flow, airport marking, signage and lighting, situational awareness, and training. Hot spots are depicted on airport diagrams as open circles or polygons designated as "HS 1", "HS 2", etc. and tabulated in the list below with a brief description of each hot spot. Hot spots will remain charted on airport diagrams until such time the increased risk has been reduced or eliminated.

CITY/AIRPORT	HOT SPOT	DESCRIPTION*
ALTON/ST. LOUIS, IL		
ST. LOUIS RGNL (ALN)	HS 1	Twy C and Rwy 11, rwy in close proximity of ramp.
	HS 2	Twy A and Rwy 17-35, rwy in close proximity of ramp.
CHAMPAIGN-URBANA, IL		
UNIVERSITY OF ILLINOIS- WILLARD (CMI)	HS 1	Rwy 18 hold short line set back on Twy C.
	HS 2	Complex twy/twy int.
	HS 3	Rwy 36 hold short lines proximity on Twy B and Twy B2.
CHICAGO, IL		
CHICAGO-O'HARE INTL (ORD)	HS 1	Twy R between Rwy 09R-27L and Rwy 04L-22R.
	HS 2	Rwy 27L and Rwy 04L-22R.
	HS 3	Twy B to Twy H int close proximity to Rwy 09R-27L.
	HS 4	Rwy 09R-27L and Twy A1.
	HS 5	Int of Twy U5 and Twy U in close proximity to Rwy 09R-27L.
	HS 6	Twy U and Twy H close proximity to Rwy 09R-27L.
	HS 7	Twy T10 and Twy M.
	HS 8	Twy S5 and Rwy 04R.
	HS 9	Int of Twy E, Twy G and Twy Z close proximity of rws.
	HS 10	Landing Rwy 27R first available turn off is Twy C1 6500' from Rwy 27R thr.
	HS 11	Rwy 14 R and Rwy 10-28. Rwy 14R now ends north of active Rwy 10-28. Rwy 10-28 arrivals - There is no exit from Rwy 10-28 onto Rwy 14R.
CHICAGO, IL		
MIDWAY INTL (MDW)	HS 1	Displaced thr Rwy 04L. Twy W turn onto Rwy 04L.
	HS 2	Int of Rwy 04L and Twy F.
	HS 3	Rwy 31L hold short line on Twy K.
	HS 4	Rwy 31R hold short line set back on Twy Y terminal side.
	HS 5	Int of Rwy 04R and Twy F.
CHICAGO/PROSPECT HEIGHTS/ WHEELING, IL		
CHICAGO EXECUTIVE (PWK)	HS 1	Complex int in close proximity of rws.
	HS 2	Twy int in close proximity of Rwy 06.
	HS 3	Rwy 06 hold short line set back on Twy T.
	HS 4	Rwy 06 hold short line set back and close to Hangar 4 ramp.
JANESVILLE, WI		
SOUTERN WISCONSIN RGNL (JVL)	HS 1	Rwy 32 and Rwy 36 apch ends are closely aligned and may be confused when lining up for departure.
LA CROSSE, WI		
LA CROSSE MUNI (LSE)	HS 1	Rwy 36 hold position set back on Twy F.

(SEE CONTINUATION PAGE FOR MORE LISTINGS)

HOT SPOTS



(CONTINUED)



CITY/AIRPORT	HOT SPOT	DESCRIPTION*
MILWAUKEE, WI		
GENERAL MITCHELL INTL (MKE)	HS 1	Twy E and Twy V at Rwy 19R and Rwy 25R.
	HS 2	Twy M and Rwy 01L-19R.
MOLINE, IL		
QUAD CITY INTL (MLI)	HS 1	Twys in close proximity to Rwy 23.
	HS 2	Wrong rwy departure risk.
	HS 3	Non-standard Rwy 13-31 hold position.
	HS 4	Confusing twy int.
	HS 5	Hold lines for Twy L appear abruptly.
SPRINGFIELD, IL		
ABRAHAM LINCOLN		
CAPITAL (SPI)	HS 1	Complex rwy/rwy int.

*See appropriate A/FD, Alaska or Pacific Supplement HOT SPOT table for additional information.

LOC I-LSE <u>111.1</u>	APP CRS 177°	Rwy Idg 8742 TDZE 653 Apt Elev 655
----------------------------------	------------------------	---

ILS or LOC RWY 18

	When local altimeter not received, use Winona altimeter setting and increase all DA 53 feet, all MDA 60 feet, increase visibility Circling Cat. C ¼.			MISSED APPROACH: Climb to 1400 then climbing right turn to 3400 via LSE VOR/DME R-185 to RONNI Int/LSE 6.5 DME and hold.	
	ATIS 124.95	MINNEAPOLIS CENTER 128.6 363.0		LA CROSSE TOWER ★ 118.45 (CTAF) 0 251.075	GND CON 121.8

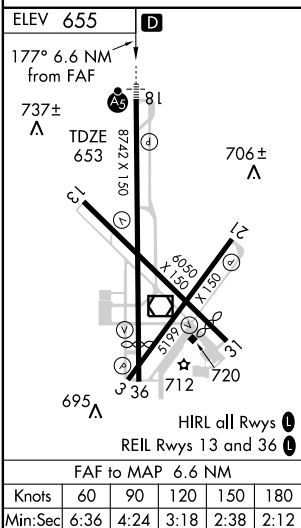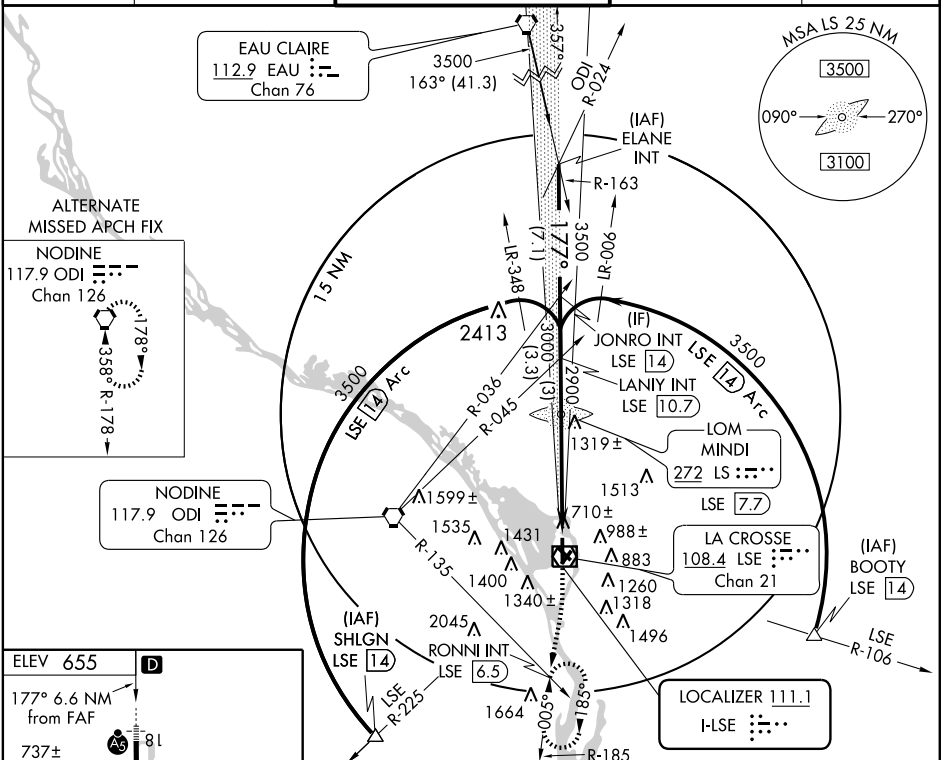

JONRO INT LSE <u>14</u> LANIY INT LSE <u>10.7</u> LOM LSE <u>7.7</u>					1400 ↑	3400 ↘ LSE R-185 108.4	RONNI INT
3500 Procedure Turn NA GS 3.00° TCH 55					177°	2864	2900
3000					3.3 NM	3 NM	6.6 NM
CATEGORY	A	B	C	D			
S-ILS 18	853-½ 200 (200-½)						
S-LOC 18	1080-½ 427 (500-½)		1080-¾ 427 (500-¾)	1080-1 427 (500-1)			
CIRCLING	1180-1 525 (600-1)		1440-2¼ 785 (800-2¼)	1780-3 1125 (1200-3)			

LOM LS 272	APP CRS 177°	Rwy Idg TDZE Apt Elev	8742 653 655
----------------------	------------------------	-----------------------------	---

NDB RWY 18

LA CROSSE MUNI (LSE)




When local altimeter not received, use Winona altimeter setting and increase all MDA 60 feet. Inoperative table does not apply to S-18 Cat. A.



MISSED APPROACH: Climbing left turn to 3500 direct MINDI LOM and hold.

ATIS 124.95	MINNEAPOLIS CENTER 128.6 363.0	LA CROSSE TOWER ★ 118.45 (CTAF) 251.075	GND CON 121.8	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

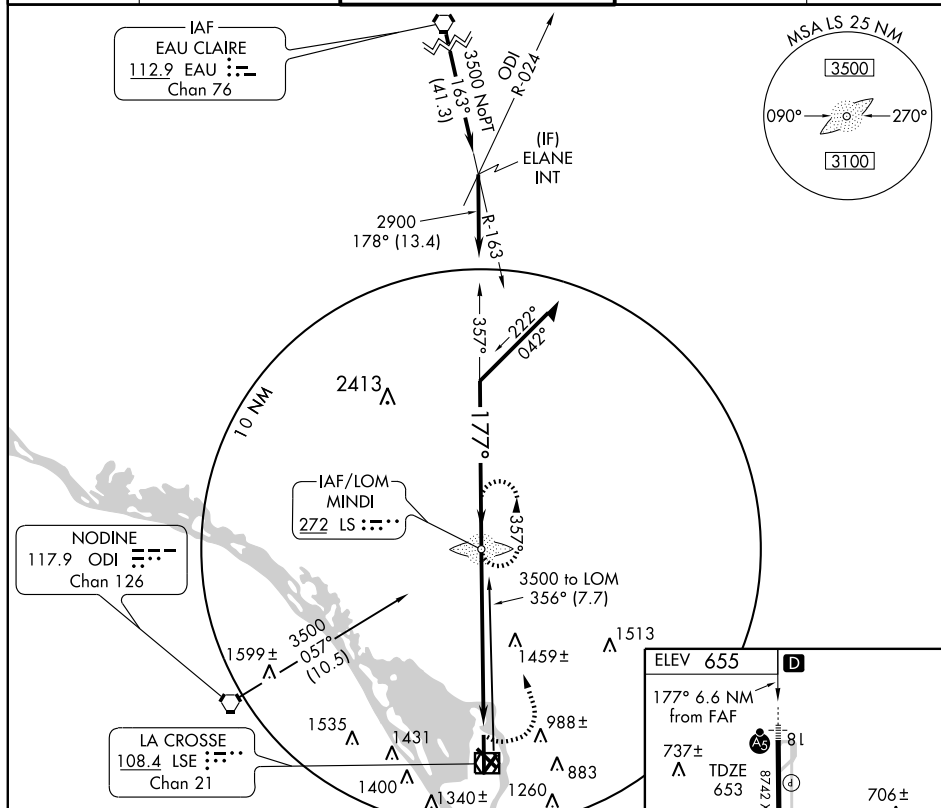

	Remain within 10 NM		LOM	
	3500	357°	2900	177°
			3.11°	TCH 55
			6.6 NM	
CATEGORY	A	B	C	D
S-18	1800-1¼ 1147 (1200-1¼)		1800-2½ 1147 (1200-2½)	1800-2¾ 1147 (1200-2¾)
CIRCLING	1800-1¼ 1145 (1200-1¼)	1800-1½ 1145 (1200-1½)	1800-3 1145 (1200-3)	

ELEV 655	D
177° 6.6 NM from FAF	81
737± TDZE 653	706±
8742 X 150	695
36 712 720	
HIRL all Rwy 1	
REIL Rwy 13 and 36 1	
FAF to MAP 6.6 NM	
Knots	60 90 120 150 180
Min:Sec	6:36 4:24 3:18 2:38 2:12

APP CRS 034°	Rwy Idg TDZE 653	5199
	Apt Elev 655	


RNAV (GPS) RWY 3

LA CROSSE MUNI (LSE)


▽ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
▲ When local altimeter setting not received, use Winona altimeter setting and increase all MDA 60 feet.

MISSED APPROACH: Climb to 3000 direct HEKOR and hold.


ATIS 124.95	MINNEAPOLIS CENTER 128.6 363.0	LA CROSSE TOWER ★ 118.45 (CTAF) 0 251.075	GND CON 121.8	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

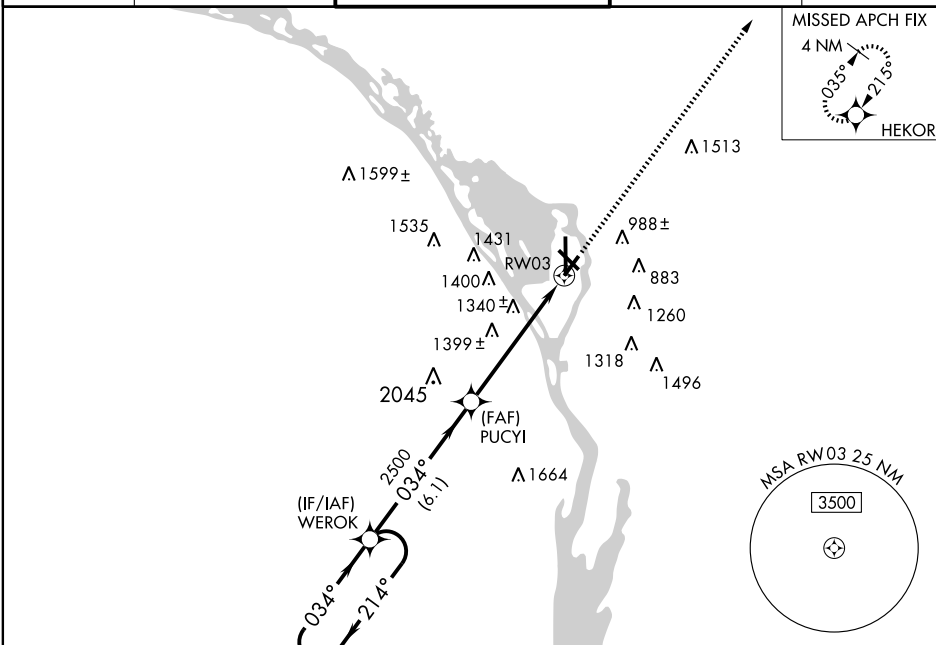

Procedure NA for arrivals at FALAR via V246 Southbound.

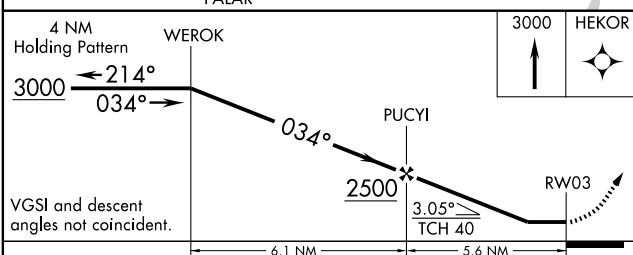

CATEGORY	A	B	C	D
LNNAV MDA	1660-1¼ 1007 (1100-1¼)	1660-1½ 1007 (1100-1½)	1660-3 1007 (1100-3)	
CIRCLING	1660-1¼ 1005 (1100-1¼)	1660-1½ 1005 (1100-1½)	1660-3 1005 (1100-3)	1780-3 1125 (1200-3)

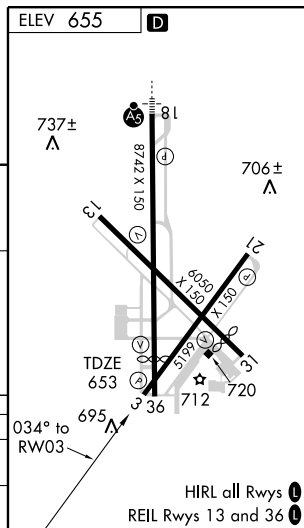

WAAS CH 56509 W13A	APP CRS 132°	Rwy Idg 5300 TDZE 655 Apt Elev 655
--	------------------------	---

RNAV (GPS) RWY 13

LA CROSSE MUNI (LSE)

▼ Baro-VNAV NA when using Winona altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 48° C (118° F).
 ▲ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Winona altimeter setting and increase LPV all Cats. DA 53 feet, increase LNAV/VNAV all Cats. DA 84 feet, increase LPV and LNAV/VNAV visibility ¼ mile all Cats., increase all MDA 60 feet, increase LNAV Cats. C/D and Circling Cat. C visibility ¼ mile.

MISSED APPROACH:
Climb to 3000 direct COSUT and via 117° track to WEVBA and hold.

ATIS
124.95

MINNEAPOLIS CENTER
128.6 363.0

LA CROSSE TOWER ★
118.45 (CTAF) 251.075

GND CON
121.8

UNICOM
122.95


3000 NoPT
(IAF) PEGGS
101°
(10.2)

4 NM

132°

(IF/IAF) LAKRE

Procedure NA for arrivals at PEGGS via V2-97 Northwest bound.



▲ 2413

2800
132°
(6)
(FAF) JAKVI

▲ 1599±

1535
▲ 1431
▲ 1400
1340±

▲ 1664

▲ 988±
▲ 883
▲ 1260

▲ 1318
▲ 1496

▲ 2045

▲ 1664

▲ 1664

▲ 1664

▲ 1664

▲ 1664

▲ 1664

▲ 1664

▲ 1664

▲ 1664

▲ 1664

▲ 1664

▲ 1664


▲ 1664

▲ 1664



4 NM Holding Pattern LAKRE
3000 ← 302°
132° →
GS 3.00°
TCH 45
VGSI and RNAV glide-path not coincident.

CATEGORY	A	B	C	D
LPV DA		957-1	302 (400-1)	
LNAV/VNAV DA		1019-1¼	364 (400-1¼)	
LNAV MDA	1140-1	485 (500-1)	1140-1¼ 485 (500-1¼)	1140-1½ 485 (500-1½)
CIRCLING	1140-1	485 (500-1)	1440-2¼ 785 (800-2¼)	1780-3 1125 (1200-3)

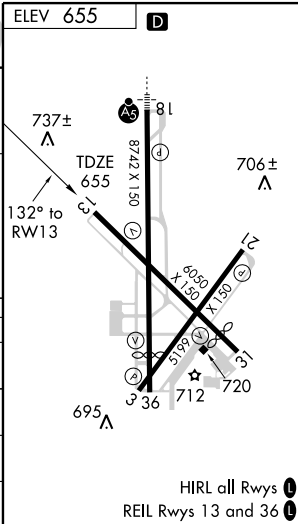

APP CRS **214°**
 Rwy Idg **5199**
 TDZE **654**
 Apt Elev **655**

RNAV (GPS) RWY 21

LA CROSSE MUNI (LSE)

▽ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
▲ When local altimeter setting not received, use Winona altimeter setting and increase all MDA 60 feet.

MISSED APPROACH: Climb to 3100 direct WEROK and hold.

ATIS
124.95

MINNEAPOLIS CENTER
128.6 363.0

LA CROSSE TOWER ★
118.45 (CTAF) 251.075

GND CON
121.8

UNICOM
122.95

Procedure NA for arrivals at SAUCY via V246 Northeast bound.

(IAF) SAUCY

▲ 2413

4 NM

035°
215°
215°
215°
(6.1)

(FAF) PUPIC

▲ 1513

▲ 1599 ±

MISSED APCH FIX WEROK

1535 ▲

1431 ▲

1400 ▲

1340 ± ▲

988 ± ▲

883 ▲


1260 ▲

1318 ▲

1496 ▲

ELEV 655

D

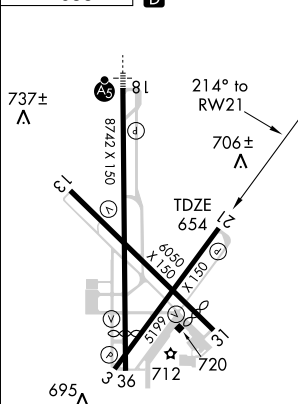

737 ± ▲

81

8742 X 150

214° to RW21

706 ± ▲

TDZE 654

6050 X 150

5199

712

720

695 ▲

36

13

HIRL all Rwy

REIL Rwy 13 and 36

3100 WEROK

HEKOR 4 NM Holding Pattern

PUPIC 2500
 3.04° TCH 40
 214° 215° 215°
 5.6 NM 6.1 NM

VGSI and descent angles not coincident.

CATEGORY	A	B	C	D
LNNAV MDA	1820-1¼ 1166 (1200-1¼)	1820-1½ 1166 (1200-1½)	1820-3	1166 (1200-3)
CIRCLING	1820-1¼ 1165 (1200-1¼)	1820-1½ 1165 (1200-1½)	1820-3	1165 (1200-3)

APP CRS	Rwy Idg	5300
297°	TDZE	654
	Apt Elev	655

RNAV (GPS) RWY 31



DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Winona altimeter setting and increase all MDA to 60 feet.


MISSED APPROACH: Climb to 3000 direct HISUN and via 315° track to LAKRE and hold.

ATIS
124.95

MINNEAPOLIS CENTER
128.6 363.0


LA CROSSE TOWER ★
118.45 (CTAF) 251.075

GND CON
121.8

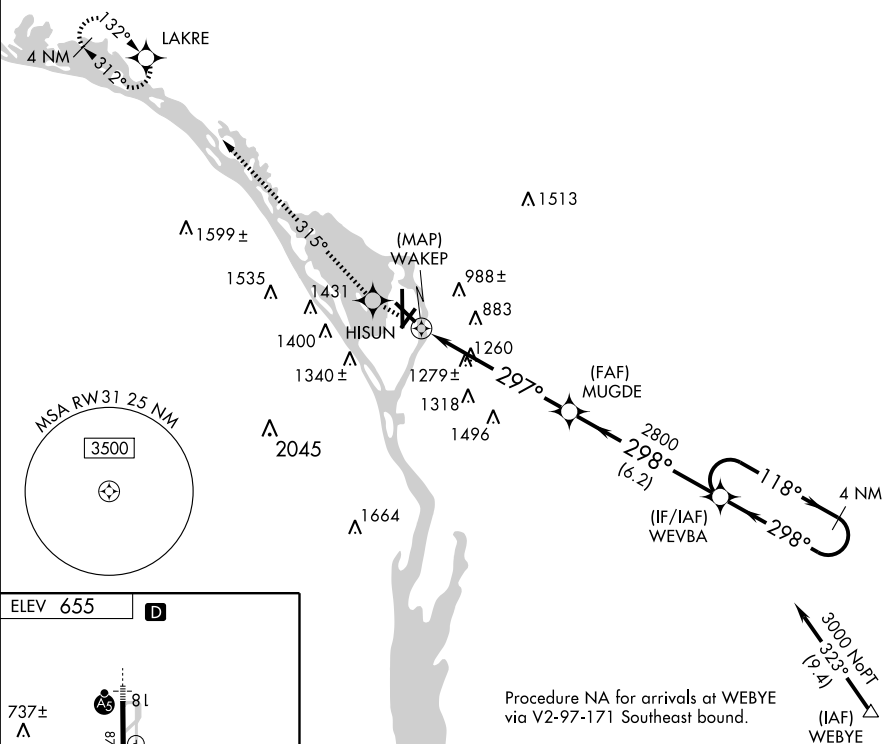UNICOM
122.95


ELEV 655

D

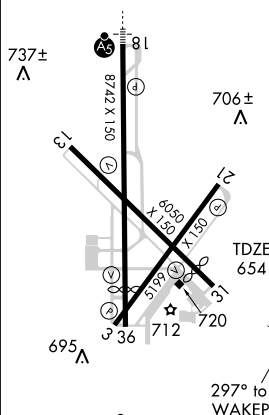

HIRL all Rwys L
REIL Rwys 13 and 36 L

Procedure NA for arrivals at WEBYE
via V2-97-171 Southeast bound.

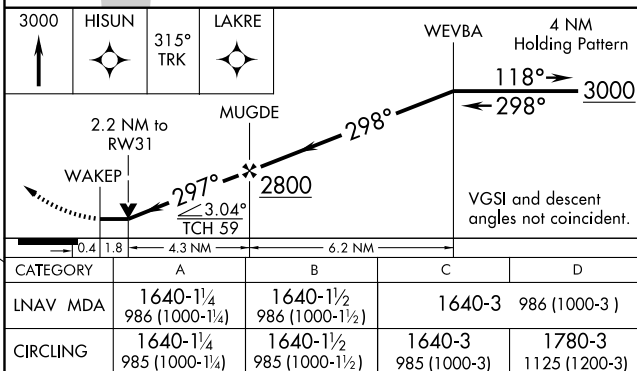

LA CROSSE, WISCONSIN
Orig 10098

43° 53'N-91° 15'W

LA CROSSE MUNI (LSE)
RNAV (GPS) RWY 31

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

WAAS CH 86509 W36A	APP CRS 357°	Rwy Idg 7611 TDZE 653 Apt Elev 655
--	------------------------	---

RNAV (GPS) RWY 36



LA CROSSE MUNI (LSE)




For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 47° C (116° F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Winona altimeter setting. When local altimeter setting not received, use Winona altimeter setting and increase all DA 53 feet, increase LPV all Cats. visibility ¼ mile and LNAV/VNAV all Cats. visibility ¼ mile, increase all MDA 60 feet and LNAV Cats. C/D visibility ¼ mile and Circling Cat. C visibility ¼ mile.

MISSED APPROACH:
Climb to 3500 direct
POGOC and hold.

ATIS 124.95	MINNEAPOLIS CENTER 128.6 363.0	LA CROSSE TOWER ★ 118.45 (CTAF) 0 251.075	GND CON 121.8	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

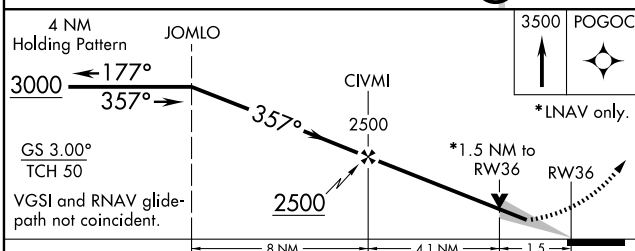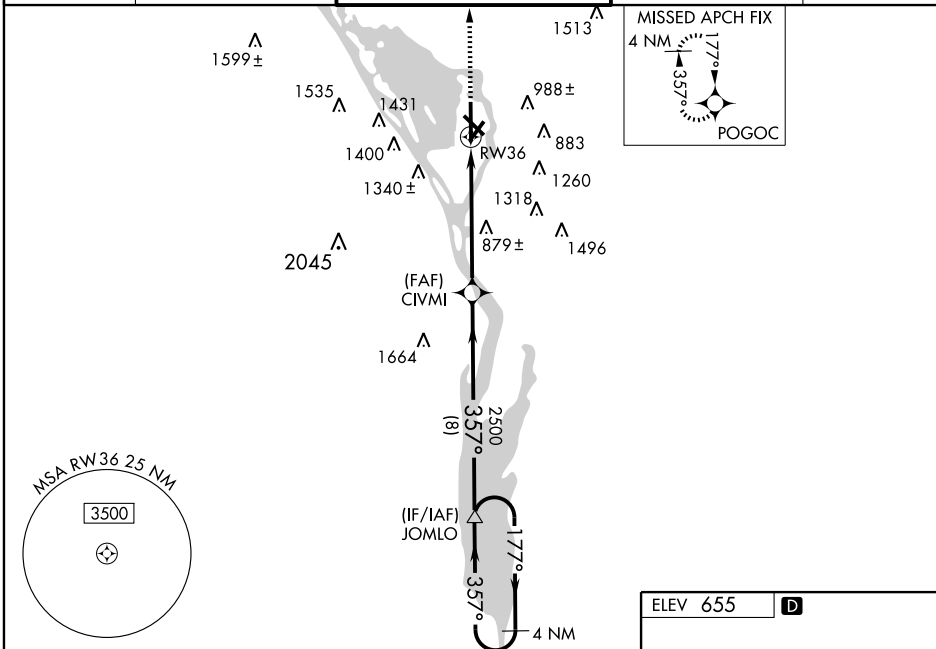

CATEGORY	A	B	C	D
LPV DA		953-1	300 (300-1)	
LNAV/VNAV DA		1203-2	550 (600-2)	
LNAV MDA	1140-1	487 (500-1)	1140-1½ 487 (500-1½)	1140-1½ 487 (500-1½)
CIRCLING	1140-1	485 (500-1)	1440-2¼ 785 (800-2¼)	1780-3 1125 (1200-3)

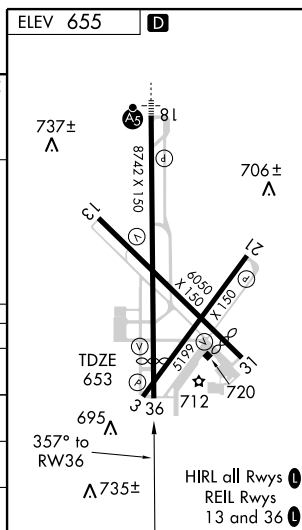

VOR/DME LSE 108.4 Chan 21	APP CRS 139°	Rwy Idg TDZE Apt Elev 5300 655 655
---	------------------------	--



VOR RWY 13

LA CROSSE MUNI (LSE)

Visibility reduction by helicopters NA. When local altimeter setting not received, use Winona altimeter setting and increase all MDA 60 feet, increase S-13 Cat. C and D visibility ¼ mile, increase Circling Cat. C visibility ¼ mile.

MISSED APPROACH: Climb to 1700 then climbing right turn to 3100 via LSE
VOR/DME R-175 to SUEZI Int/LSE 6 DME and hold, continue climb-in-hold to 3100.

ATIS 124.95	MINNEAPOLIS CENTER 128.6 363.0	LA CROSSE TOWER ★ 118.45 (CTAF) 251.075	GND CON 121.8	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

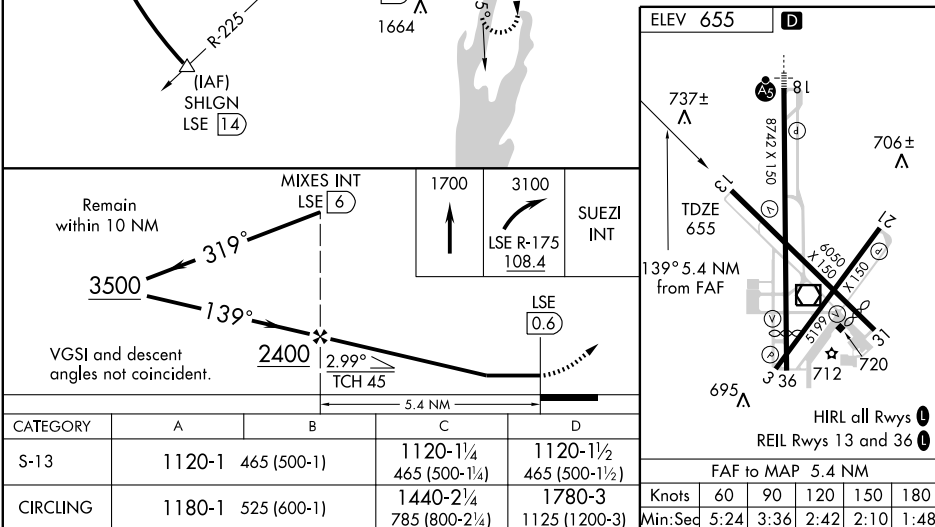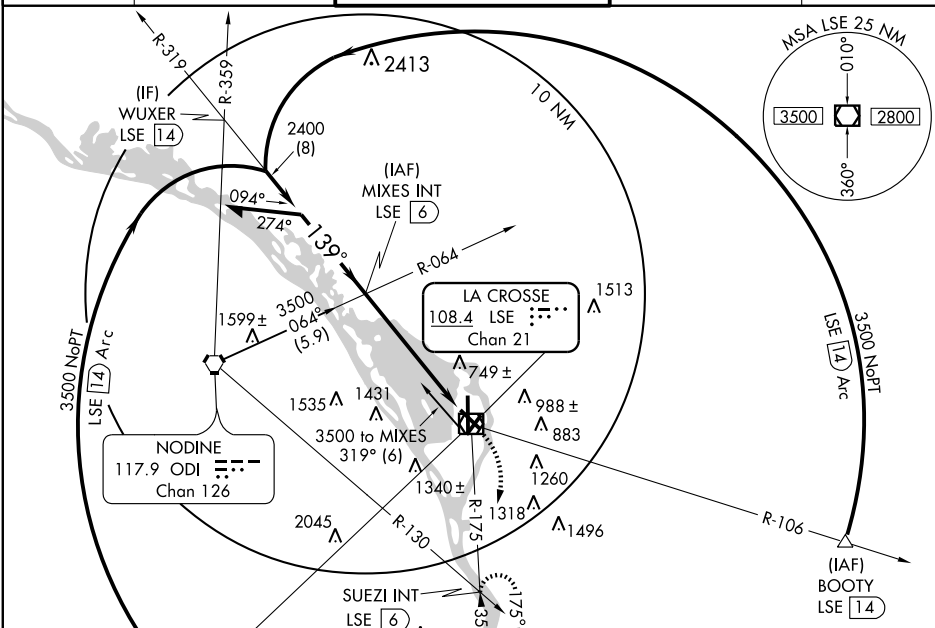

VOR/DME LSE 108.4 Chan 21	APP CRS 005°	Rwy Idg 7611 TDZE 653 Apt Elev 655
---	------------------------	---

VOR RWY 36
LA CROSSE MUNI (LSE)

T Visibility reduction by helicopters NA. When local altimeter setting
A not received, use Winona altimeter setting and increase all MDA
60 feet. Increase S-36 Cat. D and Circling Cat. C visibility ¼ mile.


MISSED APPROACH: Climb to 1500 then climbing left turn to 3500 via LSE R-319 to MIXES Int/LSE 6 DME and hold, continue climb-in-hold to 3500.

ATIS
124.95

MINNEAPOLIS CENTER
128.6 363.0

LA CROSSE TOWER ★
118.45 (CTAF) **L** 251.075

GND CON
121.8

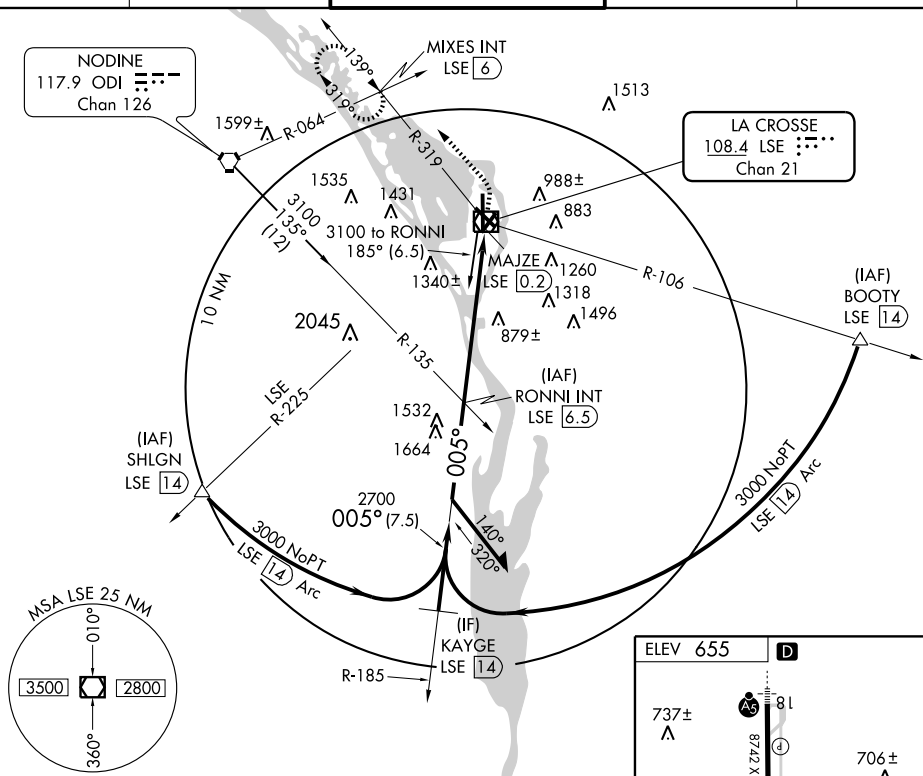UNICOM
122.95

Remain
within 10 NM

RONNI INT
LSE 6.5

VGSI and descent
angles not coincident.

Diagram illustrating the MAJZE LSE system. The system includes a 2700 nm source, a TCH 40 mirror, and two LSE (Low Scattering Element) components. The LSE components are labeled with their respective values: LSE 1.8 and LSE 0.2. The MAJZE detector is shown at the output. The diagram also includes a table with parameters: LSE R-319, 108.4, and INT.

CATEGORY	A	B	C	D
S-36	1160-1	507 (600-1)	1160-1½	507 (600-1½)
CIRCLING	1160-1	505 (600-1)	1440-2¼ 785 (800-2¼)	1780-3 1125 (1200-3)

FAF to MAP 6.3 NM					
Knots	60	90	120	150	180
Min:Sec	6:18	4:12	3:09	2:31	2:06

LA CROSSE, WISCONSIN

Amdt 31 10098

43° 53'N-91° 15'W

LA CROSSE MUNI (LSE)

VOR RWY 36

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

LA POINTE

MADLINE ISLAND (4R5) 2 NE UTC-6(-5DT) N46°47.32' W90°45.52'

GREEN BAY

649 B NOTAM FILE GRB

L-141

RWY 04-22: H3000X75 (ASPH) S-12.5 MIRL 0.8% up NE

IAP

RWY 04: PAPI(P2L)—GA 3.75° TCH 45'. Trees.

RWY 22: PAPI(P2L)—GA 3.75° TCH 45'. Trees.

AIRPORT REMARKS: Unattended. Deer on and in/ov arpt. ACTIVATE MIRL

Rwy 04-22 and PAPI Rwy 04 and Rwy 22—CTAF.


COMMUNICATIONS: CTAF 122.9

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 133.55

RADIO AIDS TO NAVIGATION: NOTAM FILE ASX.

ASHLAND (T) VORW/DME 110.2 ASX Chan 39

N46°32.96' W90°55.04' 022° 15.8 NM to fld. 820/2E.

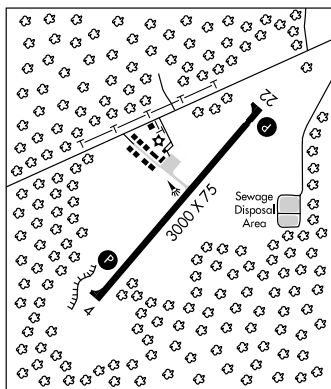

LAWRENCE J. TIMMERMAN (See MILWAUKEE)

LONE ROCK N43°17.66' W90°07.99' NOTAM FILE LNR.

CHICAGO

(L) VORW/DME 112.8 LNR Chan 75 202° 5.4 NM to Tri-Co Rgnl. 1184/0E. HIWAS.

L-11D, 12E

RCO 122.35 (GREEN BAY RADIO)

LONE ROCK

TRI-CO RGNL (LNR) 2 N UTC-6(-5DT) N43°12.71' W90°10.79'

CHICAGO

717 B S3 FUEL 100LL, JET A TPA—1517(800) NOTAM FILE LNR

H-5D, L-28G

RWY 09-27: H5000X75 (ASPH) S-12.5 MIRL

IAP

RWY 09: PAPI(P2L)—GA 3.0° TCH 35'. Antenna.

RWY 27: REIL. PAPI(P2L)—GA 3.0° TCH 33'. Trees.

RWY 18-36: H1850X60 (ASPH) S-12.5 MIRL

RWY 18: Thld dsplcd 138'. Road. RWY 36: Road.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z†. Self-serve fuel avbl 24 hrs. MIRL Rwy 09-27 preset low ints dusk-dawn; to increase ints and ACTIVATE MIRL Rwy 18-36, PAPI Rwy 09 and Rwy 27—CTAF.

WEATHER DATA SOURCES: ASOS 119.425 (608) 583-2576 HIWAS 112.8 LNR.

COMMUNICATIONS: CTAF/UNICOM 123.0

LONE ROCK RCO 122.35 (GREEN BAY RADIO)

Ⓡ MADISON APP/DEP CON 135.45 (1200-0500Z†)

Ⓡ CHICAGO CENTER APP/DEP CON 133.3 (0500-1200Z†)

AIRSPACE: CLASS E svc 1400-2200Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE LNR.

LONE ROCK (L) VORW/DME 112.8 LNR Chan 75 N43°17.66' W90°07.99' 202° 5.4 NM to fld. 1184/0E.

HIWAS.

ILS/DME 108.35 I-LNR Chan 20(Y) Rwy 27.

L. O. SIMENSTAD MUNI (See OSCEOLA)

MADLINE ISLAND (See LA POINTE)

MADISON N43°08.69' W89°20.38' NOTAM FILE MSN.

CHICAGO

(L) VORTACW 108.6 MSN Chan 23 at Dane Co Rgnl-Truax Fld. 860/3E.

L-28H

VOR portion unusable: 155°-230° byd 20NM blo 2800'; 230°-155° byd 30NM blo 2800'.

DME unusable:

010-070° byd 20 NM blo 4500'

210-010° byd 30 NM blo 4000'

070-210° byd 20 NM blo 3500'

RCO 122.6 (GREEN BAY RADIO)

APP CRS	Rwy Idg	3000
040°	TDZE	649
	Apt Elev	649

RNAV (GPS) RWY 4

LA POINTE/MADELINE ISLAND (4R5)





DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Use Ashland altimeter setting; when not received, use Superior altimeter setting and increase all MDAs 80 feet and LNAV Cat. C visibility ½ mile, Circling Cat. C visibility ¼ mile.

MISSED APPROACH: Climb to 2900 direct JEBTO and hold.

ASHLAND ASOS
126.775

MINNEAPOLIS APP CON
133.55

CTAF
122.90

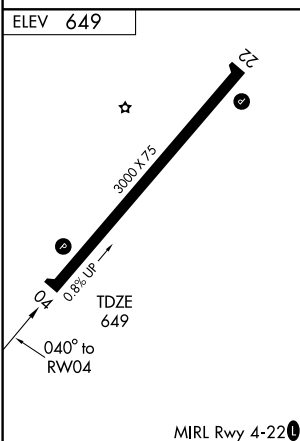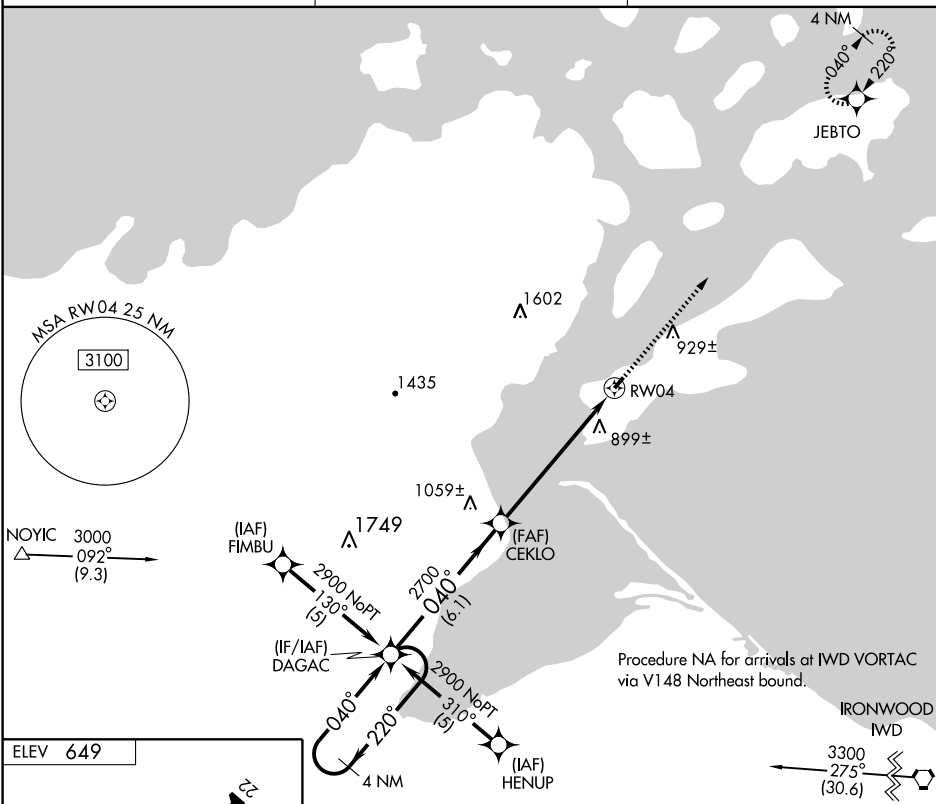

4 NM Holding Pattern				
DAGAC				
2900				
VGSIs and descent angles not coincident.				
CEKLO				
RW04				
3.05° TCH 40				
6.1 NM 6.3 NM				
CATEGORY	A	B	C	D
LNAV MDA	1240-1	591 (600-1)	1240-1½ 591 (600-1½)	NA
CIRCLING	1240-1	591 (600-1)	1280-1¾ 631 (700-1¾)	NA

APP CRS **220°**
 Rwy Idg **3000**
 TDZE **649**
 Apt Elev **649**

RNAV (GPS) RWY 22
 LA POINTE/MADELIN ISLAND (4R5)



▼ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Use Ashland altimeter setting: when not received, use Superior altimeter setting and increase all MDA 80 feet and LNAV and Circling Cat C visibility $\frac{1}{4}$ mile.

MISSED APPROACH: Climb to 2900 direct DAGAC and hold.


ASHLAND ASOS
126.775

MINNEAPOLIS APP CON
133.55

CTAF
122.90

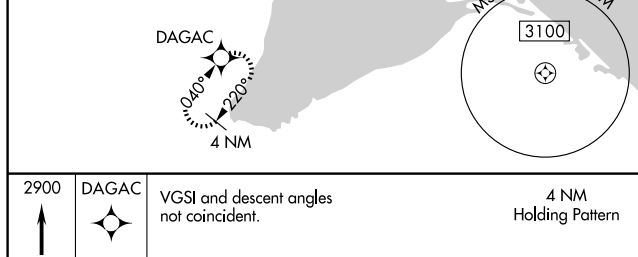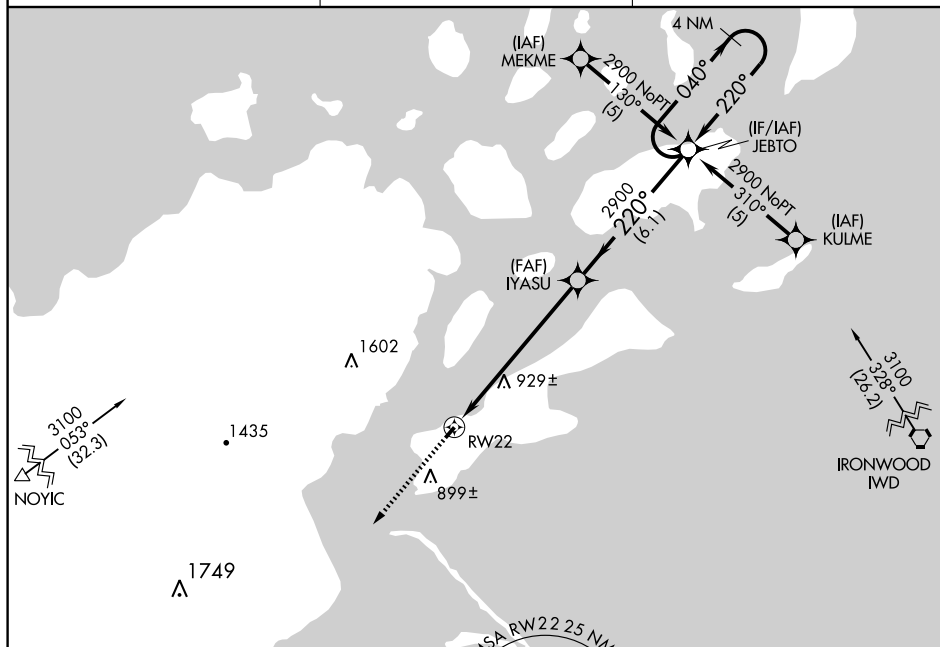

CATEGORY	A	B	C	D
LNAV MDA	1300-1	651 (700-1)	1300-1 $\frac{1}{4}$ 651 (700-1 $\frac{1}{4}$)	NA
CIRCLING	1300-1	651 (700-1)	1300-1 $\frac{1}{4}$ 651 (700-1 $\frac{1}{4}$)	NA

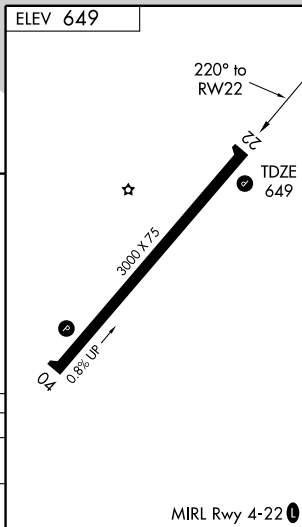

LADYSMITH

RUSK CO (RCX) 4 NE UTC-6(-5DT) N45°29.81' W91°00.03'

1238 B S4 FUEL 80, 100LL NOTAM FILE GRB

RWY 14-32: H4000X75 (ASPH) S-25 MIRL

RWY 14: REIL. PAPI(P2L)—GA 3.0° TCH 25'. Trees.

RWY 32: REIL. PAPI(P2L)—GA 3.0° TCH 25'. Trees.

RWY 01-19: H3200X75 (ASPH) MIRL 0.5% up N

RWY 01: Tree. RWY 19: Road.

AIRPORT REMARKS: Attended May-Sep 1400-0100Z†, Oct-Apr

1400-2300Z†. For attendance after hrs call

715-924-2080/403-0524. All fuel 24 hr self serve. Occasional

deer invof arpt. Rwy 32 left side REIL OTS indef. ACTIVATE MIRL

Rwy 14-32 and Rwy 01-19, PAPI Rwy 14 and Rwy 32 and REIL

Rwy 14 and Rwy 32—122.8.

WEATHER DATA SOURCES: AWOS-3 118.125 (715) 532-2665.

COMMUNICATIONS: CTAF/UNICOM 122.8

RICE LAKE RCO 122.3 (GREEN BAY RADIO)

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE RPD.

RICE LAKE (T) VORW/DME 110.0 RPD Chan 37 N45°24.91'

W91°46.68' 080° 33.2 NM to fld. 1092/1E. OTS indef.


NDB (MHW) 356 RCX N45°30.11' W91°00.07' at fld. NOTAM

FILE GRB. Unmonitored.

GREEN BAY

L-141

IAP

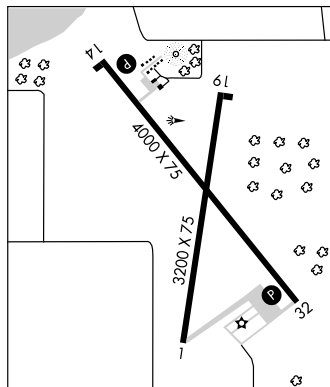

LAKE GENEVA

GRAND GENEVA RESORT (C02) 2 NE UTC-6(-5DT) N42°36.90 W88°23.38

835 B NOTAM FILE GRB

RWY 05-23: H3830X75 (ASPH) MIRL

RWY 05: Trees. Rgt tfc.

RWY 23: Trees.

AIRPORT REMARKS: Unattended. Arpt CLOSED Dec 1 thru Apr 5, until

further notice. Rwy 05-23 extensive cracking entire rwy. For noise

abatement use Rwy 23. Rotating bcn OTS indef. MIRL Rwy 05-23

preset on medium ints dusk-dawn.

COMMUNICATIONS: CTAF/UNICOM 122.8

® MILWAUKEE APP/DEP CON 119.65

RADIO AIDS TO NAVIGATION: NOTAM FILE IKK.


NORTHBROOK (H) VORW/DME 113.0 OBK Chan 77 N42°13.29'

W87°57.11' 323° 30.6 NM to fld. 758/2W.

CHICAGO

L-28H, A

IAP

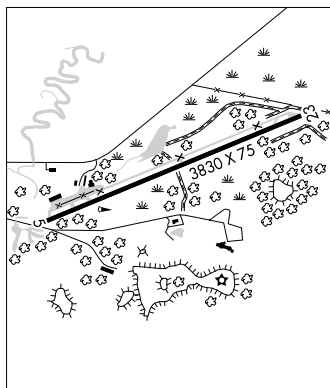

LAKELAND/NOBLE F. LEE MEML FLD (SEE MINOCQUA/WOODRUFF)

LAKE LAWN (See DELAVAN)

LAKE LAWN N42°41.93' W88°35.59' NOTAM FILE GRB.

NDB (MHW) 404 LVV 185° 3.9 NM to Lake Lawn. OTS indef.



CHICAGO

NDB RCX 356	APP CRS 330°	Rwy Idg TDZE Apt Elev	4000 1231 1238
-----------------------	------------------------	-----------------------------	---

NDB or GPS RWY 32

LADYSMITH/ RUSK COUNTY (RCX)

Use Eau Claire altimeter setting.		MISSED APPROACH: Climb to 3000 then right turn direct RCX NDB and hold.	
AWOS-3 118.125	GREEN BAY RADIO 122.3	GCO 121.725	UNICOM 122.8 (CTAF)

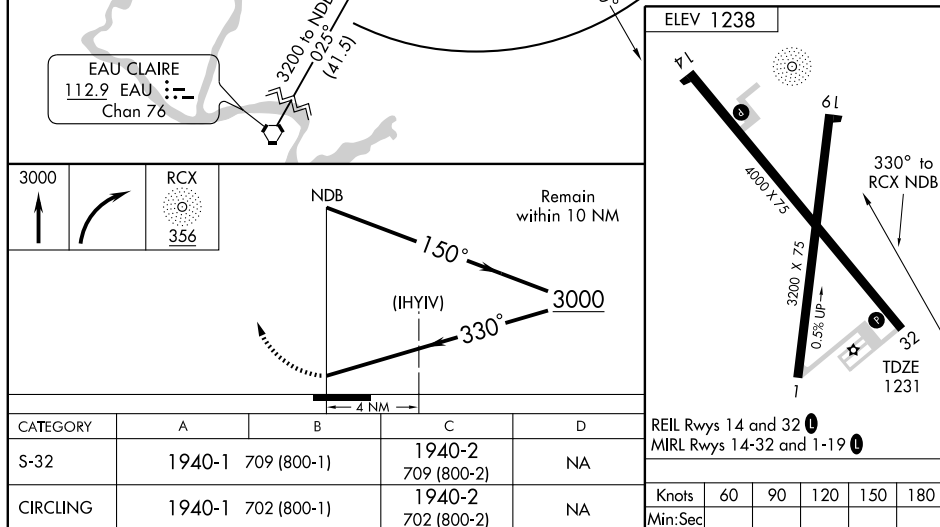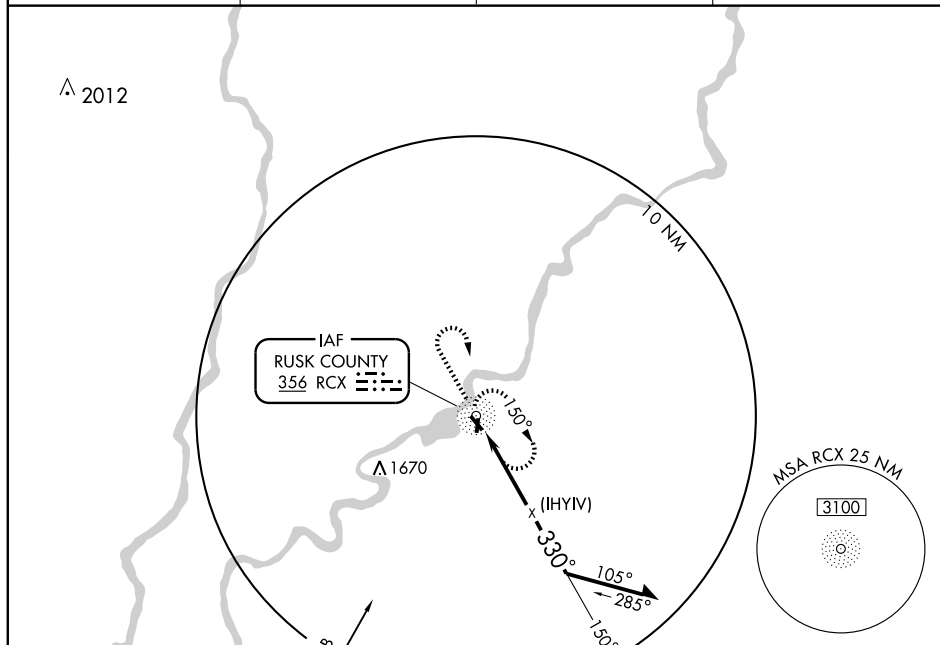

LADYSMITH

RUSK CO (RCX) 4 NE UTC-6(-5DT) N45°29.81' W91°00.03'

1238 B S4 FUEL 80, 100LL NOTAM FILE GRB

RWY 14-32: H4000X75 (ASPH) S-25 MIRL

RWY 14: REIL. PAPI(P2L)—GA 3.0° TCH 25'. Trees.

RWY 32: REIL. PAPI(P2L)—GA 3.0° TCH 25'. Trees.

RWY 01-19: H3200X75 (ASPH) MIRL 0.5% up N

RWY 01: Tree. RWY 19: Road.

AIRPORT REMARKS: Attended May-Sep 1400-0100Z†, Oct-Apr

1400-2300Z†. For attendance after hrs call

715-924-2080/403-0524. All fuel 24 hr self serve. Occasional

deer invof arpt. Rwy 32 left side REIL OTS indef. ACTIVATE MIRL

Rwy 14-32 and Rwy 01-19, PAPI Rwy 14 and Rwy 32 and REIL

Rwy 14 and Rwy 32—122.8.

WEATHER DATA SOURCES: AWOS-3 118.125 (715) 532-2665.

COMMUNICATIONS: CTAF/UNICOM 122.8

RICE LAKE RCO 122.3 (GREEN BAY RADIO)

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE RPD.

RICE LAKE (T) VORW/DME 110.0 RPD Chan 37 N45°24.91'

W91°46.68' 080° 33.2 NM to fld. 1092/1E. OTS indef.


NDB (MHW) 356 RCX N45°30.11' W91°00.07' at fld. NOTAM

FILE GRB. Unmonitored.

GREEN BAY

L-141

IAP

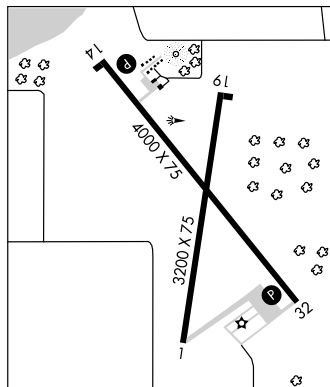

LAKE GENEVA

GRAND GENEVA RESORT (C02) 2 NE UTC-6(-5DT) N42°36.90 W88°23.38

835 B NOTAM FILE GRB

RWY 05-23: H3830X75 (ASPH) MIRL

RWY 05: Trees. Rgt tfc.

RWY 23: Trees.

AIRPORT REMARKS: Unattended. Arpt CLOSED Dec 1 thru Apr 5, until

further notice. Rwy 05-23 extensive cracking entire rwy. For noise

abatement use Rwy 23. Rotating bcn OTS indef. MIRL Rwy 05-23

preset on medium ints dusk-dawn.

COMMUNICATIONS: CTAF/UNICOM 122.8

® MILWAUKEE APP/DEP CON 119.65

RADIO AIDS TO NAVIGATION: NOTAM FILE IKK.


NORTHBROOK (H) VORW/DME 113.0 OBK Chan 77 N42°13.29'

W87°57.11' 323° 30.6 NM to fld. 758/2W.

CHICAGO

L-28H, A

IAP

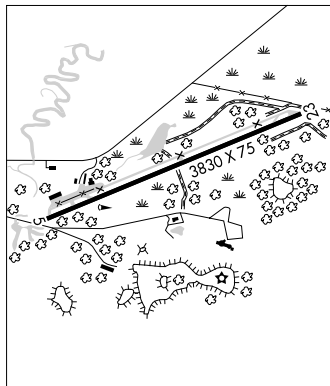

LAKELAND/NOBLE F. LEE MEML FLD (SEE MINOCQUA/WOODRUFF)

LAKE LAWN (See DELAVAN)

LAKE LAWN N42°41.93' W88°35.59' NOTAM FILE GRB.

NDB (MHW) 404 LVV 185° 3.9 NM to Lake Lawn. OTS indef.

CHICAGO

APP CRS **235°**
Rwy ldg **3830**
TDZE **835**
Apt Elev **835**

RNAV (GPS) RWY 23

LAKE GENEVA/GRAND GENEVA RESORT (C02)





▲ NA

DME/DME RNP-0.3 NA.
Use Kenosha altimeter setting.
Procedure NA at night.





MISSED APPROACH: Climbing left turn
to 3000 direct OWOZA WP and hold.

MILWAUKEE APP CON
119.65

UNICOM
122.8 (CTAF)

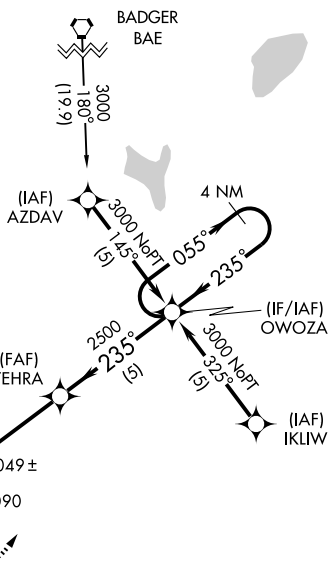

ELEV 835

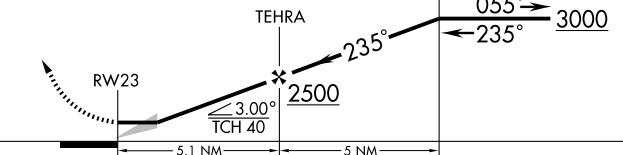

CATEGORY	A	B	C	D
LNAV MDA	1360-1	525 (600-1)	1360-1½ 525 (600-1½)	NA
CIRCLING	1500-1 665 (700-1)	1520-1 685 (700-1)	1520-2 685 (700-2)	NA

MIRL Rwy 5-23

LAKE GENEVA, WISCONSIN
Orig-A 29JUL10

LAKE GENEVA/GRAND GENEVA RESORT (C02)
42° 37'N - 88° 23'W

RNAV (GPS) RWY 23

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

LANCASTER MUNI (73C) 4 S UTC-6(-5DT) N42°46.83' W90°40.86'

CHICAGO

1008 B **FUEL** 100LL, MOGAS TPA-1808(800) NOTAM FILE GRB

L-286

RWY 18-36: H3850X45 (ASPH) S-13 LIRL

RWY 18: Thld dsplcd 155'. Tree. **RWY 36:** Thld dsplcd 220'.


AIRPORT REMARKS: Unattended. For fuel call 608-723-4246. CAUTION:

Vehicles and people occasionally crossing rwy to reach hangar area on E side of rwy. Ultralight and skydiving activity on and invof arpt. Rwy 18-36 35' p-line parallels W side 365' from centerline. Rwy 18-36 dsplcd thlds marked only with thld lgts.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE DBQ.

DUBUQUE (H) VORTACW 115.8 DBQ Chan 105 N42°24.09' W90°42.54' 359° 22.8 NM to fld. 1051/4E.

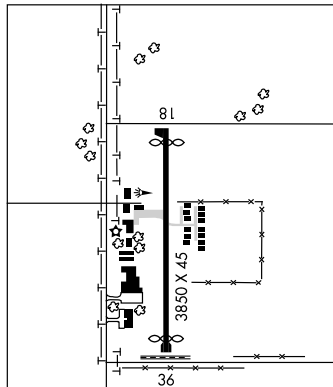

LAND O' LAKES N46°08.98' W89°12.63' NOTAM FILE LNL.

NDB (MHW) 396 LNL at Kings Land O' Lakes. Unmonitored.

GREEN BAY

L-14J

LAND O' LAKES

KINGS LAND O' LAKES (LNL) 1 SE UTC-6(-5DT) N46°09.24' W89°12.73'

GREEN BAY

1704 B S4 **FUEL** 100LL, MOGAS NOTAM FILE LNL

L-14J

RWY 14-32: H4000X75 (ASPH) S-12 MIRL

IAP

RWY 14: REIL. PAPI(P2L)—GA 4.0° TCH 35'. Thld dsplcd 200'. Trees.

RWY 32: PAPI(P2L)—GA 3.0° TCH 26'. Road.

RWY 05-23: 2580X130 (TURF)

RWY 05: Trees. **RWY 23:** Thld dsplcd 600'. Trees.

AIRPORT REMARKS: Attended 1400-2300Z±. Fuel 24 hr self svc. Occasional deer on and invof arpt. Rwy 05-23 CLOSED Dec 1 to Apr 15. Rwy 05-23 marked with yellow cones. Rwy 14 ngt ldg length 3600'. Thld lgts 400' fm end of rwy. ACTIVATE MIRL Rwy 14-32, and REIL Rwy 14—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.525 (715) 547-6313.

COMMUNICATIONS: CTAF/UNICOM 122.8

® **MINNEAPOLIS CENTER APP/DEP CON** 133.65

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE RHI.

RHINELANDER (L) VORTAC 109.2 RHI Chan 29 N45°38.03' W89°27.47' 016° 32.9 NM to fld. 1590/2E. HIWAS.

LAND O' LAKES NDB (MHW) 396 LNL N46°08.98' W89°12.63' at fld. NOTAM FILE LNL. Unmonitored.

LANGLADE CO (See ANTIGO)

NDB LNL 396	APP CRS 150°	Rwy ldg 3800 (day) 3600 (night) TDZE Apt Elev 1704 1704
-----------------------	------------------------	---

NDB RWY 14

LAND O'LAKES/ KINGS LAND O'LAKES (LNL)



If local altimeter setting not received, use Eagle River
Union altimeter setting and increase all MDAs 40 feet.
Circling to Rwy 5, 23, and 32 not authorized at night.


MISSED APPROACH: Climb to 3500, then
right turn direct LNL NDB and hold.

AWOS-3
119.525

MINNEAPOLIS CENTER
133.65 281.5

GCO
121.725

UNICOM
122.8 (CTAF) **0**

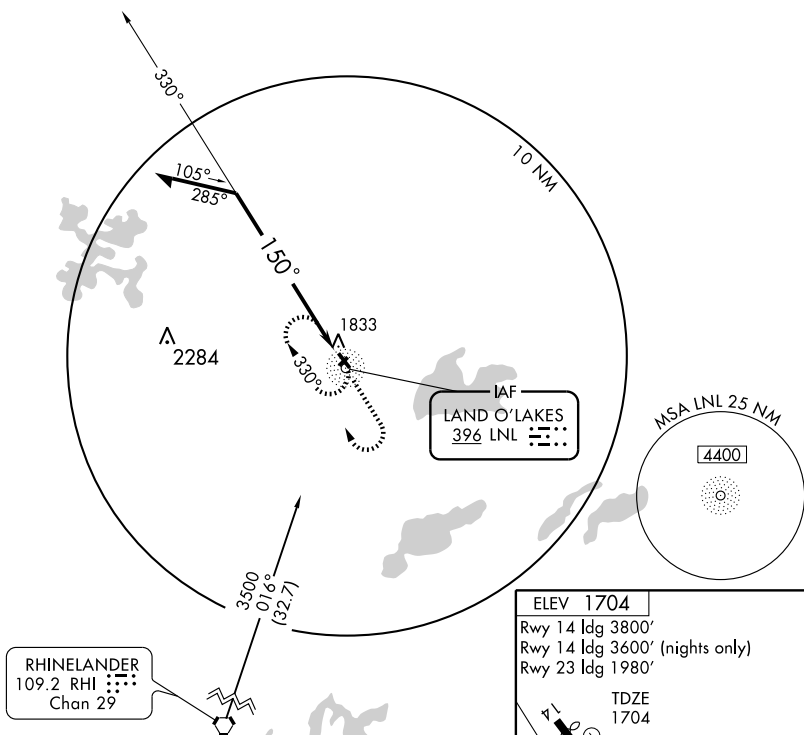

Remain
within 10 NM

NDB

3500

330°

150°


3500

LNL

396

ELEV 1704

Rwy 14 ldg 3800'
Rwy 14 ldg 3600' (nights only)
Rwy 23 ldg 1980'

TDZE
1704

REIL Rwy 14 **0**
MIRL Rwy 14-32 **0**

Knots	60	90	120	150	180
Min:Sec					

CATEGORY	A	B	C	D
S-14	2320-1	616 (700-1)	2320-1¾ 616 (700-1¾)	NA
CIRCLING	2320-1	616 (700-1)	2320-1¾ 616 (700-1¾)	NA

LAND O'LAKES, WISCONSIN

Orig 05188

LAND O'LAKES/ KINGS LAND O'LAKES (LNL)

46° 09'N - 89° 13'W

NDB RWY 14

NDB LNL 396	APP CRS 314°	Rwy ldg TDZE Apt Elev	4000 1704 1704
-----------------------	------------------------	-----------------------------	---

NDB RWY 32

LAND O'LAKES/ KINGS LAND O'LAKES (LNL)

▼
▲ NA

If local altimeter setting not received, use Eagle River
Union altimeter setting and increase all MDAs 40 feet.
Straight-in minimums not authorized at night.
Circling to Rwy's 5, 23, and 32 not authorized at night.


MISSED APPROACH: Climb to 3500, then
right turn direct LNL NDB and hold.

AWOS-3
119.525

MINNEAPOLIS CENTER
133.65 281.5


GCO
121.725

UNICOM
122.8 (CTAF) 0

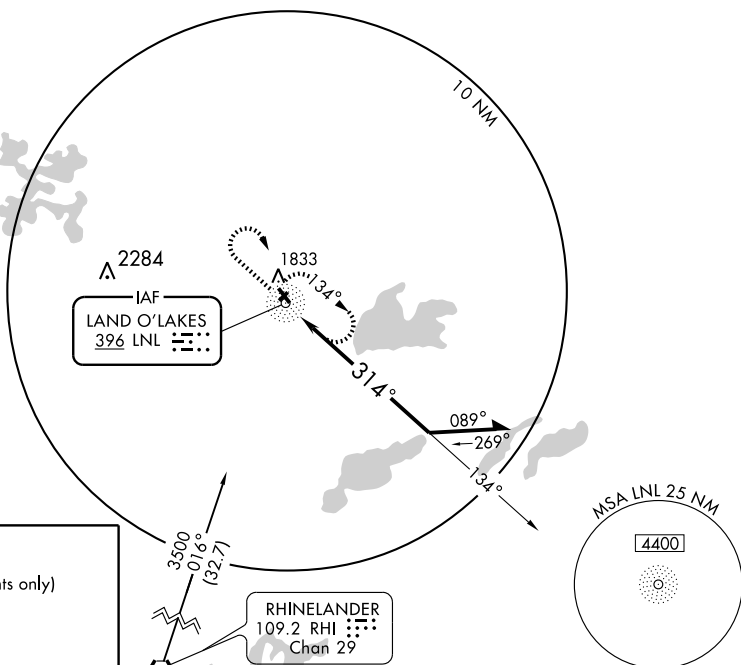


ELEV 1704

Rwy 14 ldg 3800'
Rwy 14 ldg 3600' (nights only)
Rwy 23 ldg 1980'



Knots	60	90	120	150	180
Min:Sec					

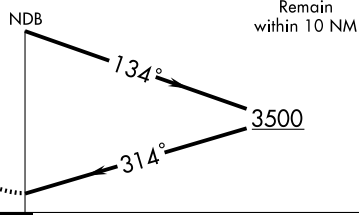

CATEGORY	A	B	C	D
S-32	2520-1 816 (900-1)	2520-1¼ 816 (900-1¼)	2520-2½ 816 (900-2½)	NA
CIRCLING	2520-1 816 (900-1)	2520-1¼ 816 (900-1¼)	2520-2½ 816 (900-2½)	NA

LAND O'LAKES, WISCONSIN

Orig 05188

LAND O'LAKES/ KINGS LAND O'LAKES (LNL)

46° 09'N - 89° 13'W

NDB RWY 32

APP CRS **145°**
 Rwy ldg **3800** (day)
3600 (night)
 TDZE **1704**
 Apt Elev **1704**

RNAV (GPS) RWY14

LAND O'LAKES/ KINGS LAND O'LAKES (LNL)

▼ If local altimeter setting not received, use Eagle River Union altimeter setting and increase all MDAs 40 feet.
▲ VDP NA with Eagle River Union altimeter setting.
 Circling to Rwy 5, 23 and 32 NA at night.
 DME/DME RNP- 0.3 NA.


MISSED APPROACH: Climb to 3500 direct TOLOY and hold.

AWOS-3
119.525

MINNEAPOLIS CENTER
133.65 281.5


GCO
121.725

UNICOM
122.8 (CTAF) ①

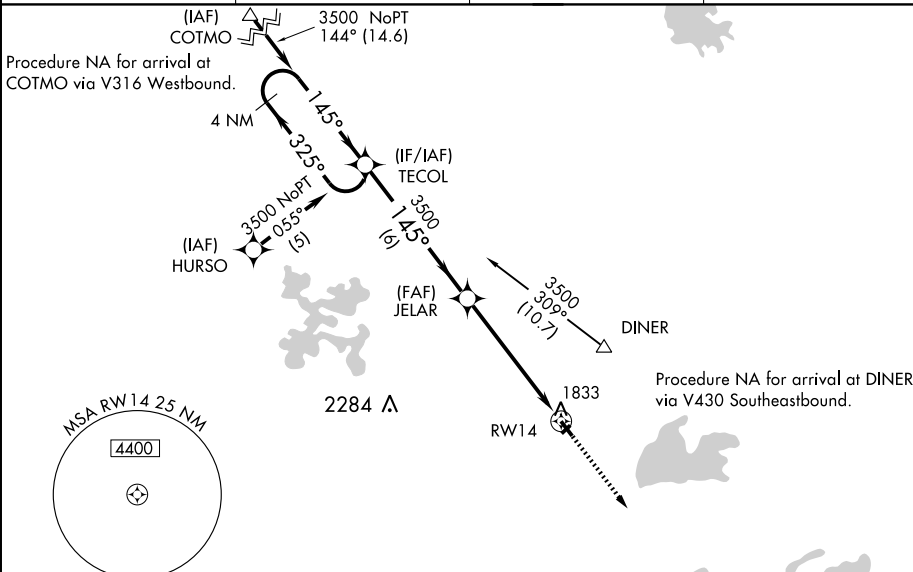


ELEV 1704

Rwy 14 ldg 3800'
 Rwy 14 ldg 3600' (nights only)
 Rwy 23 ldg 1980'

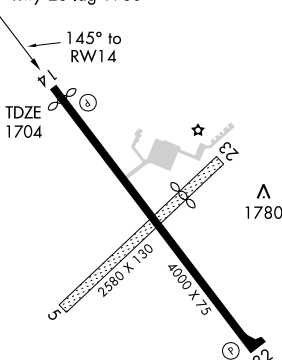

REIL Rwy 14 ①
 MRL Rwy 14-32 ①

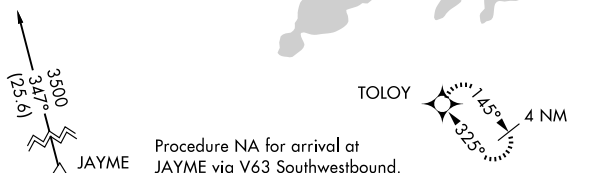

4 NM Holding Pattern				3500	TOLOY
TECOL JELAR 3500 325° 145° 145° 3500 1.1 NM to RWY14 RWY14 3.00° TCH 35					
6 NM 4.4 NM 1.1					
CATEGORY	A	B	C	D	
LNAV MDA	2220-1 516 (600-1)	2220-1 516 (600-1)	2220-1½ 516 (600-1½)	NA	
CIRCLING	2220-1 516 (600-1)	2240-1 536 (600-1)	2240-1½ 536 (600-1½)	NA	

APP CRS
325°

Rwy Ldg **4000**
TDZE **1704**
Apt Elev **1704**

RNAV (GPS) RWY 32

LAND O'LAKES/ KINGS LAND O'LAKES (LNL)

▼ If local altimeter setting not received, use Eagle River Union altimeter setting and increase all MDAs 40 feet.
▲ Straight-in minimums NA at night.
Circling to Rwy 5, 23, and 32 NA at night.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3500 direct TECOL and hold.

AWOS-3
119.525


MINNEAPOLIS CENTER
133.65 281.5

GCO
121.725

UNICOM
122.8 (CTAF) 0




▲2284





ELEV 1704

Rwy 14 Ldg 3800'
Rwy 14 Ldg 3600' (nights only)
Rwy 23 Ldg 1980'

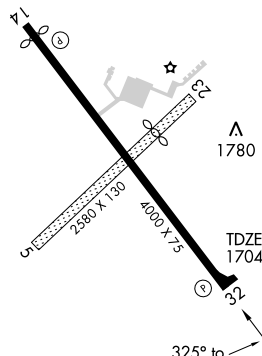

REIL Rwy 14 **0**
MIRL Rwy 14-32 **0**

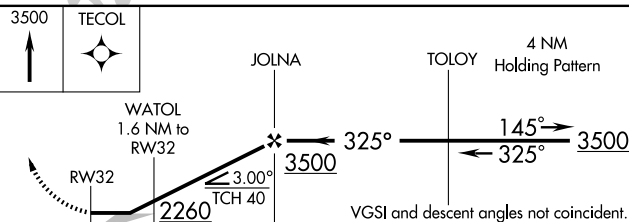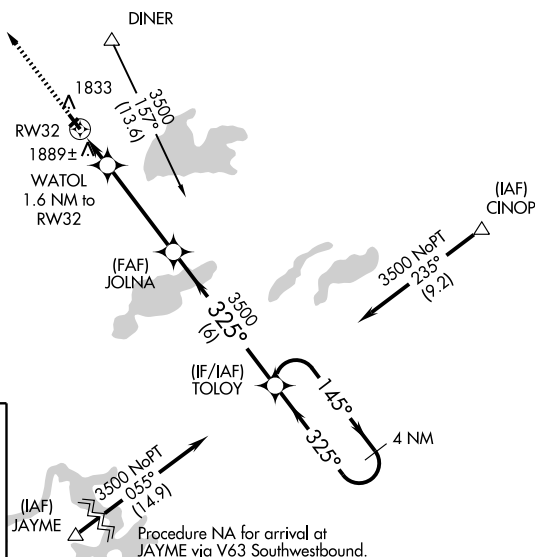

CATEGORY	A	B	C	D
LNAV MDA	2140-1	436 (500-1)	2140-1¼ 436 (500-1¼)	NA
CIRCLING	2200-1 496 (500-1)	2240-1 536 (600-1)	2240-1½ 536 (600-1½)	NA

LA POINTE

MADLINE ISLAND (4R5) 2 NE UTC-6(-5DT) N46°47.32' W90°45.52'

GREEN BAY

649 B NOTAM FILE GRB

L-141

RWY 04-22: H3000X75 (ASPH) S-12.5 MIRL 0.8% up NE

IAP

RWY 04: PAPI(P2L)—GA 3.75° TCH 45'. Trees.

RWY 22: PAPI(P2L)—GA 3.75° TCH 45'. Trees.

AIRPORT REMARKS: Unattended. Deer on and in/ov arpt. ACTIVATE MIRL

Rwy 04-22 and PAPI Rwy 04 and Rwy 22—CTAF.


COMMUNICATIONS: CTAF 122.9

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 133.55

RADIO AIDS TO NAVIGATION: NOTAM FILE ASX.

ASHLAND (T) VORW/DME 110.2 ASX Chan 39

N46°32.96' W90°55.04' 022° 15.8 NM to fld. 820/2E.

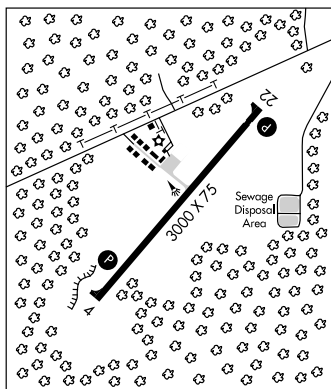

LAWRENCE J. TIMMERMAN (See MILWAUKEE)

LONE ROCK N43°17.66' W90°07.99' NOTAM FILE LNR.

CHICAGO

(L) VORW/DME 112.8 LNR Chan 75 202° 5.4 NM to Tri-Co Rgnl. 1184/OE. HIWAS.

L-11D, 12E

RCO 122.35 (GREEN BAY RADIO)

LONE ROCK

TRI-CO RGNL (LNR) 2 N UTC-6(-5DT) N43°12.71' W90°10.79'

CHICAGO

717 B S3 FUEL 100LL, JET A TPA—1517(800) NOTAM FILE LNR

H-5D, L-28G

RWY 09-27: H5000X75 (ASPH) S-12.5 MIRL

IAP

RWY 09: PAPI(P2L)—GA 3.0° TCH 35'. Antenna.

RWY 27: REIL. PAPI(P2L)—GA 3.0° TCH 33'. Trees.

RWY 18-36: H1850X60 (ASPH) S-12.5 MIRL

RWY 18: Thld dsplcd 138'. Road. RWY 36: Road.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z. Self-serve fuel avbl 24 hrs. MIRL Rwy 09-27 preset low ints dusk-dawn; to increase ints and ACTIVATE MIRL Rwy 18-36, PAPI Rwy 09 and Rwy 27—CTAF.

WEATHER DATA SOURCES: ASOS 119.425 (608) 583-2576 HIWAS 112.8 LNR.

COMMUNICATIONS: CTAF/UNICOM 123.0

LONE ROCK RCO 122.35 (GREEN BAY RADIO)

Ⓡ MADISON APP/DEP CON 135.45 (1200-0500Z)

Ⓡ CHICAGO CENTER APP/DEP CON 133.3 (0500-1200Z)

AIRSPACE: CLASS E svc 1400-2200Z other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE LNR.

LONE ROCK (L) VORW/DME 112.8 LNR Chan 75 N43°17.66' W90°07.99' 202° 5.4 NM to fld. 1184/OE.

HIWAS.

ILS/DME 108.35 I-LNR Chan 20(Y) Rwy 27.

L. O. SIMENSTAD MUNI (See OSCEOLA)

MADLINE ISLAND (See LA POINTE)

MADISON N43°08.69' W89°20.38' NOTAM FILE MSN.

CHICAGO

(L) VORTACW 108.6 MSN Chan 23 at Dane Co Rgnl-Truax Fld. 860/3E.

L-28H

VOR portion unusable: 155°-230° byd 20NM blo 2800'; 230°-155° byd 30NM blo 2800'.

DME unusable:

010-070° byd 20 NM blo 4500'

210-010° byd 30 NM blo 4000'

070-210° byd 20 NM blo 3500'

RCO 122.6 (GREEN BAY RADIO)

LOC/DME I-LNR 108.35 Chan 20 (Y)	APP CRS 270°	Rwy ldg TDZE 5001 717 Apt Elev 717
--	------------------------	--

LOC RWY 27

LONE ROCK/TRI-COUNTY RGNL (LNR)


▽ If local altimeter setting not received, use Boscobel altimeter setting and increase all MDAs 60 feet. Visibility reduction by helicopters NA.
△ NA

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct LNR VOR/DME and hold.

ASOS
119.425


MADISON APP CON ★
135.45 343.7

UNICOM
123.0 (CTAF) 0

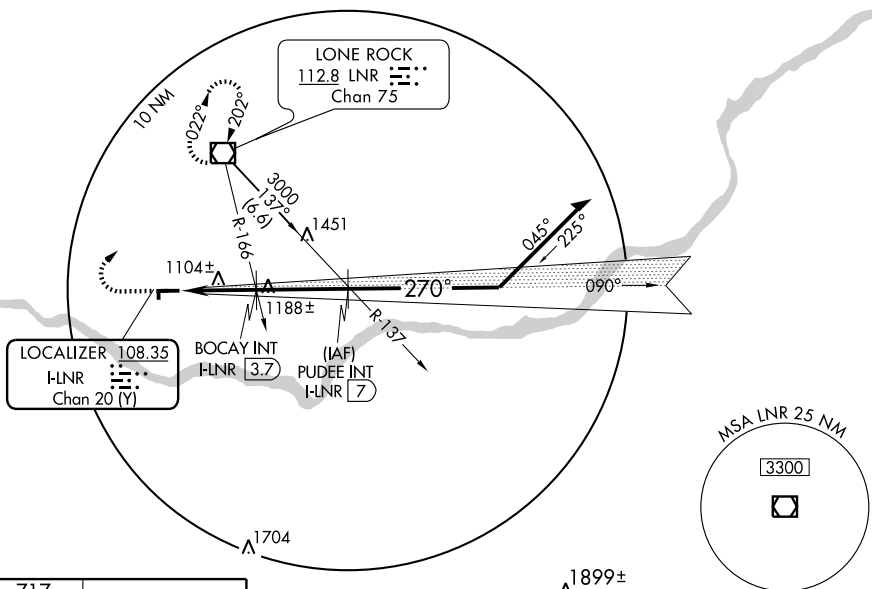

ELEV **717**

Rwy 18 ldg 1720'



MIRL Rwy 9-27 and 18-36 0


FAF to MAP 6 NM

Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

LONE ROCK, WISCONSIN

Orig 07354

2000	3000	LNR 112.8
------	------	---------------------

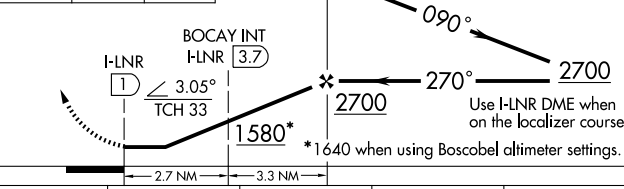

CATEGORY	A	B	C	D
S-27	1580-1 863 (900-1)	1580-1 1/4 863 (900-1 1/4)	1580-2 1/2 863 (900-2 1/2)	NA
CIRCLING	1580-1 863 (900-1)	1580-1 1/4 863 (900-1 1/4)	1580-2 1/2 863 (900-2 1/2)	NA
BOCAV FIX MINIMUMS				
S-27	1360-1 643 (700-1)	1360-1 3/4 643 (700-1 3/4)	NA	NA
CIRCLING	1500-1 783 (800-1)	1500-1 1/4 783 (800-1 1/4)	1500-2 1/4 783 (800-2 1/4)	NA

LONE ROCK/TRI-COUNTY RGNL (LNR)

LOC RWY 27

43° 13'N-90° 11'W

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

WAAS CH 78206 W09A	APP CRS 090°	Rwy Idg TDZE Apt Elev 717 717
--	------------------------	---

RNAV (GPS) RWY 9

LONE ROCK/ TRI-COUNTY RGNL (LNR)


Visibility reduction by helicopters NA. DME/DME RNP-0.3 NA.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Boscobel altimeter setting and increase all DAs/MDAs 60 feet, and all visibilities ¼ mile.
 Baro-VNAV NA when using Boscobel altimeter setting.

MISSED APPROACH: Climb to 3000 direct CABIG and hold.

ASOS
119.425


MADISON APP CON ★
135.45 343.7

UNICOM
123.0 (CTAF) 0



Procedure NA for arrivals at
DLL VORTAC via V82-172-510
Eastbound.



△ 1780




Procedure NA for arrivals at
LNR VOR/DME via airway
radials 270 CW 303.

LONE ROCK
LNR

△ 1451



LNAV/VNAV:
Fly visual to airport,
090° - 3 miles.





Procedure NA for arrivals at
DALEY via V341 Northeastbound.

1575 ±
△ 1704


ELEV 717

Rwy 18 Idg 1720'

4 NM
Holding Pattern FINKO

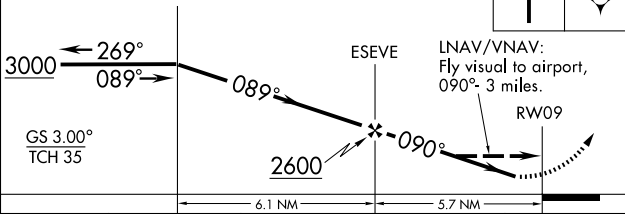

LNAV/VNAV:
Fly visual to airport,
090° - 3 miles.



CATEGORY	A	B	C	D
LPV DA	994-1 277 (300-1)			NA
LNAV/VNAV DA	1659-2	942 (1000-2)	1659-2¾ 942 (1000-2¾)	NA
LNAV MDA	1460-1 743 (800-1)	1460-1¼ 743 (800-1¼)	1460-2¼ 743 (800-2¼)	NA
CIRCLING	1520-1 803 (900-1)	1520-1¼ 803 (900-1¼)	1520-2¼ 803 (900-2¼)	NA

MIRL Rwy 9-27 and 18-36 0

WAAS CH 69506 W27A	APP CRS 270°	Rwy Idg TDZE Apt Elev 717	5001 717
--	------------------------	---	---------------------------

RNAV (GPS) RWY 27

LONE ROCK/ TRI-COUNTY RGNL (LNR)

Visibility reduction by helicopters NA. DME/DME RNP-0.3 NA.
 ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6° C (4° F) or above 54° C (130° F). When local altimeter setting not received, use Boscombel altimeter setting and increase all DAs/MDAs 60 feet, and all visibilities ¼ mile.
 ▲ Baro-VNAV NA when using Boscombel altimeter setting.


MISSED APPROACH: Climb to 3000 direct FINKO and hold.

ASOS
119.425

MADISON APP CON ★
135.45 343.7

UNICOM
123.0 (CTAF) 0


MISSED APCH FIX
FINKO

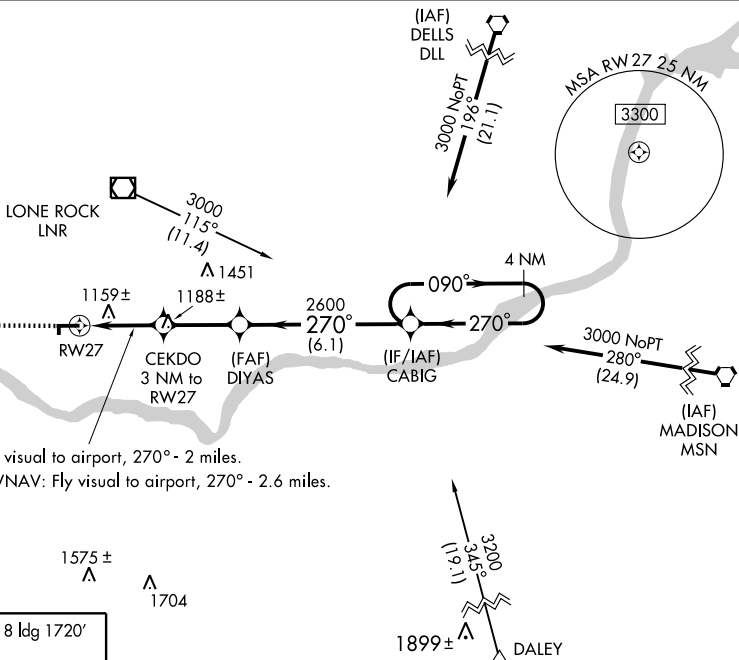

LPV: Fly visual to airport, 270° - 2 miles.
 LNAV/VNAV: Fly visual to airport, 270° - 2.6 miles.

ELEV **717**

Rwy 18 Idg 1720'



3000		FINKO	LPV: Fly visual to airport, 270° - 2 miles. LNAV/VNAV: Fly visual to airport, 270° - 2.6 miles.		4 NM Holding Pattern
* LNAV Only			CEKDO 3 NM to RWY 27	DIYAS	CABIG
RWY 27		1680*	2600	270°	090°
3 NM		2.7 NM	6.1 NM	270°	3000
CATEGORY		A	B	C	D
LPV DA		1375-2 658 (700-2)			NA
LNAV/VNAV DA		1584-2	867 (900-2)	1584-2½ 867 (900-2½)	NA
LNAV MDA		1420-1	703 (800-1)	1420-2 703 (800-2)	NA
CIRCLING		1520-1 803 (900-1)	1520-1¼ 803 (900-1¼)	1520-2¼ 803 (900-2¼)	NA

MIRL Rwy 9-27 and 18-36 0

LONE ROCK, WISCONSIN

Orig 08157

LONE ROCK/ TRI-COUNTY RGNL (LNR)

43° 13'N-90° 11'W

RNAV (GPS) RWY 27

VOR/DME LNR 112.8 Chan 75	APP CRS 203°	Rwy Idg TDZE Apt Elev	N/A N/A 717
---	------------------------	-----------------------------	--

VOR-A

LONE ROCK/ TRI-COUNTY RGNL (LNR)




When local altimeter setting not received, use Boscomb
altimeter setting and increase all MDAs 60 feet, and all
visibilities $\frac{1}{4}$ mile.

MISSED APPROACH: Climb to 3000 then left turn direct LNR VOR/DME and hold.

ASOS
119.425

MADISON APP CON ★
135.45 343.7

UNICOM
123.0 (CTAF) **L**

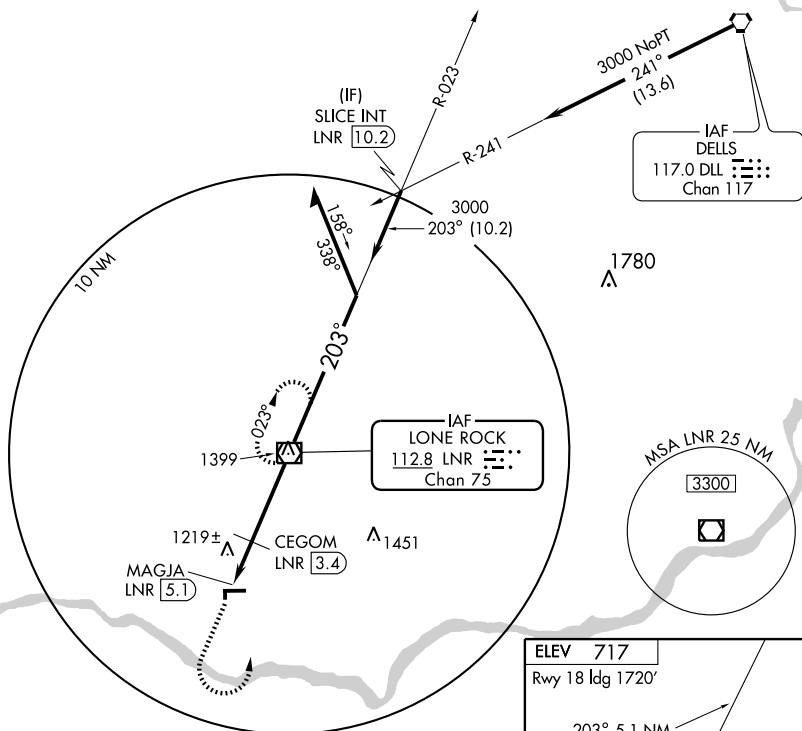

3000

LNR

112.8

VOR/DME	Remain within 10 NM
---------	------------------------

Remain
within 10 NM


MAGJA
LNR 5.1CEGOM
LNR 3.4

*1720 when using Boscobel altimeter setting.

ELEV 717

Rwy 18 ldg 1720'

203° 5.1 NA
from FAF



CATEGORY	A	B	C	D
CIRCLING	1660-1¼	943 (1000-1¼)	1660-2¾ 943 (1000-2¾)	NA

MIRL Rwy 9-27 and 18-36 **L**

CEGOM FIX MINIMUMS

FAF to MAP 5.1 NM

CIRCLING	1520-1 803 (900-1)	1520-1¼ 803 (900-1¼)	1520-2¼ 803 (900-2¼)	NA
----------	-----------------------	-------------------------	-------------------------	----

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

LONE ROCK, WISCONSIN

Amdt 7 08157

LONE ROCK/ TRI-COUNTY RGNL (LNR)

43°13'N-90°11'W

VOR-A

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

MADISON

BLACKHAWK AIRFIELD (87Y) 10 E UTC-6(-5DT) N43°06.30' W89°11.13'

CHICAGO

920 B TPA-1920(1000) NOTAM FILE GRB

L-28H

RWY 04-22: H2814X57 (ASPH) 0.5% Up SW

IAP

RWY 04: Bldg. Rgt tfc. RWY 22: Thld dsplcd 260'. Trees.

RWY 09-27: H2203X56 (ASPH) LIRL(NSTD) 0.8% up W

RWY 09: Trees. RWY 27: Thld dsplcd 230'. Road. Rgt tfc.

AIRPORT REMARKS: Unattended. Deer and turkeys on and in/ovf arpt. Rwy 04-22 sfc cracks with 1' vegetation growing on rwy. Rwy 09 avoid overflight of farm ¾ mile E. Rwy ends obstructed visually from others by weeds and trees approximate 10' tall. Rwy 09-27 NSTD LIRL; rwy lgts +2 to 3' above rwy and NSTD spacing. Rwy 09-27 lgt'd 1973'.

COMMUNICATIONS: CTAF/UNICOM 122.7

Ⓡ **MADISON APP/DEP CON** 120.1 (1200-0500Z‡) Ⓡ **CHICAGO CENTER APP/DEP CON** 133.3 (0500-1200Z‡)

RADIO AIDS TO NAVIGATION: NOTAM FILE MSN.

MADISON (L) VORTACW 108.6 MSN Chan 23 N43°08.69' W89°20.38' 106° 7.2 NM to fld. 860/3E.

DANE CO RGRL-TRUAX FLD (MSN) 5 NE UTC-6(-5DT) N43°08.39' W89°20.25'

CHICAGO

887 B S4 FUEL 100LL, JET A Class I, ARFF Index C NOTAM FILE MSN

H-5D, L-28H

RWY 18-36: H9006X150 (CONC-GRVD) S-100, D-200, 2S-175, 2D-350 HIRL CL

IAP, AD

RWY 18: MALSR. PAPI (P4L)—GA 3.0° TCH 57'. Thld dsplcd 400'. Hill.

RWY 36: MALSR. PAPI(P4L)—GA 3.0° TCH 59'. Thld dsplcd 989'.

RWY 03-21: H7200X150 (CONC-GRVD) S-100, D-200, 2S-175, 2D-350 HIRL 0.4% up NE

RWY 03: REIL. PAPI(P4L)—GA 3.0° TCH 49'. Thld dsplcd 430'. Trees.

RWY 21: MALSR. PAPI(P4L)—GA 3.0° TCH 41'. Road.


RWY 14-32: H5846X150 (CONC-GRVD) S-75, D-190, 2S-175, 2D-350 HIRL

RWY 14: REIL. Thld dsplcd 475'.

RWY 32: REIL. VASI(V4L)—GA 3.0° TCH 56'. Tree.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 03	14-32	3400
RWY 18	03-21	4850
RWY 21	18-36	6450
RWY 32	18-36	5300
RWY 36	14-32	7050

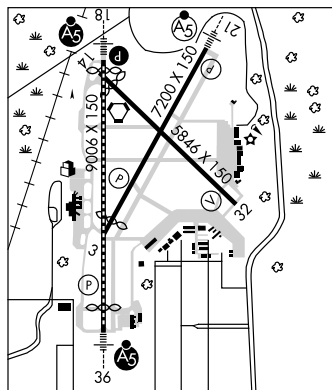**ARRESTING GEAR/SYSTEM**

RWY 18 BAK-14 BAK-12(B) (1500')

BAK-14 BAK-12(B) (750') RWY 36

BAK-14 BAK-12(B) (1620') RWY 21

AIRPORT REMARKS: Attended continuously. Birds on and in/ovf arpt. PAEW SW corner of W ramp. Air carrier and turbo jet training flights prohibited. General aviation svcs only on E ramp. General aviation access to and parking on W air carrier ramp is prohibited. Noise abatement procedures in effect ctc Arpt ops. Avoid overflight of Yahara River in/ovf arpt blo 2000' AGL. Rwy 18 and Rwy 14 apch ends are closely aligned. Verify correct rwy and compass heading prior to departure. Twy F, and G restricted to military. Rwy 18-36 touchdown and rollout runway visual range avbl. General aviation svc only avbl on E ramp. When twr clsd HIRL Rwy 18-36 preset on low ints, to incr ints and ACTIVATE MALSR Rwy 18 and Rwy 36, HIRL Rwy 03-21 and Rwy 14-32. REIL Rwy 03, Rwy 14, and Rwy 32 and PAPI Rwy 18-CTAF.

WEATHER DATA SOURCES: ASOS (608) 249-0615. LLWAS**COMMUNICATIONS:** CTAF 119.3 ATIS 124.65 UNICOM 122.95

MADISON RCD 122.6 (GREEN BAY RADIO)

Ⓡ **MADISON APP CON** 120.1 (EAST) 135.45 (WEST) (1200-0500Z‡)Ⓡ **MADISON DEP CON** 126.85 (1200-0500Z‡)Ⓡ **CHICAGO CENTER APP/DEP CON** 133.3 (0500-1200Z‡)

MADISON TOWER 119.3 (1200-0500Z‡) GND CON 121.9 CLNC DEL 121.62

AIRSPACE: CLASS C svc 1200-0500Z‡ ctc APP CON other times CLASS E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE MSN

MADISON (L) VORTACW 108.6 MSN Chan 23 N43°08.69' W89°20.38' at fld. 860/3E.

MONAH NDB (MHW/LOM) 400 MS N43°03.76' W89°20.75' 005° 4.6 NM to fld. NDB unmonitored when twr clsd.

ILS 109.9 I-MSN Rwy 36. Class IT. LOM MONAH NDB. Unmonitored when twr clsd.

ILS 110.1 I-DSZ Rwy 18. Class IB. Unmonitored when twr clsd.

ILS/DME 111.55 I-DQJ Chan 52Y Rwy 21.

ASR (1200-0500Z‡)

VORTAC MSN 108.6 Chan 23	APP CRS 106°	Rwy Idg TDZE Apt Elev N/A N/A 920
--	------------------------	---

VOR or GPS-A

MADISON/BLACKHAWK AIRFIELD (87Y)





Use Madison Dane County altimeter setting.
No Procedure Turn for arrivals on MSN VORTAC
radials 231 clockwise 351.


MISSED APPROACH: Climb to 2000 then climbing left turn to
3500 via heading 045° and MSN R-089 to DREAR Int/MSN
12.7 DME and hold.

MADISON APP CON ★
120.1 343.7

UNICOM
122.7 (CTAF)

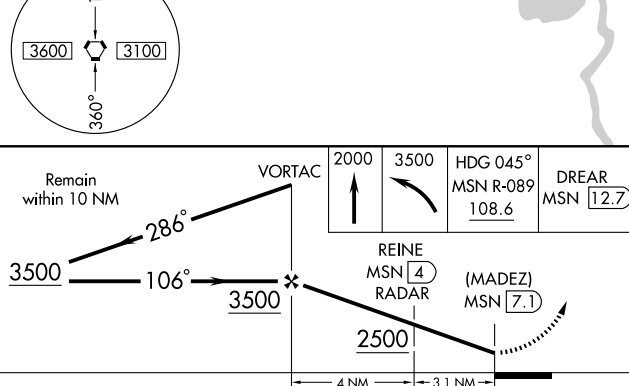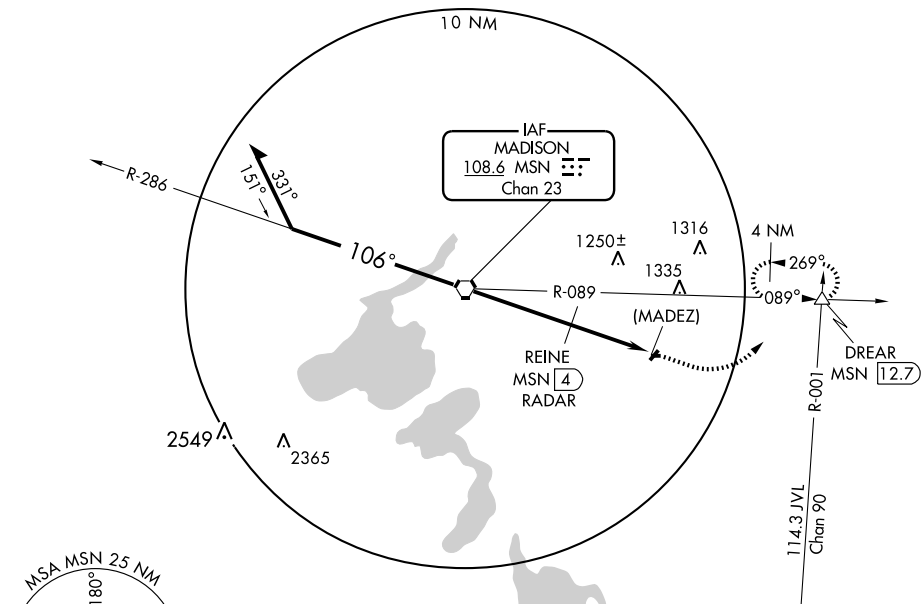

CATEGORY	A	B	C	D
CIRCLING	2500-1¼ 1580 (1600-1¼)	2500-1½ 1580 (1600-1½)	NA	
REINE FIX MINIMUMS				
CIRCLING	1460-1 540 (600-1)	1520-1 600 (600-1)	NA	

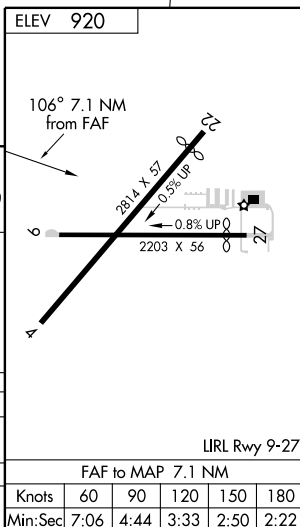

10210

AIRPORT DIAGRAM

MADISON/DANE COUNTY RGNL TRUAX FIELD (MSN)

AL-245 (FAA)

MADISON, WISCONSIN

ATIS

124.65 278.3

MADISON TOWER ★

119.3 257.8

GND CON


121.9 348.6

CLNC DEL

121.62

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
 READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

EC-3, 23 SEP 2010 to 21 OCT 2010

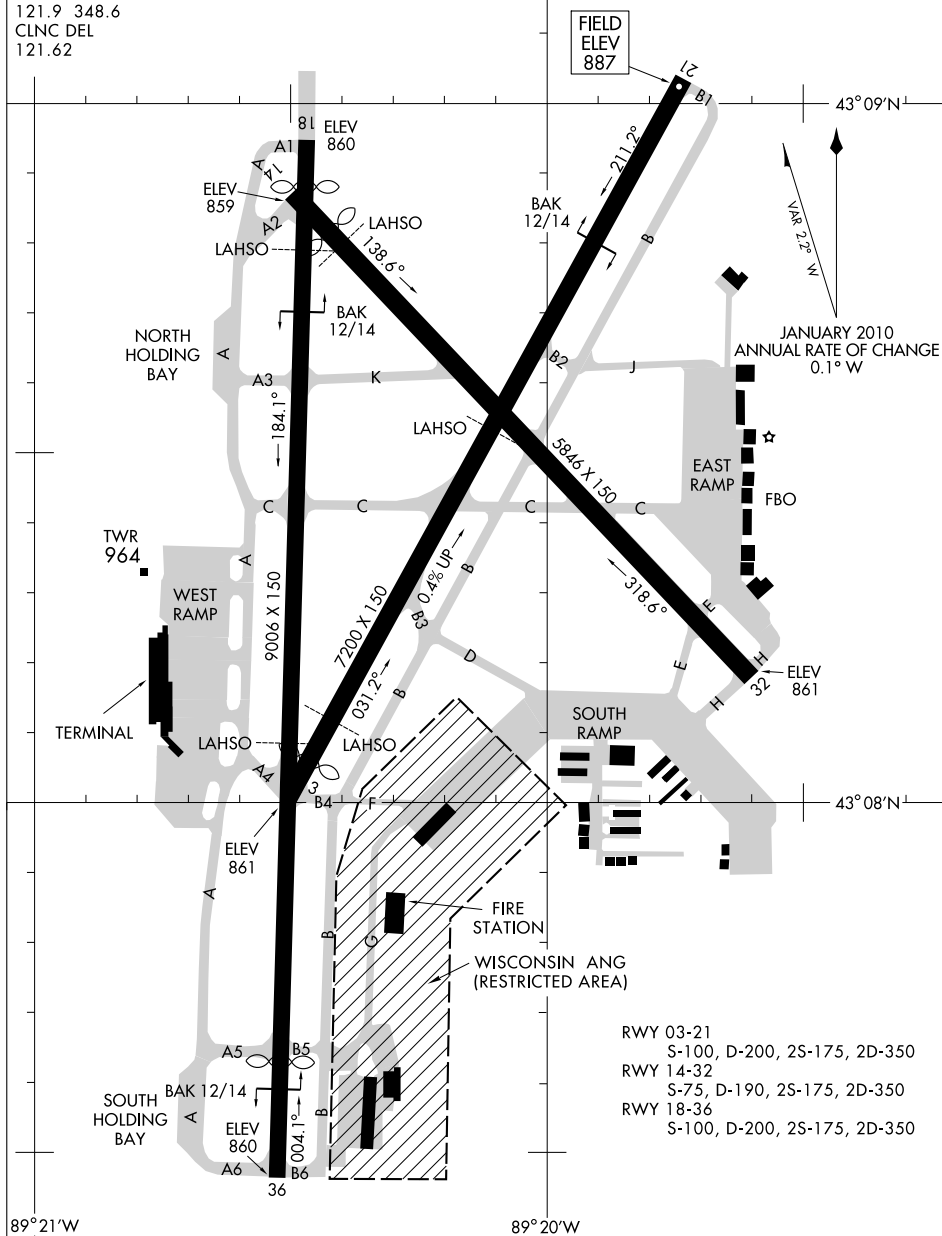

EC-3, 23 SEP 2010 to 21 OCT 2010

AIRPORT DIAGRAM

MADISON/DANE COUNTY RGNL TRUAX FIELD (MSN)

MADISON, WISCONSIN

10210

MADISON

BLACKHAWK AIRFIELD (87Y) 10 E UTC-6(-5DT) N43°06.30' W89°11.13'

CHICAGO

920 B TPA-1920(1000) NOTAM FILE GRB

L-28H

RWY 04-22: H2814X57 (ASPH) 0.5% Up SW

IAP

RWY 04: Bldg. Rgt tfc. RWY 22: Thld dsplcd 260'. Trees.

RWY 09-27: H2203X56 (ASPH) LIRL(NSTD) 0.8% up W

RWY 09: Trees. RWY 27: Thld dsplcd 230'. Road. Rgt tfc.

AIRPORT REMARKS: Unattended. Deer and turkeys on and in/ovf arpt. Rwy 04-22 sfc cracks with 1' vegetation growing on rwy. Rwy 09 avoid overflight of farm ¾ mile E. Rwy ends obstructed visually from others by weeds and trees approximate 10' tall. Rwy 09-27 NSTD LIRL; rwy lgts +2 to 3' above rwy and NSTD spacing. Rwy 09-27 lgtld 1973'.

COMMUNICATIONS: CTAF/UNICOM 122.7

Ⓡ MADISON APP/DEP CON 120.1 (1200-0500Z‡) Ⓡ CHICAGO CENTER APP/DEP CON 133.3 (0500-1200Z‡)

RADIO AIDS TO NAVIGATION: NOTAM FILE MSN.

MADISON (L) VORTACW 108.6 MSN Chan 23 N43°08.69' W89°20.38' 106° 7.2 NM to fld. 860/3E.

DANE CO RGRL-TRUAX FLD (MSN) 5 NE UTC-6(-5DT) N43°08.39' W89°20.25'

CHICAGO

887 B S4 FUEL 100LL, JET A Class I, ARFF Index C NOTAM FILE MSN

H-5D, L-28H

RWY 18-36: H9006X150 (CONC-GRVD) S-100, D-200, 2S-175, 2D-350 HIRL CL

IAP, AD

RWY 18: MALSR. PAPI (P4L)—GA 3.0° TCH 57'. Thld dsplcd 400'. Hill.

RWY 36: MALSR. PAPI(P4L)—GA 3.0° TCH 59'. Thld dsplcd 989'.

RWY 03-21: H7200X150 (CONC-GRVD) S-100, D-200, 2S-175, 2D-350 HIRL 0.4% up NE

RWY 03: REIL. PAPI(P4L)—GA 3.0° TCH 49'. Thld dsplcd 430'. Trees.

RWY 21: MALSR. PAPI(P4L)—GA 3.0° TCH 41'. Road.


RWY 14-32: H5846X150 (CONC-GRVD) S-75, D-190, 2S-175, 2D-350 HIRL

RWY 14: REIL. Thld dsplcd 475'.

RWY 32: REIL. VASI(V4L)—GA 3.0° TCH 56'. Tree.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 03	14-32	3400
RWY 18	03-21	4850
RWY 21	18-36	6450
RWY 32	18-36	5300
RWY 36	14-32	7050

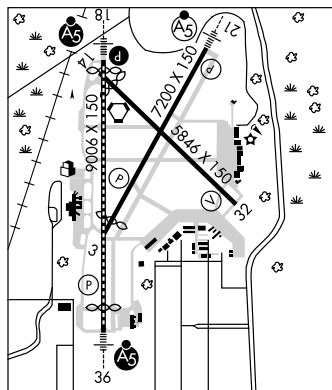

ARRESTING GEAR/SYSTEM

RWY 18 BAK-14 BAK-12(B) (1500')

BAK-14 BAK-12(B) (750') RWY 36

BAK-14 BAK-12(B) (1620') RWY 21

AIRPORT REMARKS: Attended continuously. Birds on and in/ovf arpt. PAEW SW corner of W ramp. Air carrier and turbo jet training flights prohibited. General aviation svcs only on E ramp. General aviation access to and parking on W air carrier ramp is prohibited. Noise abatement procedures in effect ctc Arpt ops. Avoid overflight of Yahara River in/ovf arpt blo 2000' AGL. Rwy 18 and Rwy 14 apch ends are closely aligned. Verify correct rwy and compass heading prior to departure. Twy F, and G restricted to military. Rwy 18-36 touchdown and rollout runway visual range avbl. General aviation svc only avbl on E ramp. When twr clsd HIRL Rwy 18-36 preset on low ints, to incr ints and ACTIVATE MALSR Rwy 18 and Rwy 36, HIRL Rwy 03-21 and Rwy 14-32. REIL Rwy 03, Rwy 14, and Rwy 32 and PAPI Rwy 18-CTAF.

WEATHER DATA SOURCES: ASOS (608) 249-0615. LLWAS

COMMUNICATIONS: CTAF 119.3 ATIS 124.65 UNICOM 122.95

MADISON RCD 122.6 (GREEN BAY RADIO)

Ⓡ MADISON APP CON 120.1 (EAST) 135.45 (WEST) (1200-0500Z‡)

Ⓡ MADISON DEP CON 126.85 (1200-0500Z‡)

Ⓡ CHICAGO CENTER APP/DEP CON 133.3 (0500-1200Z‡)

MADISON TOWER 119.3 (1200-0500Z‡) GND CON 121.9 CLNC DEL 121.62

AIRSPACE: CLASS C svc 1200-0500Z‡ ctc APP CON other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE MSN

MADISON (L) VORTACW 108.6 MSN Chan 23 N43°08.69' W89°20.38' at fld. 860/3E.

MONAH NDB (MHW/LOM) 400 MS N43°03.76' W89°20.75' 005° 4.6 NM to fld. NDB unmonitored when twr clsd.

ILS 109.9 I-MSN Rwy 36. Class IT. LOM MONAH NDB. Unmonitored when twr clsd.

ILS 110.1 I-DSZ Rwy 18. Class IB. Unmonitored when twr clsd.

ILS/DME 111.55 I-DQJ Chan 52Y Rwy 21.

ASR (1200-0500Z‡)

VORTAC MSN 108.6 Chan 23	APCH CRS 173°	Rwy ldg 9006 TDZE 860 Arpt Elev 887
--	-------------------------	--


JAL-245 [USAF]

MADISON/ DANE COUNTY REGIONAL-TRUAX FIELD (KMSN)


T	MALSR A5	MISSED APPROACH: Climbing left turn to 4000 via MSN R-090 to DRAHN 1.5 DME and hold.

ATIS 124.65 278.3	MADISON APP CON 120.1 350.3	MADISON TOWER ★ 119.3 0 (CTAF) 257.8	GND CON 121.9 348.6	ASR
-----------------------------	---------------------------------------	---	-------------------------------	-----

RADAR REQUIRED

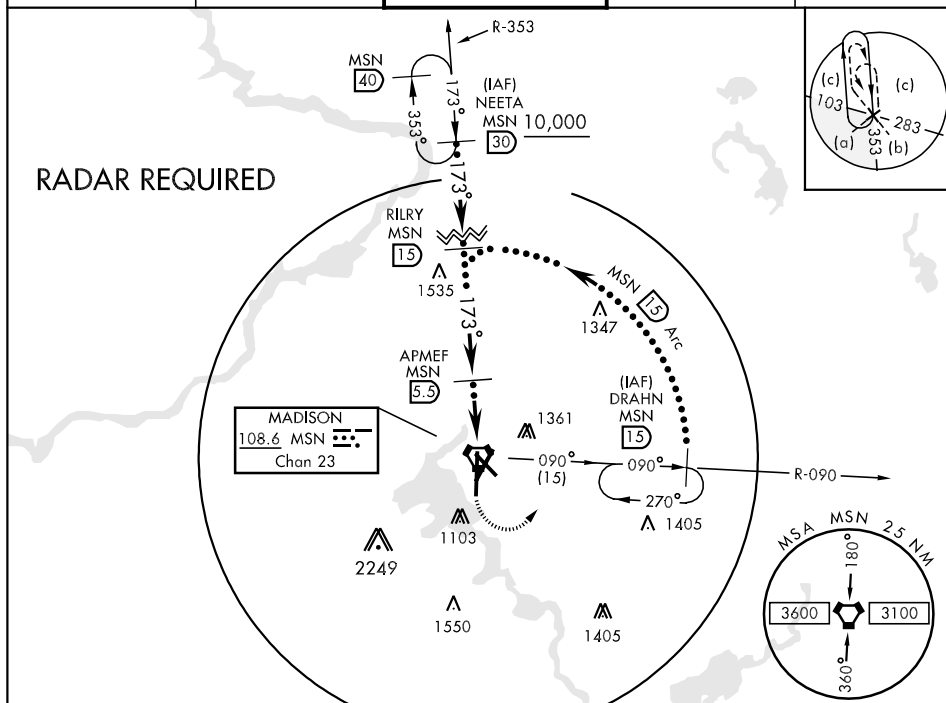

EMERG SAFE ALT 100 NM 3600

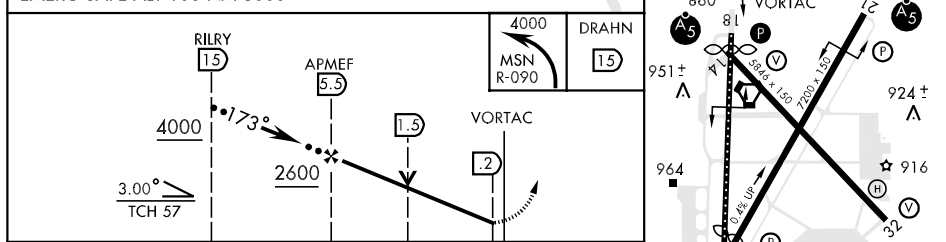

CATEGORY	C	D	E
S-18	1340/40 480 (500-3/4)	1340/50 480 (500-1)	1340/60 480 (500-1 1/4)
CIRCLING	1460-1 1/2 573 (600-1 1/2)	1460-2 573 (600-2)	1680-2 3/4 793 (800-2 3/4)
S-ASR 18	1340/40 480 (500-3/4)	1340/50 480 (500-1)	1340/60 480 (500-1 1/4)

MADISON, WISCONSIN

43°08'N-89°20'W

MADISON/ DANE COUNTY REGIONAL-TRUAX FIELD (KMSN)

Amdt 1 07130

HI-TACAN RWY 18

VORTAC MSN 108.6 Chan 23	APCH CRS 001°	Rwy ldg TDZE 862 Arpt Elev 887
--	-------------------------	--

JAL-245 [USAF]


MADISON/ DANE COUNTY REGIONAL-TRUAX FIELD (KMSN)




MISSED APPROACH: Climbing right turn to 4000
via MSN R-090 to DRAHN 15 DME and hold.

ATIS 124.65 278.3	MADISON APP CON 120.1 350.3	MADISON TOWER ★ 119.3 0 (CTAF) 257.8	GND CON 121.9 348.6	ASR
-----------------------------	---------------------------------------	---	-------------------------------	-----


RADAR REQUIRED

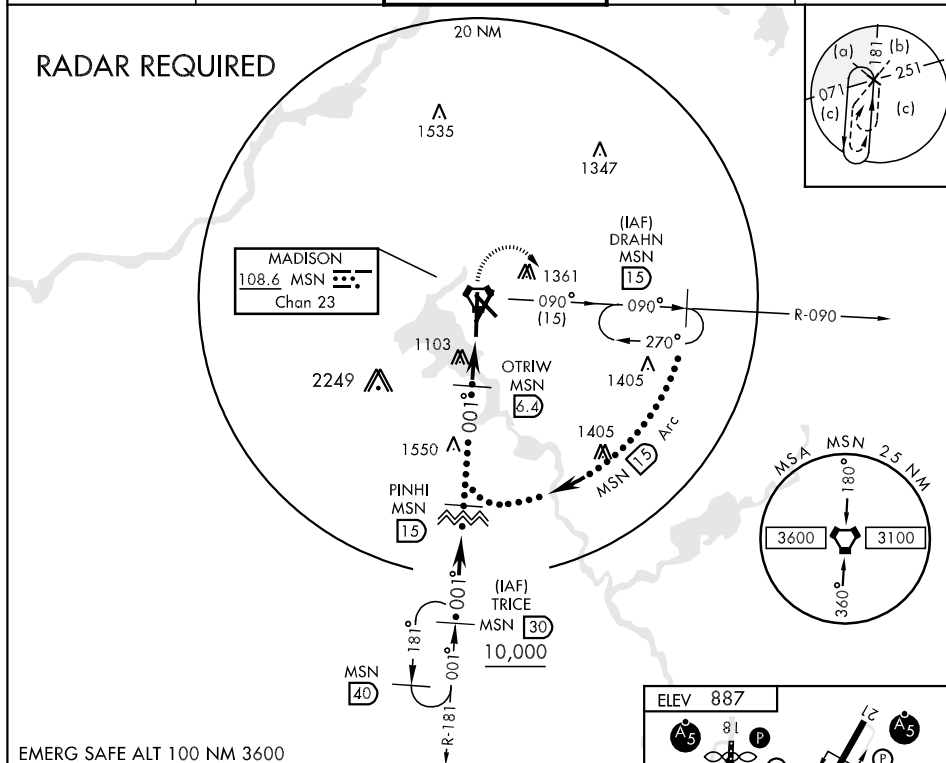

EMERG SAFE ALT 100 NM 3600

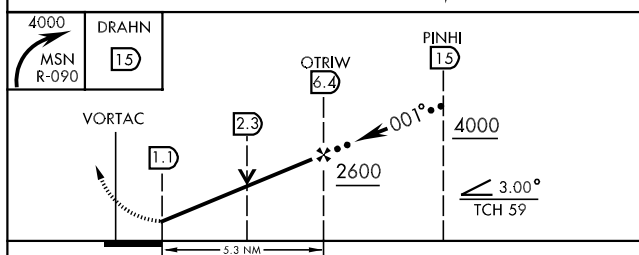

CATEGORY	C	D	E
S-36	1320/40 458 (500-34)	1320/50	458 (500-1)
CIRCLING	1460-1½ 573 (600-1½)	1460-2 573 (600-2)	1680-2¾ 793 (800-2¾)
S-ASR 36	1360/40 498 (500-34)	1360/50 498 (500-1)	1360/60 498 (500-1¼)

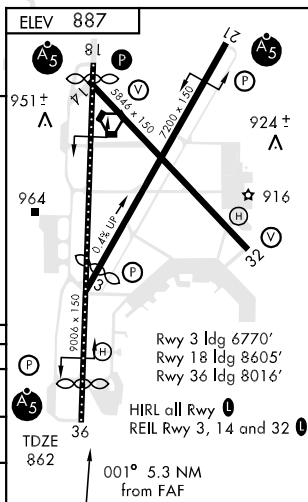

MADISON, WISCONSIN

43°08'N-89°20'W

MADISON/ DANE COUNTY REGIONAL-TRUAX FIELD (KMSN)

Amdt 1 07130

HI-TACAN RWY 36

LOC I-DSZ 110.1	APP CRS 182°	Rwy Idg TDZE 860 Apt Elev 887
---------------------------	------------------------	---

ILS or LOC/DME RWY 18

MADISON / DANE COUNTY RGNL-TRUAX FIELD (MSN)



⚠ When ALS inoperative, increase Cat. E S-ILS visibility ½ mile and S-LOC ½ mile. ADF or RADAR REQUIRED. MSN DME required for procedure turn. * Vis Cat A/B/C/D RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR




MISSED APPROACH: Climb to 2700
direct MONAH LOM/MSN 4.9
DME/RADAR and hold.

ATIS 124.65 278.3	MADISON APP CON * 135.45 343.7	MADISON TOWER * 119.3 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 121.62	UNICOM 122.95
-----------------------------	--	--	-------------------------------	---------------------------	-------------------------

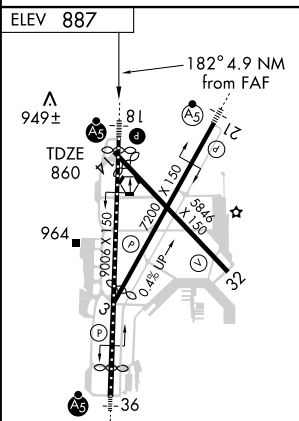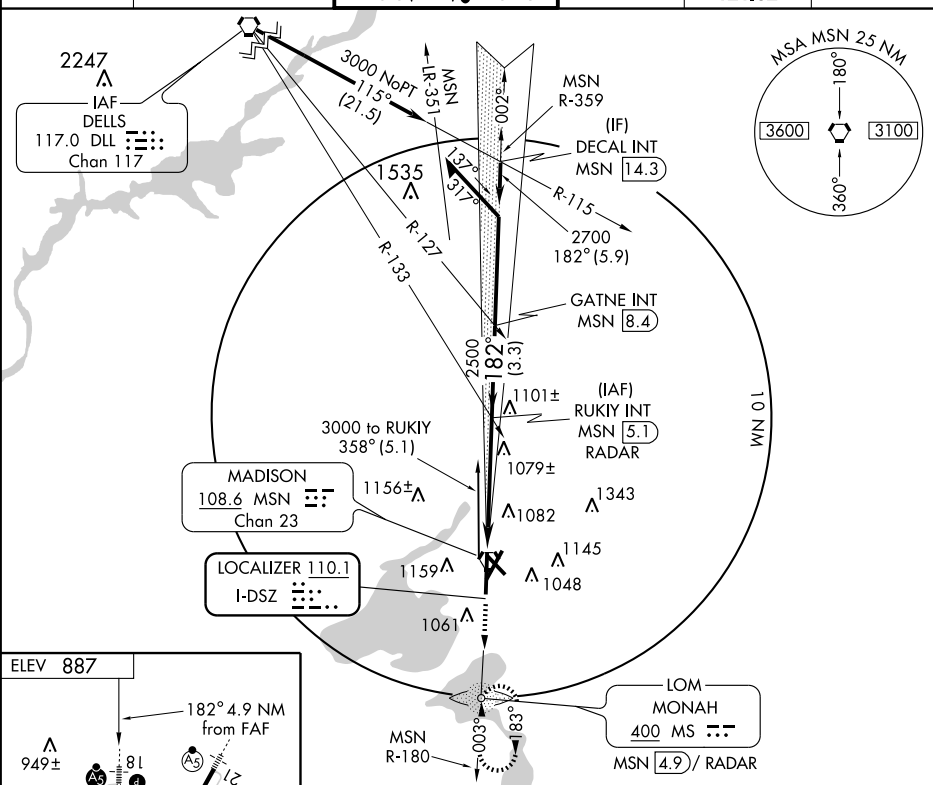

HIRL all Rwy's **⓪**
REIL Rwy's 3, 14 and 32 **⓪**

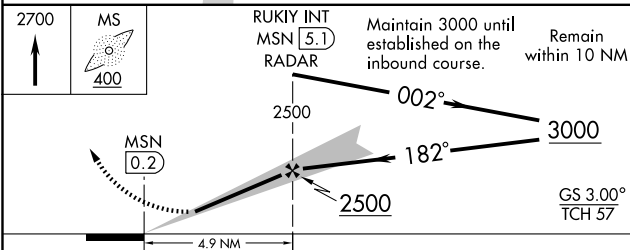

CATEGORY	A	B	C	D	E
S-ILS 18	*1060/24 200 (200-½)				
S-LOC 18	1340/24 480 (500-½)	1340/40 480 (500-¾)	1340/50 480 (500-1)	1340/60 480 (500-1½)	1340/60 480 (500-1½)
CIRCLING	1420-1 533 (600-1)	1460-1 573 (600-1)	1460-1½ 573 (600-1½)	1460-2 573 (600-2)	1700-3 813 (900-3)

MADISON, WISCONSIN
Orig-B 09351

MADISON / DANE COUNTY RGNL-TRUAX FIELD (MSN)
43°08'N-89°20'W
ILS or LOC/DME RWY 18



LOC I-MSN 109.9	APP CRS 002°	Rwy Idg 8017 TDZE 862 Apt Elev 887
---------------------------	------------------------	--

ILS or LOC/DME RWY 36

MADISON / DANE COUNTY RGNL-TRUAX FIELD (MSN)

 ASR	When ALS inoperative, increase Cat E S-ILS ¼ mile and S-LOC ½ mile. *Vis Cat A/B/C/D RVR 1800 authorized with the use of FD or AP or HUD to DA.	MALSR 	MISSED APPROACH: Climb to 2700 via MSN VORTAC R-359 to DECAL Int/MSN 14.3 DME and hold.
--------------------	---	------------------	---

ATIS 124.65 278.3	MADISON APP CON * 135.45 343.7	MADISON TOWER * 119.3 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 121.62	UNICOM 122.95
-----------------------------	--	--	-------------------------------	---------------------------	-------------------------

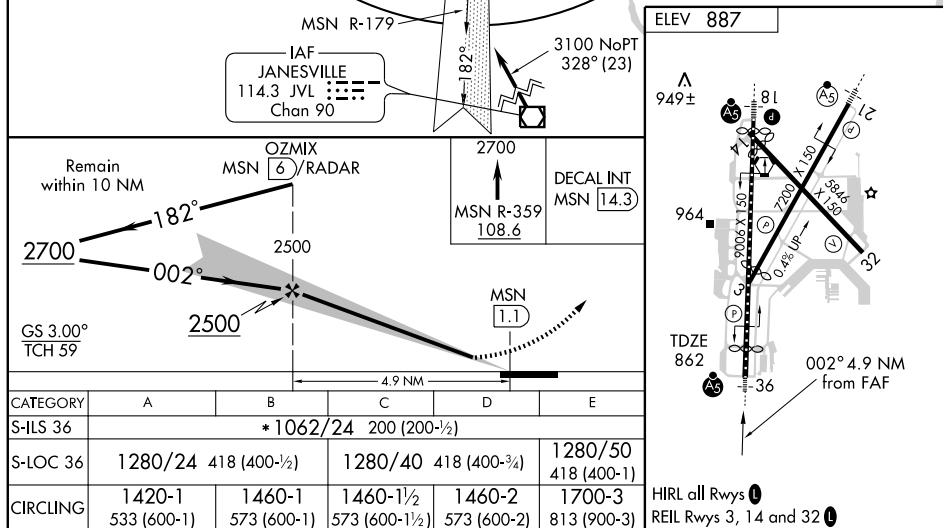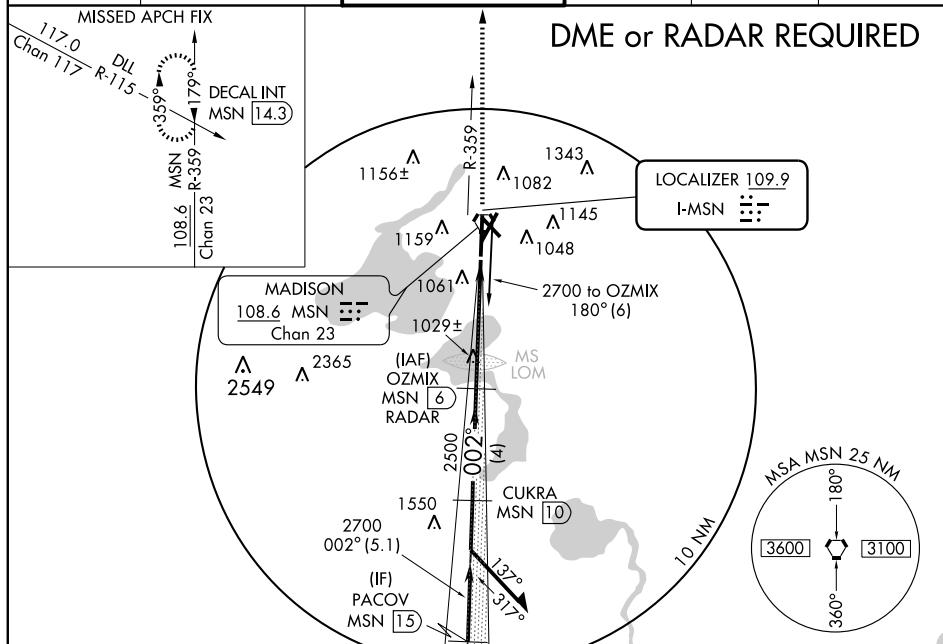



ILS or LOC RWY 21

MADISON / DANE COUNTY RGNL-TRUAX FIELD (MSN)



MISSED APPROACH: Climb to 1500, then climbing right turn to 2700 via MSN R-282 to IMMES Int/MSN 9.2 DME and hold

ATIS 124.65 278.3	MADISON APP CON ★ 135.45 343.7	MADISON TOWER ★ 119.3 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 121.62	UNICOM 122.95
-----------------------------	--	--	-------------------------------	---------------------------	-------------------------

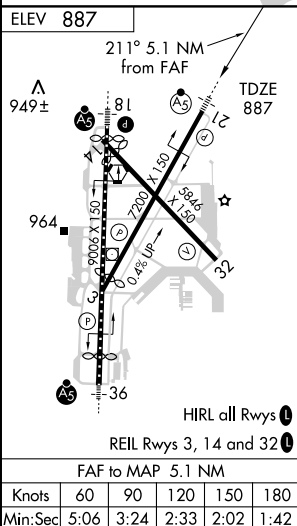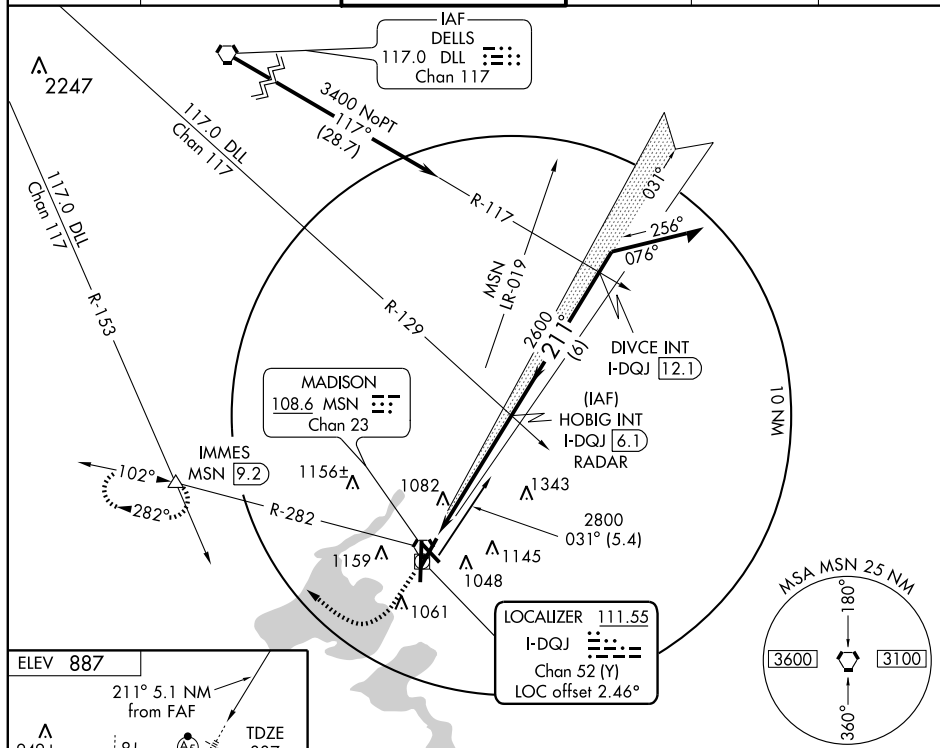

1500	2700	IMMES	HOBIG INT	Remain
↑	↻	△	I-DQJ 6.1 /RADAR	within 10 NM
MSN R-282				
I-DQJ 2.4	I-DQJ 1			
2600	2600			
1.4 NM	3.8 NM			
CATEGORY	A	B	C	D
S-ILS 21	1137-1/2 250 (300-1/2)			
S-LOC 21	1380-1/2 493 (500-1/2)		1380-3/4 493 (500-3/4)	1380-1 493 (500-1)
CIRCLING	1420-1 533 (600-1)	1460-1 573 (600-1)	1460-1 1/2 573 (600-1 1/2)	1460-2 573 (600-2)

MADISON, WISCONSIN

Orig 10154

MADISON / DANE COUNTY RGNL-TRUAX FIELD (MSN)

43° 08'N-89° 20'W

ILS or LOC RWY 21

LAND AND HOLD SHORT OPERATIONS (LAHSO)

LAHSO is an acronym for "Land and Hold Short Operations." These operations include landing and holding short of an intersection runway, an intersecting taxiway, or other predetermined points on the runway other than a runway or taxiway. Measured distance represents the available landing distance on the landing runway, in feet.

Specific questions regarding these distances should be referred to the air traffic manager of the facility concerned. The Aeronautical Information Manual contains specific details on hold-short operations and markings.

CITY/AIRPORT	LDG RWY	HOLD-SHORT POINT	MEASURED DISTANCE
ALTON/ST. LOUIS, IL			
ST. LOUIS RGNL (ALN)	29	17-35	6,850 feet
	35	11-29	5,100 feet
APPLETON, WI			
OUTAGAMIE COUNTY RGNL (ATW)	03	12-30	3,300 feet
	21	12-30	4,100 feet
	30	03-21	3,400 feet
BLOOMINGTON/NORMAL, IL			
CENTRAL IL REGL ARPT AT			
BLOOMINGTON-NORMAL (BMI)	02	11-29	4,600 feet
	11	02-20	6,200 feet
CARBONDALE-MURPHYSBORO, IL			
SOUTHERN ILLINOIS (MDH)	06	18L-36R	3,100 feet
	24	18R-36L	3,800 feet
	36R	06-24	3,000 feet
CHAMPAIGN-URBANA, IL			
UNIVERSITY OF ILLINOIS-WILLARD (CMI)	04	14L-32R	3,600 feet
	14L	04-22	3,550 feet
	18	04-22	4,100 feet
	22	18-36	4,700 feet
	32R	04-22	4,050 feet
	36	14L-32R	3,950 feet
CHICAGO, IL			
CHICAGO-O'HARE INTL (ORD)	09R	14L-32R	6,100 feet
	10	TWY S	12,156 feet
	22R	09R-27L	6,050 feet
	27L	04L-22R	5,700 feet
CHICAGO/AURORA, IL			
AURORA MUNI (ARR)	09	18-36	3,450 feet
	15	09-27	3,900 feet
	27	15-33	4,000 feet
CHICAGO/PROSPECT HEIGHTS/ WHEELING, IL			
CHICAGO EXECUTIVE (PWK)	16	12-30	3,623 feet
DECATUR, IL			
DECATUR (DEC)	06	12-30	4,800 feet
	12	06-24	4,450 feet
	18	06-24	4,450 feet
	24	12-30	3,000 feet
	24	18-36	8,000 feet
	30	18-36	5,050 feet
	36	12-30	4,800 feet

(SEE CONTINUATION PAGE FOR MORE LISTINGS)

LAND AND HOLD SHORT OPERATIONS (LAHSO)
(CONTINUED)



CITY/AIRPORT	LDG RWY	HOLD-SHORT POINT	MEASURED DISTANCE
GREEN BAY, WI			
AUSTIN STRAUBEL INTL (GRB)	18	06-24	2,692 feet
	24	18-36	6,050 feet
	36	06-24	4,932 feet
MADISON, WI			
DANE COUNTY RGNL- TRUAX FIELD (MSN)	03	14-32	3,400 feet
	18	03-21	4,850 feet
	21	18-36	6,450 feet
	32	18-36	5,300 feet
	36	14-32	7,050 feet
MARION, IL			
WILLIAMSON COUNTY RGNL (MWA)	20	11-29	6,650 feet
	29	02-20	4,650 feet
MOSINEE, WI			
CENTRAL WISCONSIN (CWA)	26	17-35	7,300 feet
	35	08-26	5,000 feet
ROCKFORD, IL			
CHICAGO/ROCKFORD INTL (RFD)	01	07-25	6,000 feet
	07	01-19	8,800 feet
SPRINGFIELD, IL			
ABRAHAM LINCOLN CAPITAL (SPI)	04	13-31	3,200 feet
	22	13-31	4,150 feet
	31	04-22	3,350 feet
	36	13-31	3,000 feet

APP CRS	Rwy Idg	537.1
136°	TDZE	861
	Apt Elev	887

RNAV (GPS) RWY 14

MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)

<div><div><div></div><div></div><div></div></div><div>NA</div><div>ASR</div></div>		GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA.		MISSED APPROACH: Climb to 3000 direct CINOT WP and hold.							
ATIS 124.65 278.3		MADISON APP CON ★ 135.45 343.7		MADISON TOWER ★ 119.3 (CTAF) 0 257.8		GND CON 121.9 348.6		CLNC DEL 121.62		UNICOM 122.95	

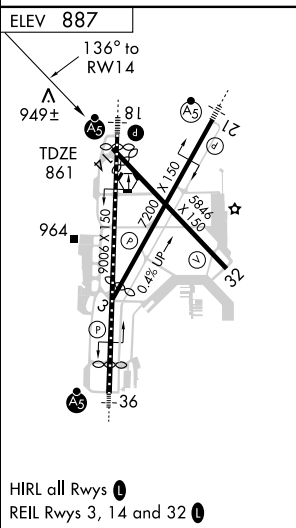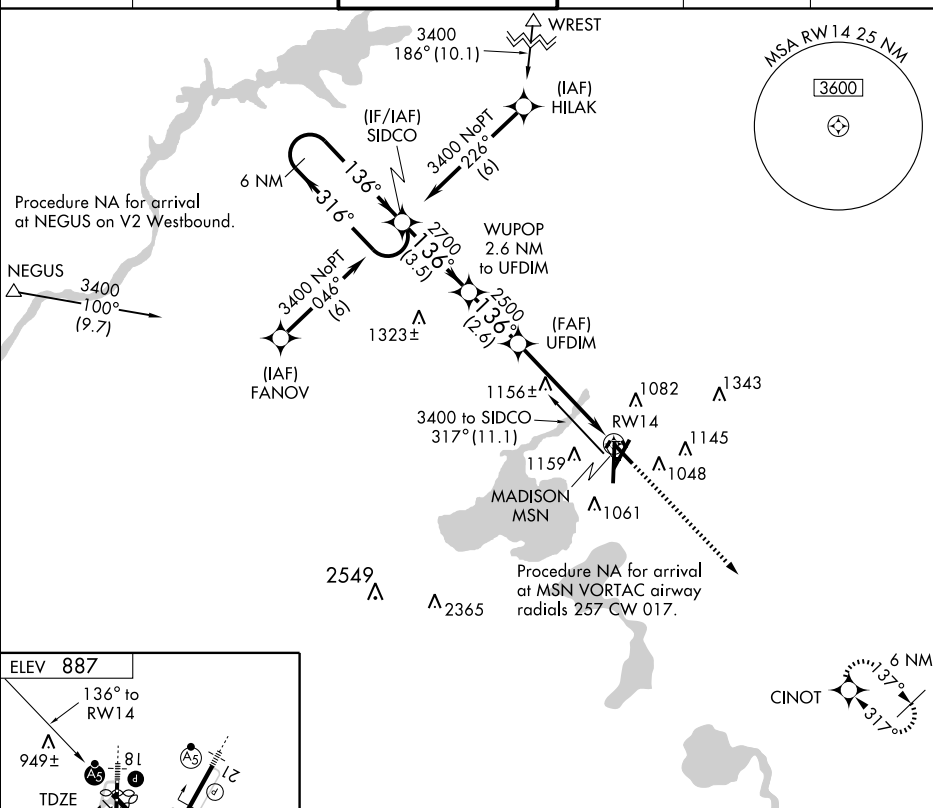

CATEGORY	A	B	C	D	
LNAV MDA	1420-1 559 (600-1)		1420-1½ 559 (600-1½)	1420-1¾ 559 (600-1¾)	
CIRCLING	1420-1 533 (600-1)	1460-1 573 (600-1)	1460-1½ 573 (600-1½)	1460-2 573 (600-2)	

MADISON, WISCONSIN

Amdt 1 09351

MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)

43° 08' N - 89° 20' W

RNAV (GPS) RWY 14

APP CRS	Rwy Idg	8606
182°	TDZE	860
	Apt Elev	887

RNAV (GPS) RWY 18

MADISON/DANE COUNTY RGNL-TRUAX FIELD(MSN)

ASR ANA

GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.
Baro-VNAV NA below -16°C (4°F).

MALSR

MISSED APPROACH: Climb to 3000 direct to DEKEY WP and hold.



ATIS
124.65 278.3

MADISON APP CON ★
135.45 343.7

MADISON TOWER ★
119.3 (CTAF) **L** 257.8

GND CON
121.9 348.6

CLNC DE
121.62

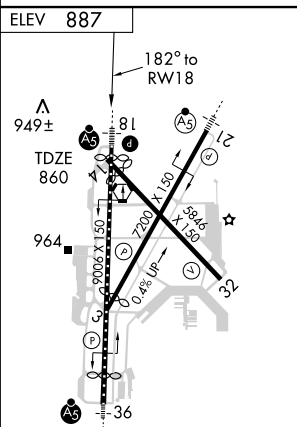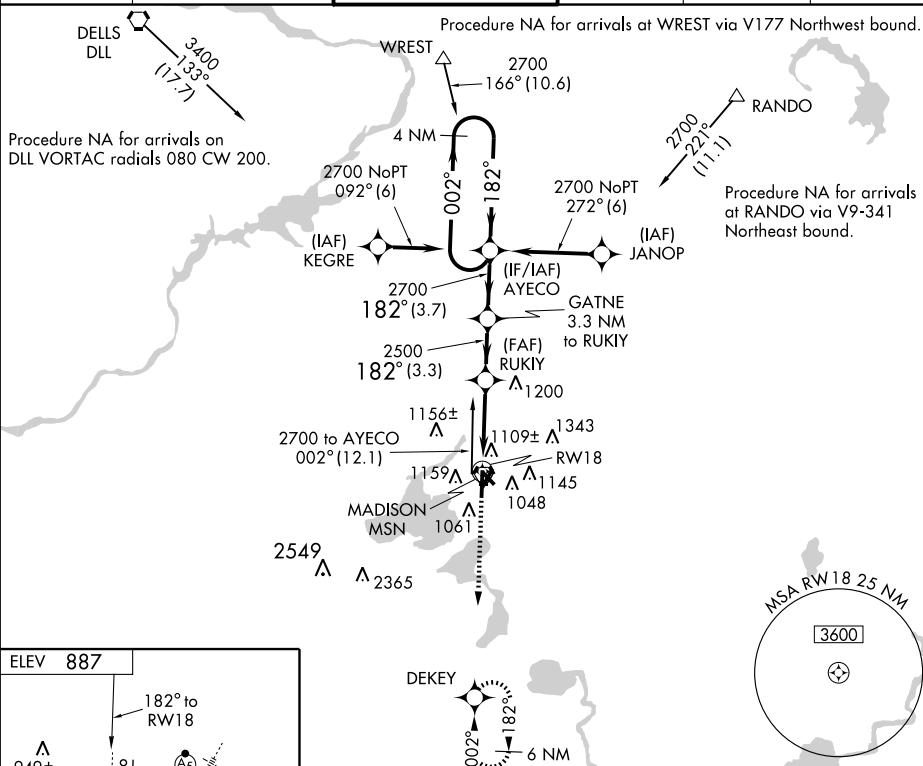UNICOM
122.95

HIRL all Rwys **L**
REIL Rwy 3, 14 and 32 **L**

MADISON/DANE COUNTY RGNI-TRUAX FIELD (MSN)

Amdt 1 093.51

43° 08' N - 89° 20' W

RNAV (GPS) RWY 18




APP CRS 209°	Rwy Idg TDZE 887	7200
	Apt Elev 887	

RNAV (GPS) RWY 21

MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)

W ASR	▽ NA	GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA. Baro-VNAV NA below -16°C (4°F).	MALS A5	MISSED APPROACH: Climb to 2000 direct GADSE WP then climbing left turn to 3000 and via 170° track to DEKEY WP and hold.
-----------------	----------------	--	--------------------------	---

ATIS 124.65 278.3	MADISON APP CON* 135.45 343.7	MADISON TOWER* 119.3 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 121.62	UNICOM 122.95
-----------------------------	---	---	-------------------------------	---------------------------	-------------------------

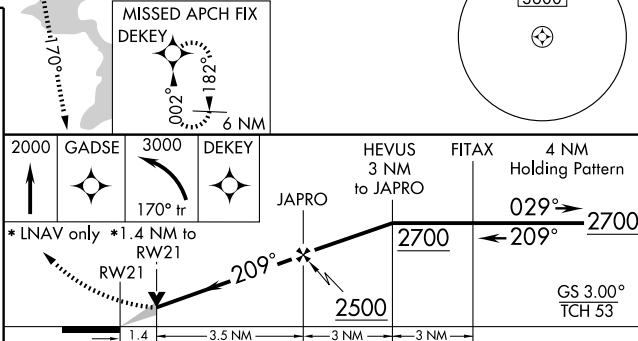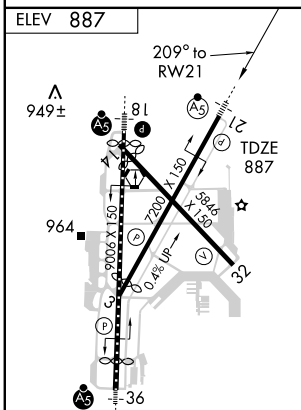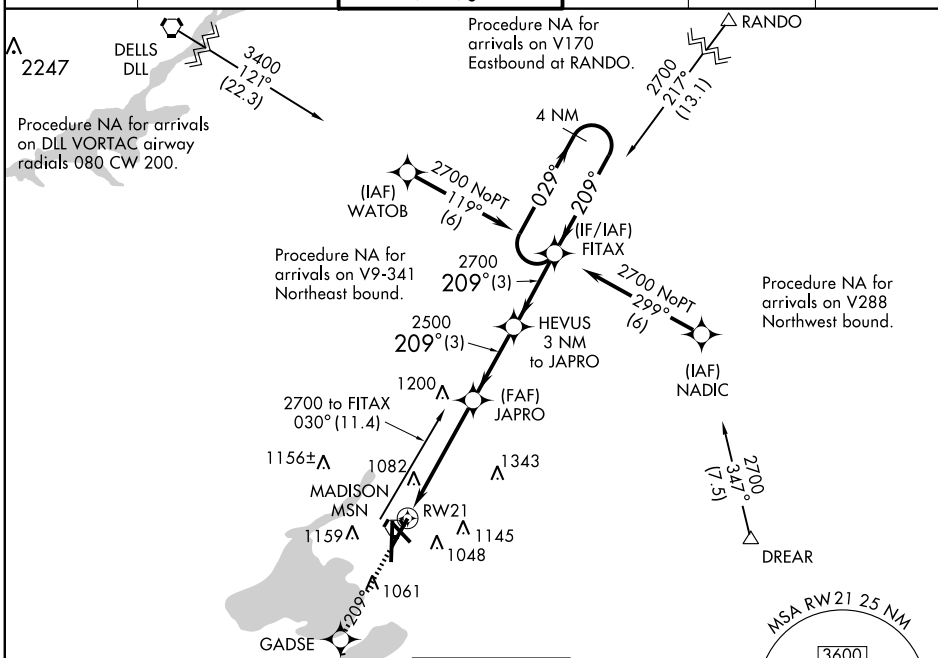

2000	GADSE	3000	DEKEY	HEVUS 3 NM to JAPRO	FITAX	4 NM Holding Pattern
		170° tr		JAPRO	2700	029°
				2500	209°	2700
						GS 3.00° TCH 53
		1.4	3.5 NM	3 NM	3 NM	
CATEGORY	A					
GLS PA DA	NA					
LNAV/VNAV DA	1380-1¼ 493 (500-1¼)					
LNAV MDA	1380-½ 493 (500-½)		1380-¾ 493 (500-¾)		1380-1 493 (500-1)	
CIRCLING	1420-1¾ 533 (600-1¾)		1460-1¾ 573 (600-1¾)		1460-2 573 (600-2)	

HIRL all Rwy's **L**
REIL Rwy's 3, 14 and 32 **L**

MADISON, WISCONSIN

Amdt 1 10154

MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)

43° 08'N - 89° 20'W

RNAV (GPS) RWY 21

APP CRS	Rwy ldg	5846
316°	TDZE	861
	Apt Elev	887

RNAV (GPS) RWY 32


MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)





GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to
3400 direct SIDCO WP and hold.

ATIS 124.65 278.3	MADISON APP CON ★ 135.45 343.7	MADISON TOWER ★ 119.3 (CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 121.62	UNICOM 122.95
-----------------------------	--	--	-------------------------------	---------------------------	-------------------------



Procedure NA for arrival on MSN VORTAC
airway radials 076 CW 196.

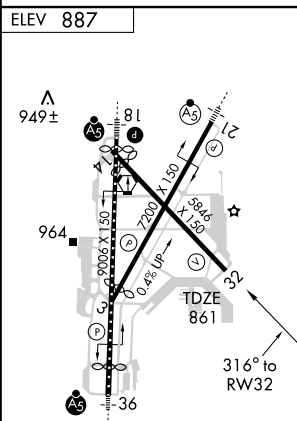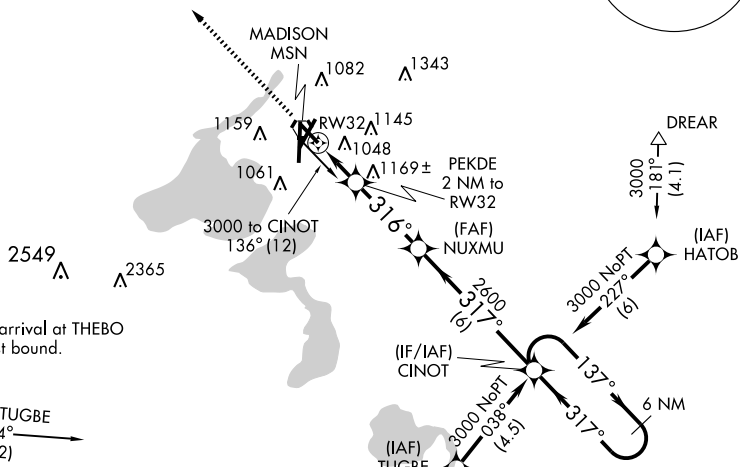

HIRL all Rwys
REIL Rws 3, 14 and 32

3400 SIDCO		CINOT 6 NM Holding Pattern	
PEKDE 2 NM to RW32		NUXMU 2600	
RW32		317°	
1520		317°	
2 NM		3.3 NM	
CATEGORY		C	
LNAV MDA		1300-1 439 (500-1)	
CIRCLING		1420-1 533 (600-1)	
		1460-1 573 (600-1)	
		1300-1 439 (500-1)	
		1460-1 573 (600-1)	
		1460-2 573 (600-2)	

MADISON, WISCONSIN

Amdt 1 09351

MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)

43° 08' N - 89° 20' W



RNAV (GPS) RWY 32

APP CRS	Rwy Idg	8017
002°	TDZE	862
	Apt Elev	887


RNAV (GPS) RWY 36

MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)

W V	GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA. Baro-VNAV NA below -16°C (4°F).	MALSR A5	MISSED APPROACH: Climb to 3200 direct AYEKO WP and hold.		
ASR NA					
ATIS 124.65 278.3	MADISON APP CON ★ 135.45 343.7	MADISON TOWER ★ 119.3 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 121.62	UNICOM 122.95

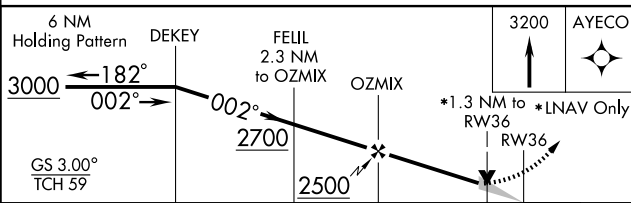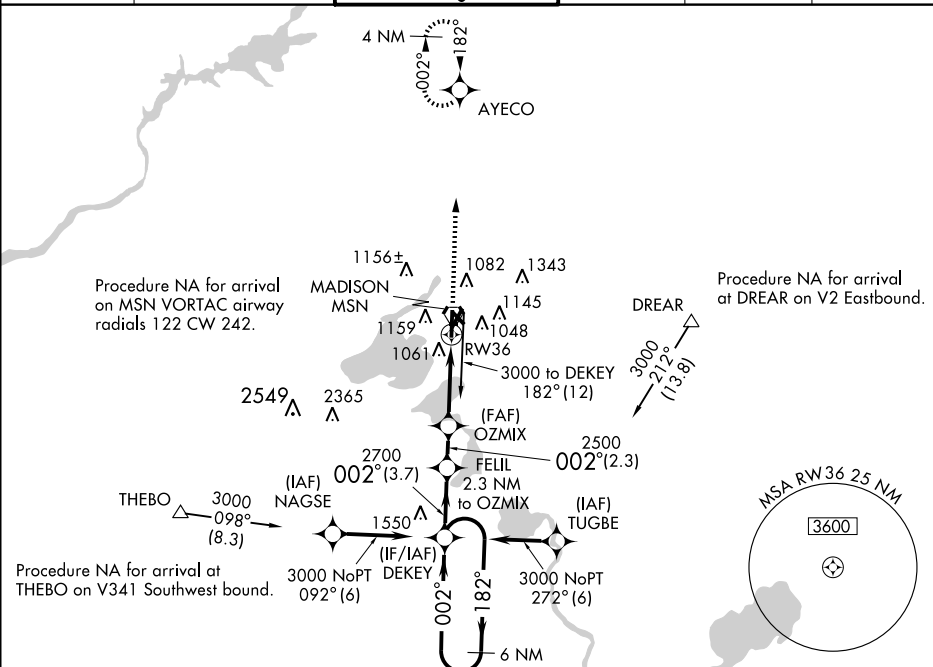

CATEGORY	A	B	C	D
GLS PA DA	NA			
RNAV/ VNAV DA	1360/60 498 (500-1¼)			
RNAV MDA	1320/24 458 (500-½)	1320/40 458 (500-¾)	1320/50 458 (500-1)	
CIRCLING	1420-1¾ 533 (600-1¾)	1460-1¾ 573 (600-1¾)	1460-2 573 (600-2)	

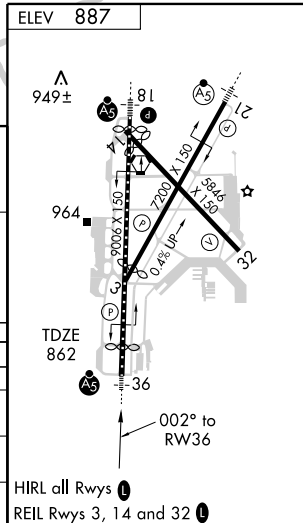

VORTAC MSN 108.6 Chan 23	APP CRS 139°	Rwy Idg TDZE Apt Elev 887
--	------------------------	--




VOR/DME or TACAN RWY 14

MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)



MISSED APPROACH: Climbing left turn to 4000
via MSN R-090 to DRAHN 15 DME and hold.

ATIS 124.65 278.3	MADISON APP CON ★ 135.45 343.7	MADISON TOWER ★ 119.3 (CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 121.62	UNICOM 122.95
-----------------------------	--	--	-------------------------------	---------------------------	-------------------------

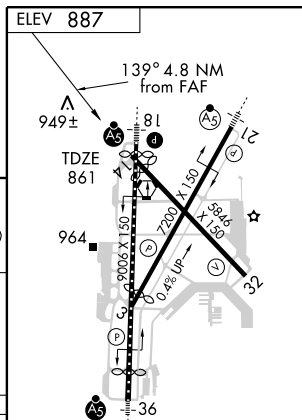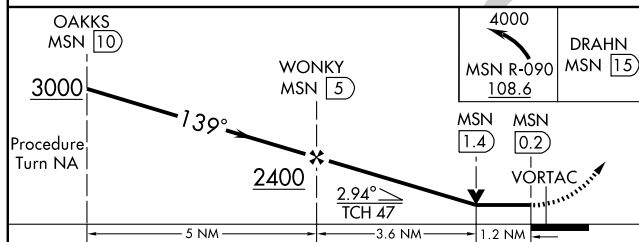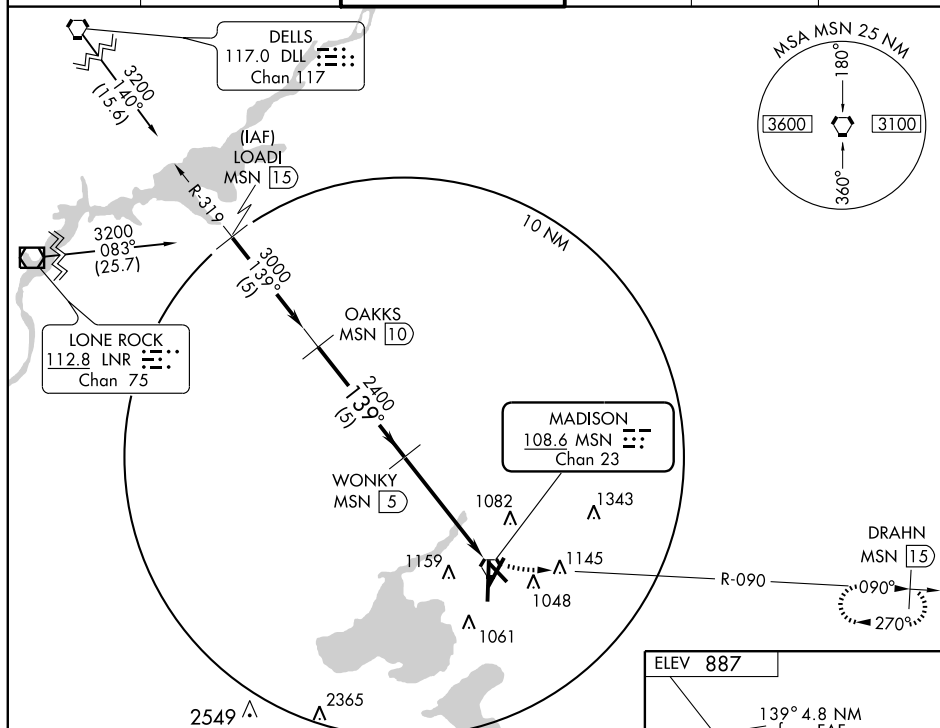

CATEGORY	A	B	C	D	E
S-14	1420-1	559 (600-1)	1420-1½ 559 (600-1½)	1420-1¾ 559 (600-1¾)	1420-2 559 (600-2)
CIRCLING	1420-1 533 (600-1)	1460-1 573 (600-1)	1460-1½ 573 (600-1½)	1460-2 573 (600-2)	1700-3 813 (900-3)

HIRL all Rwy's
REIL Rwy's 3, 14 and 32

VORTAC MSN
108.6
Chan **23**

APP CRS
171°

Rwy Idg
TDZE **860**
Apt Elev **887**

VOR/DME or TACAN RWY 18

MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)






For inoperative MALS, increase S-18 Cat E visibility to 1¾.




MISSED APPROACH: Climbing left turn to 3000 via heading 330° and R-351 to WREST Int and hold.

ATIS 124.65 278.3	MADISON APP CON ★ 135.45 343.7	MADISON TOWER ★ 119.3 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 121.62	UNICOM 122.95
-----------------------------	--	--	-------------------------------	---------------------------	-------------------------

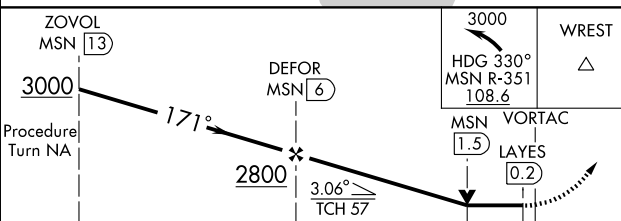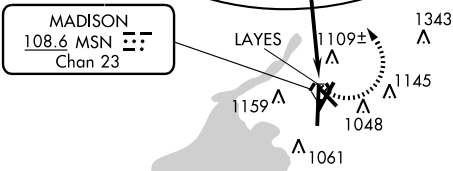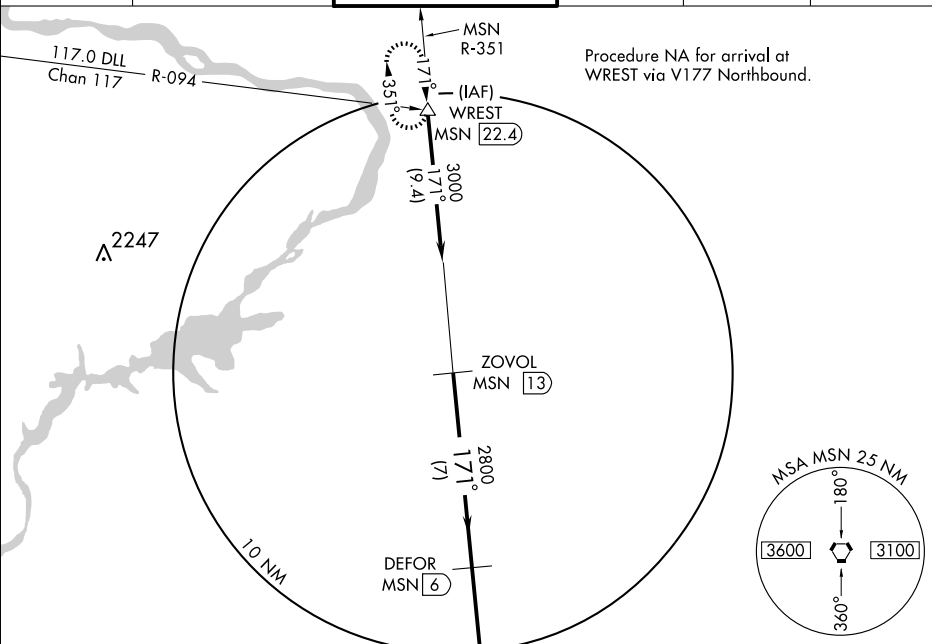

CATEGORY	A	B	C	D	E
S-18	1360/24 500 (500-½)		1360/40 500 (500-¾)	1360/50 500 (500-1)	1360/60 500 (500-1¼)
CIRCLING	1400-1 513 (600-1)	1460-1 573 (600-1)	1460-1½ 573 (600-1½)	1460-2 573 (600-2)	1700-3 813 (900-3)

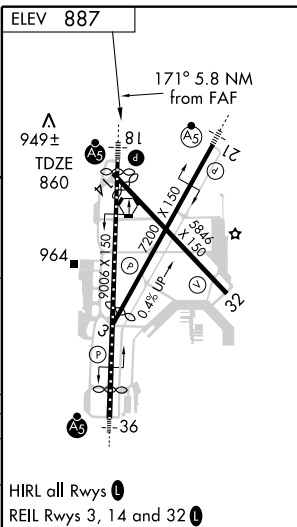



VORTAC MSN	APP CRS	Rwy Idg	5846
<u>108.6</u>	310°	TDZE	861
Chgn 23		Apt Elev	887

VOR/DME or TACAN RWY 32
MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)



MISSED APPROACH: Climb to 2600 then climbing right turn to 4000 via MSN R-090 to DRAHN 15 DME and hold.

ATIS	MADISON APP CON ★	MADISON TOWER ★	GND CON	CLNC DEL	UNICOM
124.65 278.3	135.45 343.7	119.3 (CTAF) 0 257.8	121.9 348.6	121.62	122.95

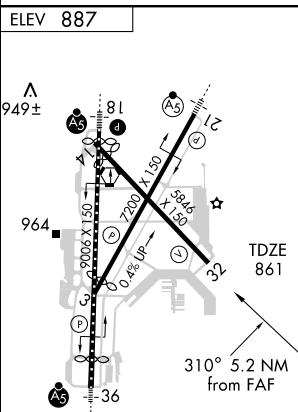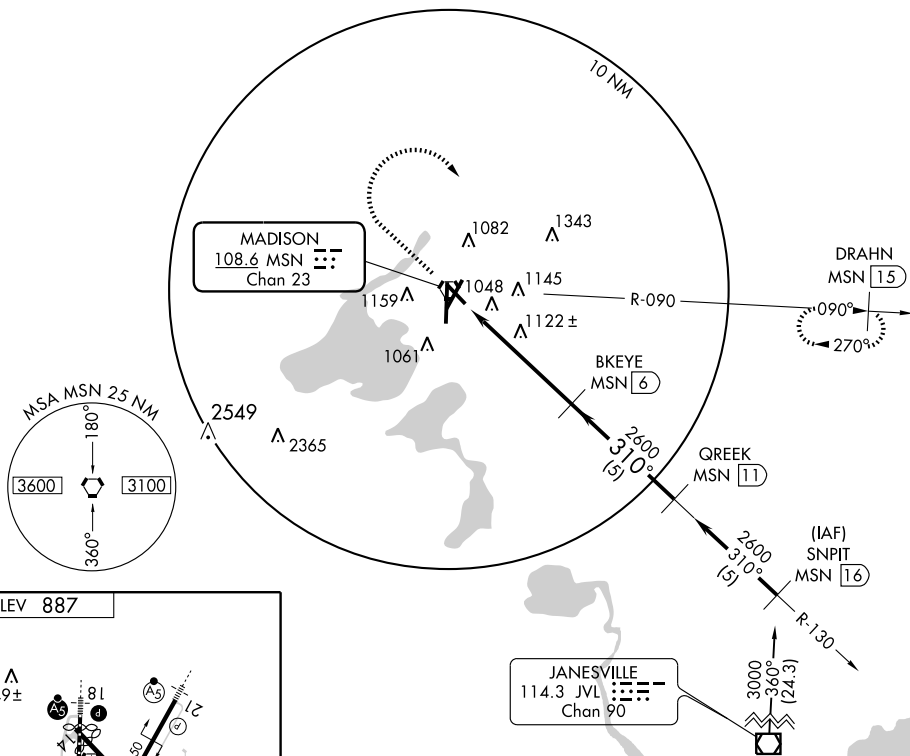

HIRL all Rwy's **L**
 PFI Rwy's 3, 14 and 32 **L**

CATEGORY	A	B	C	D	E
S-32	1420-1	559 (600-1)	1420-1½ 559 (600-1½)	1420-1¾ 559 (600-1¾)	1420-2 559 (600-2)
CIRCLING	1420-1 533 (600-1)	1460-1 573 (600-1)	1460-1½ 573 (600-1½)	1460-2 573 (600-2)	1700-3 813 (900-3)

MADISON, WISCONSIN
Orig-B 08APR10

43° 08'N - 89° 20'W

MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)
VOR/DME or TACAN RWY 32

EC-3. 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

VORTAC MSN 108.6 Chan 23	APP CRS 139°	Rwy Idg TDZE Apt Elev 887
--	------------------------	--



VOR RWY 14

MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)


V
ASR

MISSED APPROACH: Climb to 2700 via MSN R-139
then left turn direct MSN VORTAC and hold.

ATIS 124.65 278.3	MADISON APP CON ★ 135.45 343.7	MADISON TOWER ★ 119.3 (CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 121.62	UNICOM 122.95
-----------------------------	--	--	-------------------------------	---------------------------	-------------------------

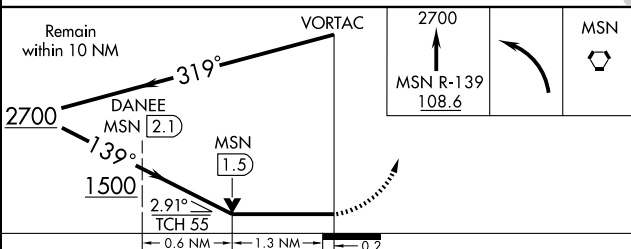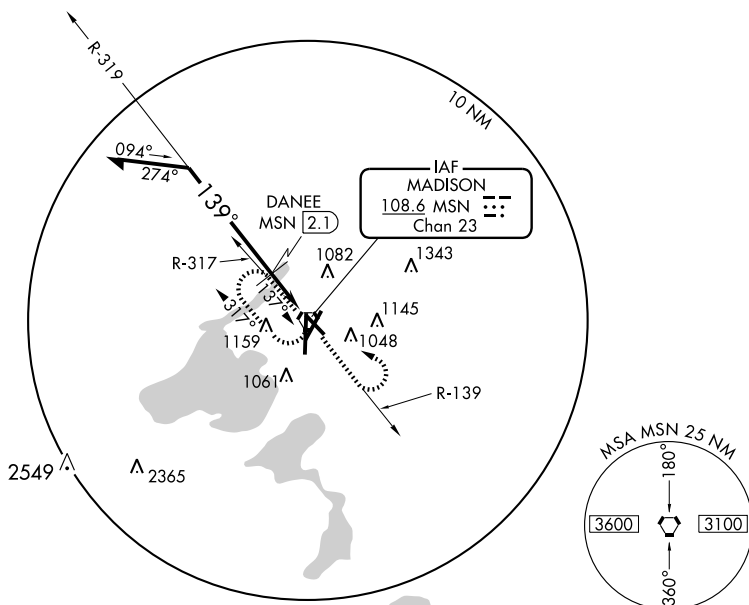

CATEGORY	A	B	C	D
S-14	1500-1 639 (700-1)		1500-1 639 (700-1 3/4)	1500-2 639 (700-2)
CIRCLING	1500-1 613 (700-1)		1500-1 613 (700-1 3/4)	1500-2 613 (700-2)
DANEE FIX MINIMUMS				
S-14	1300-1 439 (500-1)		1300-1 439 (500-1 1/4)	1300-1 1/2 439 (500-1 1/2)
CIRCLING	1400-1 513 (600-1)	1460-1 573 (600-1)	1460-1 573 (600-1 1/2)	1460-2 573 (600-2)

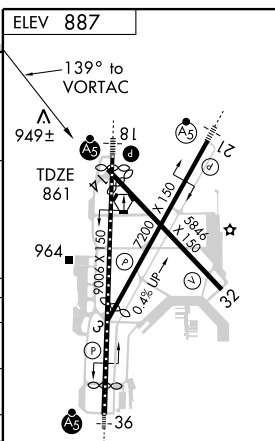

HIRL all Rwy 1
REIL Rwy 3, 14 and 32

VORTAC MSN 108.6 Chan 23	APP CRS 173°	Rwy Idg TDZE Apt Elev 887
--	------------------------	--

VOR RWY 18



MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)

T
ASR


MALSR
A5

MISSED APPROACH: Climb to 2500 via MSN R-173 then left turn direct MSN VORTAC and hold.

ATIS 124.65 278.3	MADISON APP CON ★ 135.45 343.7	MADISON TOWER ★ 119.3 (CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 121.62	UNICOM 122.95
-----------------------------	--	--	-------------------------------	---------------------------	-------------------------

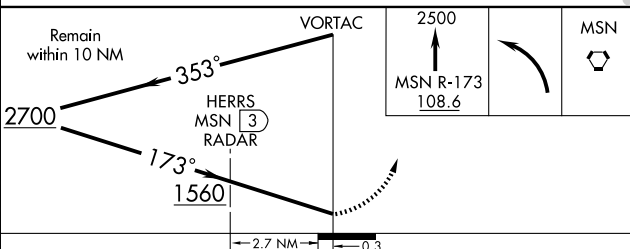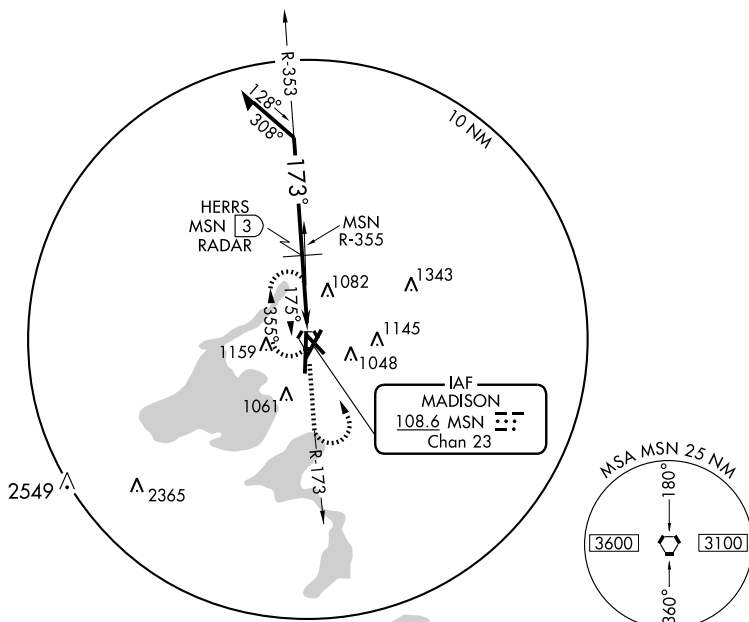

CATEGORY	A	B	C	D
S-18	1560/24	700 (700-1/2)	1560-1 1/2 700 (700-1 1/2)	1560-1 3/4 700 (700-1 3/4)
CIRCLING	1560-1	673 (700-1)	1560-2 673 (700-2)	1560-2 1/4 673 (700-2 1/4)
HERRS DME/RADAR FIX MINIMUMS				
S-18	1340/24	480 (500-1/2)	1340/40 480 (500-3/4)	1340/50 480 (500-1)
CIRCLING	1400-1 513 (600-1)	1460-1 573 (600-1)	1460-1 1/2 573 (600-1 1/2)	1460-2 573 (600-2)

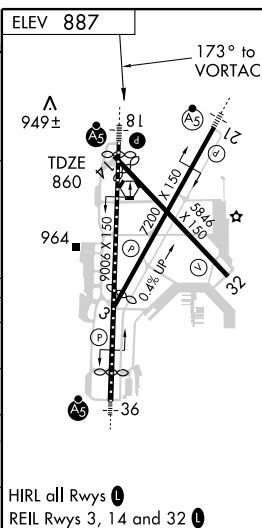

HIRL all Rwy 18
REIL Rwy 3, 14 and 32

VORTAC MSN 108.6 Chan 23	APP CRS 220°	Rwy Idg TDZE Apt Elev 887
--	------------------------	---



VOR RWY 21

MADISON / DANE COUNTY RGNL-TRUAX FIELD (MSN)




MISSED APPROACH: Climb to 2400 then climbing left turn to 2800 direct MSN VORTAC and hold.

ATIS 124.65 278.3	MADISON APP CON ★ 135.45 343.7	MADISON TOWER ★ 119.3 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 121.62	UNICOM 122.95
-----------------------------	--	--	-------------------------------	---------------------------	-------------------------

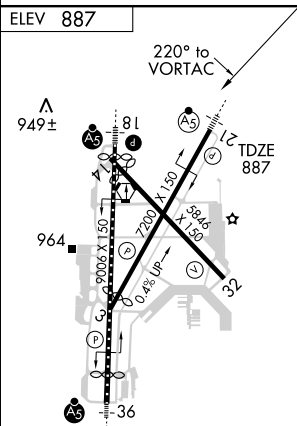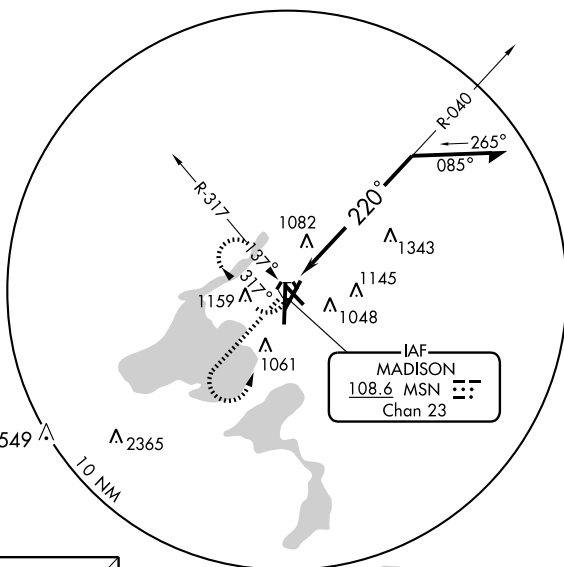

HIRL all Rwy's 1
REIL Rwy's 3, 14 and 32 1
MADISON, WISCONSIN
Orig 09351

2400 ↑	2800 ↶	MSN 108.6
-----------	-----------	--------------

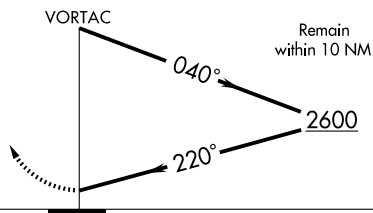

CATEGORY	A	B	C	D
S-21	1700-1 813 (900-1)	1700-1¼ 813 (900-1¼)	1700-2½ 813 (900-2½)	1700-2¾ 813 (900-2¾)
CIRCLING	1700-1 813 (900-1)	1700-1¼ 813 (900-1¼)	1700-2½ 813 (900-2½)	1700-2¾ 813 (900-2¾)

MADISON / DANE COUNTY RGNL-TRUAX FIELD (MSN)
43° 08'N-89° 20'W
VOR RWY 21

VORTAC MSN 108.6 Chan 23	APP CRS 311°	Rwy ldg TDZE Apt Elev	5846 861 887
--	------------------------	-----------------------------	---


VOR RWY 32

MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)


▼
ASR

MISSED APPROACH: Climb to 2600 via MSN R-311
then right turn direct MSN VORTAC and hold.


ATIS 124.65 278.3	MADISON APP CON ★ 135.45 343.7	MADISON TOWER ★ 119.3 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 121.62	UNICOM 122.95
-----------------------------	--	--	-------------------------------	---------------------------	-------------------------

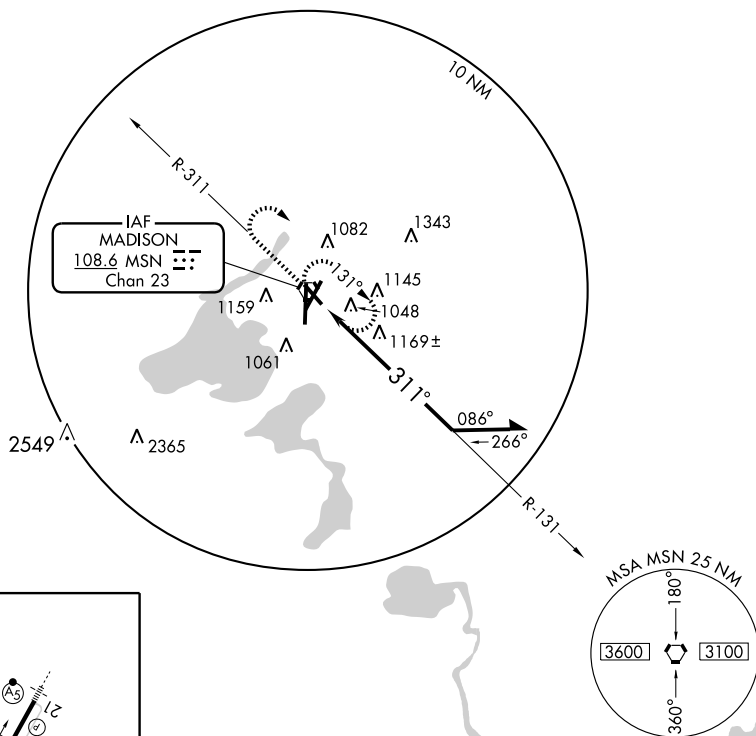

ELEV 887



HIRL all Rwy's
REIL Rwy's 3, 14 and 32

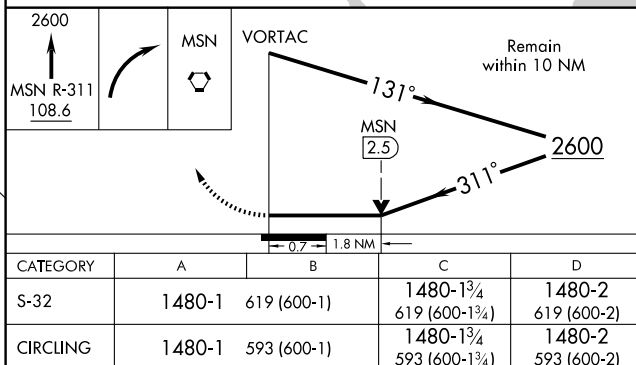

MADISON, WISCONSIN

Orig 09351

MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)

43° 08'N - 89° 20'W

VOR RWY 32

VORTAC MSN
108.6
Chan **23**

APP CRS
001°

Rwy Idg
TDZE **862**
Apt Elev **887**

VOR RWY 36

MADISON/DANE COUNTY RGNL-TRUAX FIELD (MSN)

NA
ASR

MALSR
A5

MISSED APPROACH: Climb to 2700 then
left turn direct MSN VORTAC and hold.

ATIS
124.65 278.3



MADISON APP CON ★
135.45 343.7

MADISON TOWER ★
119.3 (CTAF) 257.8


GND CON
121.9 348.6

CLNC DEL
121.62

UNICOM
122.95

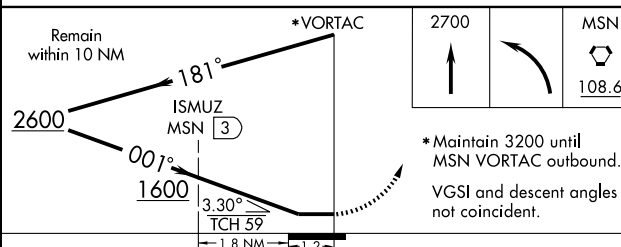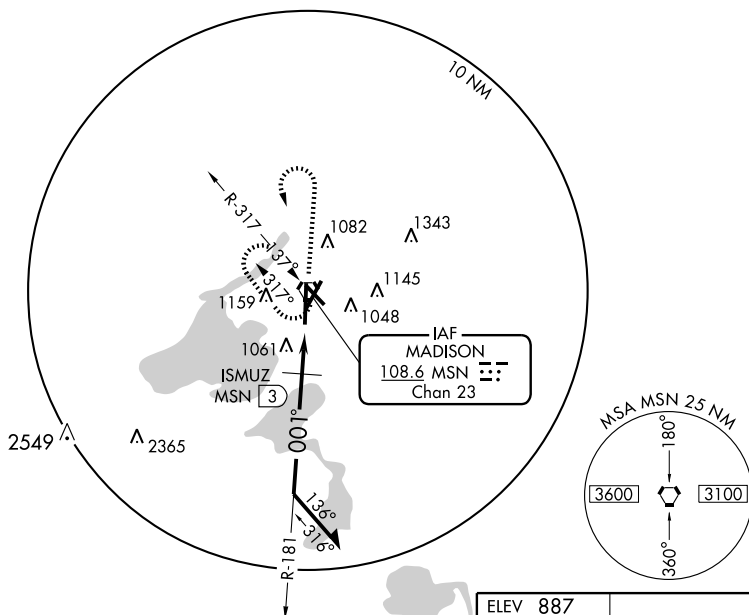

CATEGORY	A	B	C	D
S-36	1600/50	738 (800-1)	1600-1½ 738 (800-1½)	1600-1¾ 738 (800-1¾)
CIRCLING	1600-1	713 (800-1)	1600-2 713 (800-2)	1600-2¼ 713 (800-2¼)
ISMUZ FIX MINIMUMS				
S-36	1320/50	458 (500-1)	1320/60 458 (500-1¼)	1320-1½ 458 (500-1½)
CIRCLING	1400-1 513 (600-1)	1460-1 573 (600-1)	1460-1½ 573 (600-1½)	1460-2 573 (600-2)

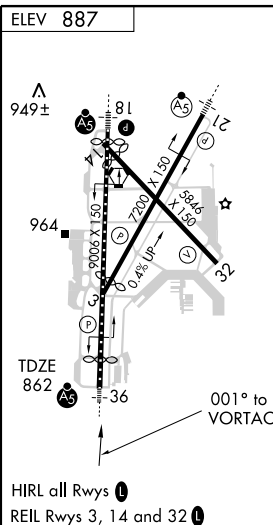

MAGGS N44°56.69' W91°22.42' NOTAM FILE EAU.

GREEN BAY

NDB (LOM) 239 EA 224° 6.7 NM to Eau Claire-Chippewa Valley Rgnl. Unmonitored.

MANITOWISH WATERS (D25) 1 S UTC-6(-5DT) N46°07.32' W89°52.94'

GREEN BAY

1610 B FUEL 100LL NOTAM FILE GRB

L-14J

Rwy 14-32: H3500X60 (ASPH) S-12.5 MIRL

IAP

Rwy 14: Trees. Rwy 32: PAPI(P2L)—GA 3.5° TCH 41'. Trees.

Rwy 04-22: 3299X120 (TURF)

Rwy 04: Trees. Rwy 22: Trees.

AIRPORT REMARKS: Attended Jun-Sep 1430-2300Z†, Nov-Apr 1430-1530Z†, Oct and May 1430-1800Z†. 100LL avbl 24 hrs with credit card. Airframe repairs on call 715-686-7523. Rwy 04-22 CLOSED winters. Be alert: Rwy 14-32 may be unusable due to snow covered until 30 Apr. Birds and migratory waterfowl on and in/ov arpt. Deer and coyotes on and in/ov arpt. MIRL Rwy 14-32 preset on low ints, to increase ints and ACTIVATE PAPI Rwy 32—CTAF. Rwy 04-22 marked with yellow cones.

COMMUNICATIONS: CTAF/UNICOM 122.8


MINNEAPOLIS CENTER APP/DEP CON 133.65

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE RHI.

RHINELANDER (L) VORTAC 109.2 RHI Chan 29 N45°38.03'

W89°27.47' 327° 34.3 NM to fld. 1590/2E. HIWAS.

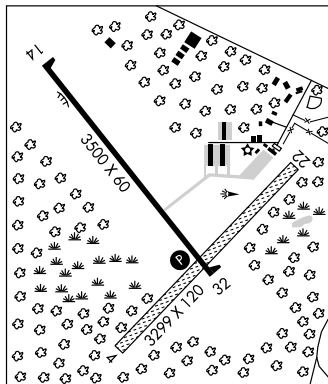

MANITOWOC CO (MTW) 2 NW UTC-6(-5DT) N44°07.73' W87°40.84'

GREEN BAY

651 B S2 FUEL 100LL, JET A, MOGAS NOTAM FILE MTW

H-2K, L-28H

Rwy 17-35: H5001X100 (ASPH) S-60 HIRL

IAP

Rwy 17: MALSR. VASI(V4L)—GA 3.0° TCH 42'.

Rwy 35: REIL. VASI(V4L)—GA 3.0° TCH 45'. Tree.

Rwy 07-25: H3341X100 (ASPH) S-12 MIRL 0.4% up W

Rwy 07: Tree.

AIRPORT REMARKS: Attended Mon-Fri 1330-2300Z†, Sat-Sun 1400-1900Z†. For svc after hrs call 920-682-0043 during attended hrs or 920-242-7527 after attended hrs. Geese and numerous birds on and in/ov arpt. Rwy 35 REIL OTS indef. ACTIVATE MIRL Rwy 07-25, HIRL Rwy 17-35, REIL Rwy 35 and MALSR Rwy 17—CTAF.

WEATHER DATA SOURCES: AWOS-3 111.0 MTW (920) 682-1164.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.1R 111.0T (GREEN BAY RADIO)

® GREEN BAY APP/DEP CON 120.2 (1130-0530Z†)

® MINNEAPOLIS CENTER APP/DEP CON 125.55 (0530-1130Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE MTW.

(T) VOR/DME 111.0 MTW Chan 47 N44°07.71'

W87°40.79' at fld. 650/2W. AWOS-3.

MAWOC NDB (LOM) 362 MT N44°11.98' W87°42.14' 162° 4.4


NM to fld.

ILS 111.3 I-MTW

Rwy 17.

Class IC.

LOM MAWOC NDB. ILS unmonitored.

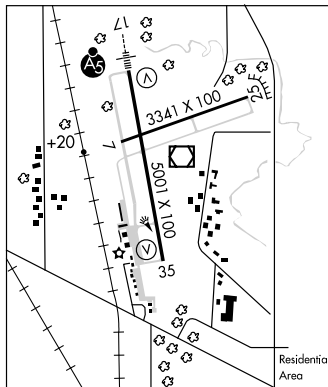

APP CRS **142°**
 Rwy Idg **3500**
 TDZE **1610**
 Apt Elev **1610**

RNAV (GPS) RWY 14

MANITOWISH WATERS (D25)

▼ DME/DME RNP-0.3 NA. Procedure NA at night.
▲ NA Visibility reduction by helicopters NA. Circling NA to Rwy 4 and 22.
 Use Minocqua-Woodruff altimeter setting. When not received, use Rhinelander altimeter setting and increase all MDA 60 feet and all Cat C visibilities ¼ mile.




MISSED APPROACH: Climbing left turn to 3500 direct ERBUH and hold.

MINOCQUA-WOODRUFF AWOS-3
121.125

MINNEAPOLIS CENTER
133.65 281.5

GCO
121.725

UNICOM
122.8 (CTAF) 0

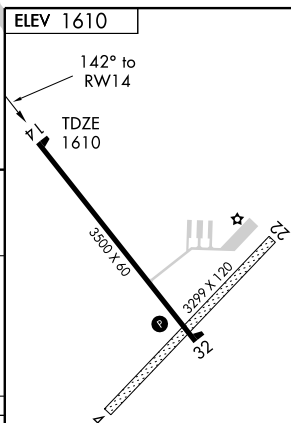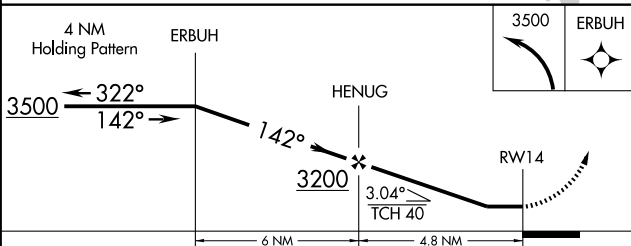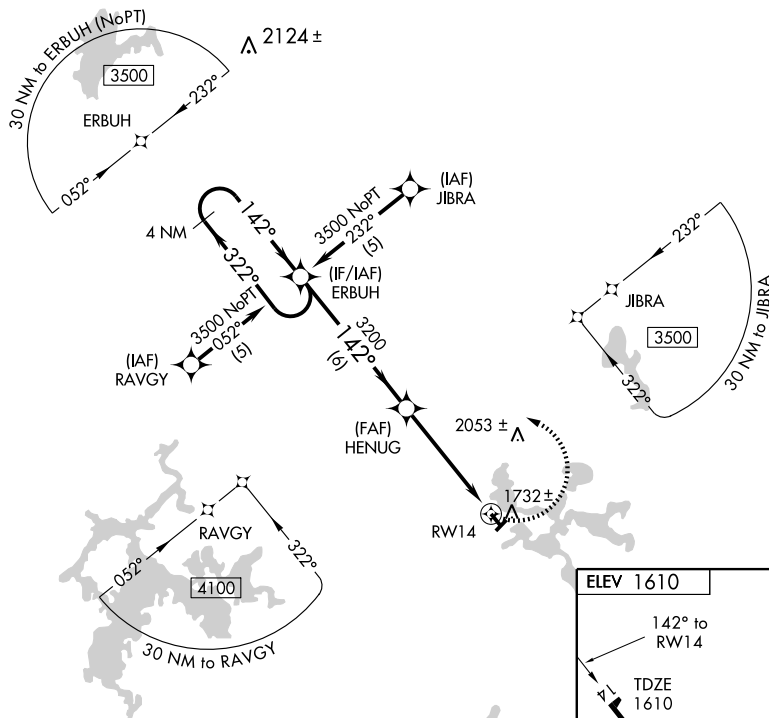

CATEGORY	A	B	C	D
LNNAV MDA	2160-1	550 (600-1)	2160-1½ 550 (600-1½)	NA
CIRCLING	2160-1	550 (600-1)	2160-1½ 550 (600-1½)	NA

MIRL Rwy 14-32 0

APP CRS **322°**
 Rwy Idg **3500**
 TDZE **1610**
 Apt Elev **1610**

RNAV (GPS) RWY 32

MANITOWISH WATERS (D25)

▼
 ▲ NA
 When VGSI inop, Straight-in/Circling Rwy 32 procedure NA at night.
 DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
 Use Minocqua-Woodruff altimeter setting. When not received,
 use Rhinelander altimeter setting and increase all MDA 60 feet.
 Circling NA to Rwy 4 and 22.

MISSED APPROACH: Climb to 3500
 direct ERBUH and hold.


MINOCQUA-WOODRUFF AWOS-3
121.125

MINNEAPOLIS CENTER
133.65 281.5


GCO
121.725

UNICOM
122.8 (CTAF) **0**

MISSED APCH FIX

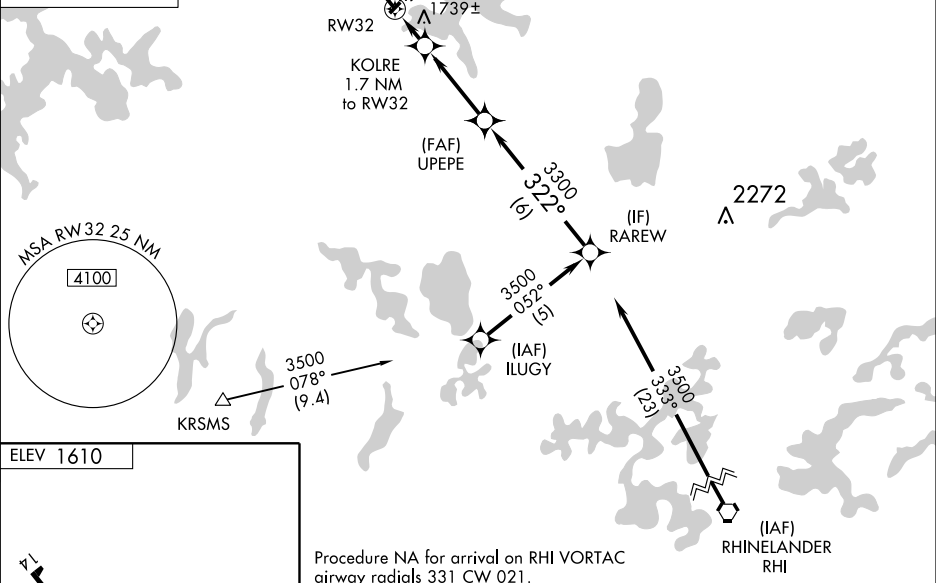


ELEV 1610



MIRL Rwy 14-32 **0**

Procedure NA for arrival on RHI VORTAC
 airway radials 331 CW 021.

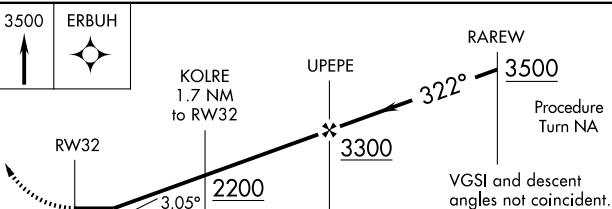

CATEGORY	A	B	C	D
LNAV MDA	2040-1	430 (500-1)	2040-1¼ 430 (500-1¼)	NA
CIRCLING	2080-1	470 (500-1)	2080-1½ 470 (500-1½)	NA

MAGGS N44°56.69' W91°22.42' NOTAM FILE EAU.

GREEN BAY

NDB (LOM) 239 EA 224° 6.7 NM to Eau Claire-Chippewa Valley Rgnl. Unmonitored.

MANITOWISH WATERS (D25) 1 S UTC-6(-5DT) N46°07.32' W89°52.94'

GREEN BAY

1610 B **FUEL** 100LL NOTAM FILE GRB

L-14J

Rwy 14-32: H3500X60 (ASPH) S-12.5 MIRL

IAP

Rwy 14: Trees. **Rwy 32:** PAPI(P2L)—GA 3.5° TCH 41'. Trees.

Rwy 04-22: 3299X120 (TURF)

Rwy 04: Trees. **Rwy 22:** Trees.

AIRPORT REMARKS: Attended Jun-Sep 1430-2300Z†, Nov-Apr 1430-1530Z†, Oct and May 1430-1800Z†. 100LL avbl 24 hrs with credit card. Airframe repairs on call 715-686-7523. Rwy 04-22 CLOSED winters. Be alert: Rwy 14-32 may be unusable due to snow covered until 30 Apr. Birds and migratory waterfowl on and in/ov arpt. Deer and coyotes on and in/ov arpt. MIRL Rwy 14-32 preset on low ints, to increase ints and ACTIVATE PAPI Rwy 32—CTAF. Rwy 04-22 marked with yellow cones.

COMMUNICATIONS: CTAF/UNICOM 122.8


MINNEAPOLIS CENTER APP/DEP CON 133.65

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE RHI.

RHINELANDER (L) VORTAC 109.2 RHI Chan 29 N45°38.03'

W89°27.47' 327° 34.3 NM to fld. 1590/2E. **HIWAS.**

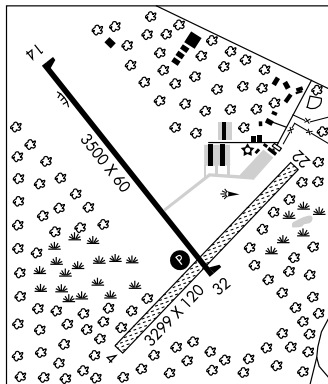

MANITOWOC CO (MTW) 2 NW UTC-6(-5DT) N44°07.73' W87°40.84'

GREEN BAY

651 B S2 **FUEL** 100LL, JET A, MOGAS NOTAM FILE MTW

H-2K, L-28H

Rwy 17-35: H5001X100 (ASPH) S-60 HIRL

IAP

Rwy 17: MALSR. VASI(V4L)—GA 3.0° TCH 42'.

Rwy 35: REIL. VASI(V4L)—GA 3.0° TCH 45'. Tree.

Rwy 07-25: H3341X100 (ASPH) S-12 MIRL 0.4% up W

Rwy 07: Tree.

AIRPORT REMARKS: Attended Mon-Fri 1330-2300Z†, Sat-Sun 1400-1900Z†. For svc after hrs call 920-682-0043 during attended hrs or 920-242-7527 after attended hrs. Geese and numerous birds on and in/ov arpt. Rwy 35 REIL OTS indef. ACTIVATE MIRL Rwy 07-25, HIRL Rwy 17-35, REIL Rwy 35 and MALSR Rwy 17—CTAF.

WEATHER DATA SOURCES: AWOS-3 111.0 MTW (920) 682-1164.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.1R 111.0T (GREEN BAY RADIO)

Ⓡ **GREEN BAY APP/DEP CON** 120.2 (1130-0530Z†)

Ⓡ **MINNEAPOLIS CENTER APP/DEP CON** 125.55 (0530-1130Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE MTW.

(T) **VOR/DME** 111.0 MTW Chan 47 N44°07.71'

W87°40.79' at fld. 650/2W. **AWOS-3.**

MAWOC NDB (LOM) 362 MT N44°11.98' W87°42.14' 162° 4.4


NM to fld.

ILS 111.3 I-MTW

Rwy 17.

Class IC.

LOM MAWOC NDB. ILS unmonitored.

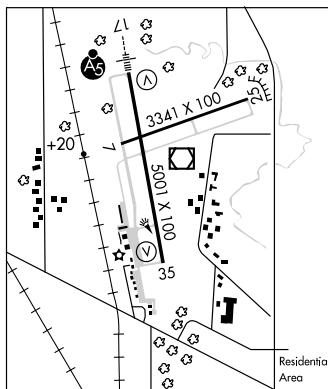

LOC I-MTW 111.3	APP CRS 172°	Rwy Idg TDZE Apt Elev	5001 651 651
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 17

MANITOWOC COUNTY (MTW)

When local altimeter setting not received, use Sheboygan altimeter setting and increase all DA 67 feet and all MDA 80 feet, increase S-LOC 17 Cats. C and D and Circling Cats. C and D visibility ¼ mile.

When using Sheboygan altimeter setting: For inoperative MALSR, increase S-ILS 17 all Cats. visibility to 1.

MALSR



MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct MTW VOR/DME and hold.


AWOS-3

111.0

GREEN BAY APP CON★


120.2 338.2

UNICOM

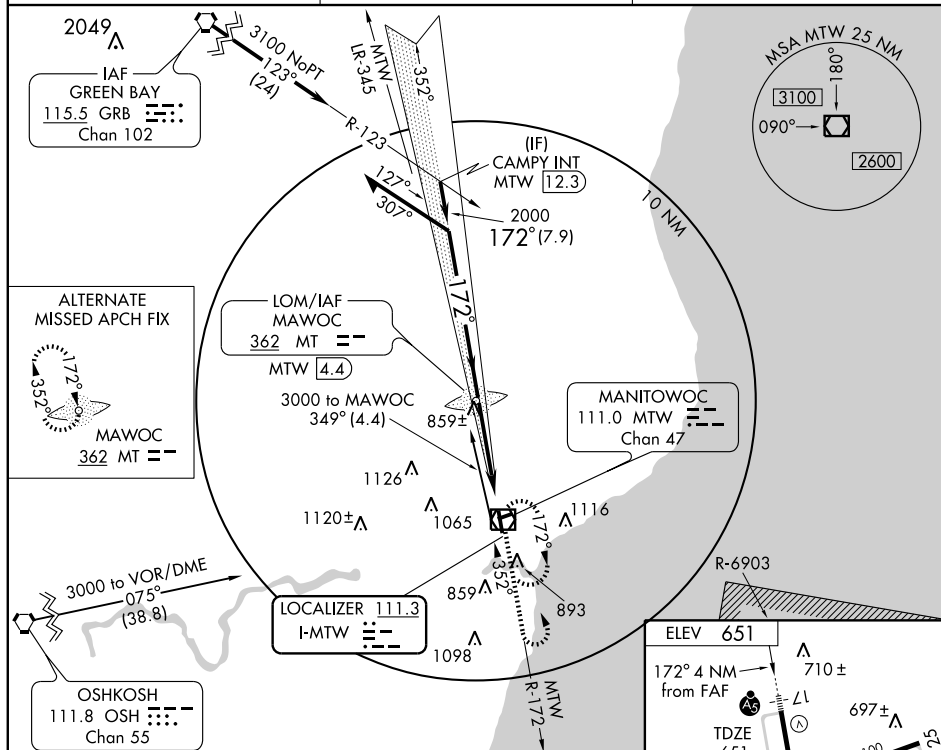
122.8 (CTAF) 0

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

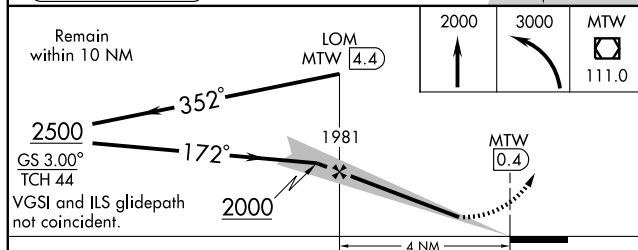

CATEGORY	A	B	C	D
S-ILS 17	851-1/2 200 (200-1/2)			
S-LOC 17	1120-1/2	469 (500-1/2)	1120-3/4 469 (500-3/4)	1120-1 469 (500-1)
CIRCLING	1200-1	549 (600-1)	1200-1/2 549 (600-1/2)	1420-2/2 769 (800-2/2)

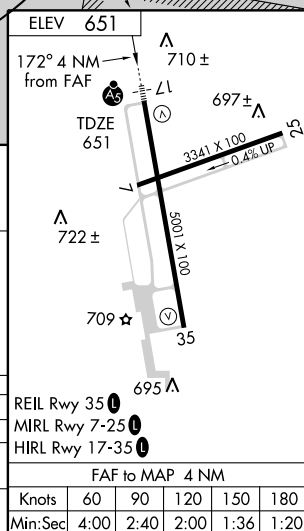

REIL Rwy 35 0
MIRL Rwy 7-25 0
HIRL Rwy 17-35 0

FAF to MAP 4 NM

Knots	60	90	120	150	180
Min:Sec	4:00	2:40	2:00	1:36	1:20

MANITOWOC, WISCONSIN

Amdt 5 09071

44°08'N - 87°41'W

MANITOWOC COUNTY (MTW)

ILS or LOC RWY 17

WAAS CH 63111 W17A	APP CRS 172°	Rwy Idg TDZE Apt Elev	5001 651
--	------------------------	-----------------------------	---------------------------

RNAV (GPS) RWY 17

MANITOWOC COUNTY (MTW)

▼ For inoperative MALSRS when using Sheboygan altimeter setting, increase LPV all Cats. visibility to 1 mile. For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Sheboygan altimeter setting. When local altimeter setting not received, use Sheboygan altimeter setting and increase all DA 67 feet and all MDA 80 feet, increase LNAV/VNAV all Cats., LNAV Cat. C and D, and Circling Cat. C and D visibility ¼ mile.

MALSRS





MISSED APPROACH:
Climb to 3000 direct
HEMTI and via 225°
track to FAH VOR/DME
and hold.


AWOS-3
111.0

GREEN BAY APP CON *
120.2 338.2

UNICOM
122.8 (CTAF)

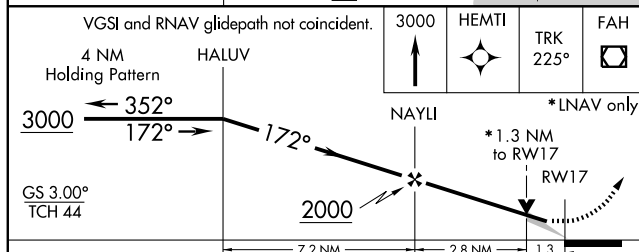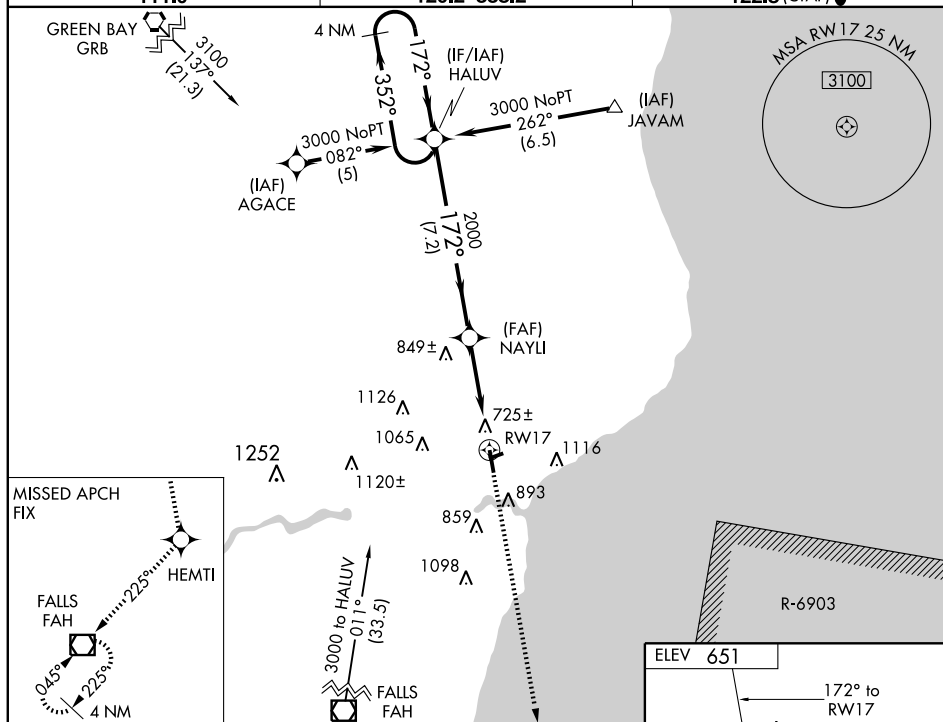

CATEGORY	A	B	C	D
LPV DA	851-½ 200 (200-½)			
LNAV/VNAV DA	993-¾ 342 (400-¾)			
LNAV MDA	1100-½ 449 (500-½)	1100-¾ 449 (500-¾)	1100-1 449 (500-1)	1100-1 449 (500-1)
CIRCLING	1200-1 549 (600-1)	1200-1½ 549 (600-1½)	1420-2½ 769 (800-2½)	1420-2½ 769 (800-2½)

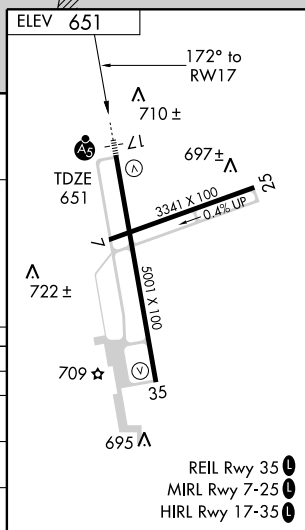

WAAS CH 82611 W35A	APP CRS 352°	Rwy Idg TDZE Apt Elev	5001 651 651
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

MANITOWOC COUNTY (MTW)




⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP and Baro-VNAV NA when using Sheboygan altimeter setting. When local altimeter setting not received, use Sheboygan altimeter setting and increase all DA 67 feet and all MDA 80 feet, increase LPV all Cats., LNAV/VNAV all Cats., LNAV Cat. D, and Circling Cat. C and D visibility ½ mile.

⚠ MISSED APPROACH: Climb to 3000 direct HALUV and hold.

AWOS-3
111.0

GREEN BAY APP CON ★
120.2 338.2

UNICOM
122.8 (CTAF)

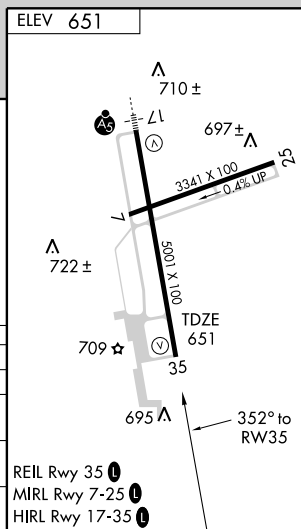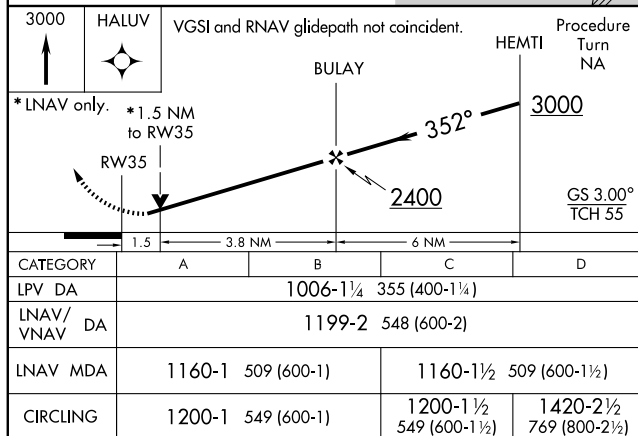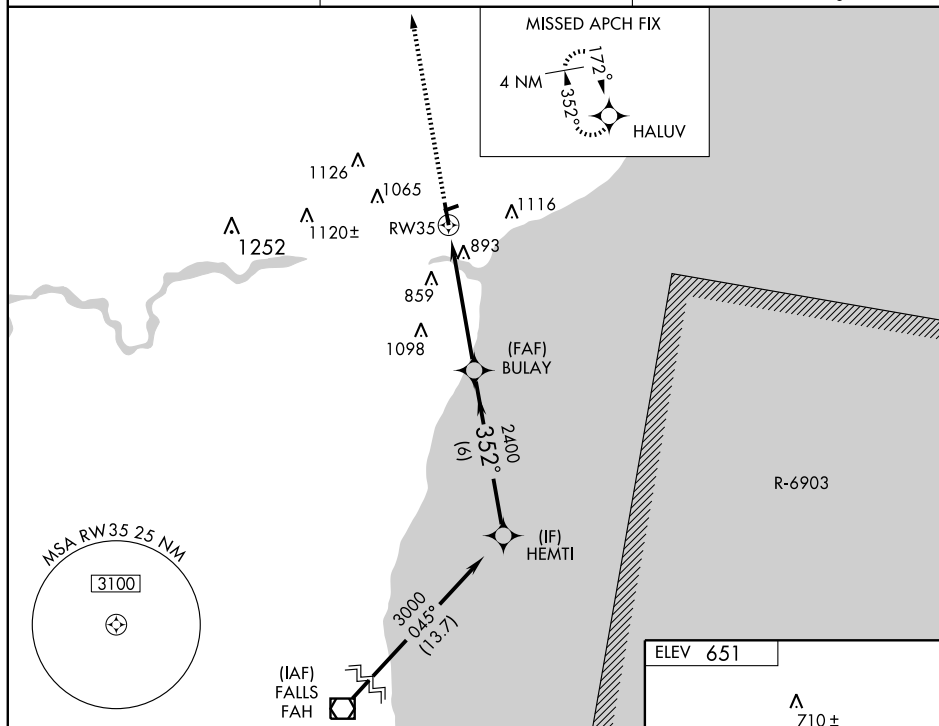

VOR/DME MTW 111.0 Chan 47	APP CRS 357°	Rwy Idg 5001 TDZE 651 Apt Elev 651
---	------------------------	---



VOR/DME RWY 35
MANITOWOC COUNTY(MTW)

T Visibility reduction by helicopters NA. VDP NA when using Sheboygan altimeter setting. When local altimeter setting not received, use Sheboygan altimeter setting and increase all MDA 80 feet, increase S-35 Cat. D and Circling Cats. C and D visibility $\frac{1}{4}$ mile.

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct MTW VOR/DME and hold.

AWOS-3
111.0

GREEN BAY APP CON ★
120.2 338.2

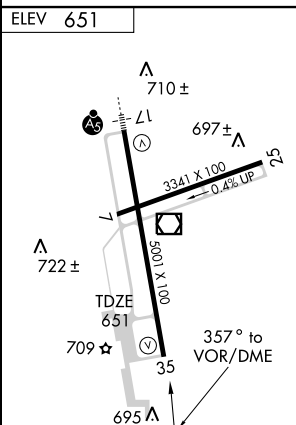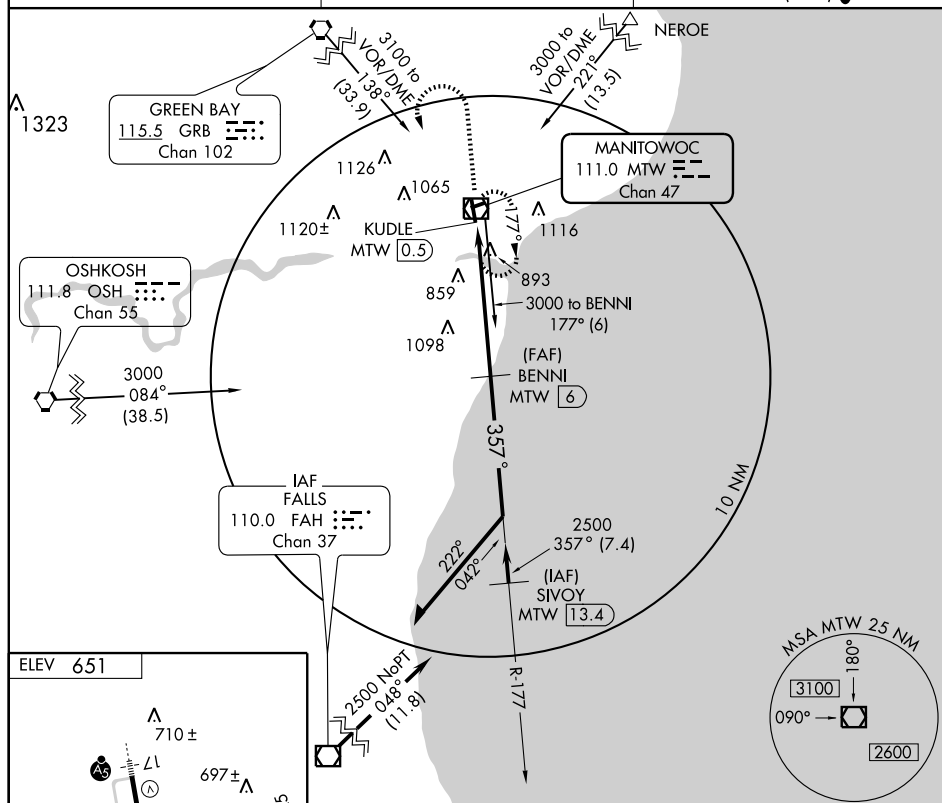UNICOM
122.8 (CTAF) **L**REIL Rwy 35 **L**
MIRI Rwy 7-25 **L**

MANITOWOC, WISCONSIN
Amdt 1 09071

44° 08' N-87° 41' W

MANITOWOC COUNTY(MTW)
VOR/DME RWY 35

EC-3. 23 SEP 2010 to 21 OCT 2010

VOR/DME MTW
111.0
 Chan **47**

APP CRS
166°

Rwy Idg
 TDZE **651**
 Apt Elev **651**

VOR RWY 17

MANITOWOC COUNTY (MTW)





MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct MTW VOR/DME and hold.


AWOS-3
111.0

GREEN BAY APP CON ★
120.2 338.2

UNICOM
122.8 (CTAF) **0**

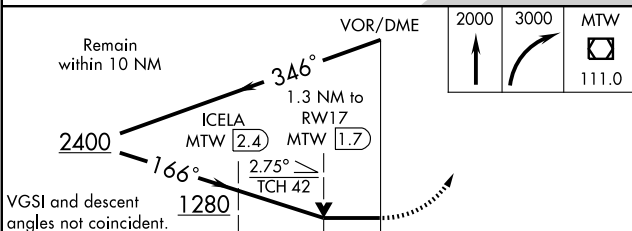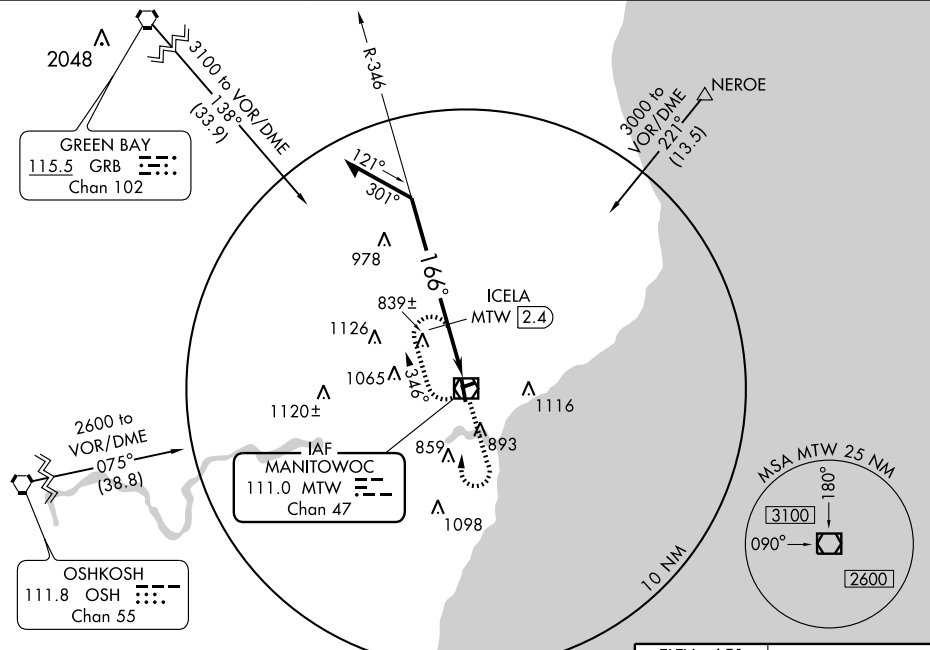

CATEGORY	A	B	C	D
S-17	1280-½ 629 (700-½)		1280-1½ 629 (700-1½)	
CIRCLING	1280-1 629 (700-1)		1280-1¾ 629 (700-1¾)	1420-2½ 769 (800-2½)
DME MINIMUMS				
S-17	1100-½ 449 (500-½)		1100-¾ 449 (500-¾)	1100-1 449 (500-1)
CIRCLING	1200-1 549 (600-1)		1200-1½ 549 (600-1½)	1420-2½ 769 (800-2½)

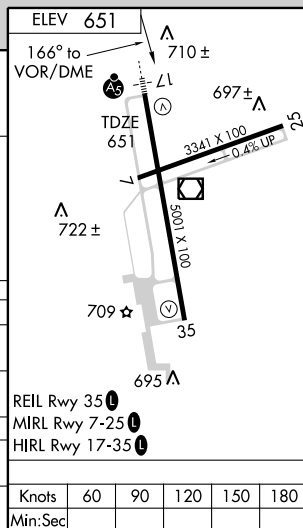

MARSHFIELD MUNI (MFI) 1 S UTC-6(-5DT) N44°38.21' W90°11.36'

1277 B S3 FUEL 100LL, JET A NOTAM FILE MFI

RWY 16-34: H5000X100 (ASPH) S-35, D-50 MIRL 0.5% up NW

RWY 16: REIL. VASI(V2L)-GA 3.0° TCH 35'. Rgt ttc.

RWY 34: MALSR. VASI(V2L)-GA 3.0° TCH 42'.

RWY 04-22: H3600X100 (ASPH) S-35, D-45 MIRL

RWY 04: REIL. PAPI(P2L)-GA 3.0° TCH 29'. Rgt ttc.

RWY 22: Pole.

AIRPORT REMARKS: Attended 1400-0000Z† Nov-Apr. For after hrs svc call 715-743-4700. Rwy 34 departing acft climb to 2000' MSL prior to initiating rgt turn. Birds, waterfowl and deer invof arpt. Rotating bcn OTS indef. ACTIVATE MIRL Rwy 04-22 and 16-34 and MALSR Rwy 34 and VASI Rwy 16 and Rwy 34—CTAF. PAPI Rwy 04 ops continuously.

WEATHER DATA SOURCES: ASOS 121.575 (715) 387-6516.**COMMUNICATIONS:** CTAF/UNICOM 123.0

RCO 122.55 (GREEN BAY RADIO)

⑧ MINNEAPOLIS CENTER APP/DEP CON 124.4

RADIO AIDS TO NAVIGATION: NOTAM FILE MFI.

WAUSAU (L) VORTACW 111.6 AUV Chan 53 N44°50.81'


W89°35.19' 242° 28.7 NM to fld. 1205/2E.

NOTAM FILE AUV.

CALIN NDB (LOM) 266 DU N44°34.15' W90°09.06' 338° 4.4 NM to fld. Unmonitored 0300-1330Z†.

NDB (MHW) 391 MFI N44°38.45' W90°11.26' at fld.

SDF 109.9 DUS Rwy 34. LOM CALIN NDB.

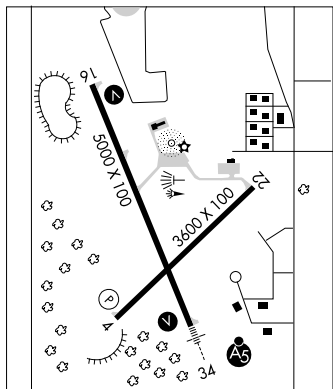

GREEN BAY

H-2K, L-141

IAP

MAUSTON-NEW LISBON UNION (See NEW LISBON)**MAWOC** N44°11.98' W87°42.14' NOTAM FILE MTW.

NDB (LOM) 362 MT 170° 4.4 NM to Manitowoc Co.

GREEN BAY

McCOY N43°56.27' W90°38.51' NOTAM FILE CMY.

NDB (MHW) 412 CMY 287° 4.3 NM to Sparta/Fort McCoy.

CHICAGO

L-286

MEDFORD N45°06.32' W90°18.52' NOTAM FILE MDZ.

NDB (MHW) 335 MDZ at Taylor Co.

GREEN BAY

L-141

MEDFORD**TAYLOR CO** (MDZ) 3 SE UTC-6(-5DT) N45°06.09' W90°18.05'

1478 B FUEL 100LL, JET A TPA-2478(1000) NOTAM FILE MDZ

RWY 09-27: H6902X75 (ASPH) MIRL 0.3% up E

RWY 09: PAPI(P2L)-GA 3.0° TCH 31'. Tree. RWY 27: REIL. PAPI(P2L)-GA 3.0° TCH 26'.

RWY 16-34: H4435X75 (ASPH) S-12.5 MIRL

RWY 16: PAPI(P2L). Tree. RWY 34: REIL. PAPI(P2L).

AIRPORT REMARKS: Attended Mon-Fri 1330-2330Z†. For svc after hrs call 715-678-2974. Fuel 24 hr self svc. Deer on and invof arpt. For tkt on Rwy 34 left turn after 1000' AGL. MIRL Rwy 09-27 preset low ints; to increase ints and ACTIVATE MIRL Rwy 16-34 and PAPI Rwy 16 and Rwy 34; REIL Rwy 27 and Rwy 34—CTAF. Overnight tiedown fee.

WEATHER DATA SOURCES: AWOS-3 119.025 (715) 678-6030.**COMMUNICATIONS:** CTAF/UNICOM 122.8

⑧ MINNEAPOLIS CENTER APP/DEP CON 124.4

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE AUV.

WAUSAU (L) VORTACW 111.6 AUV Chan 53 N44°50.81' W89°35.19' 295° 34.0 NM to fld. 1205/2E.

MEDFORD NDB (MHW) 335 MDZ N45°06.32' W90°18.52' at fld. NOTAM FILE MDZ.

GREEN BAY

H-2K, L-141

IAP

NDB MFI 391	APP CRS 035°	Rwy Idg TDZE Apt Elev	3600 1257 1277
-----------------------	------------------------	-----------------------------	---

NDB or GPS RWY 4

MARSHFIELD MUNI (MFI)





MISSED APPROACH: Climb to 3000
then left turn direct MFI NDB and hold.


ASOS
121.575

MINNEAPOLIS CENTER
124.4 317.7



UNICOM
123.0 (CTAF) 0

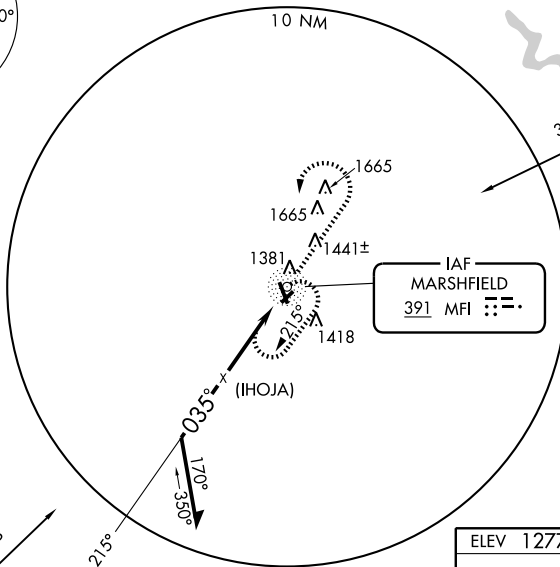


WAUSAU
111.6 AWW
Chan 53



Remain
within 10 NM

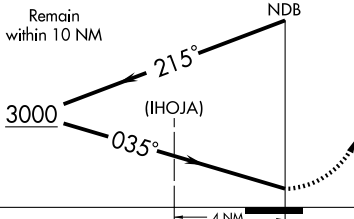

ELEV 1277

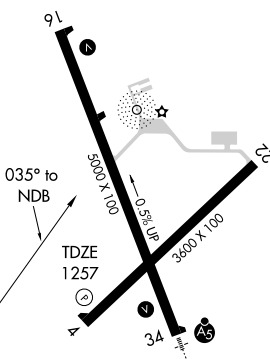

CATEGORY	A	B	C	D
S-4	1860-1 603 (600-1)		1860-1 ³ / ₄ 603 (600-1 ³ / ₄)	1860-2 603 (600-2)
CIRCLING	1860-1 583 (600-1)		1860-1 ³ / ₄ 583 (600-1 ³ / ₄)	1860-2 583 (600-2)

REIL Rwy 4 and 16
MIRL Rwy 4-22 and 16-34 0

NDB RWY 16

MARSHFIELD MUNI (MFI)

NDB MFI
391

APP CRS
146°

Rwy Idg
TDZE **5000**
Apt Elev **1277**





MISSED APPROACH: Climb to 3000
then right turn direct MFI NDB and hold.

ASOS
121.575

MINNEAPOLIS CENTER
124.4 317.7


UNICOM
123.0 (CTAF) 0

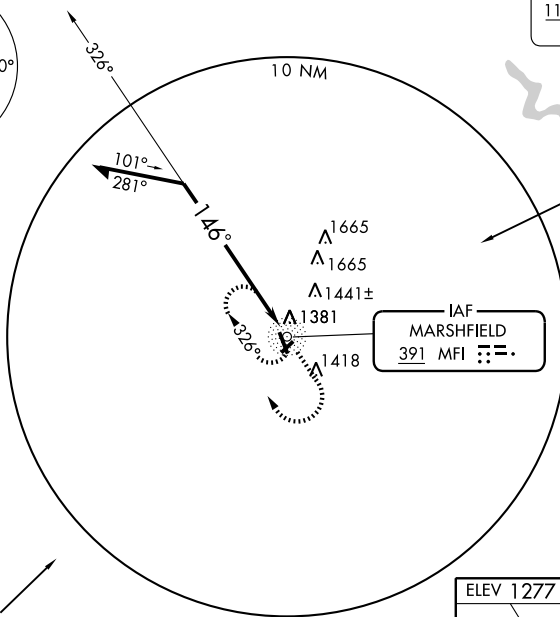


WAUSAU
111.6 AUV
Chan 53

3000
243°
(28.5)

2000



Remain
within 10 NM

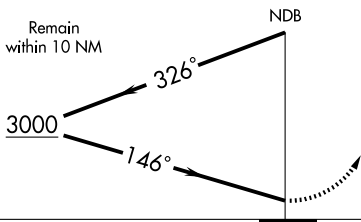


3000



MFI

391

ELEV 1277

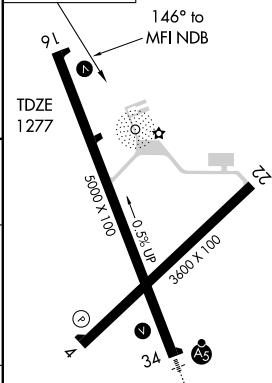

CATEGORY	A	B	C	D
S-16	1820-1	543 (600-1)	1820-1½ 543 (600-1½)	1820-1¾ 543 (600-1¾)
CIRCLING	1820-1	543 (600-1)	1820-1½ 543 (600-1½)	1840-2 563 (600-2)

REIL Rwy 4 and 16
MIRL Rwy 4-22 and 16-34 0

WAAS CH 99501 W16A	APP CRS 159°	Rwy Idg TDZE Apt Elev	5000 1277 1277
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 16

MARSHFIELD MUNI (MFI)





- ▼ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
 ▲ If local altimeter setting not received, use Central Wisconsin altimeter setting and increase all DAs/MDAs 60 feet.
 ▲ Baro-VNAV NA when using Central Wisconsin altimeter setting.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (115°F).

MISSED APPROACH: Climb to 3000 direct
VECSU and hold.

ASOS
121.575

MINNEAPOLIS CENTER
124.4 317.7

UNICOM
123.0 (CTAF) 0

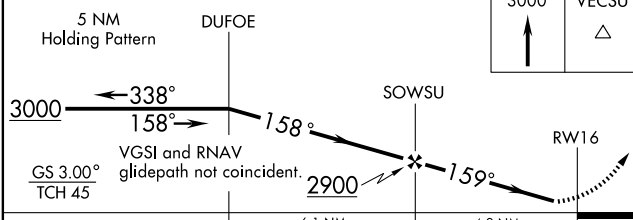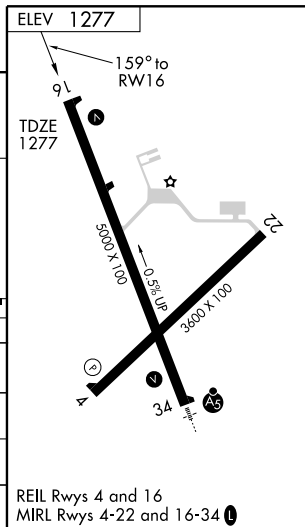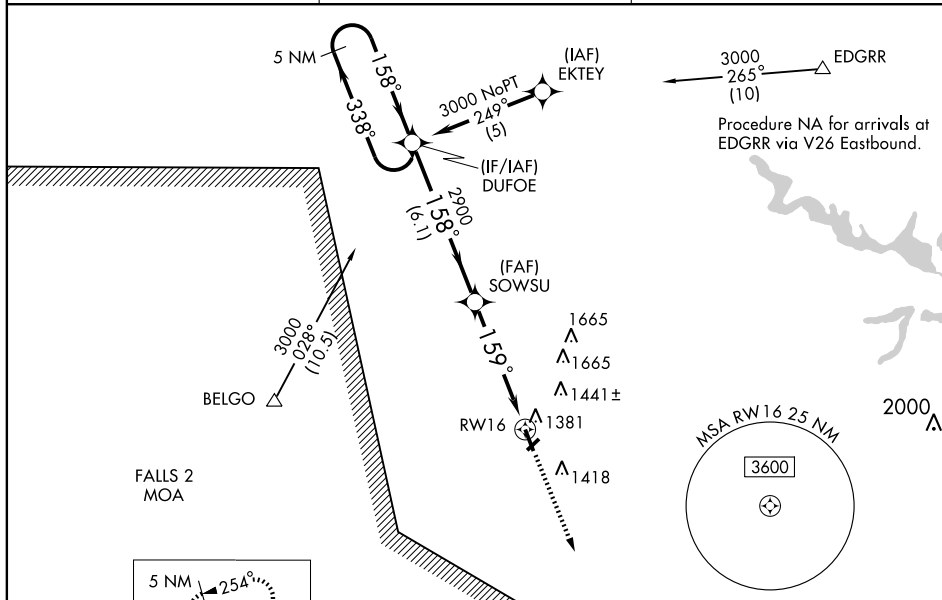

CATEGORY	A	B	C	D
LPV DA	1596-1	319 (400-1)		
LNAV/VNAV DA	1641-1¼	364 (400-1¼)		
LNAV MDA	1640-1	363 (400-1)		1640-1¼ 363 (400-1¼)
CIRCLING	1700-1¼ 423 (500-1¼)	1740-1¼ 463 (500-1¼)	1740-1½ 463 (500-1½)	1840-2 563 (600-2)

REIL Rwy 4 and 16
MIRL Rwy 4-22 and 16-34 0

WAAS CH 58101 W34A	APP CRS 339°	Rwy Idg TDZE Apt Elev	5000 1257 1277
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 34

MARSHFIELD MUNI (MFI)

▼
▲
For inoperative MALS R increase LPV all Cats visibility to 1, increase LNAV Cats A and B to 1 and Cat D to 1½. If local altimeter setting not received, use Central Wisconsin altimeter setting and increase all DAs/MDAs 60 feet. VDP and Baro-VNAV NA when using Central Wisconsin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17° C (2° F) or above 46° C (115° F). DME/DME RNP-0.3 NA.

MALSR




MISSED APPROACH: Climb to 3000 direct DUFOE and hold.

ASOS
121.575

MINNEAPOLIS CENTER
124.4 317.7

UNICOM
123.0 (CTAF) 0

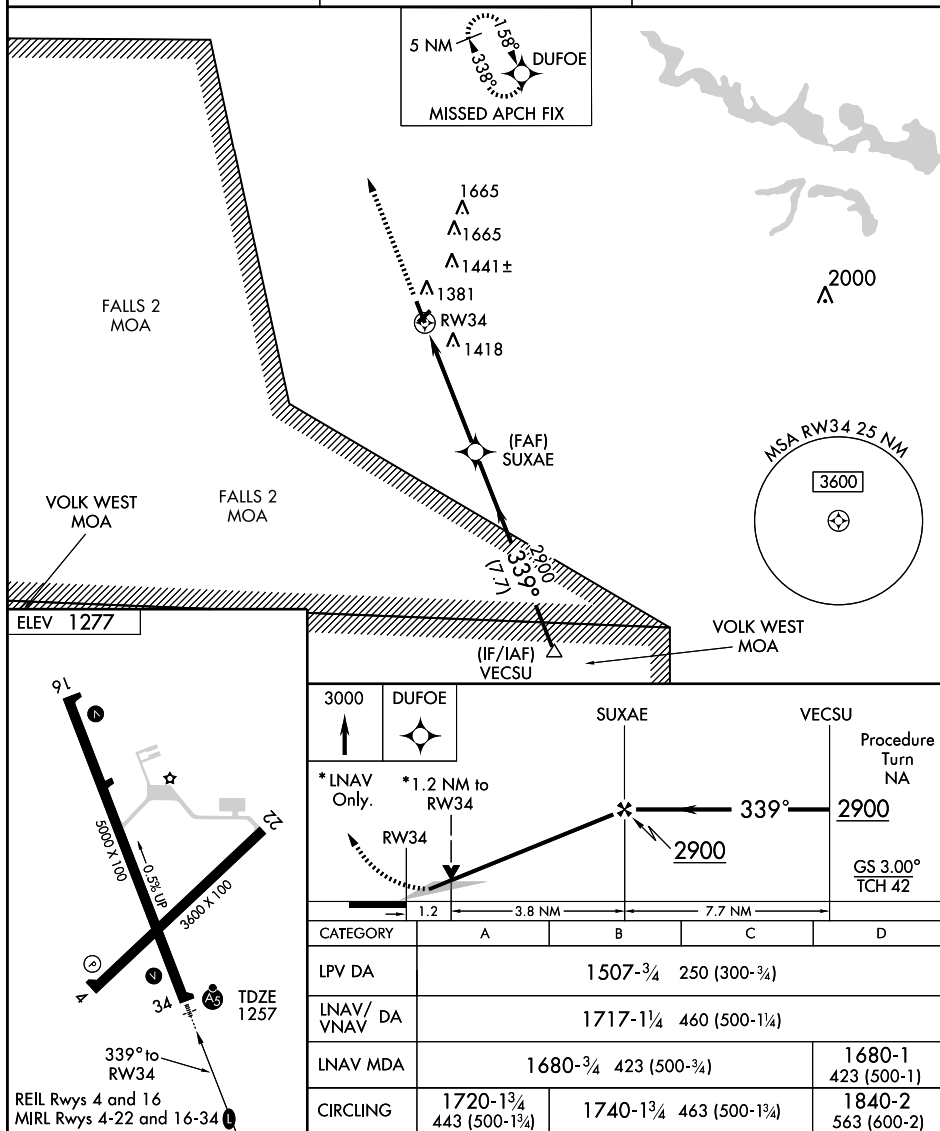

SDF DUS 109.9	APP CRS 339°	Rwy Idg TDZE Apt Elev	5000 1257 1277
-------------------------	------------------------	-----------------------------	---

SDF RWY 34

MARSHFIELD MUNI (MFI)

▼ For inoperative MALSR, increase S-34 Cat D visibility to 1¼.
▲ NA ADF REQUIRED

MALSR




MISSED APPROACH: Climb to 3000
then left turn direct CALIN LOM and hold.


ASOS
121.575

MINNEAPOLIS CENTER
124.4 317.7




UNICOM
123.0 (CTAF) 0

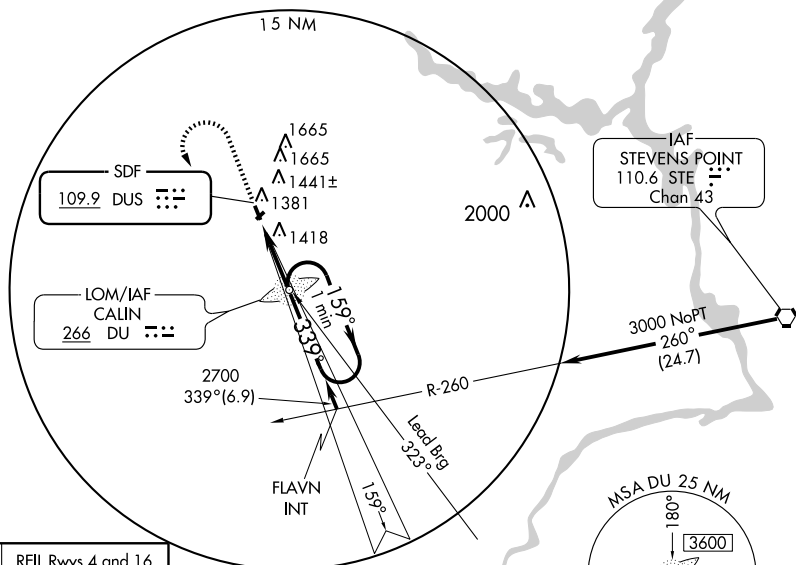

ELEV 1277 REIL Rwy 4 and 16
MIRL Rwy 4-22 and 16-34

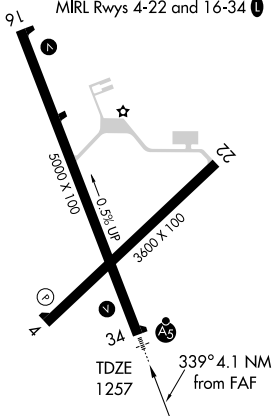

FAF to MAP 4.1 NM					
Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22



CATEGORY	A	B	C	D
S-34	1640-½ 383 (400-½)			1640-1 383 (400-1)
CIRCLING	1700-1 423 (500-1)	1740-1 463 (500-1)	1740-1½ 463 (500-1½)	1840-2 563 (600-2)

MARSHFIELD MUNI (MFI) 1 S UTC-6(-5DT) N44°38.21' W90°11.36'

1277 B S3 FUEL 100LL, JET A NOTAM FILE MFI

RWY 16-34: H5000X100 (ASPH) S-35, D-50 MIRL 0.5% up NW

RWY 16: REIL. VASI(V2L)—GA 3.0° TCH 35'. Rgt ttc.

RWY 34: MALSR. VASI(V2L)—GA 3.0° TCH 42'.

RWY 04-22: H3600X100 (ASPH) S-35, D-45 MIRL

RWY 04: REIL. PAPI(P2L)—GA 3.0° TCH 29'. Rgt ttc.

RWY 22: Pole.

AIRPORT REMARKS: Attended 1400-0000Z† Nov-Apr. For after hrs svc call 715-743-4700. Rwy 34 departing acft climb to 2000' MSL prior to initiating rgt turn. Birds, waterfowl and deer invof arpt. Rotating bcn OTS indef. ACTIVATE MIRL Rwy 04-22 and 16-34 and MALSR Rwy 34 and VASI Rwy 16 and Rwy 34—CTAF. PAPI Rwy 04 ops continuously.

WEATHER DATA SOURCES: ASOS 121.575 (715) 387-6516.**COMMUNICATIONS:** CTAF/UNICOM 123.0

RCO 122.55 (GREEN BAY RADIO)

⑧ MINNEAPOLIS CENTER APP/DEP CON 124.4

RADIO AIDS TO NAVIGATION: NOTAM FILE MFI.

WAUSAU (L) VORTACW 111.6 AUV Chan 53 N44°50.81'


W89°35.19' 242° 28.7 NM to fld. 1205/2E.

NOTAM FILE AUV.

CALIN NDB (LOM) 266 DU N44°34.15' W90°09.06' 338° 4.4 NM to fld. Unmonitored 0300-1330Z†.

NDB (MHW) 391 MFI N44°38.45' W90°11.26' at fld.

SDF 109.9 DUS Rwy 34. LOM CALIN NDB.

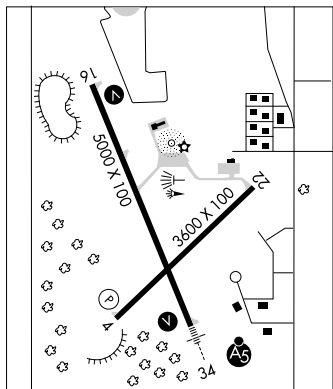

GREEN BAY

H-2K, L-141

IAP

MAUSTON-NEW LISBON UNION (See NEW LISBON)**MAWOC** N44°11.98' W87°42.14' NOTAM FILE MTW.

NDB (LOM) 362 MT 170° 4.4 NM to Manitowoc Co.

GREEN BAY

McCOY N43°56.27' W90°38.51' NOTAM FILE CMY.

NDB (MHW) 412 CMY 287° 4.3 NM to Sparta/Fort McCoy.

CHICAGO

L-286

MEDFORD N45°06.32' W90°18.52' NOTAM FILE MDZ.

NDB (MHW) 335 MDZ at Taylor Co.

GREEN BAY

L-141

MEDFORD**TAYLOR CO** (MDZ) 3 SE UTC-6(-5DT) N45°06.09' W90°18.05'

1478 B FUEL 100LL, JET A TPA-2478(1000) NOTAM FILE MDZ

RWY 09-27: H6902X75 (ASPH) MIRL 0.3% up E

RWY 09: PAPI(P2L)—GA 3.0° TCH 31'. Tree. RWY 27: REIL. PAPI(P2L)—GA 3.0° TCH 26'.

RWY 16-34: H4435X75 (ASPH) S-12.5 MIRL

RWY 16: PAPI(P2L). Tree. RWY 34: REIL. PAPI(P2L).

AIRPORT REMARKS: Attended Mon-Fri 1330-2330Z†. For svc after hrs call 715-678-2974. Fuel 24 hr self svc. Deer on and invof arpt. For tcf on Rwy 34 left turn after 1000' AGL. MIRL Rwy 09-27 preset low ints; to increase ints and ACTIVATE MIRL Rwy 16-34 and PAPI Rwy 16 and Rwy 34; REIL Rwy 27 and Rwy 34—CTAF. Overnight tiedown fee.

WEATHER DATA SOURCES: AWOS-3 119.025 (715) 678-6030.**COMMUNICATIONS:** CTAF/UNICOM 122.8

⑧ MINNEAPOLIS CENTER APP/DEP CON 124.4

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE AUV.

WAUSAU (L) VORTACW 111.6 AUV Chan 53 N44°50.81' W89°35.19' 295° 34.0 NM to fld. 1205/2E.

MEDFORD NDB (MHW) 335 MDZ N45°06.32' W90°18.52' at fld. NOTAM FILE MDZ.

GREEN BAY

H-2K, L-141

IAP

NDB MDZ	APP CRS	Rwy Idg	4435
<u>335</u>	340°	TDZE	1459
		Apt Elev	1478

NDB RWY 34

MEDFORD/TAYLOR COUNTY (MDZ)

T
A NA

Visibility reduction by helicopters NA. When local altimeter setting not received, use Merrill altimeter setting and increase all MDA 100 feet, and all Cat. C/D visibility $\frac{1}{4}$ mile.


MISSED APPROACH: Climb to 3100 then right turn direct MDZ NDB and hold.

AWOS-3
119.025

MINNEAPOLIS CENTER
124.4 317.7



GCO
121,725

UNICOM
122.8 (CTAF) **L**

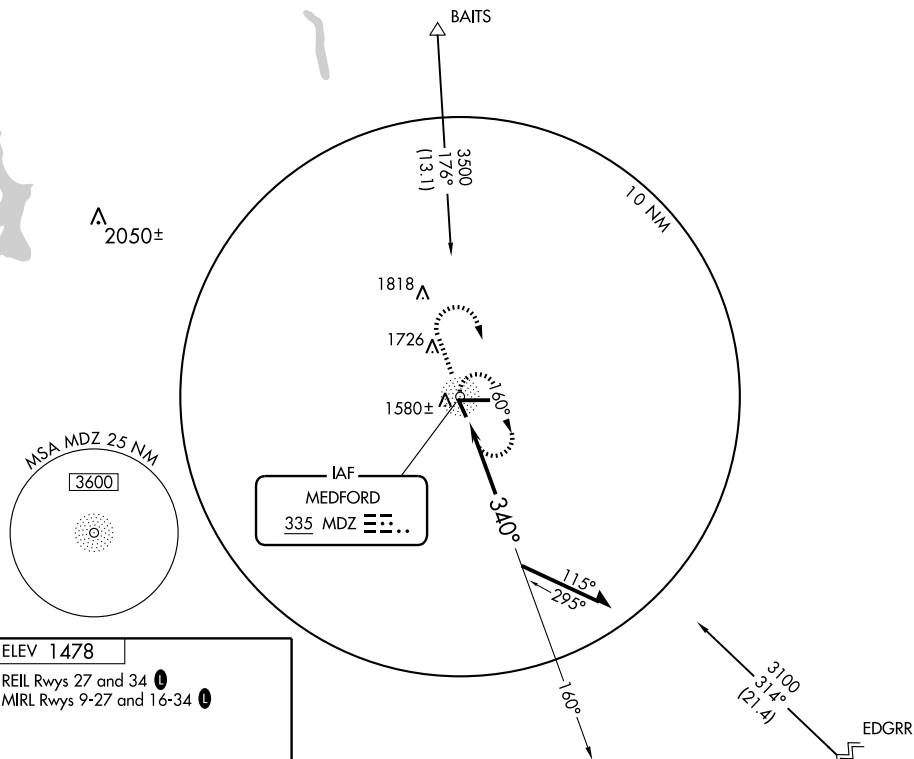

ELEV 1478

REIL Rwys 27 and 34 **L**
MIRL Rwys 9-27 and 16-34 **L**

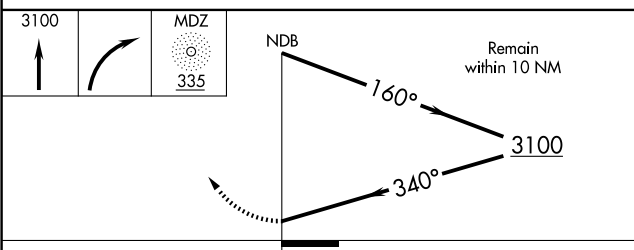

CATEGORY	A	B	C	D
S-34	2060-1	601 (600-1)	2060-1 ³ / ₄ 601 (600-1 ³ / ₄)	2060-2 601 (600-2)
CIRCLING	2060-1	582 (600-1)	2060-1 ³ / ₄ 582 (600-1 ³ / ₄)	2080-2 602 (700-2)


WAAS CH 66011 W27A	APP CRS 269°	Rwy Idg TDZE Apt Elev	6902 1478 1478
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27

MEDFORD/ TAYLOR COUNTY (MDZ)

<p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Merrill altimeter setting and increase all DA 82 feet, and all MDA 100 feet, increase LPV all Cats., LNAV/VNAV all Cats., LNAV Cat. C/D, and Circling Cat. D visibilities ¼ mile. VDP and Baro-VNAV NA when using Merrill altimeter setting.</p>	<p>MISSED APPROACH: Climb to 4500 direct FIRAX and right turn via 016° track to BAITS and hold.</p>
---	--

AWOS-3 119.025	MINNEAPOLIS CENTER 124.4 317.7	GCO 121.725	UNICOM 122.8 (CTAF) 0
--------------------------	--	-----------------------	---------------------------------

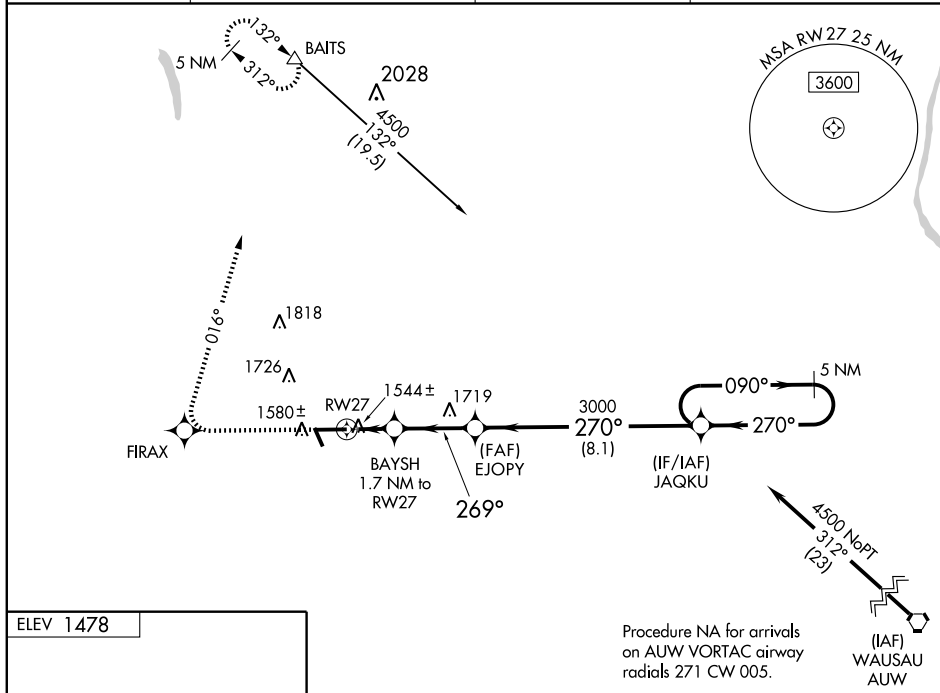

4500	FIRAX	BAITS	JAQKU	5 NM Holding Pattern
*LNAV only.	BAYSH 1.7 NM to RW27	EJOPY 3000	090° → 4500	← 270°
RW27	*1.1 NM to RW27	*2060	270°	3000
1.1 NM	0.6 NM	2.9 NM	8.1 NM	
CATEGORY	A	B	C	D
LPV DA	1778-1		300 (300-1)	
LNAV/VNAV DA	1814-1 ¼		336 (400-1 ¼)	
LNAV MDA	1880-1 402 (500-1)		1880-1 ¼ 402 (500-1 ¼)	
CIRCLING	1940-1 462 (500-1)		1940-1 ½ 462 (500-1 ½) 2080-2 602 (700-2)	

MEMORONIE

MEMORONIE MUNI—SCORE FLD (LUM) 3 E UTC−6(−5DT) N44°53.54′ W91°52.07′ **GREEN BAY**
 895 B S4 **FUEL** 100LL, JET A NOTAM FILE GRB **H-2I, L-14I**
RWY 09-27: H5074X75 (ASPH) MIRL **IAP**
RWY 09: REIL. PAPI(P2L)—GA 3.0° TCH 43′. Trees. **RWY 27:** REIL. PAPI(P2L)—GA 3.0° TCH 40′. Road.
RWY 18-36: H3470X75 (ASPH) MIRL
RWY 18: REIL. PAPI(2PL)—GA 3.0° TCH 40′. Road. **RWY 36:** PAPI(2PR)—GA 3.0° TCH 40′. Ground.
AIRPORT REMARKS: Attended Mon–Fri 1500–2300Z. ACTIVATE MIRL Rwy 09–27 and Rwy 18–36, PAPI Rwy 09, Rwy 27, Rwy 18 and Rwy 36, REIL Rwy 09, Rwy 18 and Rwy 27—CTAF.
WEATHER DATA SOURCES: AWOS-3 118.025 (715) 235-5342.
COMMUNICATIONS: CTAF/UNICOM 122.7
MINNEAPOLIS CENTER APP/DEP CON 125.3
GCO 121.725 (FLIGHT SERVICES)
RADIO AIDS TO NAVIGATION: NOTAM FILE EAU.
EAU CLAIRE (L) VORTACW 112.9 EAU Chan 76 N44°53.86′ W91°28.71′ 265° 16.6 NM to fld. 804/4E.
HIWAS.

MERRILL MUNI (RRL) 1 NW UTC−6(−5DT) N45°11.94′ W89°42.77′ **GREEN BAY**
 1318 B S3 **FUEL** 100LL, JET A OX 4 NOTAM FILE RRL **H-2K, L-14I**
RWY 07-25: H5100X75 (ASPH) S-45, D-65, 2S-83, 2D-100 MIRL **IAP**
RWY 07: REIL. PAPI(P2L)—GA 3.0° TCH 40′. Trees. **RWY 25:** REIL. PAPI(P2L)—GA 3.0° TCH 40′. Trees.
RWY 16-34: H2997X75 (ASPH) S-26 MIRL 0.5% up N
RWY 16: Pole. **RWY 34:** Trees.
AIRPORT REMARKS: Attended Sat 1400–2300Z, Sun 1500–2200Z, Oct–May, Mon–Fri 1400–2300Z, June–Sep, Mon–Fri 1400–0100Z. CAUTION: Deer on and invof arpt. Ultralight activity on and invof arpt. MIRL Rwy 07–25 preset on low ints, to increase ints and ACTIVATE REIL Rwy 07 and Rwy 25 and MIRL Rwy 16–34—CTAF.
WEATHER DATA SOURCES: AWOS-3 119.925 (715) 539-8422.
COMMUNICATIONS: CTAF/UNICOM 122.8
MINNEAPOLIS CENTER APP/DEP CON 124.4
GCO 121.725 (FLIGHT SERVICES)
RADIO AIDS TO NAVIGATION: NOTAM FILE AUW.
WAUSAU (L) VORTACW 111.6 AUW Chan 53 N44°50.81′ W89°35.19′ 344° 21.8 NM to fld. 1205/2E.
NDB (MHW) 257 RRL N45°11.92′ W89°42.26′ at fld. NOTAM FILE RRL. NDB unusable byd 12 NM.

MIDDLETON MUNI—MOREY FLD (C29) 5 NW UTC−6(−5DT) N43°06.86′ W89°31.89′ **CHICAGO**
 928 B S4 **FUEL** 100LL, JET A TPA—1928(1000) NOTAM FILE GRB **L-28G**
RWY 10-28: H4000X100 (ASPH) MIRL **IAP**
RWY 10: REIL PAPI(P2L)—GA 4.0° TCH 32′. Trees. **RWY 28:** REIL. PAPI(P2L)—GA 4.0° TCH 36′. Pole.
RWY 01-19: 2000X120 (TURF)
AIRPORT REMARKS: Attended 1400–2330Z. Birds on and invof arpt; especially during rainy periods. 135′ crane ¼ mile east 1900–0400Z, 240′ crane ½ mile from AER 28 SR–SS, 230′ crane 1 mile SE AER 28 and 240′ crane 2.2 miles SW. Crane 80′ AGL ¼ SM E of AER, unlgtd/unflagged. Avoid noise sensitive area 1 mile SW. Ctc arpt manager at 608-836-1711 for noise abatement procedures. ACTIVATE MIRL Rwy 10–28 and REIL Rwy 10 and Rwy 28—CTAF.
WEATHER DATA SOURCES: AWOS-3 118.675 (608) 833-1686.
COMMUNICATIONS: CTAF/UNICOM 123.0
MINNEAPOLIS CENTER APP/DEP CON 135.45 (1200-0500Z) **CHICAGO CENTER APP/DEP CON** 133.3 (0500-1200Z)
GCO 121.725 (FLIGHT SERVICES and MADISON APP CON)
RADIO AIDS TO NAVIGATION: NOTAM FILE MSN.
MADISON (L) VORTACW 108.6 MSN Chan 23 N43°08.69′ W89°20.38′ 255° 8.6 NM to fld. 860/3E.
ILS/DME 110.35 I-CFQ Chan 40(Y) Rwy 10. Unmonitored.

MILWAUKEE N42°56.82′ W87°53.82′ **CHICAGO**
RCD 122.65 122.4 (GREEN BAY RADIO) Unusable byd 30 NM blo 3000′. **L-28H.**

WAAS CH 40304 W09A	APP CRS 088°	Rwy Idg 5074 TDZE 894 Apt Elev 895
--	------------------------	---

RNAV (GPS) RWY 9

MENOMONIE MUNI-Score FIELD (LUM)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. LNAV/VNAV minimums NA when using Chippewa Valley Rgnl altimeter setting. If local altimeter setting not received, use Chippewa Valley Rgnl altimeter setting and increase LPV DA 41 feet and all MDAs 60 feet.




MISSED APPROACH: Climb to 2800 direct OJYAB and hold.

AWOS-3
118.025

MINNEAPOLIS CENTER
125.3 335.6

GCO
121.725

UNICOM
122.7 (CTAF) 0

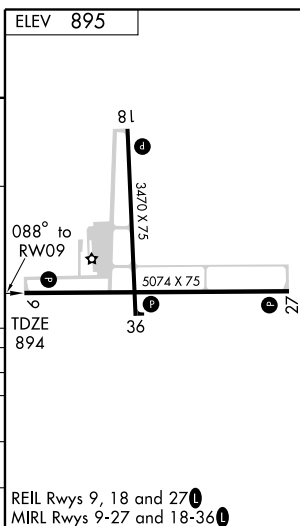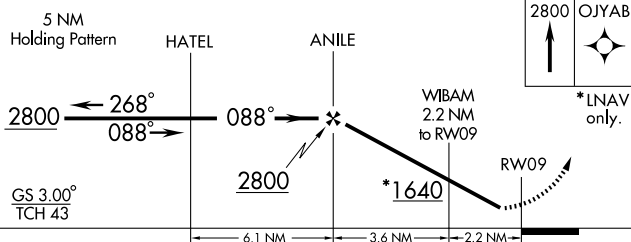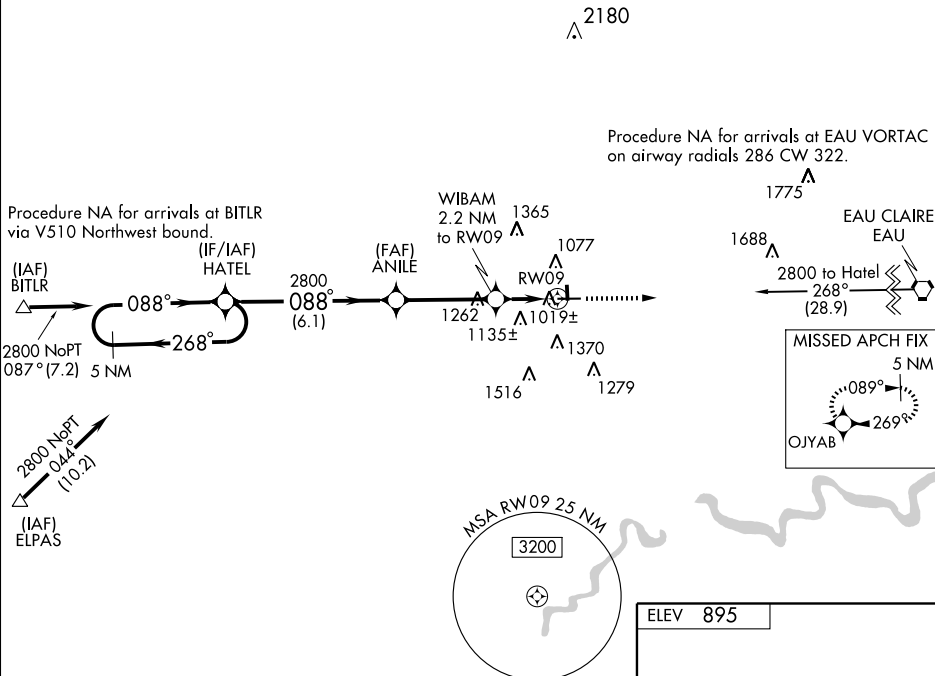

CATEGORY	A	B	C	D
LPV DA	1193-1	299 (300-1)		NA
LNAV/VNAV DA	1279-1¼	385 (400-1¼)		NA
LNAV MDA	1360-1	466 (500-1)	1360-1¼ 466 (500-1¼)	NA
CIRCLING	1440-1	545 (600-1)	1520-1¾ 625 (700-1¾)	NA

WAAS CH 97604 W27A	APP CRS 268°	Rwy Idg 5074 TDZE 894 Apt Elev 895
--	------------------------	---



RNAV (GPS) RWY 27

MENOMONIE MUNI-Score FIELD (LUM)

▼ Baro-VNAV NA when using Chippewa Valley Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).
▲ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA when using Chippewa Valley Rgnl altimeter setting. If local altimeter setting not received, use Chippewa Valley Rgnl altimeter setting and increase all DAs 41 feet and all MDAs 60 feet.

MISSED APPROACH: Climb to 2800 direct HATEL and hold.

AWOS-3 118.025	MINNEAPOLIS CENTER 125.3 335.6	GCO 121.725	UNICOM 122.7 (CTAF) 0
--------------------------	--	-----------------------	---------------------------------

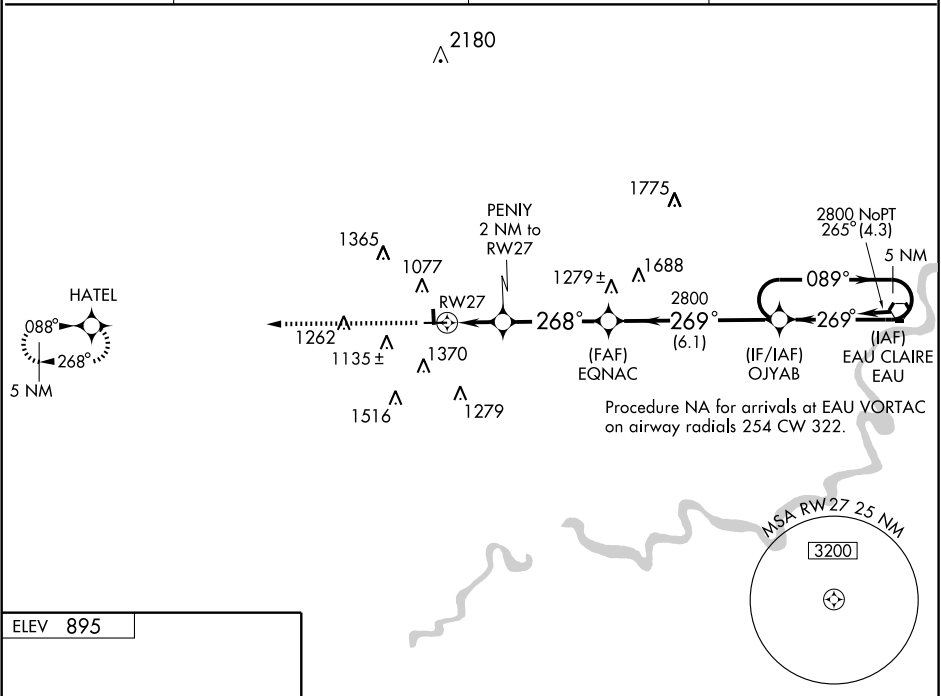

2800	HATEL	EQNAC	OJYAB	5 NM Holding Pattern
*LNAV only.	*1.2 NM to RW27	*1560	268°	269°
RW27	1.2	0.9	3.8 NM	6.1 NM
TDZE 894	939±	2800	089°	2800
GS 3.00°	TCH 40			
CATEGORY	A	B	C	D
LPV DA	1144-1	250 (300-1)		NA
LNAV/VNAV DA	1430-2	536 (600-2)		NA
LNAV MDA	1300-1	406 (500-1)	1300-1¼ 406 (500-1¼)	NA
CIRCLING	1440-1	545 (600-1)	1520-1¾ 625 (700-1¾)	NA

VORTAC EAU 112.9 Chan 76	APP CRS 265°	Rwy Idg TDZE Apt Elev	5074 894 895
--	------------------------	-----------------------------	---




VOR/DME RWY 27

MENOMONIE MUNI-Score Field (LUM)

▼ If local altimeter setting not received, use Chippewa Valley Rgnl altimeter setting and increase all MDAs 60 feet. Visibility reduction by helicopters NA. VDP NA when using Chippewa Valley Rgnl altimeter setting.

MISSED APPROACH: Climb to 2000 then climbing right turn to 2800 direct EAU VORTAC and hold.

AWOS-3 118.025	MINNEAPOLIS CENTER 125.3 335.6	GCO 121.725	UNICOM 122.7 (CTAF) 0
--------------------------	--	-----------------------	---------------------------------

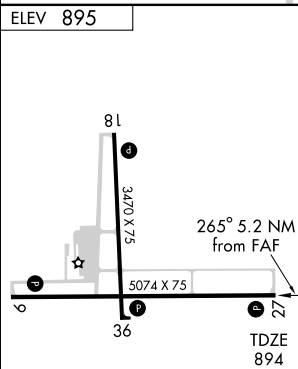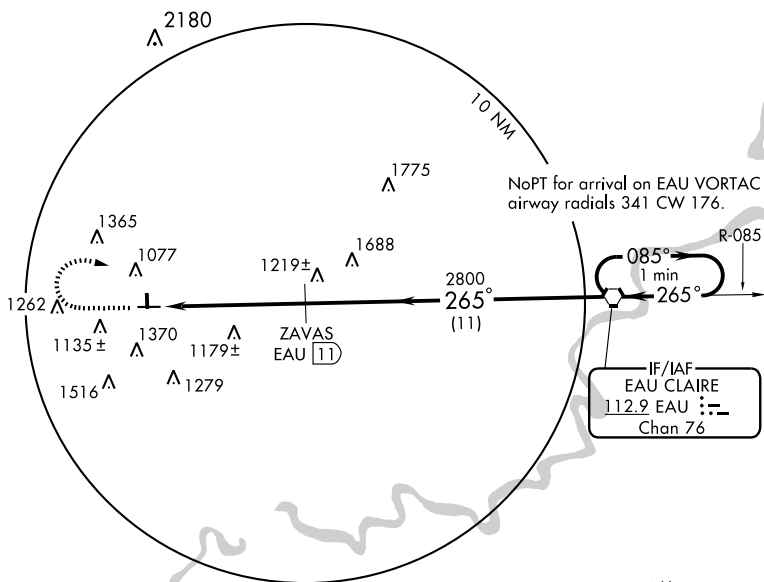

	2000	2800	EAU 112.9	ZAVAS EAU 11	VORTAC	One Minute Holding Pattern
			EAU 14.2	EAU 16.2	265°	085° → 2800
			2 NM	3.2 NM	11 NM	
CATEGORY	A	B	C	D		
S-27	1560-1	666 (700-1)	1560-1¾ 666 (700-1¾)	NA		
CIRCLING	1560-1	665 (700-1)	1560-1¾ 665 (700-1¾)	NA		

REIL Rwy 9, 18 and 27
MIRL Rwy 9-27 and 18-36

MENOMONIE

MENOMONIE MUNI—SCORE FLD (LUM) 3 E UTC-6(-5DT) N44°53.54' W91°52.07' **GREEN BAY**
 895 B S4 **FUEL** 100LL, JET A NOTAM FILE GRB **H-2I, L-14I**
RWY 09-27: H5074X75 (ASPH) MIRL **IAP**
RWY 09: REIL. PAPI(P2L)—GA 3.0° TCH 43'. Trees. **RWY 27:** REIL. PAPI(P2L)—GA 3.0° TCH 40'. Road.
RWY 18-36: H3470X75 (ASPH) MIRL
RWY 18: REIL. PAPI(2PL)—GA 3.0° TCH 40'. Road. **RWY 36:** PAPI(2PR)—GA 3.0° TCH 40'. Ground.
AIRPORT REMARKS: Attended Mon-Fri 1500-2300Z. ACTIVATE MIRL Rwy 09-27 and Rwy 18-36, PAPI Rwy 09, Rwy 27, Rwy 18 and Rwy 36, REIL Rwy 09, Rwy 18 and Rwy 27—CTAF.
WEATHER DATA SOURCES: AWOS-3 118.025 (715) 235-5342.
COMMUNICATIONS: CTAF/UNICOM 122.7
MINNEAPOLIS CENTER APP/DEP CON 125.3
GCO 121.725 (FLIGHT SERVICES)
RADIO AIDS TO NAVIGATION: NOTAM FILE EAU.
EAU CLAIRE (L) VORTACW 112.9 EAU Chan 76 N44°53.86' W91°28.71' 265° 16.6 NM to fld. 804/4E.
HIWAS.

MERRILL MUNI (RRL) 1 NW UTC-6(-5DT) N45°11.94' W89°42.77' **GREEN BAY**
 1318 B S3 **FUEL** 100LL, JET A OX 4 NOTAM FILE RRL **H-2K, L-14I**
RWY 07-25: H5100X75 (ASPH) S-45, D-65, 2S-83, 2D-100 MIRL **IAP**
RWY 07: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Trees. **RWY 25:** REIL. PAPI(P2L)—GA 3.0° TCH 40'. Trees.
RWY 16-34: H2997X75 (ASPH) S-26 MIRL 0.5% up N
RWY 16: Pole. **RWY 34:** Trees.
AIRPORT REMARKS: Attended Sat 1400-2300Z, Sun 1500-2200Z, Oct-May, Mon-Fri 1400-2300Z, June-Sep, Mon-Fri 1400-0100Z. CAUTION: Deer on and invof arpt. Ultralight activity on and invof arpt. MIRL Rwy 07-25 preset on low ints, to increase ints and ACTIVATE REIL Rwy 07 and Rwy 25 and MIRL Rwy 16-34—CTAF.
WEATHER DATA SOURCES: AWOS-3 119.925 (715) 539-8422.
COMMUNICATIONS: CTAF/UNICOM 122.8
MINNEAPOLIS CENTER APP/DEP CON 124.4
GCO 121.725 (FLIGHT SERVICES)
RADIO AIDS TO NAVIGATION: NOTAM FILE AUW.
WAUSAU (L) VORTACW 111.6 AUW Chan 53 N44°50.81' W89°35.19' 344° 21.8 NM to fld. 1205/2E.
NDB (MHW) 257 RRL N45°11.92' W89°42.26' at fld. NOTAM FILE RRL. NDB unusable byd 12 NM.

MIDDLETON MUNI—MOREY FLD (C29) 5 NW UTC-6(-5DT) N43°06.86' W89°31.89' **CHICAGO**
 928 B S4 **FUEL** 100LL, JET A TPA-1928(1000) NOTAM FILE GRB **L-28G**
RWY 10-28: H4000X100 (ASPH) MIRL **IAP**
RWY 10: REIL PAPI(P2L)—GA 4.0° TCH 32'. Trees. **RWY 28:** REIL. PAPI(P2L)—GA 4.0° TCH 36'. Pole.
RWY 01-19: 2000X120 (TURF)
AIRPORT REMARKS: Attended 1400-2330Z. Birds on and invof arpt; especially during rainy periods. 135' crane ¼ mile east 1900-0400Z, 240' crane ½ mile from AER 28 SR-SS, 230' crane 1 mile SE AER 28 and 240' crane 2.2 miles SW. Crane 80' AGL ¼ SM E of AER, unlgtd/unflagged. Avoid noise sensitive area 1 mile SW. Ctc arpt manager at 608-836-1711 for noise abatement procedures. ACTIVATE MIRL Rwy 10-28 and REIL Rwy 10 and Rwy 28—CTAF.
WEATHER DATA SOURCES: AWOS-3 118.675 (608) 833-1686.
COMMUNICATIONS: CTAF/UNICOM 123.0
MINNEAPOLIS CENTER APP/DEP CON 135.45 (1200-0500Z) **CHICAGO CENTER APP/DEP CON** 133.3 (0500-1200Z)
GCO 121.725 (FLIGHT SERVICES and MADISON APP CON)
RADIO AIDS TO NAVIGATION: NOTAM FILE MSN.
MADISON (L) VORTACW 108.6 MSN Chan 23 N43°08.69' W89°20.38' 255° 8.6 NM to fld. 860/3E.
ILS/DME 110.35 I-CFQ Chan 40(Y) Rwy 10. Unmonitored.

MILWAUKEE N42°56.82' W87°53.82' **CHICAGO**
RCD 122.65 122.4 (GREEN BAY RADIO) Unusable byd 30 NM blo 3000'. **L-28H.**

NDB RRL 257	APP CRS 151°	Rwy Idg TDZE Apt Elev	2997 1317 1318
-----------------------	------------------------	-----------------------------	---

NDB RWY 16

MERRILL MUNI (RRL)





MISSED APPROACH: Climb to 3200 then right turn direct RRL NDB and hold.

AWOS-3
119.925

MINNEAPOLIS CENTER
124.4 317.7


GCO
121.725

UNICOM
122.8 (CTAF)

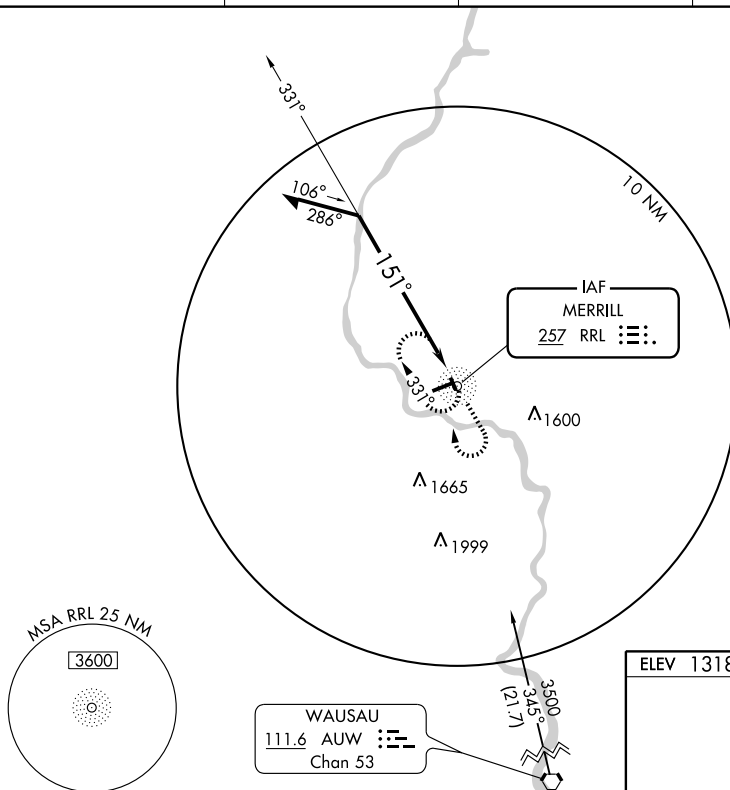

WAUSAU
111.6 AWW
Chan 53

Remain
within 10 NM

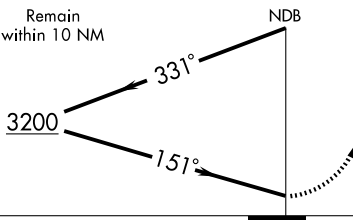

3200



RRL
257

ELEV 1318

151° to
RRL NDB



REIL Rwy 7 and 25

MIRL Rwy 16-34 and 7-25

Knots	60	90	120	150	180
Min:Sec					

WAAS CH 70604 W07A	APP CRS 069°	Rwy Idg 5100 TDZE 1318 Apt Elev 1318
--	------------------------	---

RNAV (GPS) RWY 7

MERRILL MUNI (RRL)

▼ Circling to Rwy 16-34 NA at night. Baro-VNAV NA when using Wausau altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Visibility reduction by helicopters NA. VDP NA when using Wausau altimeter setting.


▲ If local altimeter setting not received, use Wausau altimeter setting, increase all DAs 55 feet and all MDAs 60 feet. DME/DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 3500 direct
FOROG and hold.

AWOS-3
119.925

MINNEAPOLIS CENTER
124.4 317.7

GCO
121.725

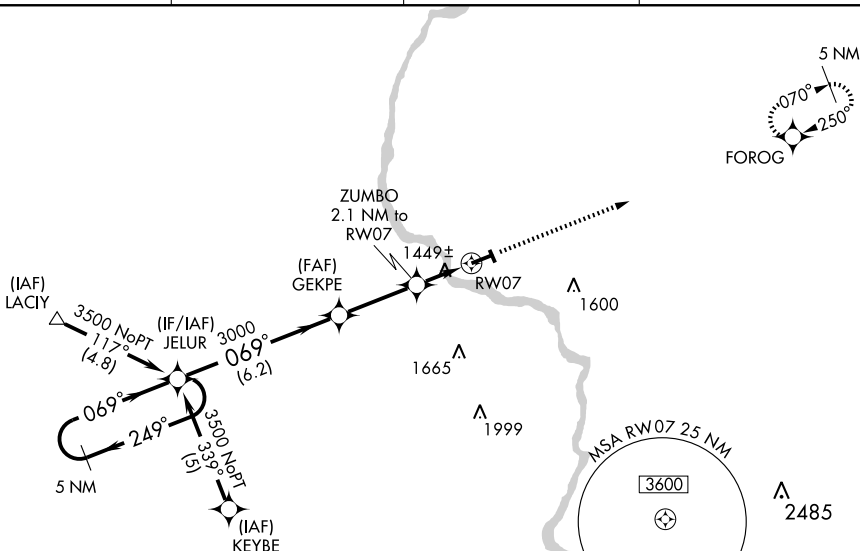UNICOM
122.8 (CTAF) **L**


Procedure NA for arrivals at AUW
VORTAC via airway radials 271 CW 005.

WAUSAU
AUW

ELEV 1318

5 NM
Holding Pattern

3500	FOROG
------	-------

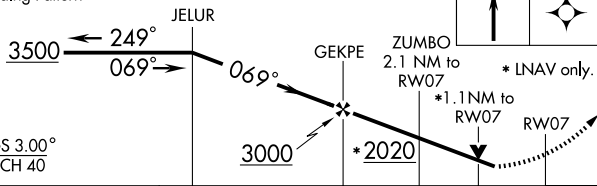

* LNAV only.

1 NIM to

RW07 31123

RW07/ RW07/

TDZE
1318

②

7

 0.40° to

RW07

R1107

REIL Rwy

MIRL R_w

PLAY

NAV

MERRILL, WISCONSIN

Amdt 1 07242

45° 12' N - 89° 43' W

MERRILL MUNI (RRL)

RNAV (GPS) RWY 7

WAAS CH 49104 W25A	APP CRS 250°	Rwy Idg TDZE Apt Elev	5100 1311 1318
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 25

MERRILL MUNI (RRL)

- ▼ Circling to Rwy 16-34 NA at night. Baro-VNAV NA when using Wausau altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA when using
- ▲ Wausau altimeter setting. If local altimeter setting not received, use Wausau altimeter setting, increase all DAs 55 feet; increase all MDAs 60 feet.


MISSED APPROACH:
Climb to 3500 direct
JELUR and hold.

AWOS-3
119.925



MINNEAPOLIS CENTER
124.4 317.7

GCO
121.725

UNICOM
122.8 (CTAF) 0

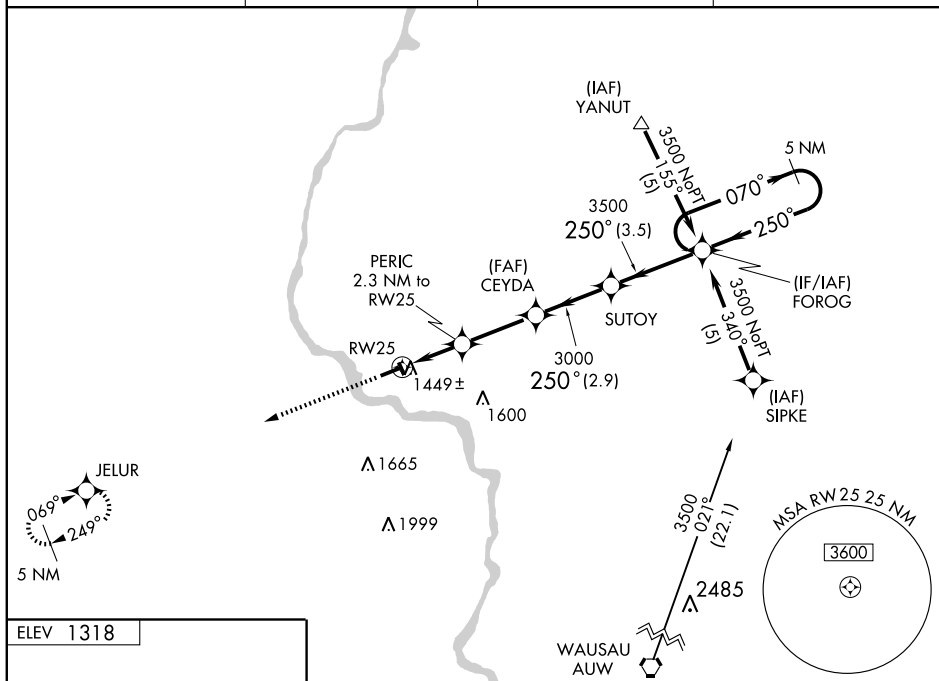

ELEV 1318

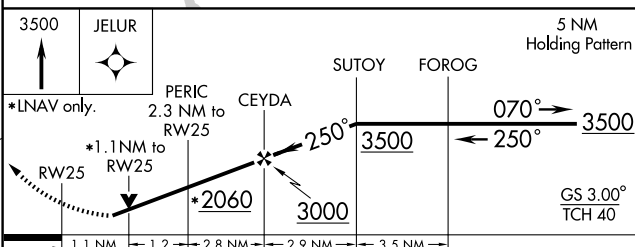

CATEGORY	A	B	C	D
LPV DA	1640-1¼	329 (400-1¼)		NA
LNAV/VNAV DA	1719-1½	408 (500-1½)		NA
LNAV MDA	1700-1	389 (400-1)		NA
CIRCLING	1760-1 442 (500-1)	1780-1 462 (500-1)	1780-1½ 462 (500-1½)	NA

REIL Rwy 7 and 25 0
MIRL Rwy 16-34 and 7-25 0

MERRILL, WISCONSIN

Amdt 1 07242

45° 12' N - 89° 43' W

MERRILL MUNI (RRL)

RNAV (GPS) RWY 25

MEMONONIE

MEMONONIE MUNI—SCORE FLD (LUM) 3 E UTC-6(-5DT) N44°53.54' W91°52.07' **GREEN BAY**
 895 B S4 **FUEL** 100LL, JET A NOTAM FILE GRB **H-2I, L-14I**
RWY 09-27: H5074X75 (ASPH) MIRL **IAP**
RWY 09: REIL. PAPI(P2L)—GA 3.0° TCH 43'. Trees. **RWY 27:** REIL. PAPI(P2L)—GA 3.0° TCH 40'. Road.
RWY 18-36: H3470X75 (ASPH) MIRL
RWY 18: REIL. PAPI(2PL)—GA 3.0° TCH 40'. Road. **RWY 36:** PAPI(2PR)—GA 3.0° TCH 40'. Ground.
AIRPORT REMARKS: Attended Mon-Fri 1500-2300Z. ACTIVATE MIRL Rwy 09-27 and Rwy 18-36, PAPI Rwy 09, Rwy 27, Rwy 18 and Rwy 36, REIL Rwy 09, Rwy 18 and Rwy 27—CTAF.
WEATHER DATA SOURCES: AWOS-3 118.025 (715) 235-5342.
COMMUNICATIONS: CTAF/UNICOM 122.7
MINNEAPOLIS CENTER APP/DEP CON 125.3
GCO 121.725 (FLIGHT SERVICES)
RADIO AIDS TO NAVIGATION: NOTAM FILE EAU.
EAU CLAIRE (L) VORTACW 112.9 EAU Chan 76 N44°53.86' W91°28.71' 265° 16.6 NM to fld. 804/4E.
HIWAS.

MERRILL MUNI (RRL) 1 NW UTC-6(-5DT) N45°11.94' W89°42.77' **GREEN BAY**
 1318 B S3 **FUEL** 100LL, JET A OX 4 NOTAM FILE RRL **H-2K, L-14I**
RWY 07-25: H5100X75 (ASPH) S-45, D-65, 2S-83, 2D-100 MIRL **IAP**
RWY 07: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Trees. **RWY 25:** REIL. PAPI(P2L)—GA 3.0° TCH 40'. Trees.
RWY 16-34: H2997X75 (ASPH) S-26 MIRL 0.5% up N
RWY 16: Pole. **RWY 34:** Trees.
AIRPORT REMARKS: Attended Sat 1400-2300Z, Sun 1500-2200Z, Oct-May, Mon-Fri 1400-2300Z, June-Sep, Mon-Fri 1400-0100Z. CAUTION: Deer on and invof arpt. Ultralight activity on and invof arpt. MIRL Rwy 07-25 preset on low ints, to increase ints and ACTIVATE REIL Rwy 07 and Rwy 25 and MIRL Rwy 16-34—CTAF.
WEATHER DATA SOURCES: AWOS-3 119.925 (715) 539-8422.
COMMUNICATIONS: CTAF/UNICOM 122.8
(R) MINNEAPOLIS CENTER APP/DEP CON 124.4
GCO 121.725 (FLIGHT SERVICES)
RADIO AIDS TO NAVIGATION: NOTAM FILE AUW.
WAUSAU (L) VORTACW 111.6 AUW Chan 53 N44°50.81' W89°35.19' 344° 21.8 NM to fld. 1205/2E.
NDB (MHW) 257 RRL N45°11.92' W89°42.26' at fld. NOTAM FILE RRL. NDB unusable byd 12 NM.

MIDDLETON MUNI—MOREY FLD (C29) 5 NW UTC-6(-5DT) N43°06.86' W89°31.89' **CHICAGO**
 928 B S4 **FUEL** 100LL, JET A TPA-1928(1000) NOTAM FILE GRB **L-28G**
RWY 10-28: H4000X100 (ASPH) MIRL **IAP**
RWY 10: REIL PAPI(P2L)—GA 4.0° TCH 32'. Trees. **RWY 28:** REIL. PAPI(P2L)—GA 4.0° TCH 36'. Pole.
RWY 01-19: 2000X120 (TURF)
AIRPORT REMARKS: Attended 1400-2330Z. Birds on and invof arpt; especially during rainy periods. 135' crane ¼ mile east 1900-0400Z, 240' crane ½ mile from AER 28 SR-SS, 230' crane 1 mile SE AER 28 and 240' crane 2.2 miles SW. Crane 80' AGL ¼ SM E of AER, unlgtd/unflagged. Avoid noise sensitive area 1 mile SW. Ctc arpt manager at 608-836-1711 for noise abatement procedures. ACTIVATE MIRL Rwy 10-28 and REIL Rwy 10 and Rwy 28—CTAF.
WEATHER DATA SOURCES: AWOS-3 118.675 (608) 833-1686.
COMMUNICATIONS: CTAF/UNICOM 123.0
(R) MADISON APP/DEP CON 135.45 (1200-0500Z) **(R) CHICAGO CENTER APP/DEP CON** 133.3 (0500-1200Z)
GCO 121.725 (FLIGHT SERVICES and MADISON APP CON)
RADIO AIDS TO NAVIGATION: NOTAM FILE MSN.
MADISON (L) VORTACW 108.6 MSN Chan 23 N43°08.69' W89°20.38' 255° 8.6 NM to fld. 860/3E.
ILS/DME 110.35 I-CFQ Chan 40(Y) Rwy 10. Unmonitored.

MILWAUKEE N42°56.82' W87°53.82' **CHICAGO**
RCD 122.65 122.4 (GREEN BAY RADIO) Unusable byd 30 NM blo 3000'. **L-28H.**

LOC/DME I-CFQ <u>110.35</u> Chan 40 (Y)	APP CRS 101°	Rwy Idg 4000 TDZE 928 Apt Elev 928
---	------------------------	---

LOC/DME RWY 10
MIDDLETON MUNI - MOREY FIELD (C29)

T Visibility reduction by helicopters NA. Use Dane County
A Rgnl-Truax Field altimeter setting, when not received use
NA Baraboo Wisconsin Dells altimeter setting and increase
all MDA 60 feet, and increase S-10 Cat. C visibility $\frac{1}{4}$ mile.


MISSED APPROACH: Climb to 1700 then climbing left turn to 3600 via heading 010° and MSN VORTAC R-282 to IMMES Int/MSN 9.2 DME and hold, continue climb-in-hold to 3600.


AWOS-3
118.675

DANE COUNTY RGNL ATIS
124.65 278.3

MADISON APP CON ★
135.45 343.7

GCO
121.725

UNICOM
123.0 (CTAF) 

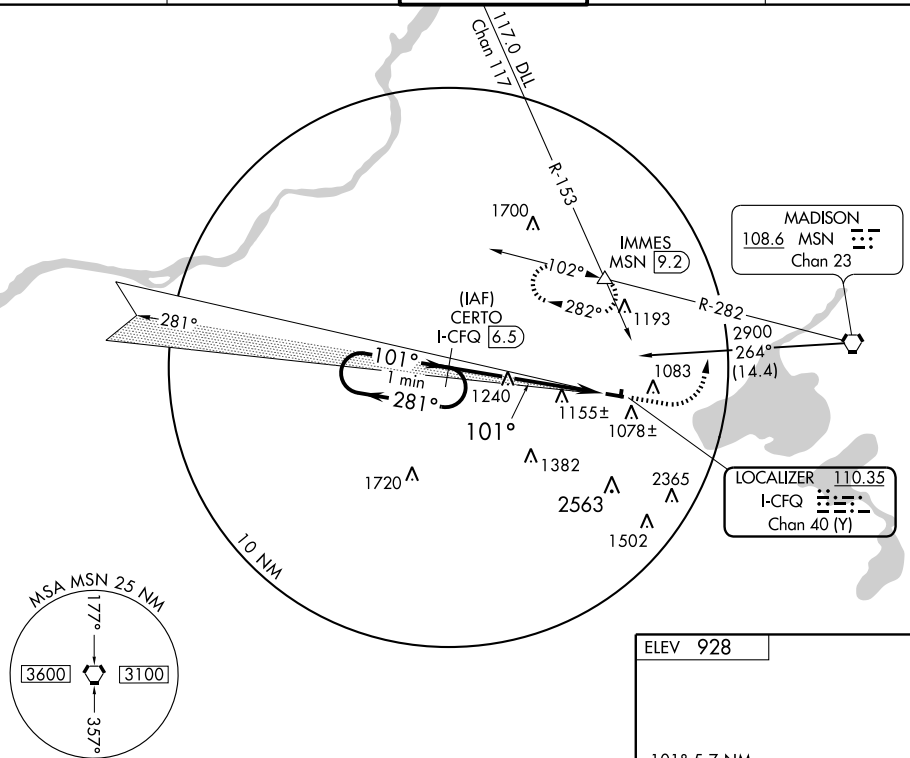

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

One Minute Holding Pattern

CERTO
I-CFQ 6.5

1700 ↑	3600 ↙ HDG 010° MSN R-282 <u>108.6</u>	IMMES △ MSN 9.2
-----------	--	---

VGSI and descent
angles not coincident.

CATEGORY	A	B	C	D
S-10	1580-1	652 (700-1)	1580-1 ³ / ₄ 652 (700-1 ³ / ₄)	NA
CIRCLING	1580-1 652 (700-1)	1600-1 672 (700-1)	1600-2 672 (700-2)	NA

ELEV 928

101° 5.7 NM

MIRL Rwy 10-28 **L**
 BFI Rwy 10 and 28 **L**

MIDDLETON, WISCONSIN
Amdt 1 10098MIDDLETON MUNI - MOREY FIELD (C29)
LOC/DME RWY 10

43°07'N - 89°32'W

WAAS CH 62912 W10A	APP CRS 101°	Rwy Idg 4000 TDZE 928 Apt Elev 928
--	------------------------	---

RNAV (GPS) RWY 10

MIDDLETON MUNI - MOREY FIELD (C29)

NA helicopters NA. Use Dane County Rgnl-Truax Field altimeter setting, when not received use Baraboo Wisconsin Dells altimeter setting and increase all DA 43 feet and all MDA 60 feet, increase LVP and LNAV/VNAV all Cats. and LNAV Cat. C visibility $\frac{1}{4}$ mile.


MISSED APPROACH: Climb to 4000 direct APOOZ and via 011° track to FAVOM and via 281° track to CIKAS and via 270° track to NEGUS and hold.

AWOS-3
118.675

DANE COUNTY RGNL ATIS
124.65 278.3

MADISON APP CON ★
135.45 343.7

GCO
121-725


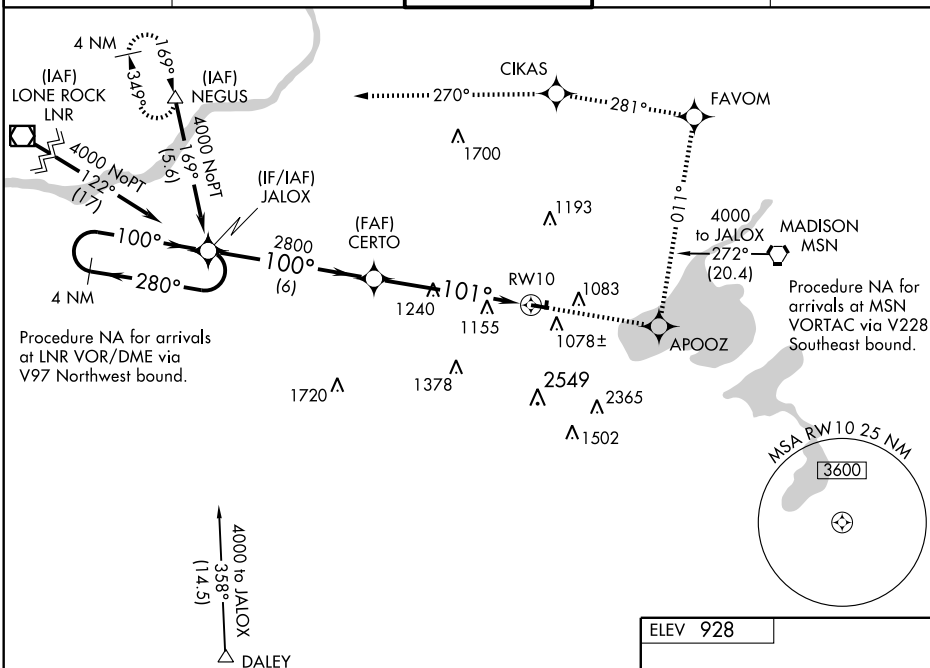
UNICOM
123.0 (CTAF) **0**

EC-3. 23 SEP 2010 to 21 OCT 2010

ELEV 928

4 NM
Holding Pattern

← 280° JALOX CERTO VGSI and RNAV glidepath not coincident.



CATEGORY	A	B	C	D
LPV DA	1450-1 ³ / ₄	522 (600-1 ³ / ₄)		NA
RNAV/ VNAV DA	1559-2 ¹ / ₄	631 (700-2 ¹ / ₄)		NA
RNAV MDA	1580-1	652 (700-1)	1580-1 ³ / ₄ 652 (700-1 ³ / ₄)	NA
CIRCLING	1580-1 652 (700-1)	1600-1 672 (700-1)	1600-2 672 (700-2)	NA

MIRL Rwy 10-28 **L**
REIL Rwy 10 and 28 **L**

MIDDLETON, WISCONSIN
Amdt 1 10098

MIDDLETON MUNI - MOREY FIELD (C29)

RNAV (GPS) RWY 10

43°07'N - 89°32'W

WAAS CH 82404 W28A	APP CRS 281°	Rwy Idg TDZE Apt Elev	4000 928 928
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28

MIDDLETON MUNI - MOREY FIELD (C29)

▼ Baro-VNAV NA. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
▲ NA Use Dane County Rgnl-Truax Field altimeter setting, when not received use Baraboo Wisconsin Dells altimeter setting and increase all DA 43 feet and all MDA 60 feet, increase LNAV/VNAV all Cats. and LNAV Cat. C visibility $\frac{1}{4}$ mile.

MISSED APPROACH:
Climb to 4000 direct JALOX and hold.


AWOS-3
118.675

DANE COUNTY RGNL ATIS
124.65 278.3

MADISON APP CON ★
135.45 343.7


GCO
121.725

UNICOM
123.0 (CTAF) ①

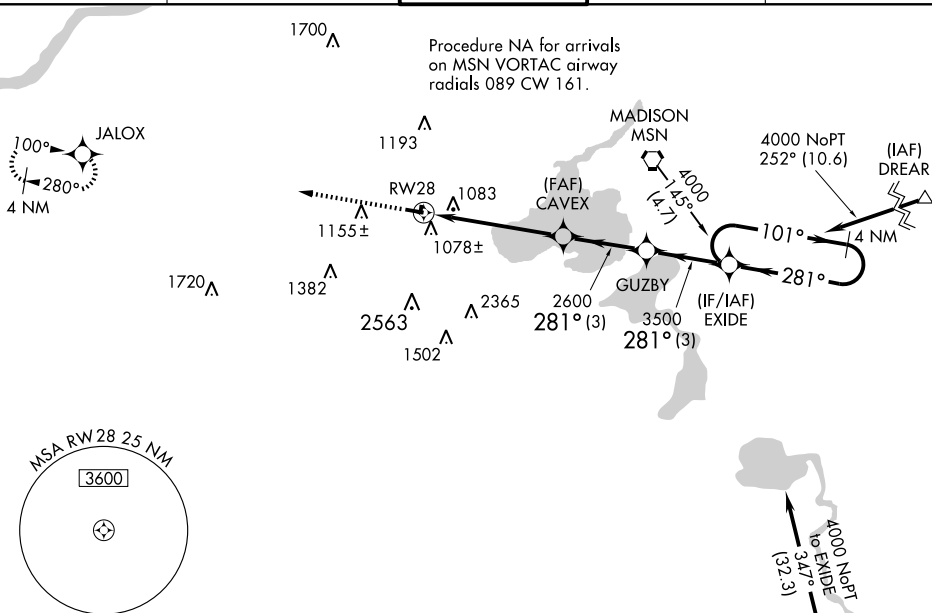

ELEV 928

Procedure NA for arrivals at JVL
VOR/DME via V97 Southeast bound.

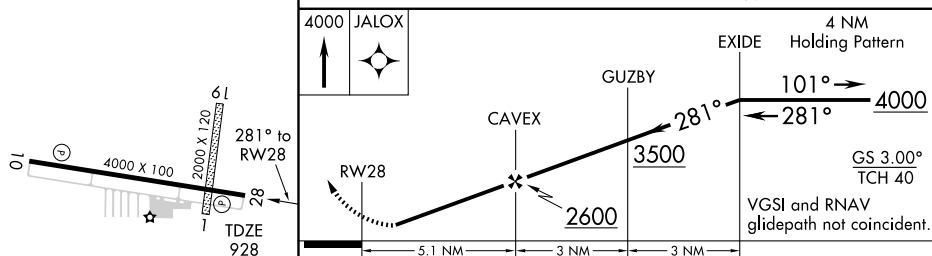

MIRL Rwy 10-28 ①
REIL Rwy 10 and 28 ①

CATEGORY	A	B	C	D
LPV DA	1326-1½	398 (400-1½)		NA
LNAV/VNAV DA	1442-1¾	514 (600-1¾)		NA
LNAV MDA	1480-1	552 (600-1)	1480-1½ 552 (600-1½)	NA
CIRCLING	1560-1 632 (700-1)	1600-1 672 (700-1)	1600-2 672 (700-2)	NA

VORTAC MSN 108.6 Chan 23	APP CRS 076°	Rwy Idg TDZE Apt Elev 4000 928 928
--	------------------------	--

VOR RWY 10

MIDDLETON MUNI - MOREY FIELD (C29)

▼
▲ NA Use Dane County Rgnl-Truax Field altimeter setting, if not received use Baraboo Wisconsin Dells altimeter setting and increase all MDAs 60 feet.

MISSED APPROACH: Climbing left turn to 3500 via heading 050° and MSN R-282 to IMMES Int/9.2 DME and hold, continue climb-in hold to 3500.


AWOS-3
118.675

DANE COUNTY RGNL ATIS
124.65 278.3



MADISON APP CON ★
135.45 343.7

GCO
121.725

UNICOM
123.0 (CTAF) **0**

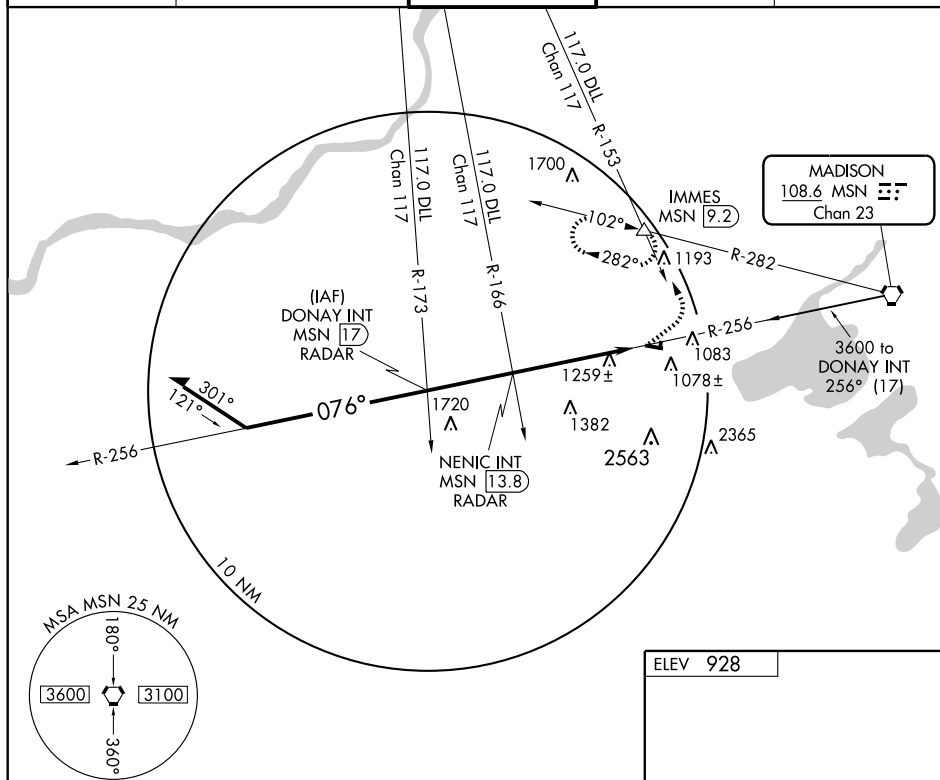

ELEV 928

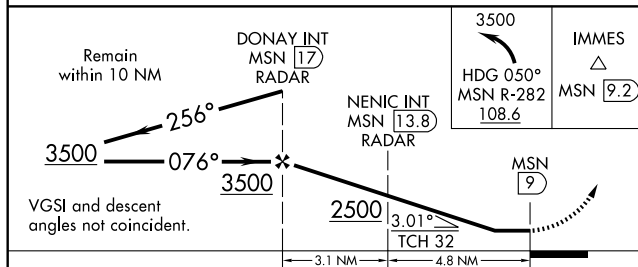

MIRL Rwy 10-28 **0**
REIL Rwy 10 and 28 **0**

FAF to MAP 7.9 NM

Knots	60	90	120	150	180
Min:Sec	7:54	5:16	3:57	3:10	2:38

VORTAC MSN 108.6 Chan 23	APP CRS 254°	Rwy Idg TDZE Apt Elev 928	4000 928
--	------------------------	---	---------------------------



VOR RWY 28

MIDDLETON MUNI - MOREY FIELD (C29)

Use Dane County Rgnl-Truax Field alimeter setting, if not received use Baraboo Wisconsin Dells alimeter setting and increase all MDAs 60 feet. RADAR or DME REQUIRED.

MISSED APPROACH: Climb to 2000 then climbing right turn to 3500 via heading 020° and MSN R-282 to IMMES Int/9.2 DME and hold.

AWOS-3 118.675	DANE COUNTY RGNL ATIS 124.65 278.3	MADISON APP CON ★ 135.45 343.7	GCO 121.725	UNICOM 123.0 (CTAF) 0
--------------------------	--	--	-----------------------	--

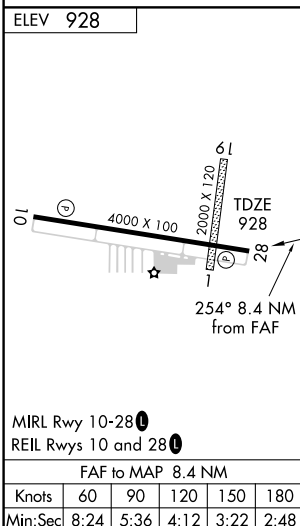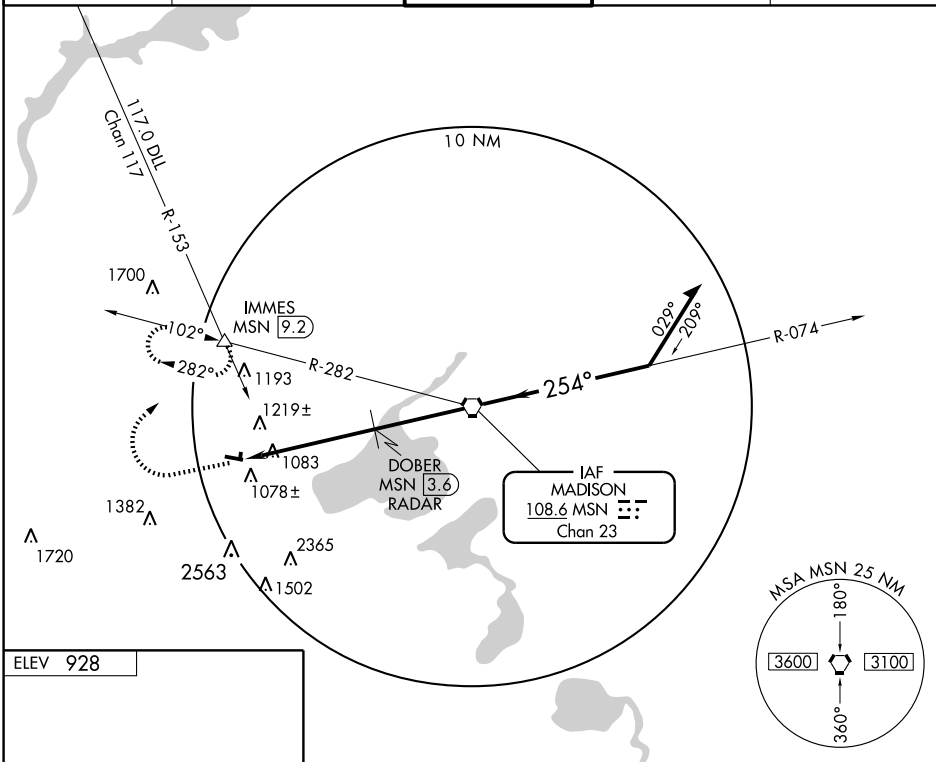

ELEV 928	2000	3500	IMMES MSN 9.2	VORTAC	074°	3500	Remain within 10 NM
	HDG 020° MSN R-282 108.6			DOBER MSN 3.6 RADAR	254°	3500	VGSI and descent angles not coincident.
	MSN 8.4	3.00° TCH 36					
	4.8 NM	3.6 NM					
CATEGORY	A	B	C	D			
S-28	1500-1	572 (600-1)	1500-1½ 572 (600-1½)	NA			
CIRCLING	1560-1 632 (700-1)	1600-1 672 (700-1)	1600-2 672 (700-2)	NA			

AIRPORT DIAGRAM

AL-262 (FAA)

MILWAUKEE/GENERAL MITCHELL INTL (MKE)


MILWAUKEE, WISCONSIN

ATIS
126.4
MILWAUKEE TOWER
119.1 325.8
GND CON
121.8 263.125
CLNC DEL
120.8

D

ASDE-X Surveillance System in use.
Pilots should operate transponders
with Mode C on all twys and rwy.

EC-3, 23 SEP 2010 to 21 OCT 2010

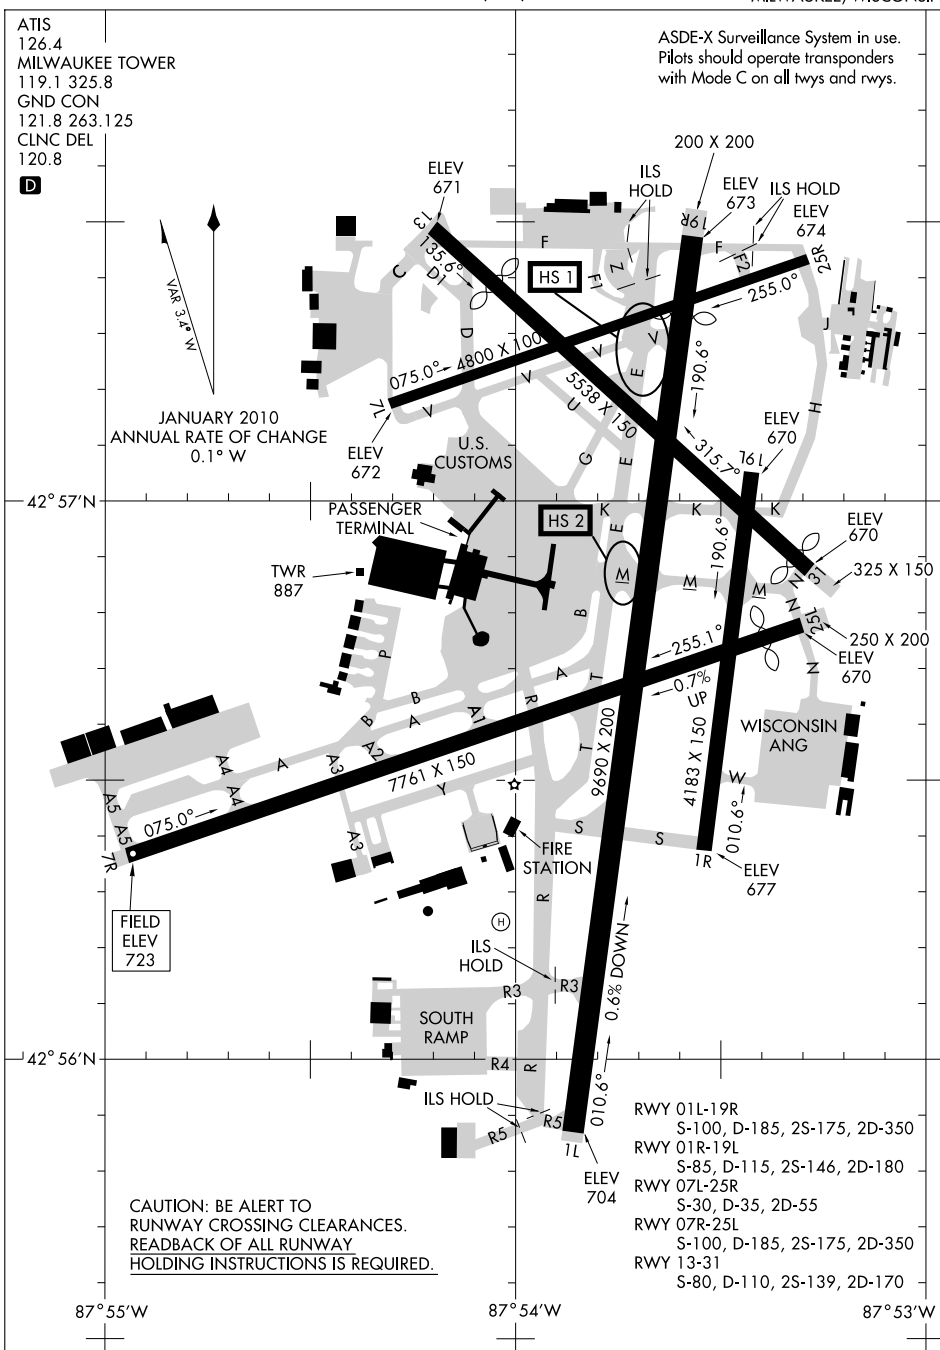

EC-3, 23 SEP 2010 to 21 OCT 2010

AIRPORT DIAGRAM

MILWAUKEE, WISCONSIN
MILWAUKEE/GENERAL MITCHELL INTL (MKE)

MILWAUKEE

GENERAL MITCHELL INTL (MKE) 5 S UTC-6(-5DT) N42°56.83' W87°53.80'

CHICAGO

723 B S4 FUEL 100LL, JET A OX1 LRA ARFF Index—See Remarks

H-5E, L-28H, A

NOTAM FILE MKE

IAP, AD

RWY 01L-19R: H9690X200 (ASPH-CONC-GRVD) S-100, D-185, 2S-175, 2D-350 HIRL, CL

RWY 01L: ALSF2, TDZL. PAPI(P4R)—GA 3.0° TCH 65'. Tree. 0.6%

down.

RWY 19R: MALSR. PAPI(P4R)—GA 3.0° TCH 68'. Thld dspcd 785'.

Fence.

RWY 07R-25L: H7761X150 (ASPH-CONC-GRVD) S-100, D-185,

2S-175, 2D-350 HIRL 0.7% up

RWY 07R: MALSR. PAPI(P4L)—GA 3.0° TCH 56'. Tree.

RWY 25L: REIL. PAPI(P4L)—GA 3.0° TCH 50'. Thld dspcd 432'.

Pole.

RWY 13-31: H5538X150 (ASPH-CONC) S-80, D-110, 2S-139,

2D-170. MIRL

RWY 13: REIL. PAPI(P4L)—GA 3.0° TCH 54'. Thld dspcd 741'. Pole.

RWY 31: REIL. PAPI(P4R)—GA 3.0° TCH 55'. Thld dspcd 204'.

Railroad.

RWY 07L-25R: H4800X100 (ASPH) S-30, D-35, 2D-55 MIRL

RWY 07L: REIL. VASI(V4L)—GA 3.1° TCH 37'. Tree.

RWY 25R: REIL. PAPI(P4R)—GA 3.0° TCH 40'. Pole.

RWY 01R-19L: H4183X150 (CONC) S-85, D-115, 2S-146, 2D-180

MIRL

RWY 01R: REIL. RWY 19L: Tree.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 07R: TORA-7761 TODA-7761 ASDA-7761 LDA-7761

RWY 13: TORA-5538 TODA-5538 ASDA-5538 LDA-4797

RWY 25L: TORA-7761 TODA-7761 ASDA-7761 LDA-7329

RWY 31: TORA-5538 TODA-5538 ASDA-5538 LDA-5331

AIRPORT REMARKS: Attended continuously. Rwy 07L-25R CLOSED to all jet acft Rwy 13-31 CLOSED jet acft without

PPR from airport manager —call 414-747-5325. Rwy 13-31 and Rwy 01R-19L and Rwy 07L-25R CLOSED

except light weight single engine acft 0400-1200Z† daily. All approaches are over noise sensitive areas; all

turbojet acft should refrain from conducting multi VFR tfc pattern apchs and departures without prior approval

from arpt manager call 414-747-5325. Training flights involving successive use of any rwy prohibited

0400-1200Z†. Acft with wingspan greater than 175' cannot pass simultaneously on Twy A and Twy B between

Twy A1 and Twy A2. Acft with wingspan greater than 175' cannot pass simultaneously on Twy E and Twy Z. Birds

on and in/ov arpt. Class I ARFF Index C. Index D equipment avbl upon req. Preferred usage by acft between

0400-1200Z† is tkr Rwy 19R and ldg Rwy 01L. ASDE-X surveillance system in use: pilots should operate

transponders with mode C on all twys and rwys. Twy A clsd from Twy R to E and Twy E clsd from Twy T to M and

Twy T north clsd from Rwy 07R-25L acft with tail height greater than 54.5' during CAT II and CAT III ops. Twy B

between Twy V and Twy R clsd to acft with wingspan greater than 170'. Twy B clsd between Twy R and Twy A1 to

acft with wingspan greater than 117' without permission from arpt director at 414-747-5325. Twy D1, Twy F2

Twy H, Twy J, Twy F1, Twy P, and Twy F (east of Rwy 19R) clsd to acft with wingspan greater than 78'. Twy F

(west of Twy Z) clsd to acft with wingspan greater than 117' unless permission from arpt director at

414-747-5325. Twy S and Twy T clsd during CAT II and CAT III ops. Twy V between Twy D and Rwy 07L-25R

clsd to acft with wingspan greater than 170' when Rwy 07L-25R in use. Twy S and Twy T clsd between Rwy

07R-25L and Twy R during CAT II and CAT III ops. Holding bays at Rwy 01L and Rwy 07R are in use. Associated

twy adjacent to bay is limited to acft wingspan up to 137'. Holding bay at Rwy 19R when in use. Twy Z adjacent

to bay is limited to acft with wingspan up to 170'. Rwy 07L-25R no acft 65,000 lbs or greater allowed taxi

between Twy C and Twy E. Rwy 19R TODA 8450' from int Twy V. Flight Notification Service (ADCUS) avbl. NOTE:

See Special Notices Section-Intersection Departures During Period of Darkness. Continuous Power Facilities.

WEATHER DATA SOURCES: ASOS (414) 769-7161. TDWR.

COMMUNICATIONS: D-ATIS 126.4 UNICOM 122.95

MILWAUKEE RCO 122.65 122.4 (GREEN BAY RADIO) Unusable bdy 30 NM blo 3000'.

① MILWAUKEE APP CON 127.85 127.0 126.5 (A) 118.0 (B) ② MILWAUKEE DEP CON 127.0 125.35 (A) 119.65 (B)

MILWAUKEE TOWER 119.1 GND CON 121.8 CLNC DEL 120.8

AIRSPACE: CLASS C svc continuous ctc APP CON

RADIO AIDS TO NAVIGATION: NOTAM FILE MKE.

BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01' W88°17.06' 119° 19.9 NM to fld. 1080/2E.

HIWAS.

YANKS NDB (MHW/LOM) 260 BL N43°03.60' W87°52.61' 189° 6.8 NM to fld. Unmonitored.

TEELS NDB (MH/LOM) 242 GM N42°54.54' W88°02.46' 072° 6.8 NM to fld. Unmonitored.


CAPPY NDB (LOM) 410 MK N42°50.38' W87°54.78' 008° 6.5 NM to fld.

ILS/DME 110.3 I-MKE Chan 40 Rwy 01L. Class IIIIE. LOM CAPPY NDB. MM unmonitored.

ILS/DME 111.5 I-GMF Chan 52 Rwy 07R. Class IE. LOM TEELS NDB.

ILS 110.3 I-BLY Rwy 19R. Class IE. LOM YANKS NDB.

ILS/DME 111.5 I-PXY Chan 52 Rwy 25L.

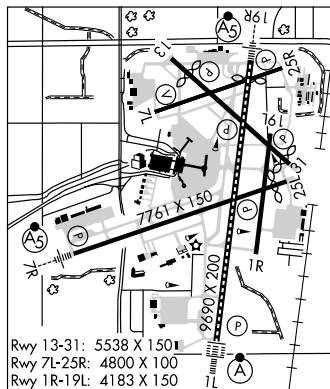

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

COMM/NAV/WEATHER REMARKS: APP/DEP CON: (A) West of 01L–19R extended LOC course of active rwy and north of Rwy 07R–25L extended course of active rwy. (B) East of Rwy 01L–19R extended LOC course of active rwy and south of Rwy 07R–25L extended course of active rwy.

LAWRENCE J. TIMMERMAN (MWC) 5 NW UTC–6(–5DT) N43°06.62' W88°02.07'

CHICAGO

745 B S4 FUEL 100, JET A OX 1, 2 TPA—1745(1000) NOTAM FILE MWC

L-28H, A

RWY 15L–33R: H4103X75 (ASPH) S–30 MIRL

IAP, AD

RWY 15L: REIL. VASI(V4L)—GA 3.0° TCH 41'. Tree.

RWY 33R: VASI(V4L)—GA 3.0° TCH 26'. Tree.

RWY 15R–33L: 3231X270 (TURF)

RWY 15R: Tree. RWY 33L: Tree.

RWY 04L–22R: H3201X75 (ASPH) S–30 MIRL

RWY 04L: REIL. VASI(V4L)—GA 4.0° TCH 44'. Tree.

RWY 22R: REIL. VASI(V4L)—GA 3.0° TCH 36'. Tree.

RWY 04R–22L: 2839X270 (TURF)

RWY 04R: Tree. RWY 22L: Trees.

AIRPORT REMARKS: Attended May–Sep 1300–0400Z†, Oct–Apr 1300–0300Z†. Birds on and in/ovf arpt. Turf Rwy 04R–22L, Rwy 15R–33L and all turf twys clsd 15 Oct–1 May. When twr clsd, ACTIVATE MIRL Rwy 04L–22R, VASI and REIL Rwy 04L and 22R, MIRL Rwy 15L–33R, VASI Rwy 15L and 33R, and REIL Rwy 15L—CTAF.

WEATHER DATA SOURCES: AWOS–3 (414) 461–2954. LAWRS.

COMMUNICATIONS: CTAF 120.5 ATIS 128.3 UNICOM 122.95

TIMMERMAN RCO 123.6R 112.5T (GREEN BAY RADIO)

Ⓡ MILWAUKEE APP/DEP CON 125.35


TIMMERMAN TOWER 120.5 (1300–0300Z†) GND CON 121.7 CLNC DEL 121.7 (when Twr clsd)

AIRSPACE: CLASS D svc 1300–0300Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE MWC.

TIMMERMAN (L) VOR/DME 112.5 LJT Chan 72 N43°06.59' W88°02.24' at fld. 737/2W.

ILS 108.5 I–MWC Rwy 15L. LOC only. Unmonitored when twr clsd.

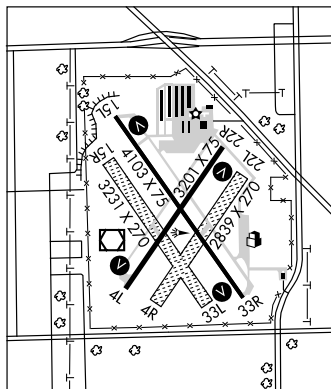

MINDI N44°00.24' W91°15.65' NOTAM FILE LSE.

CHICAGO

NDB (LOM) 272 LS 177° 7.5 NM to La Crosse Muni.

MINERAL POINT N42°53.28' W90°13.59' NOTAM FILE MRJ.

CHICAGO

NDB (MHW) 365 MRJ at Iowa Co.

L-28G

MINERAL POINT

IOWA CO (MRJ) 3 NW UTC–6(–5DT) N42°53.21' W90°14.17'

CHICAGO

1171 B S4 FUEL 100LL, JET A OX 4 NOTAM FILE MRJ

H-5D, L-28G

RWY 11–29: H5000X75 (ASPH) MIRL 0.7% up SE

IAP

RWY 11: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 29: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 04–22: H3601X60 (ASPH) S–12.5 MIRL

RWY 04: PAPI(P2L)—GA 3.0° TCH 31'. Road.

RWY 22: PAPI(P2L)—GA 3.0° TCH 31'.

AIRPORT REMARKS: Attended Mon–Fri 1400–2300Z†, Sat 1400–1800Z†, Sun on call. For attendant call 608–553–7571 or 608–341–8455. Fuel avbl 24 hour self service. Call pager 608–376–4464 or self service. For service information call 608–987–9931/608–574–2294. Birds on and in/ovf of arpt. Be alert: Acft taxiing on Rwy 04–22 and 11–29. For noise abatement preferred no wind rwy is Rwy 29. Rwy 22 VASI OTS indef. MIRL Rwy 11–29 preset on low ints, to increase ints and ACTIVATE MIRL Rwy 04–22, PAPI Rwy 04, Rwy 22, Rwy 11 and Rwy 29, REIL Rwy 11 and Rwy 29—CTAF.

WEATHER DATA SOURCES: AWOS–3 118.525 (608) 987–2157.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ CHICAGO CENTER APP/DEP CON 133.95


GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE LNR.

LONE ROCK (L) VOR/DME 112.8 LNR Chan 75 N43°17.66' W90°07.99' 191° 24.9 NM to fld. 1184/OE.

HIWAS.

MINERAL POINT NDB (MHW) 365 MRJ N42°53.28' W90°13.59' at fld. NOTAM FILE MRJ.

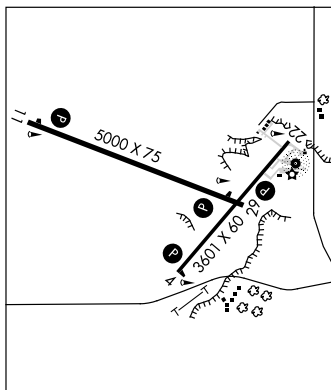

HOT SPOTS

An "airport surface hot spot" is a location on an aerodrome movement area with a history or potential risk of collision or runway incursion, and where heightened attention by pilots/drivers is necessary.

A "hot spot" is a runway safety related problem area on an airport that presents increased risk during surface operations. Typically it is a complex or confusing taxiway/taxiway or taxiway/runway intersection. The area of increased risk has either a history of or potential for runway incursions or surface incidents, due to a variety of causes, such as but not limited to: airport layout, traffic flow, airport marking, signage and lighting, situational awareness, and training. Hot spots are depicted on airport diagrams as open circles or polygons designated as "HS 1", "HS 2", etc. and tabulated in the list below with a brief description of each hot spot. Hot spots will remain charted on airport diagrams until such time the increased risk has been reduced or eliminated.

CITY/AIRPORT	HOT SPOT	DESCRIPTION*
ALTON/ST. LOUIS, IL		
ST. LOUIS RGNL (ALN)	HS 1	Twy C and Rwy 11, rwy in close proximity of ramp.
	HS 2	Twy A and Rwy 17-35, rwy in close proximity of ramp.
CHAMPAIGN-URBANA, IL		
UNIVERSITY OF ILLINOIS- WILLARD (CMI)	HS 1	Rwy 18 hold short line set back on Twy C.
	HS 2	Complex twy/twy int.
	HS 3	Rwy 36 hold short lines proximity on Twy B and Twy B2.
CHICAGO, IL		
CHICAGO-O'HARE INTL (ORD)	HS 1	Twy R between Rwy 09R-27L and Rwy 04L-22R.
	HS 2	Rwy 27L and Rwy 04L-22R.
	HS 3	Twy B to Twy H int close proximity to Rwy 09R-27L.
	HS 4	Rwy 09R-27L and Twy A1.
	HS 5	Int of Twy U5 and Twy U in close proximity to Rwy 09R-27L.
	HS 6	Twy U and Twy H close proximity to Rwy 09R-27L.
	HS 7	Twy T10 and Twy M.
	HS 8	Twy S5 and Rwy 04R.
	HS 9	Int of Twy E, Twy G and Twy Z close proximity of rws.
	HS 10	Landing Rwy 27R first available turn off is Twy C1 6500' from Rwy 27R thr.
	HS 11	Rwy 14 R and Rwy 10-28. Rwy 14R now ends north of active Rwy 10-28. Rwy 10-28 arrivals - There is no exit from Rwy 10-28 onto Rwy 14R.
CHICAGO, IL		
MIDWAY INTL (MDW)	HS 1	Displaced thr Rwy 04L. Twy W turn onto Rwy 04L.
	HS 2	Int of Rwy 04L and Twy F.
	HS 3	Rwy 31L hold short line on Twy K.
	HS 4	Rwy 31R hold short line set back on Twy Y terminal side.
	HS 5	Int of Rwy 04R and Twy F.
CHICAGO/PROSPECT HEIGHTS/ WHEELING, IL		
CHICAGO EXECUTIVE (PWK)	HS 1	Complex int in close proximity of rws.
	HS 2	Twy int in close proximity of Rwy 06.
	HS 3	Rwy 06 hold short line set back on Twy T.
	HS 4	Rwy 06 hold short line set back and close to Hangar 4 ramp.
JANESVILLE, WI		
SOUTERN WISCONSIN RGNL (JVL)	HS 1	Rwy 32 and Rwy 36 apch ends are closely aligned and may be confused when lining up for departure.
LA CROSSE, WI		
LA CROSSE MUNI (LSE)	HS 1	Rwy 36 hold position set back on Twy F.

(SEE CONTINUATION PAGE FOR MORE LISTINGS)

HOT SPOTS

(CONTINUED)

CITY/AIRPORT	HOT SPOT	DESCRIPTION*
MILWAUKEE, WI		
GENERAL MITCHELL INTL (MKE)	HS 1	Twy E and Twy V at Rwy 19R and Rwy 25R.
	HS 2	Twy M and Rwy 01L-19R.
MOLINE, IL		
QUAD CITY INTL (MLI)	HS 1	Twys in close proximity to Rwy 23.
	HS 2	Wrong rwy departure risk.
	HS 3	Non-standard Rwy 13-31 hold position.
	HS 4	Confusing twy int.
	HS 5	Hold lines for Twy L appear abruptly.
SPRINGFIELD, IL		
ABRAHAM LINCOLN		
CAPITAL (SPI)	HS 1	Complex rwy/rwy int.

*See appropriate A/FD, Alaska or Pacific Supplement HOT SPOT table for additional information.



LOC/DME I-MKE 110.3 Chan 40	APP CRS 009°	Rwy 1L Idg 9690 TDZE 704 Apt Elev 723	Rwy 1R Idg 4183 TDZE 677 Apt Elev 723
--	------------------------	--	--

ILS or LOC RWY 1L


MILWAUKEE/GENERAL MITCHELL INTL (MKE)

<p>For inoperative ALSF-2, increase S-LOC 1L Cat D visibility to RVR 5000.</p>	<p>ALSF-2 Rwy 1L</p>	<p>MISSED APPROACH: Climb to 2900 then left turn direct BAE VORTAC and hold.</p>
--	----------------------	--

ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 119.1 325.8	GND CON 121.8 263.125	CLNC DEL 120.8
----------------------	---	---------------------------------------	---------------------------------	--------------------------

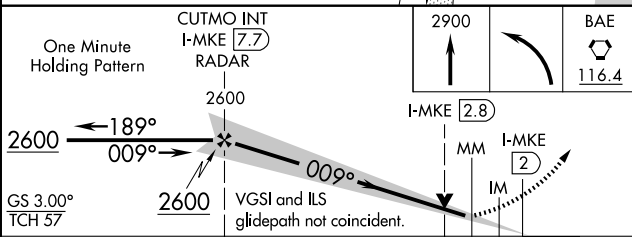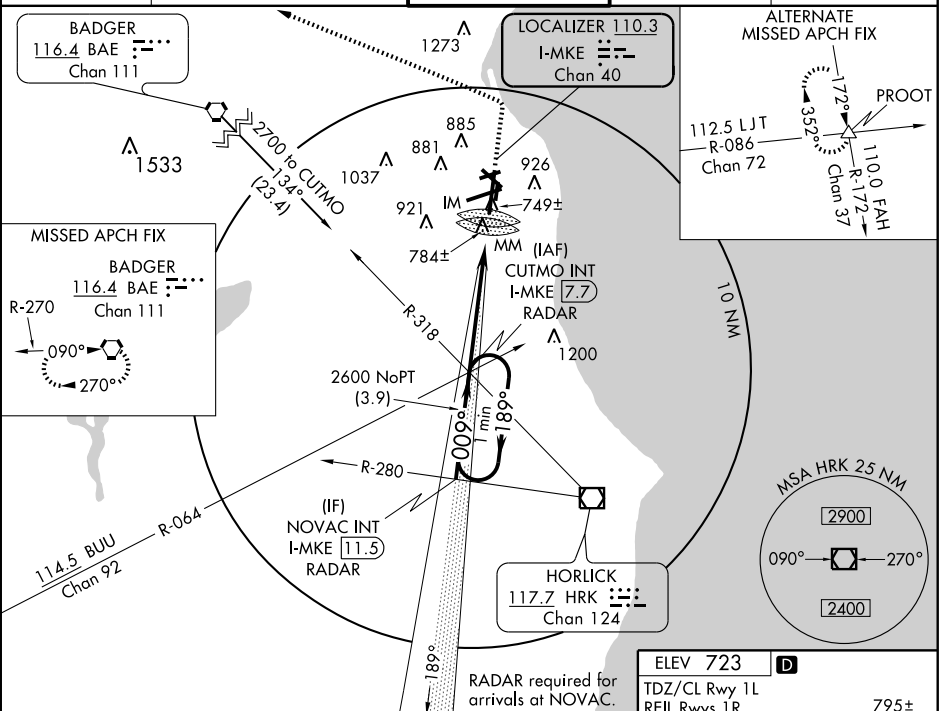

CATEGORY	A	B	C	D
S-ILS 1L	904/18 200 (200-½)			
S-LOC 1L	1040/24 336 (400-½)			1040/40 336 (400-¾)
SIDESTEP 1R	1040-1 363 (400-1)	1040-1½ 363 (400-½)	1040-2 363 (400-2)	
CIRCLING	1240-1 517 (600-1)	1240-1½ 517 (600-½)	1280-2 557 (600-2)	

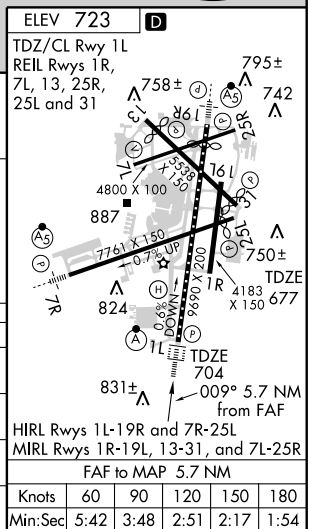



LOC/DME I-GMF 111.5 Chan 52	APP CRS 074°	Rwy ldg 7761 TDZE 723 Apt Elev 723
---	------------------------	---

ILS or LOC RWY 7R


MILWAUKEE/GENERAL MITCHELL INTL (MKE)

V **RVR 1800 authorized with the use of FD or AP or HUD to DA.	MALSR 	MISSED APPROACH: Climb to 2900 then left turn direct BAE VORTAC and hold.
---	-----------	---

ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 119.1 325.8	GND CON 121.8 263.125	CLNC DEL 120.8
----------------------	---	---------------------------------------	---------------------------------	--------------------------

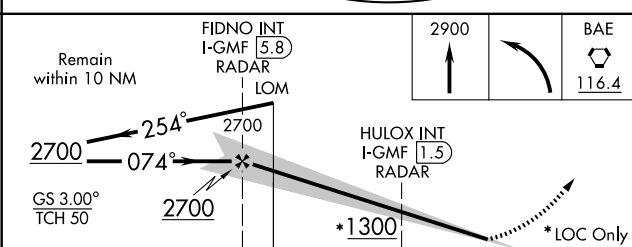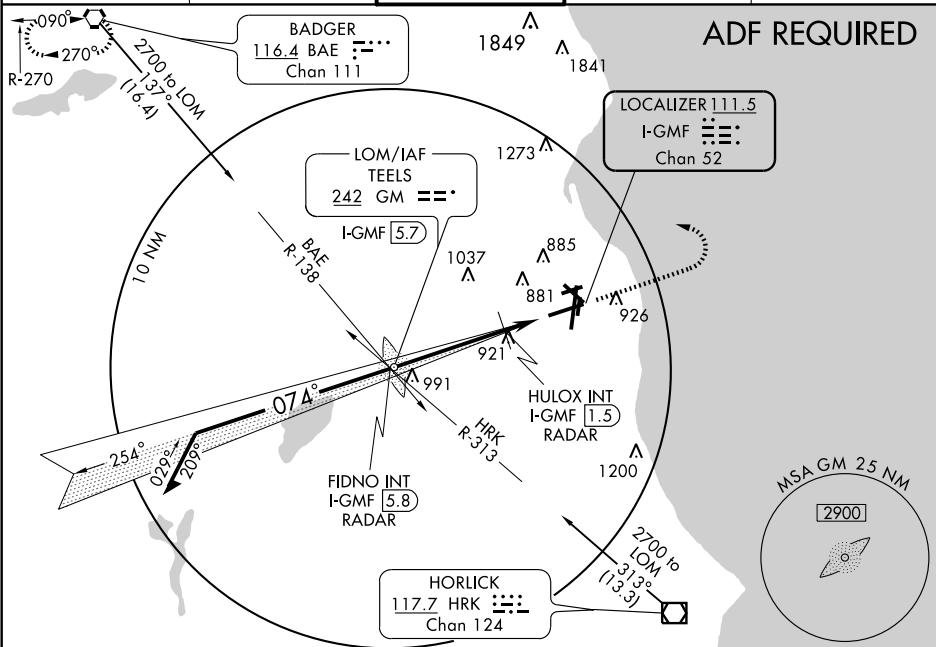

CATEGORY	A	B	C	D
S-ILS 7R	** 923/24 200 (200-½)			
S-LOC 7R	1300/24 577 (600-½)	1300/50 577 (600-1)	1300/60 577 (600-1¼)	
CIRCLING	1300-1 577 (600-1)	1300-1½ 577 (600-1½)	1300-2 577 (600-2)	
HULOX FIX MINIMUMS				
S-LOC 7R	1180/24 457 (500-½)	1180/40 457 (500-¾)	1180/50 457 (500-1)	
CIRCLING	1240-1 517 (600-1)	1240-1½ 517 (600-1½)	1280-2 557 (600-2)	

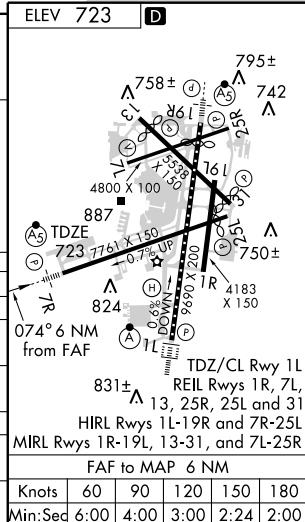

MILWAUKEE, WISCONSIN

Amdt 15B 09351

MILWAUKEE/GENERAL MITCHELL INTL (MKE)


42° 57'N - 87° 54'W

ILS or LOC RWY 7R

LOC I-BLY <u>110.3</u>	APP CRS 189°	Rwy 19R Idg 8915 TDZE 672 Apt Elev 723	Rwy 19L Idg 4183 TDZE 674 Apt Elev 723
----------------------------------	------------------------	---	---

ILS or LOC RWY 19R

MILWAUKEE/GENERAL MITCHELL INTL (MKE)



MISSED APPROACH: Climb to 2800 then right turn direct BAE VORTAC and hold.

ATIS
126.4




MILWAUKEE APP CON
126.5 307.0

MILWAUKEE TOWER
119.1 325.8


GND CON
121.8 263.125

CLNC DEL
120.8

ADF REQUIRED

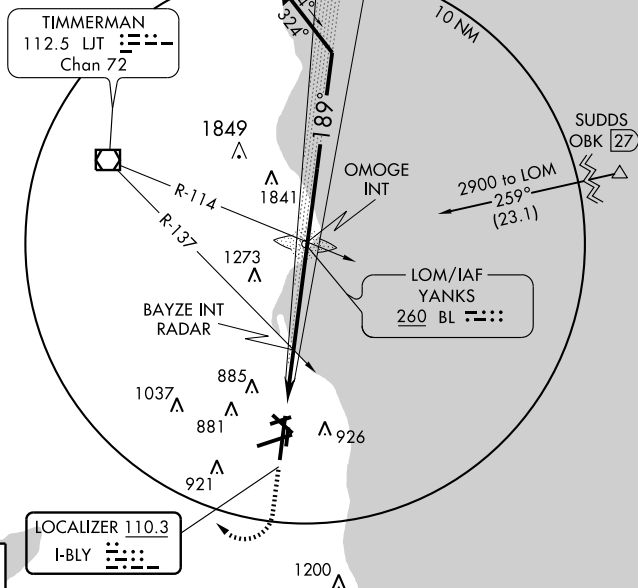

ELEV 723 **D** 189°
TDZ/CL Rwy 1L 6.4 NM
REIL Rwy 1R, TDZE from FAF
7L, 13, 25R, 672 795±
25L and 31 750±

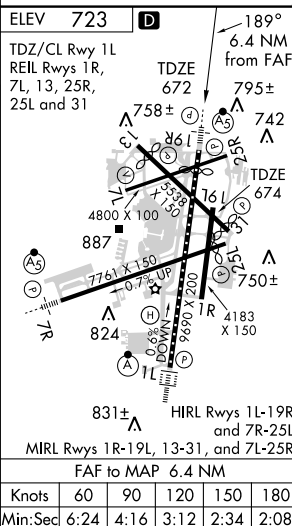

MILWAUKEE, WISCONSIN

Amdt 10B 09351

MILWAUKEE/ GENERAL MITCHELL INTL (MKE)

42° 57' N - 87° 54' W

ILS or LOC RWY 19R

ILS RWY 1L (CAT II)
MILWAUKEE/GENERAL MITCHELL INTL (MKE)

ELEV 723

758±

742

795±

750±

824

831±

887

4183

4800 X 100

7761 X 150

0.75 UP

0.02 X 0.96

0.02 X 150

TDZE 704

1R, 7L, 13, 25R, 25L, and 31

1L-19R and 7R-25L

1R-19L, 13-31, and 7L-25R

CATEGORY II ILS - SPECIAL AIRCREW
& AIRCRAFT CERTIFICATION REQUIRED

MILWAUKEE/ GENERAL MITCHELL INTL (MKE)
42° 57'N - 87° 54'W **IIS RWY 11** (CAT II)


EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

ILS RWY 1L (CAT III)
MILWAUKEE/GENERAL MITCHELL INTL (MKE)

ALSF-2 Rwy 1L

MISSED APPROACH: Climb to 2900 then left turn direct BAE VORTAC and hold.

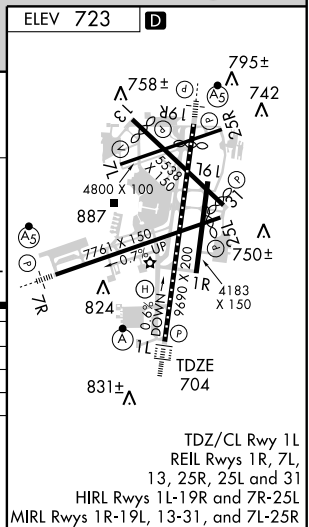

CATEGORY III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED



TDZ/CL Rwy 1L
REIL Rwy 1R, 7L,
13, 25R, 25L and 31
HIRL Rwy 1L-19R and 7R-25L
MIRL Rwy 1R-19L, 13-31, and 7L-25R

MILWAUKEE/ GENERAL MITCHELL INTL (MKE)




MISSED APPROACH: Climb to 2800 then right turn direct BAE VORTAC and hold.

CLNC DEL
120.8

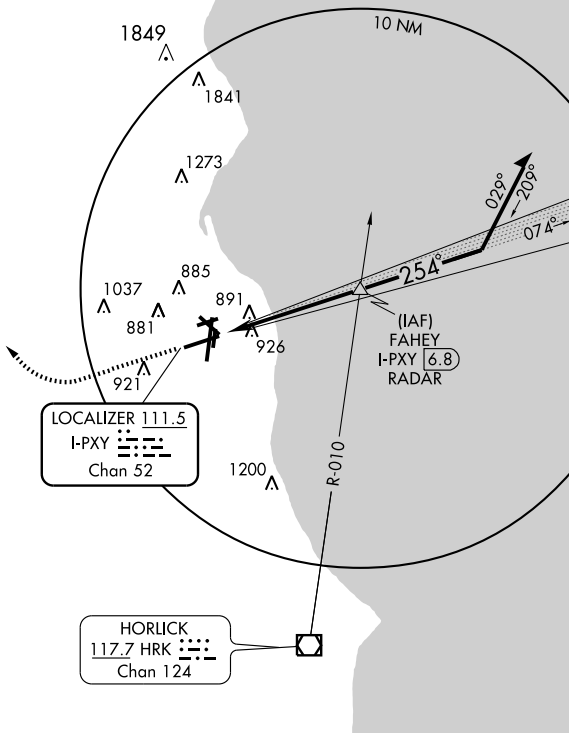

ELEV 723	D
----------	---

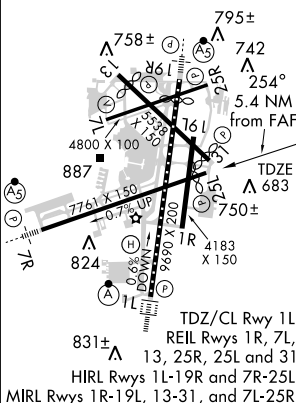

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

MILWAUKEE, WISCONSIN

Amdt 4A 09351


MILWAUKEE/ GENERAL MITCHELL INTL (MKE)

42° 57'N - 87° 54'W

LOC RWY 25L

EC-3, 23 SEP 2010 to 21 OCT 2010

MITCHELL ONE DEPARTURE

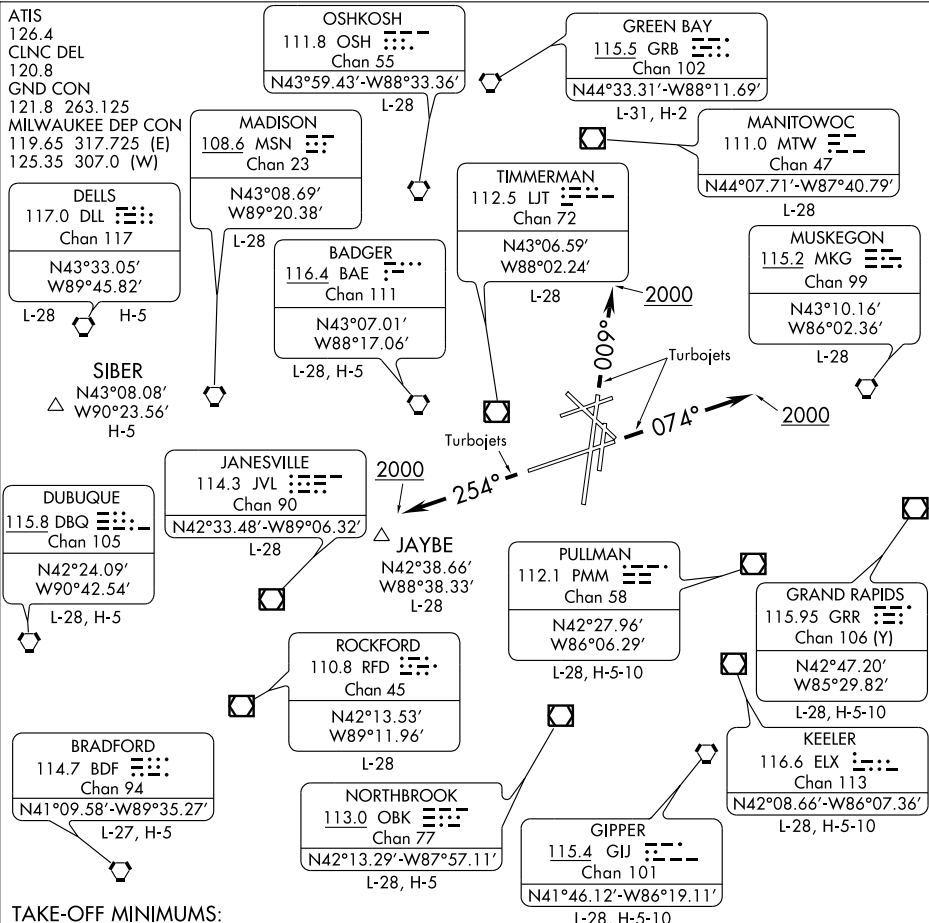MILWAUKEE/ GENERAL MITCHELL INTL (MKE)
MILWAUKEE, WISCONSIN
SL-262 (FAA)


TAKE-OFF MINIMUMS:

Rwy 1R, 1L, 7L, 13, 19R, 25L, STANDARD.

Rwy 7R, 300-1½ or STANDARD with a minimum climb of 300 feet per NM to 1100.

Rwy 31, 300-1½ or STANDARD with a minimum climb of 257 feet per NM to 1000.

SPECIAL INSTRUCTIONS: For all Turboprop aircraft:

TAKE-OFF Runway 1L: Climb heading 009° to 2000, then turn to assigned heading.

TAKE-OFF Runway 7R: Climb heading 074° to 2000, then turn to assigned heading.

TAKE-OFF Runway 19R: Turn to assigned heading.

TAKE-OFF Runway 25L: Climb heading 254° to 2000, then turn to assigned heading.

NOTE: RADAR Required.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

All aircraft expect radar vectors to join filed/assigned route. Maintain 5000' or assigned lower altitude. Expect clearance to requested altitude/flight level ten minutes after departure.

MITCHELL ONE DEPARTURE

MILWAUKEE/ GENERAL MITCHELL INTL (MKE)
SL-262 (FAA) MILWAUKEE, WISCONSINTAKE-OFF OBSTACLES:

- RWY 1R, Antenna, 581' from DER, 600' left of centerline, 46' AGL/719' MSL. Trees beginning 3210' from DER, 462' right of centerline, up to 100' AGL/795' MSL.
- RWY 1L, Fence, beginning 148' from DER, 391' left of centerline, up to 4' AGL/679' MSL. Vehicle on road, 459' from DER, 577' left of centerline, 17' AGL/696' MSL. Pole, 575' from DER, 593' left of centerline, 6' AGL/689' MSL. Pole, 1859' from DER, 912' right of centerline, 18' AGL/734' MSL. Antenna, 1928' from DER, 1' right of centerline, 15' AGL/727' MSL. Pole 2291' from DER, 937' right of centerline, 28' AGL/750' MSL. Tower, 2284' from DER, 463' right of centerline, 17' AGL/739' MSL. Pole, 2393' from DER, 683' right of centerline, 14' AGL/ 736' MSL. Trees, beginning 2492' from DER, 971' left of centerline, up to 54' AGL/ 780' MSL. Trees, beginning 2816' from DER, 154' right of centerline, up to 100' AGL/799' MSL.
- RWY 7R, Multiple poles beginning 457' from DER, 456' right of centerline, up to 36' AGL/ 709' MSL. Train on track, 566' from DER, 12' right of centerline, to 23' AGL/734' MSL. Multiple poles beginning 801' from DER, 199' left of centerline, up to 38' AGL/711' MSL. Trees, beginning 1211' from DER, 186' right of centerline, up to 100' AGL/779' MSL. Tree, 2192' from DER, 456' left of centerline, 66' AGL/742' MSL. Stack, 1.1 NM from DER, 2171' right of centerline, 210' AGL/926' MSL. Stack, 1.2 NM from DER, 1164' left of centerline, 180' AGL/891' MSL.
- RWY 7L, Hanger, 319' from DER, 456' right of centerline, 13' AGL/696' MSL. Tree, 730' from DER, 675' left of centerline, 100' AGL/779' MSL. Pole, 1727' from DER, 194' left of centerline, 55' AGL/751' MSL. Tower, 1864' from DER, 48' left of centerline, 30' AGL/742' MSL.
- RWY 13, Multiple light poles beginning 379' from DER, 156' left of centerline, up to 36' AGL/709' MSL. Multiple light poles beginning 858' from DER, 144' right of centerline, up to 36' AGL/709' MSL. Train on track, 556' from DER, 405' left of centerline, 23' AGL/734' MSL. Multiple trees beginning 1222' from DER, 206' left of centerline, up to 100' AGL/779' MSL. Multiple trees beginning 1067' from DER, 406' right of centerline, up to 100' AGL/770' MSL.
- RWY 19L, Tree, 1785' from DER, 863' left of centerline, 100' AGL/779' MSL. Rod on glide slope antenna, 1837' from DER, 559' right of centerline, 63' AGL/749' MSL.
- RWY 19R, Tree, 778' from DER, 647' right of centerline, 100' AGL/809' MSL. Vehicle on road, 398' from DER, 588' left of centerline, 17' AGL/726' MSL.
- RWY 25L, Tree, 1072' from DER, 757' left of centerline, 100' AGL/829' MSL. Tower, 3330' from DER, 1222' right of centerline, 57' AGL/812' MSL.
- RWY 25R, Flag Pole, 603' from DER, 336' left of centerline, 36' AGL/709' MSL. Hangar, 625' from DER, 363' right of centerline, 26' AGL/ 702' MSL. Tree, 855' from DER, 401' right of centerline, 100' AGL/779' MSL. Tree, 1297' from DER, 187' left of centerline, 30' AGL/716' MSL. Pole, 1605' from DER, 301' right of centerline, 47' AGL/720' MSL.
- RWY 31, Fence, 197' from DER, 244' right of centerline, 7' AGL/681' MSL. Sign, 219' from DER, 449' right of centerline, 50' AGL/730' MSL. Multiple light poles beginning 265' from DER, 69' right of centerline, up to 30' AGL/706' MSL. Multiple light poles beginning 687' from DER, 112' left of centerline, up to 30' AGL/703' MSL. Hangar, 438' from DER, 564' left of centerline, 50' AGL/722' MSL. Pole, 1351' from DER, 340' right of centerline, 46' AGL/735' MSL. Multiple trees beginning 1504' from DER, 258' right of centerline, up to 100' AGL/775' MSL. Multiple trees beginning 1122' from DER, 391' left of centerline, up to 100' AGL/768' MSL. Tank, 1.1 NM from DER, 742' right of centerline, 165' AGL/885' MSL. Pole, 2629' from DER, 344' right of centerline, 165' AGL/758' MSL.

MITCHELL ONE DEPARTURE

(MITCH1.MITCH) 09183

MILWAUKEE, WISCONSIN
MILWAUKEE/ GENERAL MITCHELL INTL (MKE)

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

WAAS CH 62816 W01A	APP CRS 009°	Rwy Idg TDZE 704 Apt Elev 723
--	------------------------	---

RNAV (GPS) RWY 1L

MILWAUKEE/GENERAL MITCHELL INTL (MKE)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. For inoperative ALSF-2, increase LNAV Cat D visibility to RVR 6000.

ALSF-2




MISSED APPROACH: Climb to 2900 direct HOVEP then left turn via track 277° to BAE VORTAC and hold.

ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 119.1 325.8	GND CON 121.8 263.125	CLNC DEL 120.8
----------------------	---	---------------------------------------	---------------------------------	--------------------------

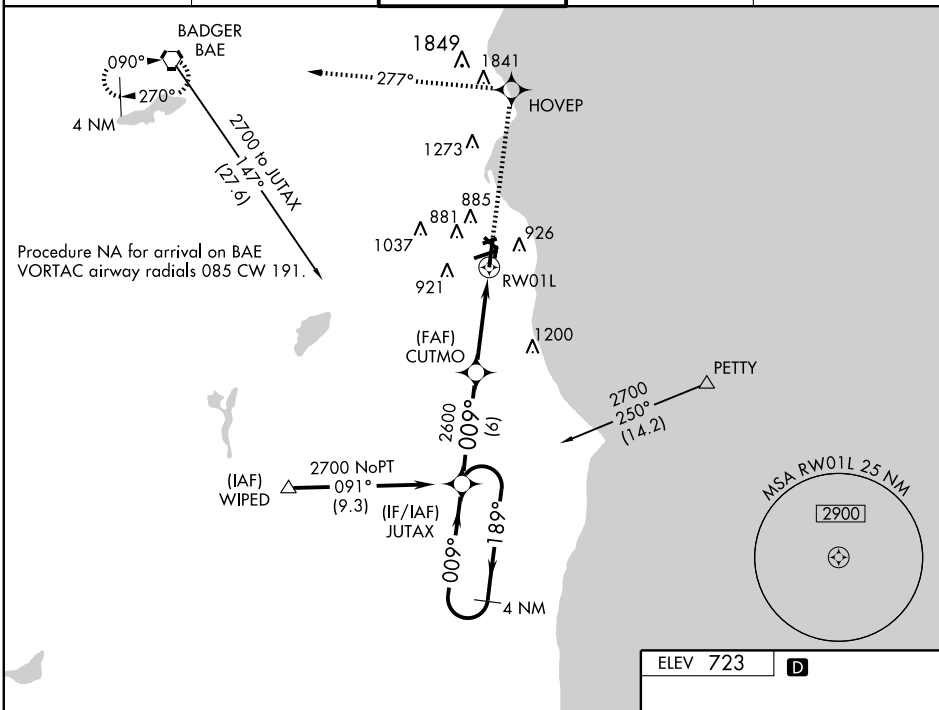

4 NM Holding Pattern VGSI and RNAV glidepath not coincident. JUTAX 2700 ← 189° 009° → GS 3.00° TCH 57 CUTMO 2600 RW01L *1 NM to RW01L *LNAV only 6 NM 4.7 NM 1 NM				
CATEGORY	A	B	C	D
LPV DA	904/24 200 (200-½)			
LNAV/VNAV DA	1101/40 397 (400-¾)			
LNAV MDA	1100/24 396 (400-½)		1100/50 396 (400-1)	
CIRCLING	1240-1 517 (600-1)	1240-1½ 517 (600-1½)		1280-2 557 (600-2)

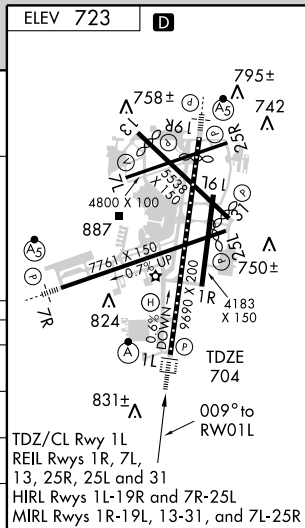

APP CRS **074°**
Rwy Idg **4800**
TDZE **672**
Apt Elev **723**

RNAV (GPS) RWY 7L

MILWAUKEE/GENERAL MITCHELL INTL (MKE)




NA


GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2900 direct
FETIX WP and hold.


ATIS	MILWAUKEE APP CON	MILWAUKEE TOWER	GND CON	CLNC DEL
126.4	126.5 307.0	119.1 325.8	121.8 263.125	120.8

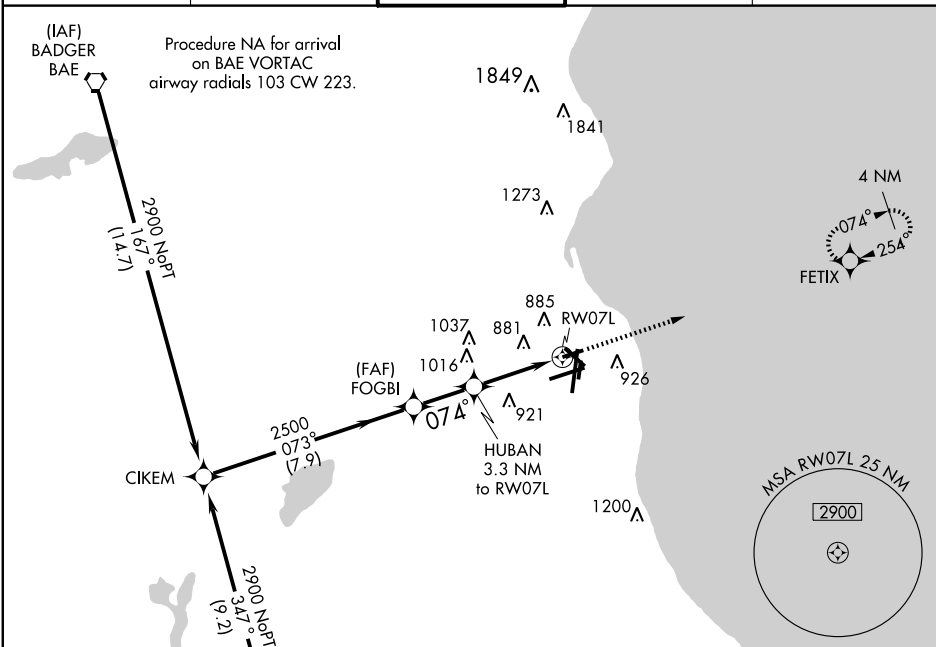

Procedure NA for arrival at WIPED on V191 southbound.

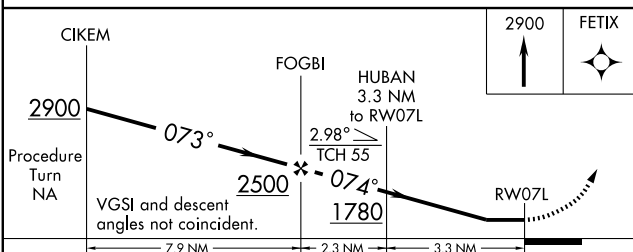

CATEGORY	A	B	C	D
LNAV MDA	1140-1 468 (500-1)	1140-1 468 (500-1)	1140-1 468 (500-1)	1140-1 468 (500-1)
CIRCLING	1240-1 517 (600-1)	1240-1 517 (600-1)	1240-1 517 (600-1)	1240-1 517 (600-1)

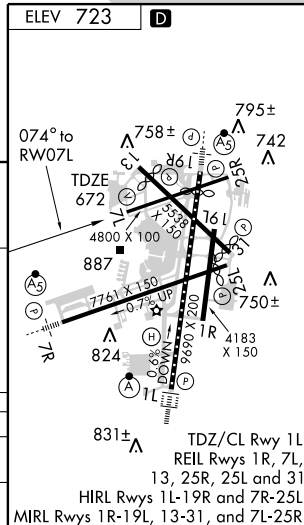

APP CRS	Rwy Idg	7761
074°	TDZE	723
	Apt Elev	723

RNAV (GPS) RWY 7R

MILWAUKEE/ GENERAL MITCHELL INTL (MKE)

T
A NA

Baro-VNAV NA below -16° C (4° F).
GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

MALSR




MISSED APPROACH: Climb to 2900 direct CUXEB WP then left turn via 314° track to DICAY WP then via 279° track to BAE VORTAC and hold.

ATIS
126.4

MILWAUKEE APP CON
126.5 307.0

MILWAUKEE TOWER
119.1 325.8

GND CON
121.8 263.125

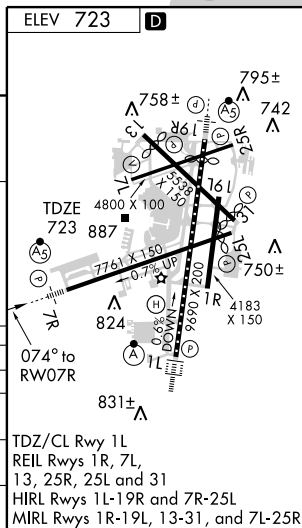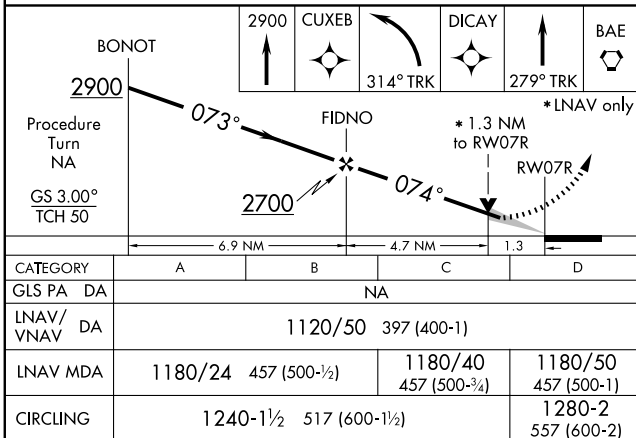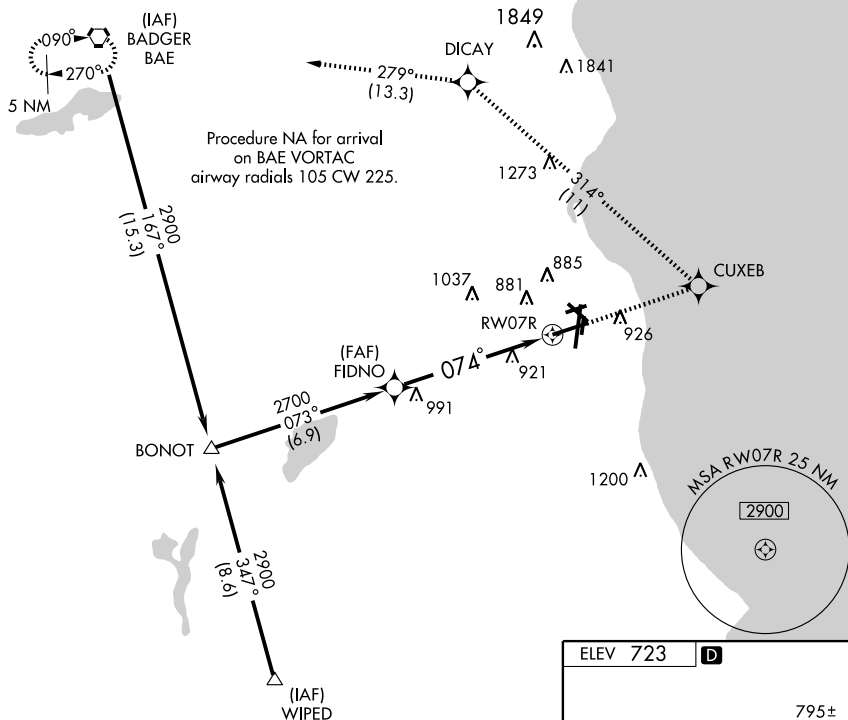CLNC DEL
120.8

MILWAUKEE, WISCONSIN
Orig 09351

MILWAUKEE/ GENERAL MITCHELL INTL (MKE)

42° 57' N-87° 54' W

RNAV (GPS) RWY 7R

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

APP CRS **189°**
Rwy Idg **4183**
TDZE **674**
Apt Elev **723**

RNAV (GPS) RWY 19L

MILWAUKEE/GENERAL MITCHELL INTL (MKE)



GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2800 direct DUYEY WP then right turn via 309° track to GAPYE WP then via 324° track to BAE VORTAC and hold.

ATIS
126.4



MILWAUKEE APP CON
126.5 307.0

MILWAUKEE TOWER
119.1 325.8

GND CON
121.8 263.125


CLNC DEL
120.8

Procedure NA for arrival
on BAE VORTAC
airway radials 022 CW 142.

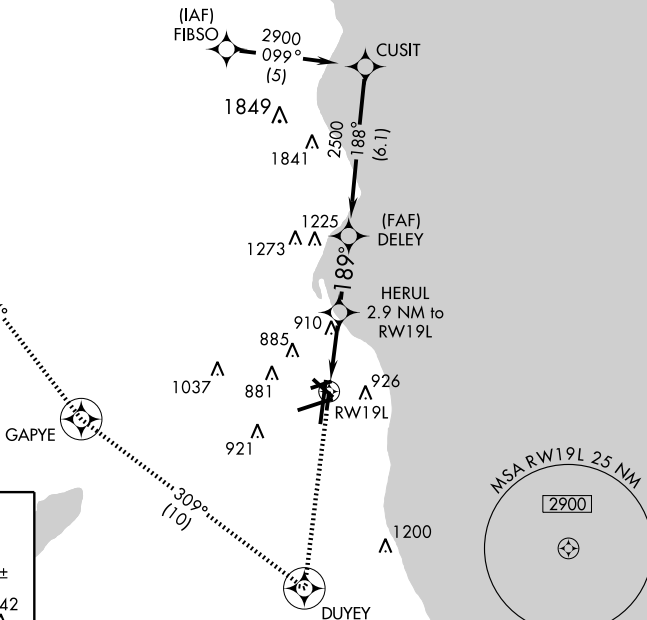

ELEV 723

D

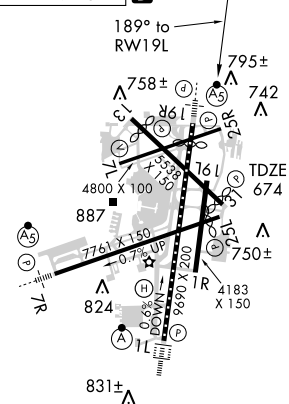

TDZ/CL Rwy 1L
REIL Rwy 1R, 7L,
13, 25R, 25L and 31
HIRL Rwy 1L-19R and 7R-25L
MIRL Rwy 1R-19L, 13-31, and 7L-25R

MILWAUKEE, WISCONSIN
Orig 20266

MILWAUKEE/GENERAL MITCHELL INTL (MKE)

42° 57' N - 87° 54' W

RNAV (GPS) RWY 19L

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

APP CRS **254°**
Rwy Idg **7329**
TDZE **683**
Apt Elev **723**

RNAV (GPS) RWY 25L

MILWAUKEE/GENERAL MITCHELL INTL (MKE)



GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2900 direct OMTOE WP
then via 334° track to BAE VORTAC and hold.



ATIS
126.4

MILWAUKEE APP CON
126.5 307.0

MILWAUKEE TOWER
119.1 325.8

GND CON
121.8 263.125

CLNC DEL
120.8



334°
(15.4)

OMTOE

Procedure NA for arrival
at PROOT
on V7 northbound.

(IAF) PROOT

2900
170°
(8.2)

CITKI

2500
254°
(5)


2900
344°
(5)

2900
340°
(5.6)


PETTY

Procedure NA for arrival
at PETTY
on V7 southbound.

ELEV 723

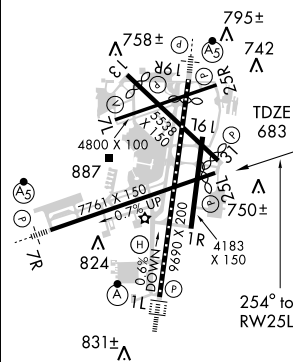

TDZ/CL Rwy 1L
REIL Rws 1R, 7L,
13, 25R, 25L and 31
HIRL Rws 1L-19R and 7R-25L
MIRL Rws 1R-19L, 13-31, and 7L-25R

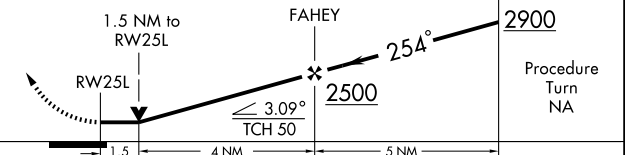

CATEGORY	A	B	C	D
LNAV MDA	1180-1	497 (500-1)	1180-1¼ 497 (500-1¼)	1180-1½ 497 (500-1½)
CIRCLING	1240-1	517 (600-1)	1240-1½ 517 (600-1½)	1280-2 557 (600-2)

MILWAUKEE, WISCONSIN
Orig-A 09351

MILWAUKEE/GENERAL MITCHELL INTL (MKE)

42° 57'N-87° 54'W

RNAV (GPS) RWY 25L

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

APP CRS 254°	Rwy Idg TDZE Apt Elev	4800 674 723
------------------------	-----------------------------	---

RNAV (GPS) RWY 25R

MILWAUKEE/GENERAL MITCHELL INTL (MKE)



GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2900
direct CIKEM WP and hold.



ATIS
126.4

MILWAUKEE APP CON
126.5 307.0

MILWAUKEE TOWER
119.1 325.8

GND CON
121.8 263.125


CLNC DEL
120.8

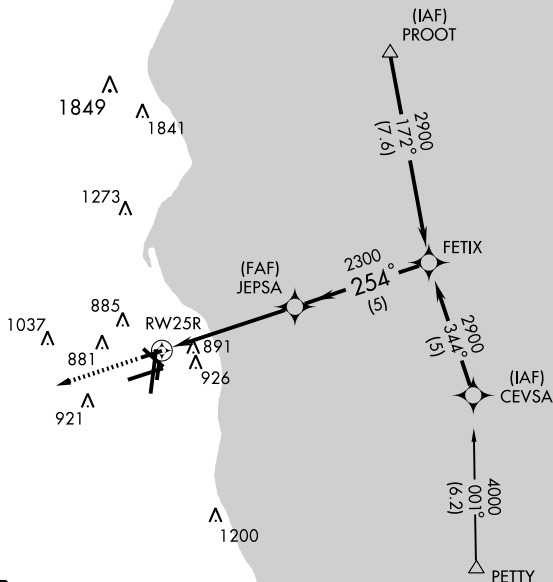

Procedure NA for arrival
at PETTY
on V170 southwest bound.

ELEV 723

D

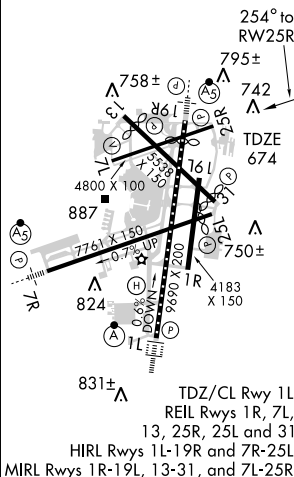

MILWAUKEE, WISCONSIN
Orig-A 09351

	2900	CIKEM	VGSI and descent angles not coincident.		Procedure Turn NA	
			JEPSA		FETIX	
				254°	2900	
				2300		
				≤ 2.98° TCH 45		
				5 NM	5 NM	
CATEGORY	A	B	C	D		
LNAV MDA	1160-1	486 (500-1)	1160-1½ 486 (500-1¼)	1160-1½ 486 (500-1½)		
CIRCLING	1240-1	517 (600-1)	1240-1½ 517 (600-1½)	1280-2 557 (600-2)		


MILWAUKEE/GENERAL MITCHELL INTL (MKE)
42° 57'N - 87° 54'W

RNAV (GPS) RWY 25R


APP CRS 314°	Rwy Idg TDZE Apt Elev	5334 670 723
------------------------	-----------------------------	---

RNAV (GPS) RWY 31

MILWAUKEE/GENERAL MITCHELL INTL (MKE)

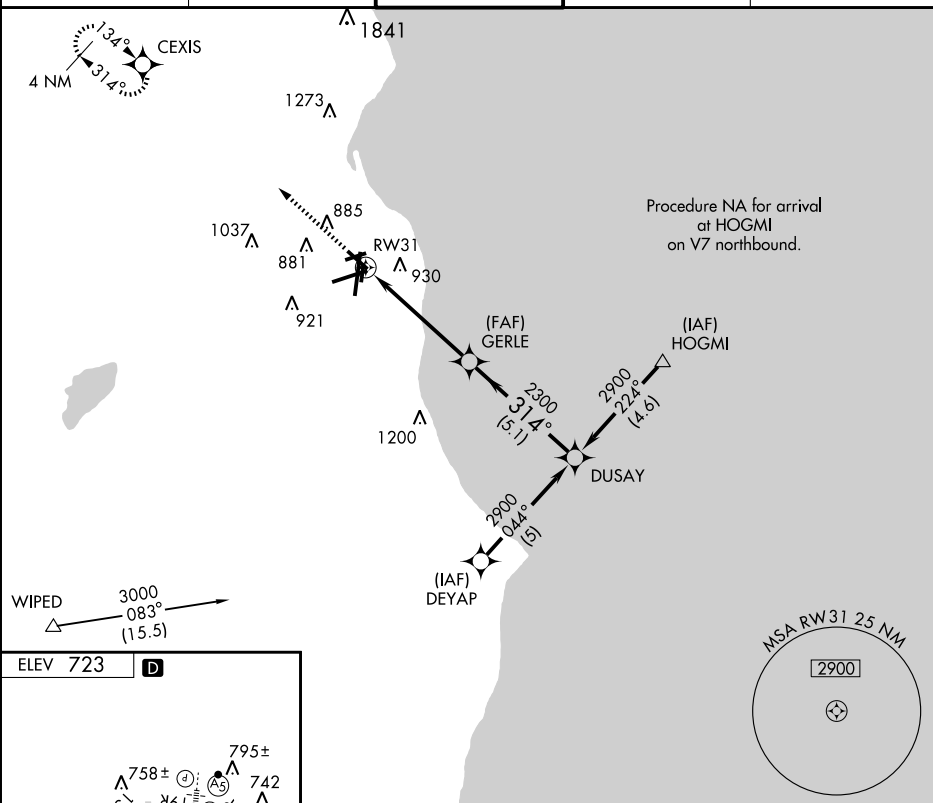
GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.MISSED APPROACH: Climb to 2900
direct CEXIS WP and hold.ATIS
126.4MILWAUKEE APP CON
126.5 307.0MILWAUKEE TOWER
119.1 325.8GND CON
121.8 263.125CLNC DEL
120.8

ELEV 723

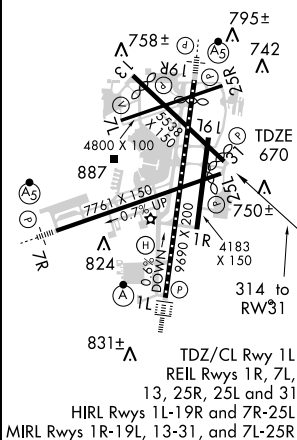MILWAUKEE, WISCONSIN
Orig 09351

MILWAUKEE/GENERAL MITCHELL INTL (MKE)

42° 57'N-87° 54'W

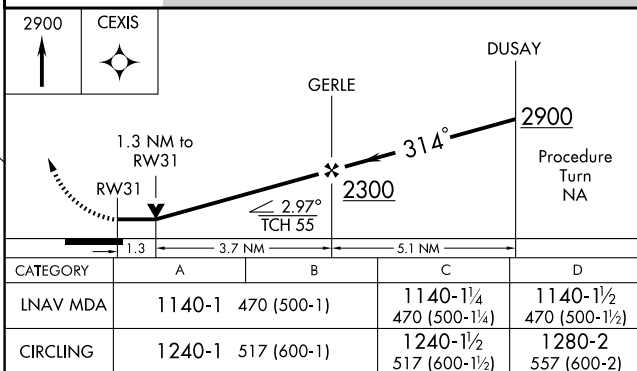RNAV (GPS) RWY 31

APP CRS 189°	Rwy Idg TDZE Apt Elev	8915 672 723
------------------------	-----------------------------	---

RNAV (GPS) Y RWY 19R




MILWAUKEE/GENERAL MITCHELL INTL (MKE)

GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

MALSR




MISSED APPROACH: Climb to 2800 direct FEGAG WP then via 319° track to BAE VORTAC and hold.

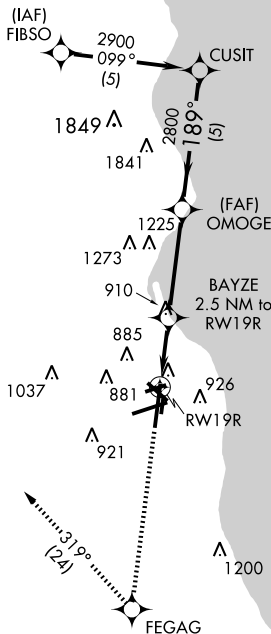ATIS
126.4MILWAUKEE APP CON
126.5 307.0MILWAUKEE TOWER
119.1 325.8GND CON
121.8 263.125CLNC DEL
120.8Procedure NA for arrival
on BAE VORTAC
airway radials 022 CW 142.

ELEV 723

D

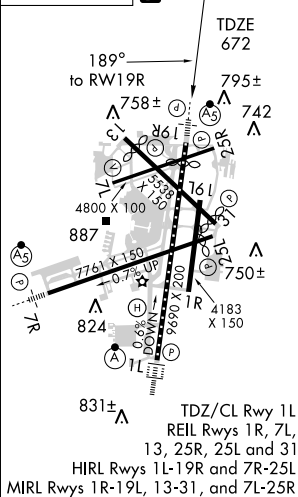MILWAUKEE, WISCONSIN
Orig 09351

MILWAUKEE/GENERAL MITCHELL INTL (MKE)

42° 57'N-87° 54'W

RNAV (GPS) Y RWY 19R

	2800	FEGAG	319° TRK	BAE	CUSIT
				BAYZE 2.5 NM to RW19R	2900
				OMOG	Procedure Turn NA
				1.2 NM to RW19R	
				3.07° TCH 54	
				1.3 NM	
				3.9 NM	
				5 NM	
CATEGORY	A	B	C	D	
LNAV MDA	1120-1/2	448 (400-1/2)	1120-3/4 448 (400-3/4)	1120-1 448 (400-1)	
CIRCLING	1240-1	517 (600-1)	1240-1/2 517 (600-1/2)	1280-2 557 (600-2)	

APP CRS **189°** Rwy Idg **8915**
TDZE **672**
Apt Elev **723**

RNAV (GPS) Z RWY 19R

MILWAUKEE/GENERAL MITCHELL INTL (MKE)



NA

Baro-VNAV NA below -16° C (4°F).
GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

MALSR



MISSED APPROACH: Climb to 2800 direct FEGAG WP then via 319° track to BAE VORTAC and hold.

ATIS
126.4




MILWAUKEE APP CON
126.5 307.0

MILWAUKEE TOWER
119.1 325.8

GND CON
121.8 263.125


CLNC DEL
120.8

Procedure NA for arrival
on BAE VORTAC
airway radials 022 CW 142.

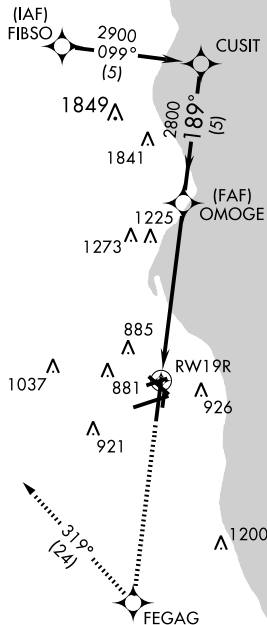

ELEV 723

D

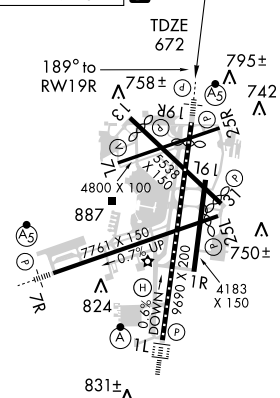

TDZ/CL Rwy 1L
REIL Rws 1R, 7L,
13, 25R, 25L and 31
HIRL Rws 1L-19R and 7R-25L
MIRL Rws 1R-19L, 13-31, and 7L-25R

2800

↑

FEGAG

✧

319° TRK

↑

BAE

⬡

CUSIT

2900

Procedure Turn NA

GS 3.00° TCH 54

* LNAV Only

* 2.6 NM to RW19R

OMOG

189°

2800

VGSI and descent angles not coincident.

RW19R

2.6 NM

3.8 NM


5 NM

CATEGORY	A	B	C	D
GLS PA DA	NA			
LNAV/VNAV DA	1060/40 388 (400-¾)			
LNAV MDA	1560/40 888 (900-¾)	1560-2¼ 888 (900-2¼)	1560-2½ 888 (900-2½)	
CIRCLING	1560-1¼ 837 (900-1¼)	1560-2¾ 837 (900-2¾)	1560-3 837 (900-3)	

TRUDO ONE (FMS) ARRIVAL (TRUDO.TRUDO1)

GENERAL MITCHELL INTL
MILWAUKEE, WISCONSIN

EC-3, 23 SEP 2010 to 21 OCT 2010

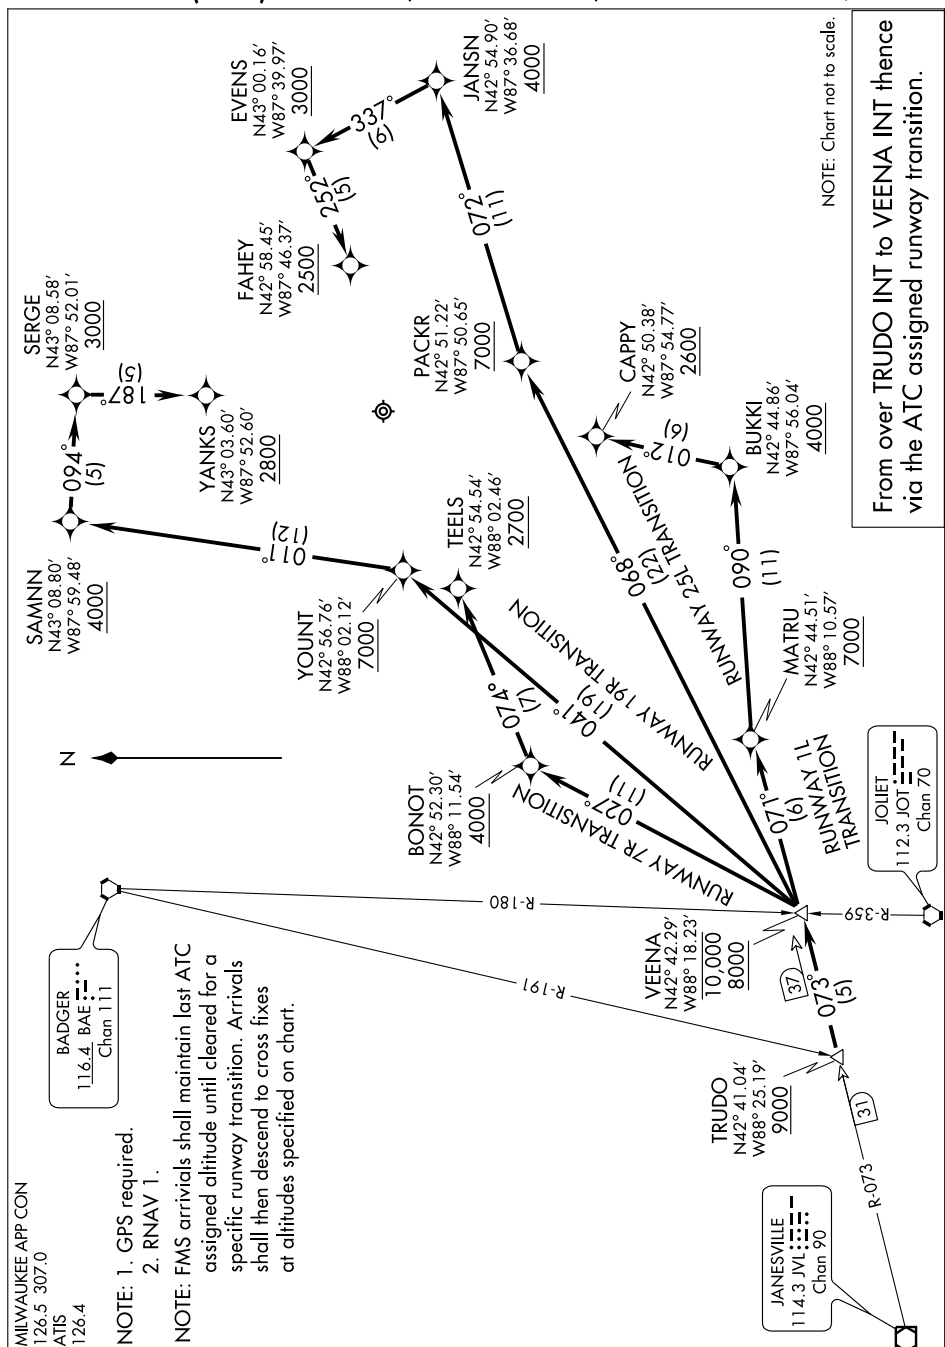

TRUDO ONE (FMS) ARRIVAL (TRUDO.TRUDO1)

MILWAUKEE, WISCONSIN
GENERAL MITCHELL INTL

EC-3, 23 SEP 2010 to 21 OCT 2010

VEENA TWO ARRIVAL (VEENA.VEENA2)


MILWAUKEE, WISCONSIN

MILWAUKEE APP CON
126.5 307.0
GENERAL MITCHELL ATIS
126.4
TIMMERMAN ATIS
128.3
WAUKEGAN ATIS
132.4
KENOSHA ATIS
127.175
WAUKESHA ATIS
118.875

BADGER
116.4 BAE
Chan 111

JANESVILLE
114.3 JVL
Chan 90
N42° 33.48' - W89° 06.32'
L-28

JOLIET
112.3 JOT
Chan 70
N41° 32.79' - W88° 19.10'
L-28, H-5

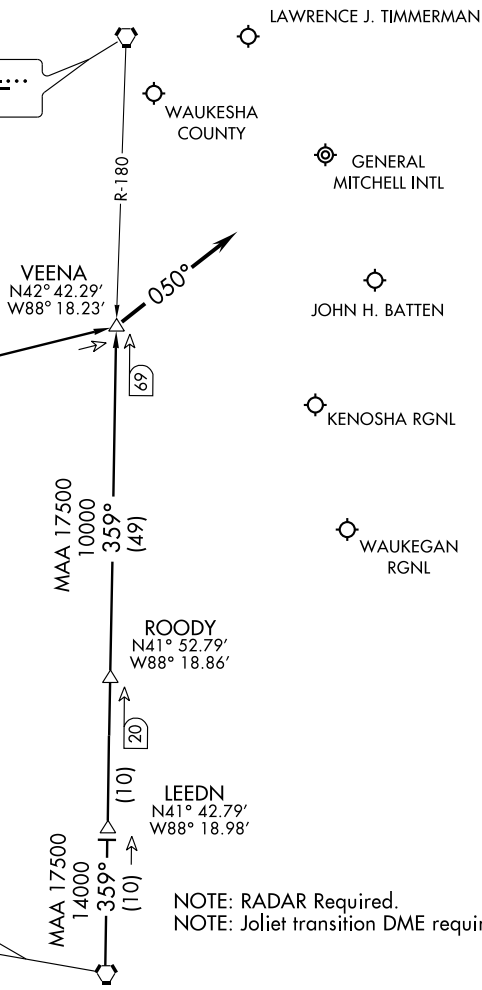

NOTE: Chart not to scale.

JANESVILLE TRANSITION (JVL.VEENA2): From over JVL VOR/DME via JVL R-073 to VEENA INT. Thence . . .

JOLIET TRANSITION (JOT.VEENA2): From over JOT VORTAC via JOT R-359 to VEENA INT. Thence . . .

. . . Depart VEENA INT heading 050° for initial vector to final approach.


LOST COMMUNICATIONS: From VEENA INT proceed direct IAF for destination airport.

AIRPORT DIAGRAM

AL-5077 (FAA)

MILWAUKEE/LAWRENCE J. TIMMERMAN(MWC)
MILWAUKEE, WISCONSIN

ATIS
128.3
TIMMERMAN TOWER★
120.5
GND CON
121.7
CLNC DEL
121.7 (When Tower Closed)

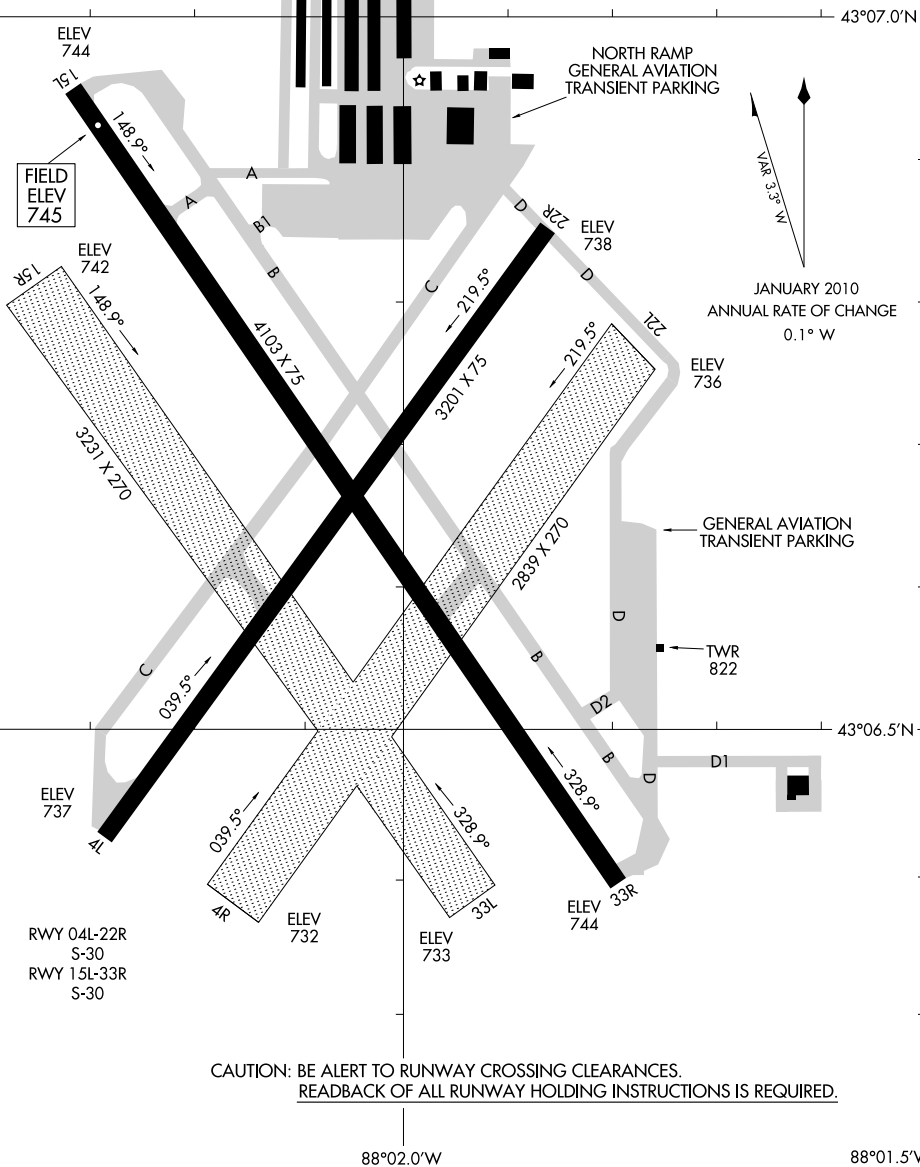

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

AIRPORT DIAGRAM

MILWAUKEE, WISCONSIN
MILWAUKEE/LAWRENCE J. TIMMERMAN(MWC)

CONTINUED FROM PRECEDING PAGE

COMM/NAV/WEATHER REMARKS: APP/DEP CON: (A) West of 01L–19R extended LOC course of active rwy and north of Rwy 07R–25L extended course of active rwy. (B) East of Rwy 01L–19R extended LOC course of active rwy and south of Rwy 07R–25L extended course of active rwy.

LAWRENCE J. TIMMERMAN (MWC) 5 NW UTC–6(–5DT) N43°06.62' W88°02.07'

CHICAGO

745 B S4 FUEL 100, JET A OX 1, 2 TPA–1745(1000) NOTAM FILE MWC

L–28H, A

RWY 15L–33R: H4103X75 (ASPH) S–30 MIRL

IAP, AD

RWY 15L: REIL. VASI(V4L)—GA 3.0° TCH 41'. Tree.

RWY 33R: VASI(V4L)—GA 3.0° TCH 26'. Tree.

RWY 15R–33L: 3231X270 (TURF)

RWY 15R: Tree. RWY 33L: Tree.

RWY 04L–22R: H3201X75 (ASPH) S–30 MIRL

RWY 04L: REIL. VASI(V4L)—GA 4.0° TCH 44'. Tree.

RWY 22R: REIL. VASI(V4L)—GA 3.0° TCH 36'. Tree.

RWY 04R–22L: 2839X270 (TURF)

RWY 04R: Tree. RWY 22L: Trees.

AIRPORT REMARKS: Attended May–Sep 1300–0400Z†, Oct–Apr 1300–0300Z†. Birds on and in/ovf arpt. Turf Rwy 04R–22L, Rwy 15R–33L and all turf twys clsd 15 Oct–1 May. When twr clsd, ACTIVATE MIRL Rwy 04L–22R, VASI and REIL Rwy 04L and 22R, MIRL Rwy 15L–33R, VASI Rwy 15L and 33R, and REIL Rwy 15L—CTAF.

WEATHER DATA SOURCES: AWOS–3 (414) 461–2954. LAWRS.

COMMUNICATIONS: CTAF 120.5 ATIS 128.3 UNICOM 122.95

TIMMERMAN RCO 123.6R 112.5T (GREEN BAY RADIO)

Ⓡ MILWAUKEE APP/DEP CON 125.35


TIMMERMAN TOWER 120.5 (1300–0300Z†) GND CON 121.7 CLNC DEL 121.7 (when Twr clsd)

AIRSPACE: CLASS D svc 1300–0300Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE MWC.

TIMMERMAN (L) VOR/DME 112.5 LJT Chan 72 N43°06.59' W88°02.24' at fld. 737/2W.

ILS 108.5 I–MWC Rwy 15L. LOC only. Unmonitored when twr clsd.

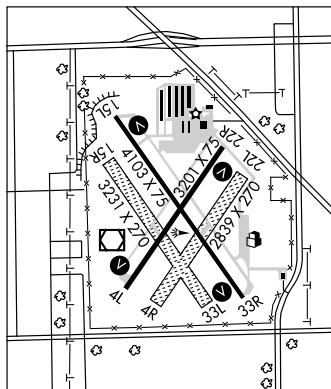

MINDI N44°00.24' W91°15.65' NOTAM FILE LSE.

CHICAGO

NDB (LOM) 272 LS 177° 7.5 NM to La Crosse Muni.

MINERAL POINT N42°53.28' W90°13.59' NOTAM FILE MRJ.

CHICAGO

NDB (MHW) 365 MRJ at Iowa Co.

L–28G

MINERAL POINT

IOWA CO (MRJ) 3 NW UTC–6(–5DT) N42°53.21' W90°14.17'

CHICAGO

1171 B S4 FUEL 100LL, JET A OX 4 NOTAM FILE MRJ

H–5D, L–28G

RWY 11–29: H5000X75 (ASPH) MIRL 0.7% up SE

IAP

RWY 11: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 29: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 04–22: H3601X60 (ASPH) S–12.5 MIRL

RWY 04: PAPI(P2L)—GA 3.0° TCH 31'. Road.

RWY 22: PAPI(P2L)—GA 3.0° TCH 31'.

AIRPORT REMARKS: Attended Mon–Fri 1400–2300Z†, Sat 1400–1800Z†, Sun on call. For attendant call 608–553–7571 or 608–341–8455. Fuel avbl 24 hour self service. Call pager 608–376–4464 or self service. For service information call 608–987–9931/608–574–2294. Birds on and in/ovf of arpt. Be alert: Acft taxiing on Rwy 04–22 and 11–29. For noise abatement preferred no wind rwy is Rwy 29. Rwy 22 VASI OTS indef. MIRL Rwy 11–29 preset on low ints, to increase ints and ACTIVATE MIRL Rwy 04–22, PAPI Rwy 04, Rwy 22, Rwy 11 and Rwy 29, REIL Rwy 11 and Rwy 29—CTAF.

WEATHER DATA SOURCES: AWOS–3 118.525 (608) 987–2157.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ CHICAGO CENTER APP/DEP CON 133.95


GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE LNR.

LONE ROCK (L) VOR/DME 112.8 LNR Chan 75 N43°17.66' W90°07.99' 191° 24.9 NM to fld. 1184/OE.

HIWAS.

MINERAL POINT NDB (MHW) 365 MRJ N42°53.28' W90°13.59' at fld. NOTAM FILE MRJ.

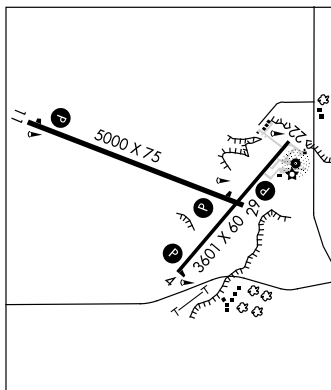

LOC I-MWC
108.5

APP CRS
148°

Rwy Idg
TDZE **745**
Apt Elev **745**

LOC RWY 15L

MILWAUKEE/LAWRENCE J. TIMMERMAN (MWC)

When control tower closed, obtain local altimeter setting on UNICOM;
when not received, use Milwaukee General Mitchell Intl altimeter
setting and increase all MDAs 20' and Cat C visibility ½ mile.

MISSED APPROACH: Climb to 3000 then
right turn direct BAE VORTAC and hold.

ATIS
128.3



MILWAUKEE APP CON
125.35 307.0

TIMMERMAN TOWER ★
120.5 (CTAF) 0


MILWAUKEE CLNC DEL
121.7
(when tower closed)

GND CON
121.7

UNICOM
122.95

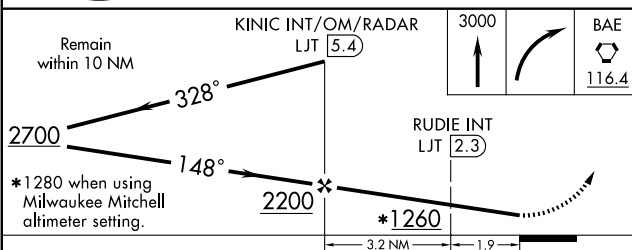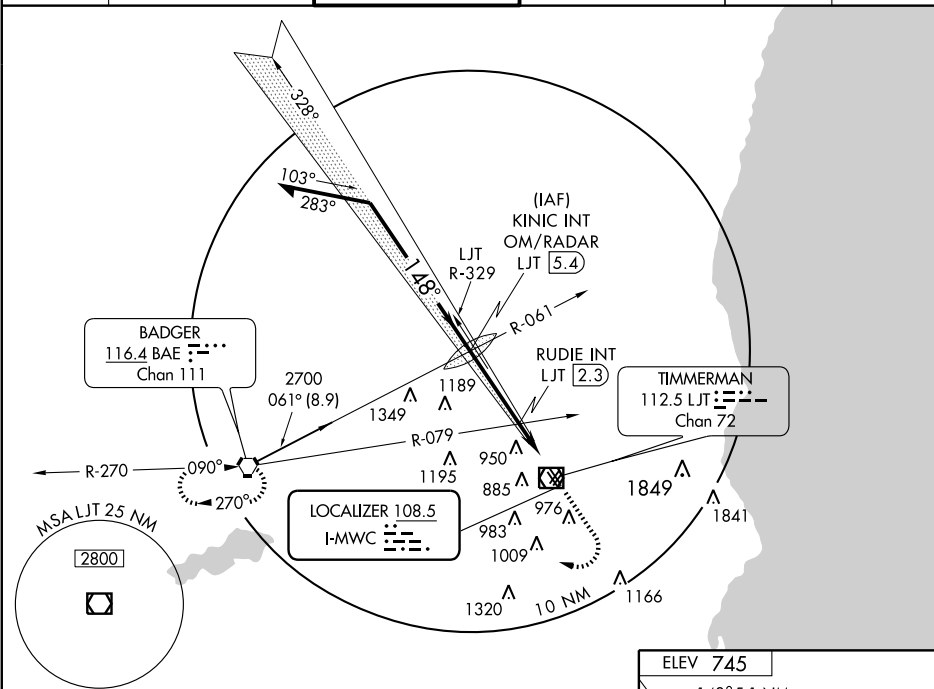

CATEGORY	A	B	C	D
S-15L	1260-1	515 (600-1)	1260-1½ 515 (600-1½)	1260-1¾ 515 (600-1¾)
CIRCLING	1260-1 515 (600-1)	1340-1 595 (600-1)	1340-1½ 595 (600-1½)	1340-2 595 (600-2)
RUDIE INT MINIMUMS				
S-15L	1120-1	375 (400-1)	1120-1¼ 375 (400-1¼)	
CIRCLING	1200-1 455 (500-1)	1340-1 595 (600-1)	1340-1½ 595 (600-1½)	1340-2 595 (600-2)

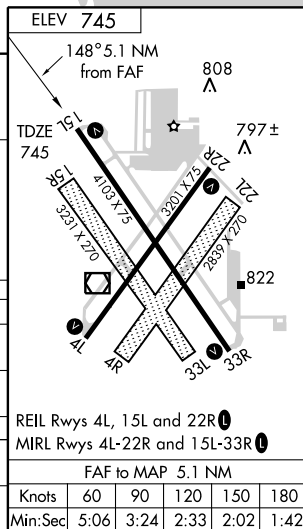

REIL Rwy 4L, 15L and 22R
MIRL Rwy 4L-22R and 15L-33R

FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

VEENA TWO ARRIVAL (VEENA.VEENA2)

MILWAUKEE, WISCONSIN

MILWAUKEE APP CON
126.5 307.0
GENERAL MITCHELL ATIS
126.4
TIMMERMAN ATIS
128.3
WAUKEGAN ATIS
132.4
KENOSHA ATIS
127.175
WAUKESHA ATIS
118.875

BADGER
116.4 BAE
Chan 111

JANESVILLE
114.3 JVL
Chan 90
N42° 33.48' - W89° 06.32'
L-28

JOLIET
112.3 JOT
Chan 70
N41° 32.79' - W88° 19.10'
L-28, H-5

VEENA
N42° 42.29'
W88° 18.23'

WAUKESHA
COUNTY

LAWRENCE J. TIMMERMAN

GENERAL
MITCHELL INTL

JOHN H. BATTEN

KENOSHA RGNL

WAUKEGAN
RGNL

ROODY
N41° 52.79'
W88° 18.86'

LEEDN
N41° 42.79'
W88° 18.98'

NOTE: RADAR Required.
NOTE: Joliet transition DME required.

NOTE: Chart not to scale.

JANESVILLE TRANSITION (JVL.VEENA2): From over JVL VOR/DME via JVL R-073 to VEENA INT. Thence . . .

JOLIET TRANSITION (JOT.VEENA2): From over JOT VORTAC via JOT R-359 to VEENA INT. Thence . . .

. . . Depart VEENA INT heading 050° for initial vector to final approach.

LOST COMMUNICATIONS: From VEENA INT proceed direct IAF for destination airport.

VEENA TWO ARRIVAL (VEENA.VEENA2)

MILWAUKEE, WISCONSIN

VOR/DME LJT 112.5 Chan 72	APP CRS 040°	Rwy Idg TDZE 739 Apt Elev 745
---	------------------------	---

VOR or GPS RWY 4L

MILWAUKEE/ LAWRENCE J. TIMMERMAN (MWC)

▼ When tower closed, use Milwaukee General Mitchell
▲ Intl altimeter setting.

MISSED APPROACH: Climb to 3000 then left turn direct BAE
VORTAC and hold.

ATIS
128.3



MILWAUKEE APP CON
125.35 307.0

TIMMERMAN TOWER ★
120.5 (CTAF) **0**


MILWAUKEE CLNC DEL
121.7
(when tower closed)

GND CON
121.7

UNICOM
122.95

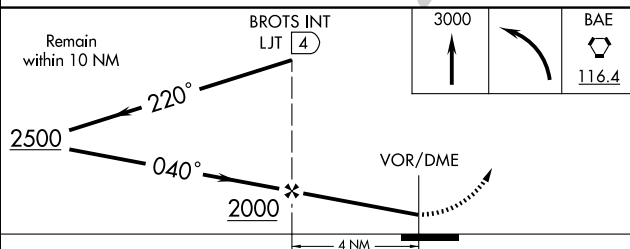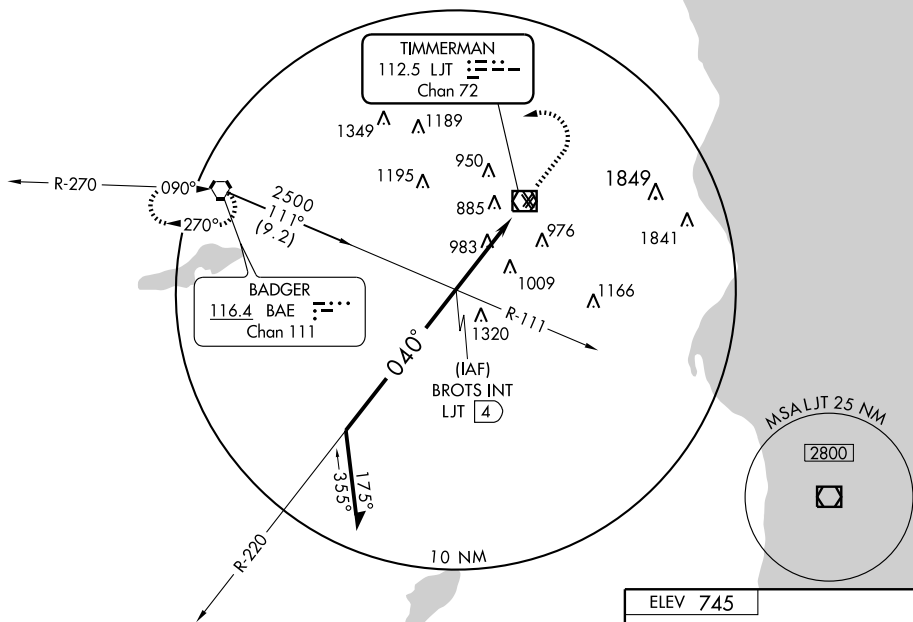

CATEGORY	A	B	C	D
S-4L	1300-1	561 (600-1)	1300-1½ 561 (600-1½)	1300-1¾ 561 (600-1¾)
CIRCLING	1300-1 555 (600-1)	1340-1 595 (600-1)	1340-1½ 595 (600-1½)	1340-2 595 (600-2)
MILWAUKEE MITCHELL ALTIMETER SETTING MINIMUMS				
S-4L	1320-1	581 (600-1)	1320-1½ 581 (600-1½)	1320-1¾ 581 (600-1¾)
CIRCLING	1320-1 575 (600-1)	1380-1 635 (700-1)	1380-1¾ 635 (700-1¾)	1380-2 635 (700-2)

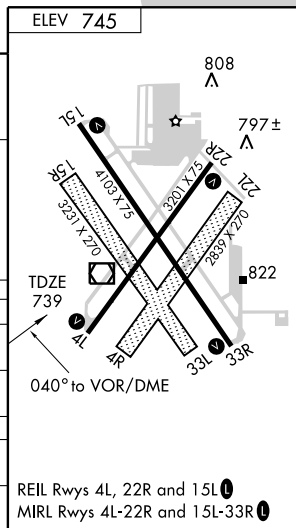

VOR/DME LJT	APP CRS	Rwy Idg	4103
Chan 72	158°	TDZE	745
		Apt Elev	745

VOR or GPS RWY 15L

MILWAUKEE/LAWRENCE J. TIMMERMAN (MWC)

When tower closed, use Milwaukee General Mitchell
Intl altimeter setting.

MISSED APPROACH: Climb to 2000 then climbing right
turn to 3000 direct BAE VORTAC and hold.

ATIS
128.3





MILWAUKEE APP CON
125.35 307.0

TIMMERMAN TOWER ★
120.5 (CTAF) 0

MILWAUKEE CLNC DEL
121.7
(when tower closed)

GND CON
121.7

UNICOM
122.95

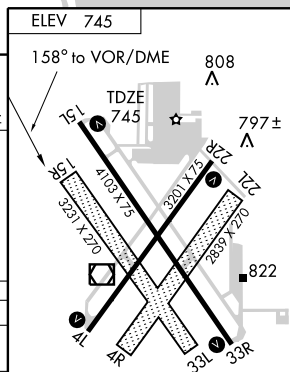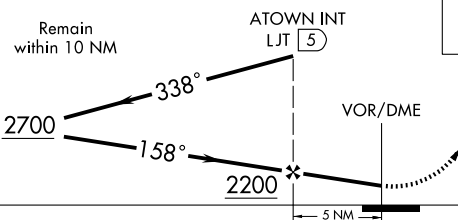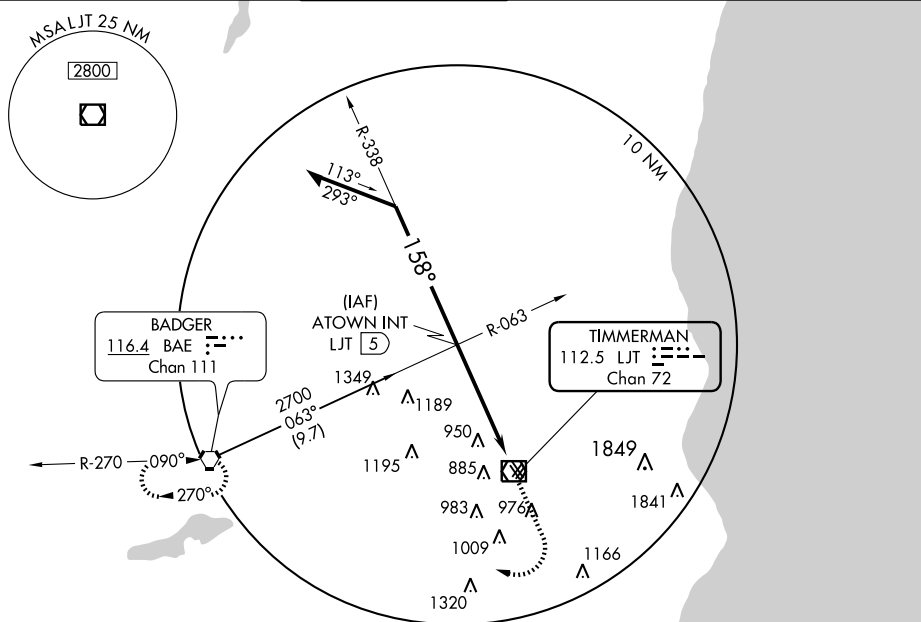

CATEGORY	A	B	C	D
S-15L	1260-1	515 (600-1)	1260-1½ 515 (600-1½)	1260-1¾ 515 (600-1¾)
CIRCLING	1300-1 555 (600-1)	1340-1 595 (600-1)	1340-1½ 595 (600-1½)	1340-2 595 (600-2)
MILWAUKEE MITCHELL ALTIMETER SETTING MINIMUMS				
S-15L	1280-1	535 (600-1)	1280-1½ 535 (600-1½)	1280-1¾ 535 (600-1¾)
CIRCLING	1340-1 595 (600-1)	1380-1 635 (700-1)	1380-1¾ 635 (700-1¾)	1380-2 635 (700-2)

MIRL Rwy 4L-22R and 15L-33R 0
REIL Rwy 4L, 15L and 22R 0

CONTINUED FROM PRECEDING PAGE

COMM/NAV/WEATHER REMARKS: APP/DEP CON: (A) West of 01L–19R extended LOC course of active rwy and north of Rwy 07R–25L extended course of active rwy. (B) East of Rwy 01L–19R extended LOC course of active rwy and south of Rwy 07R–25L extended course of active rwy.

LAWRENCE J. TIMMERMAN (MWC) 5 NW UTC–6(–5DT) N43°06.62' W88°02.07'

CHICAGO

745 B S4 FUEL 100, JET A OX 1, 2 TPA–1745(1000) NOTAM FILE MWC

L–28H, A

RWY 15L–33R: H4103X75 (ASPH) S–30 MIRL

IAP, AD

RWY 15L: REIL. VASI(V4L)—GA 3.0° TCH 41'. Tree.

RWY 33R: VASI(V4L)—GA 3.0° TCH 26'. Tree.

RWY 15R–33L: 3231X270 (TURF)

RWY 15R: Tree. RWY 33L: Tree.

RWY 04L–22R: H3201X75 (ASPH) S–30 MIRL

RWY 04L: REIL. VASI(V4L)—GA 4.0° TCH 44'. Tree.

RWY 22R: REIL. VASI(V4L)—GA 3.0° TCH 36'. Tree.

RWY 04R–22L: 2839X270 (TURF)

RWY 04R: Tree. RWY 22L: Trees.

AIRPORT REMARKS: Attended May–Sep 1300–0400Z†, Oct–Apr 1300–0300Z†. Birds on and in/ovf arpt. Turf Rwy 04R–22L, Rwy 15R–33L and all turf twys clsd 15 Oct–1 May. When twr clsd, ACTIVATE MIRL Rwy 04L–22R, VASI and REIL Rwy 04L and 22R, MIRL Rwy 15L–33R, VASI Rwy 15L and 33R, and REIL Rwy 15L—CTAF.

WEATHER DATA SOURCES: AWOS–3 (414) 461–2954. LAWRS.

COMMUNICATIONS: CTAF 120.5 ATIS 128.3 UNICOM 122.95

TIMMERMAN RCO 123.6R 112.5T (GREEN BAY RADIO)

Ⓡ MILWAUKEE APP/DEP CON 125.35


TIMMERMAN TOWER 120.5 (1300–0300Z†) GND CON 121.7 CLNC DEL 121.7 (when Twr clsd)

AIRSPACE: CLASS D svc 1300–0300Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE MWC.

TIMMERMAN (L) VOR/DME 112.5 LJT Chan 72 N43°06.59' W88°02.24' at fld. 737/2W.

ILS 108.5 I–MWC Rwy 15L. LOC only. Unmonitored when twr clsd.

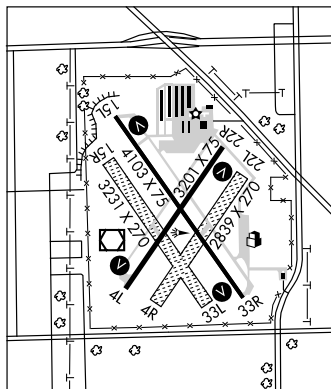

MINDI N44°00.24' W91°15.65' NOTAM FILE LSE.

CHICAGO

NDB (LOM) 272 LS 177° 7.5 NM to La Crosse Muni.

MINERAL POINT N42°53.28' W90°13.59' NOTAM FILE MRJ.

CHICAGO

NDB (MHW) 365 MRJ at Iowa Co.

L–28G

MINERAL POINT

IOWA CO (MRJ) 3 NW UTC–6(–5DT) N42°53.21' W90°14.17'

CHICAGO

1171 B S4 FUEL 100LL, JET A OX 4 NOTAM FILE MRJ

H–5D, L–28G

RWY 11–29: H5000X75 (ASPH) MIRL 0.7% up SE

IAP

RWY 11: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 29: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 04–22: H3601X60 (ASPH) S–12.5 MIRL

RWY 04: PAPI(P2L)—GA 3.0° TCH 31'. Road.

RWY 22: PAPI(P2L)—GA 3.0° TCH 31'.

AIRPORT REMARKS: Attended Mon–Fri 1400–2300Z†, Sat 1400–1800Z†, Sun on call. For attendant call 608–553–7571 or 608–341–8455. Fuel avbl 24 hour self service. Call pager 608–376–4464 or self service. For service information call 608–987–9931/608–574–2294. Birds on and in/ovf of arpt. Be alert: Acft taxiing on Rwy 04–22 and 11–29. For noise abatement preferred no wind rwy is Rwy 29. Rwy 22 VASI OTS indef. MIRL Rwy 11–29 preset on low ints, to increase ints and ACTIVATE MIRL Rwy 04–22, PAPI Rwy 04, Rwy 22, Rwy 11 and Rwy 29, REIL Rwy 11 and Rwy 29—CTAF.

WEATHER DATA SOURCES: AWOS–3 118.525 (608) 987–2157.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ CHICAGO CENTER APP/DEP CON 133.95


GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE LNR.

LONE ROCK (L) VOR/DME 112.8 LNR Chan 75 N43°17.66' W90°07.99' 191° 24.9 NM to fld. 1184/OE.

HIWAS.

MINERAL POINT NDB (MHW) 365 MRJ N42°53.28' W90°13.59' at fld. NOTAM FILE MRJ.

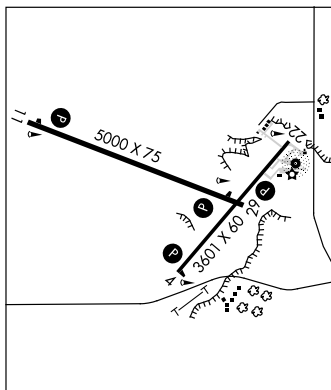


NDB MRJ 365	APP CRS 208°	Rwy Idg TDZE Apt Elev	3601 1171 1171
-----------------------	------------------------	-----------------------------	---

NDB RWY 22

MINERAL POINT/IOWA COUNTY (MRJ)





▲ NA

MISSED APPROACH: Climb to 2300 then climbing right turn to 3000 direct MRJ NDB and hold.

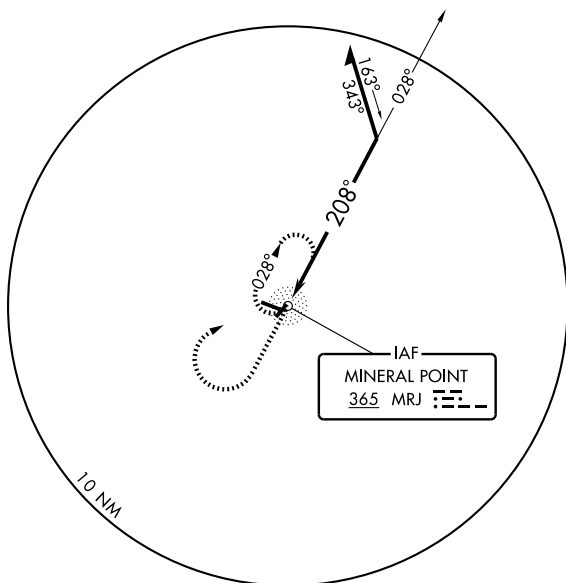AWOS-3
118.525CHICAGO CENTER
133.95 281.4GCO
121.725UNICOM
122.8 (CTAF) 0

3000
267°
(19.4) DALEY

ELEV 1171



CATEGORY	A	B	C	D
S-22	1920-1 749 (800-1)	1920-1¼ 749 (800-1¼)	1920-2¼ 749 (800-2¼)	NA
CIRCLING	1920-1 749 (800-1)	1920-1¼ 749 (800-1¼)	1920-2¼ 749 (800-2¼)	NA

REIL Rwy 11 and 29 0
MIRL Rwy 4-22 and 11-29 0

MINERAL POINT, WISCONSIN
Amdt 5 09295

MINERAL POINT/IOWA COUNTY (MRJ)

42°53'N-90°14'W

NDB RWY 22

APP CRS	Rwy Idg	3601
040°	TDZE	1165
	Apt Elev	1171

RNAV (GPS) RWY 4

MINERAL POINT/IOWA COUNTY (MRJ)

NA

GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.


MISSED APPROACH: Climb to 3500 direct
TEVNE WP and hold.

AWOS-3
118.525


CHICAGO CENTER
133.95 281.4

GCO
121.725


UNICOM
122.8 (CTAF)

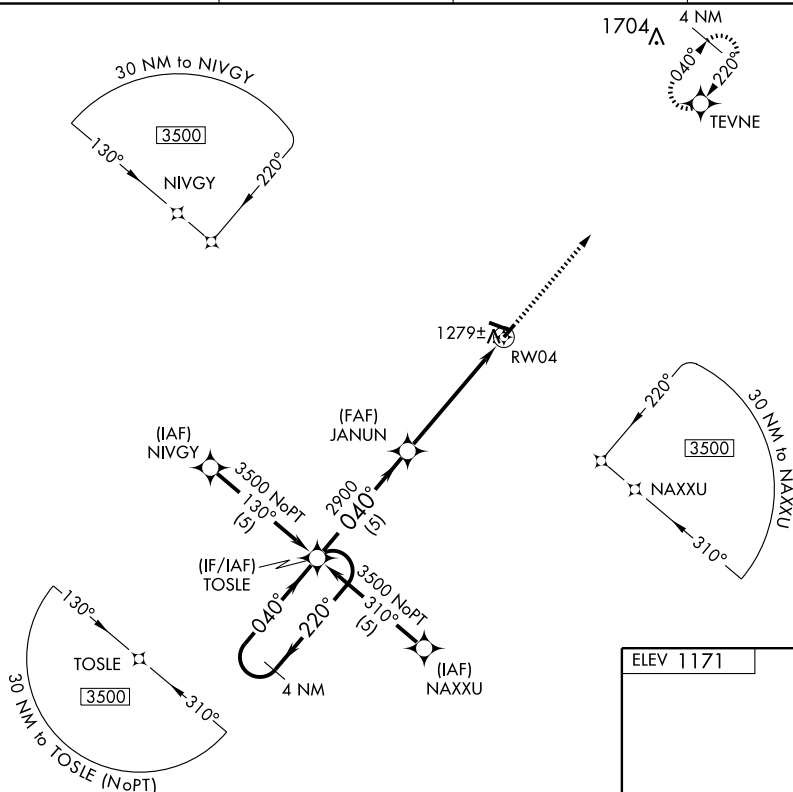

ELEV 1171

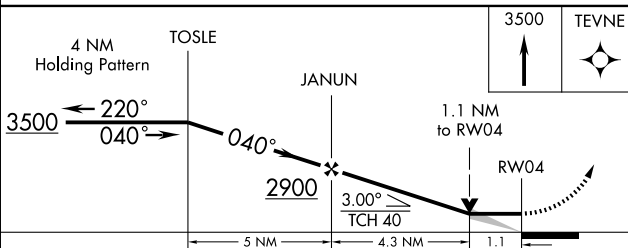

3500
↑
TEVNE



CATEGORY	A	B	C	D
LNNAV MDA	1540-1 375 (400-1)			NA
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1½ 469 (500-1½)	NA

REIL Rwy 11 and 29

MIRL Rwy 4-22 and 11-29

APP CRS	Rwy Idg	5000
111°	TDZE	1153
	Apt Elev	1171

RNAV (GPS) RWY 11

MINERAL POINT/IOWA COUNTY (MRJ)

▲ NA

GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.


MISSED APPROACH: Climb to 3500 direct TIBEE WP and hold.

AWOS-3
118.525


CHICAGO CENTER
133.95 281.4

GCO
121.725


UNICOM
122.8 (CTAF) 0

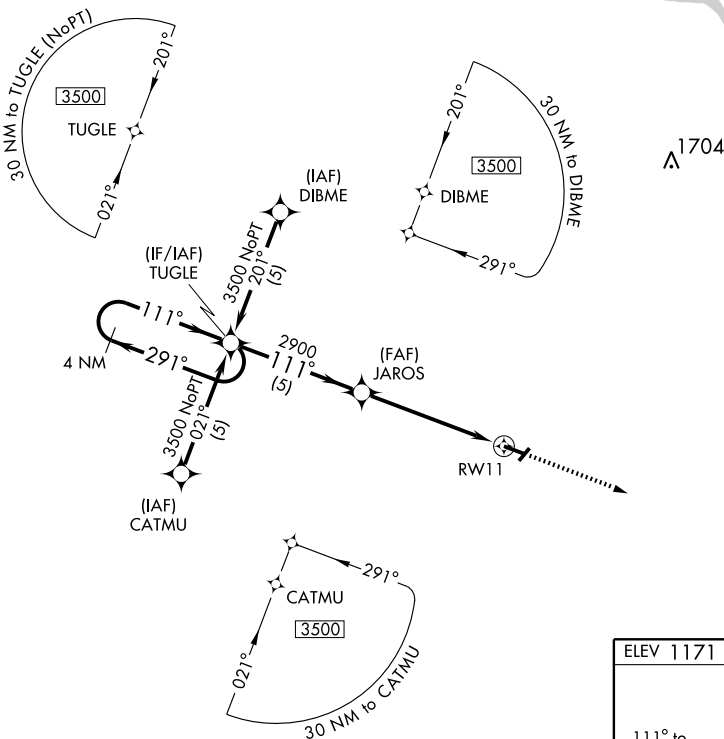

ELEV 1171



4 NM
Holding Pattern

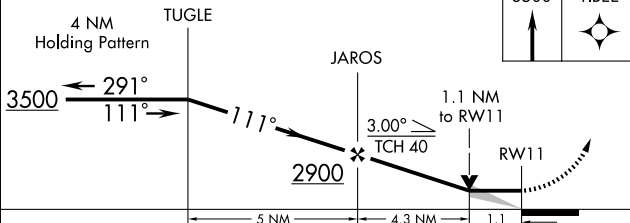

CATEGORY	A	B	C	D
LNNAV MDA	1520-1 367 (400-1)			NA
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1½ 469 (500-1½)	NA

REIL Rwy 11 and 29
MRL Rwy 4-22 and 11-29

APP CRS	Rwy Idg	3601
220°	TDZE	1171
	Apt Elev	1171

RNAV (GPS) RWY 22

MINERAL POINT/ IOWA COUNTY (MRJ)

NA

GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.


MISSED APPROACH: Climb to 3500 direct TOSLE WP and hold.

AWOS-3
118.525




CHICAGO CENTER
133.95 281.4

GCO
121.725

UNICOM
122.8 (CTAF)

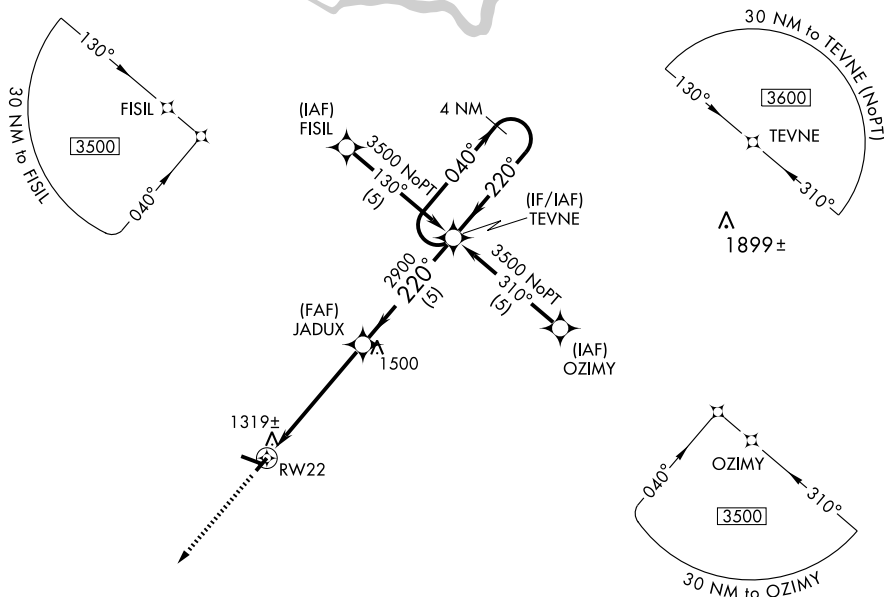

ELEV 1171

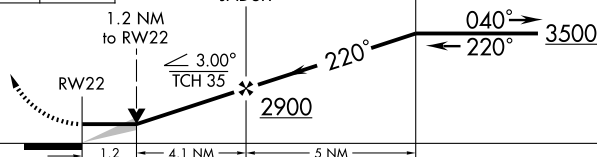

CATEGORY	A	B	C	D
RNAV MDA	1580-1 409 (500-1)	1580-1¼ 409 (500-1¼)	1580-1½ 409 (500-1½)	NA
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1½ 469 (500-1½)	NA

REIL Rwy 11 and 29
MRL Rwy 4-22 and 11-29

APP CRS **291°**
 Rwy Idg **5000**
 TDZE **1163**
 Apt Elev **1171**

RNAV (GPS) RWY 29

MINERAL POINT/ IOWA COUNTY (MRJ)

NA

GPS or RNP-0.3 Required.
 DME/DME RNP-0.3 NA.


MISSED APPROACH: Climb to 3500 direct TUGLE WP and hold.

AWOS-3
118.525



CHICAGO CENTER
133.95 281.4

GCO
121.725

UNICOM
122.8 (CTAF)

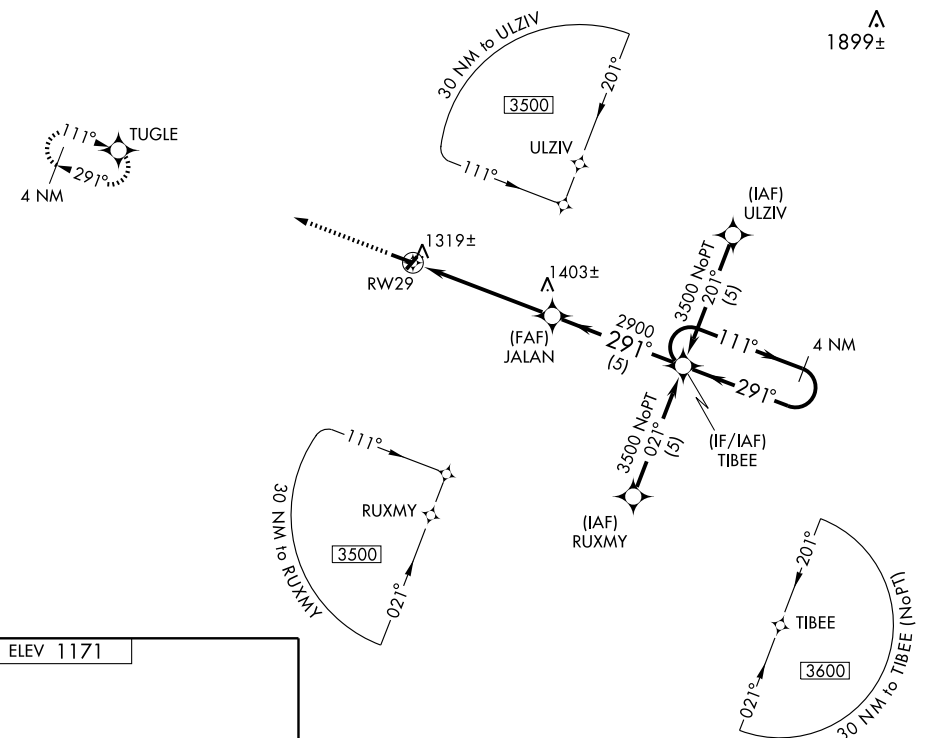

ELEV 1171

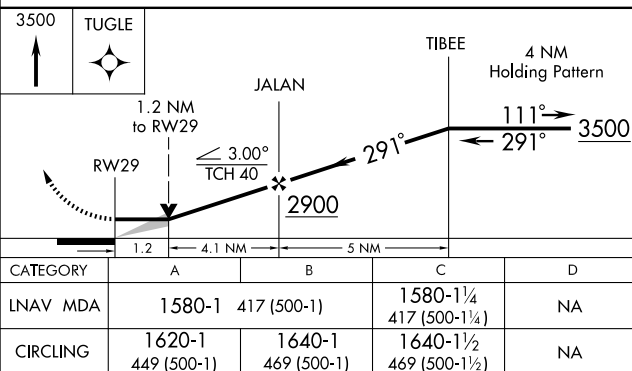

REIL Rwy 11 and 29
 MRL Rwy 4-22 and 11-29

MINERAL POINT, WISCONSIN
 Orig 09295

42° 53' N-90° 14' W

MINERAL POINT/ IOWA COUNTY (MRJ)
RNAV (GPS) RWY 29

MINOCQUA-WOODRUFF**LAKELAND/NOBLE F LEE MEML FLD** (ARV) 3 NW UTC-6(-5DT) N45°55.68' W89°43.86'**GREEN BAY**

1629 B S2 FUEL 100LL, JET A1 + TPA-2629(1000) NOTAM FILE ARV

H-2K, L-14J

RWY 18-36: H5150X100 (ASPH) S-90, D-150 HIRL (NSTD).

IAP

RWY 18: REIL. VASI(V4L)—GA 3.0° TCH 44'.

RWY 36: MALSR. REIL. VASI(V4L)—GA 3.0° TCH 45'. Trees.

RWY 10-28: H3602X75 (ASPH) S-35 MIRL

RWY 10: Trees.

RWY 28: REIL. PAPI(P2L)—GA 3.0° TCH 37'. Trees.

AIRPORT REMARKS: Attended Oct-May 1400-2300Z, Jun-Sep 1300-0000Z. For attendant other hrs call 715-356-3891 or 715-356-2972. Deer on and in/ov arpt. HIRL Rwy 18-36 preset on low ints, to increase ints and ACTIVATE MIRL Rwy 10-28; REIL Rwy 18, Rwy 28 and Rwy 36; VASI Rwy 18; Rwy 36; PAPI Rwy 28 and MALSR Rwy 36—CTAF. Rwy 18-36 NSTD HIRL; NSTD thld lgtls MALS type thld lgt bar in addition to standard lighting.

WEATHER DATA SOURCES: AWOS-3 121.125 (715) 356-2417.**COMMUNICATIONS:** CTAF/UNICOM 122.7

WOODRUFF RCO 122.6 (GREEN BAY RADIO)

⑧ MINNEAPOLIS CENTER APP/DEP CON 133.65

RADIO AIDS TO NAVIGATION: NOTAM FILE RHI.


RHINELANDER (L) VORTAC 109.2 RHI Chan 29 N45°38.03'

W89°27.47' 325° 21.1 NM to fld. 1590/2E. HIWAS.

ARBOR VITAE NDB (MHW) 221 ARV N45°55.57' W89°43.76' at fld. NOTAM FILE ARV.

DOUGY NDB (MHW/LOM) 236 DO N45°50.07' W89°43.83' 001° 5.6 NM to fld. NDB unmonitored.

ILS/DME 111.7 I-DOF Chan 54 Rwy 36. LOM DOUGY NDB. LOC only. LOC/DME unmonitored.

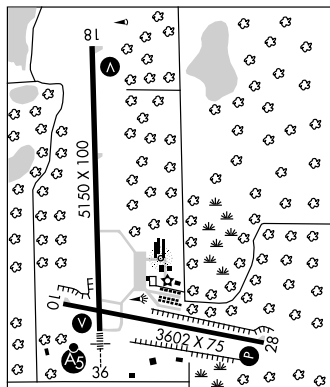**MONAH** N43°03.76' W89°20.75' NOTAM FILE MSN.**CHICAGO**

NDB (MHW/LOM) 400 MS 005° 4.6 NM to Dane Co Rgnl-Truax Fld. Unmonitored
when twr clsd.

L-28H

MONROE MUNI (EFT) 3 NE UTC-6(-5DT) N42°36.89' W89°35.42'**CHICAGO**

1086 B S4 FUEL 100LL, JET A NOTAM FILE EFT

H-5D, L-28G

RWY 12-30: H5000X75 (ASPH-AFSC) S-12.5 MIRL

IAP

RWY 12: REIL. PAPI(P2L)—GA 3.15° TCH 40'. Tree.

RWY 30: REIL. PAPI(P2L)—GA 3.0° TCH 30'. Tree.

RWY 02-20: H3000X75 (ASPH) MIRL 0.9% up N

RWY 02: REIL. PAPI(P2L)—GA 3.0° TCH 25'. Tree.

RWY 20: REIL. Tree.

AIRPORT REMARKS: Attended Apr-Oct 1300-2300Z, Nov-Mar 1400-2200Z. For attendant after hrs call 608-329-7777. Ultralight activity on and in/ov arpt. MIRL Rwy 12-30 ops low ints, to increase ints and ACTIVATE REIL Rwy 12 and 30 and Rwy 02 and 20 and PAPI Rwy 02 and 30 and MIRL Rwy 02-20—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.375 (608) 328-8359.**COMMUNICATIONS:** CTAF/UNICOM 123.05

⑧ ROCKFORD APP/DEP CON 126.0

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE FEP.

JANESVILLE (L) VOR/DME 114.3 JVL Chan 90 N42°33.48' W89°06.32' 276° 21.8 NM to fld. 931/3E.

MOSINEE N44°46.93' W89°39.56'**GREEN BAY**

RCO 122.525 (GREEN BAY RADIO).

H-2K, L-14J

NDB ARV <u>221</u>	APP CRS 291°	Rwy Idg TDZE Apt Elev	3602 1625 1629
------------------------------	------------------------	-----------------------------	---

NDB RWY 28
MINOCQUA-WOODRUFF/LAKELAND/NOBLE F. LEE MEM. FIELD (ARV)


NA When local altimeter setting not received, use Eagle River altimeter setting and increase all MDA 60 feet, increase S-28 Cats C and D and Circling Cat C visibility $\frac{1}{4}$ mile.

MISSED APPROACH: Climb to 3300 then left turn direct ARV NDB and hold.



AWOS-3
121.125

MINNEAPOLIS CENTER
133.65 281.5

GREEN BAY RADIO
122.6

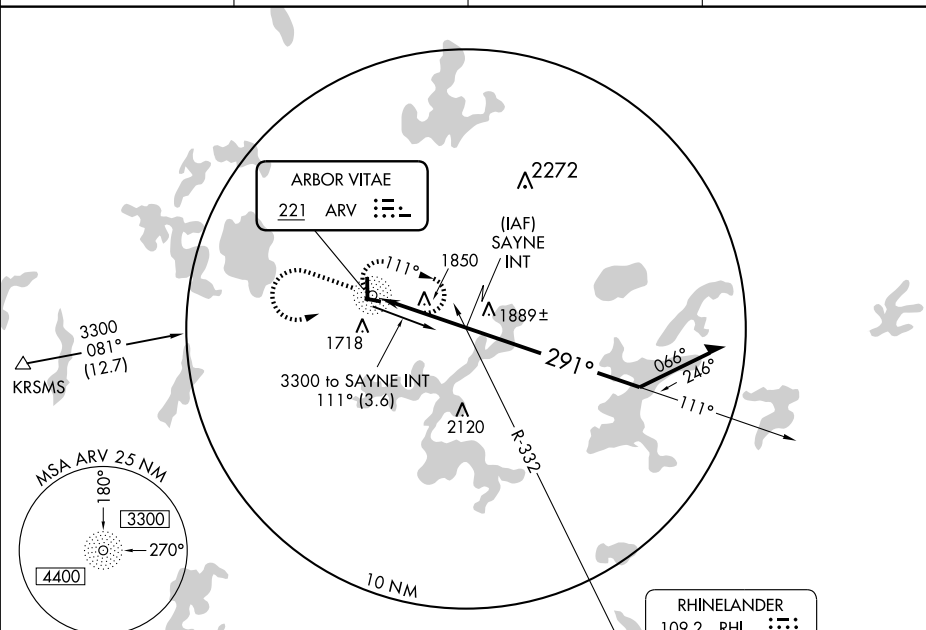UNICOM
122.7 (CTAF) **L**

ELEV 1629	MIRL Rwy 10-28 L
	HIRL Rwy 18-36 L
81	REIL Rwy 18, 28 and 36 L

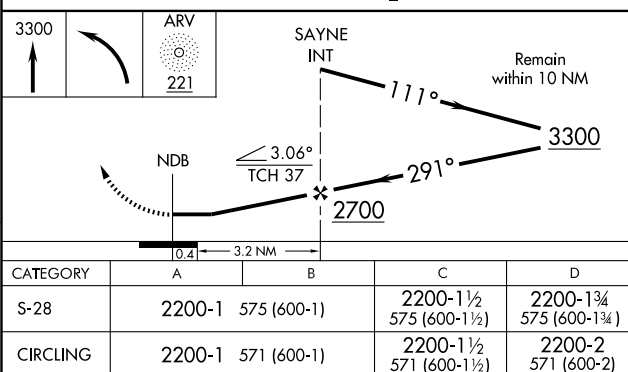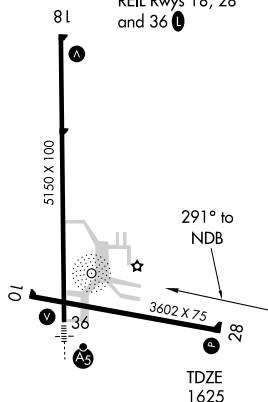

MINOCQUA-WOODRUFF, WISCONSIN
Amdt 12 17DEC09

MINOCQUA-WOODRUFF/LAKELAND/NOBLE F. LEE MEM. FIELD (ARV)
45°56'N-89°44'W NDB PWY 28

NDB RWY 28



EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

WAAS
CH **72915**
W18AAPP CRS
181°Rwy Idg **5150**
TDZE **1629**
Apt Elev **1629**RNAV (GPS) RWY 18
MINOCQUA-WOODRUFF/LAKELAND/NOBLE F. LEE MEM. FIELD (A.R.V.)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Eagle River altimeter setting and increase all DA 47 feet and all MDA 60 feet, increase LNAV Cat D and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Eagle River altimeter setting.

MISSED APPROACH: Climb to 6000 direct CEPMU and right turn via track 283° to KRSMS and hold, continue climb-in-hold to 6000.

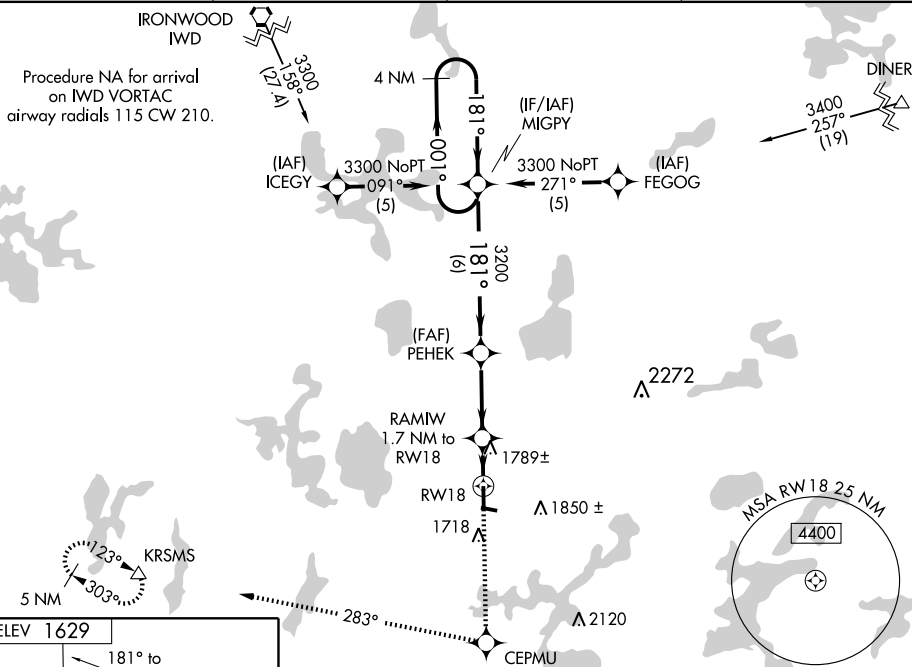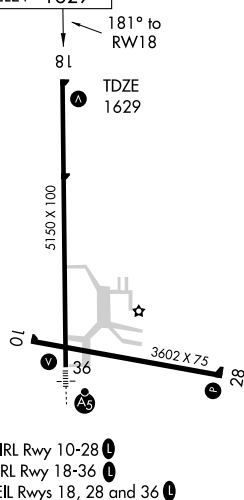

AWOS-3
121.125MINNEAPOLIS CENTER
133.65 281.5GREEN BAY RADIO
122.6UNICOM
122.7 (CTAF) 0ELEV **1629**

MIRL Rwy 10-28 **0**
HIRL Rwy 18-36 **0**
REIL Rwy 18, 28 and 36 **0**

6000 ↑	CEPMU ✦	283° track ↷	KRSMS △				
* LNAV only				4 NM Holding Pattern			
CATEGORY	A		B		C		D
LPV DA	1973-1¼		344 (400-1¼)				
LNAV/ VNAV DA	2100-1¾		471 (500-1¾)				
LNAV MDA	2040-1 411 (500-1)		2040-1¼ 411 (500-1¼)				
CIRCLING	2100-1 471 (500-1)		2200-1½ 571 (600-1½)		2200-2 571 (600-2)		

RNAV (GPS) RWY 28

MISSED APPROACH: Climb to 6000 direct OBUVE and via track 249° to KRSMS and hold.

UNICOM
122.7 (CTAF) 

6000
↑

OBUVE

KRSMS
△

249° track

1.5 NM to RW28

RW28

ANGIW

3200

283°

FAXUV

3300

Procedure Turn NA

3.04° TCH 37

1.5 NM

3.3 NM

6 NM

CATEGORY	A	B	C	D
LNAV MDA	2140-1	515 (600-1)	2140-1½ 515 (600-1½)	2140-1¾ 515 (600-1¾)
CIRCLING	2140-1	511 (600-1)	2200-1½ 571 (600-1½)	2200-2 571 (600-2)

RNAV (GPS) RWY 28


EC-3. 23 SEP 2010 to 21 OCT 2010

WAAS
CH **49115**
W36AAPP CRS
001°Rwy Idg **5150**
TDZE **1627**
Apt Elev **1629**RNAV (GPS) RWY 36
MINOCQUA-WOODRUFF/LAKELAND/NOBLE F. LEE MEM. FIELD (ARV)


▼ Baro-VNAV NA when using Eagle River altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Inoperative table does not apply to LNAV Cats A, B, C. For inoperative MALS, increase LNAV/VNAV all Cats and LNAV Cat D visibility ¼ mile. When local altimeter setting not received, use Eagle River altimeter setting and increase all DA 47 feet and all MDA 60 feet and increase Circling Cat C visibility ¼ mile. Inoperative table does not apply to LNAV Cats A, B when using Eagle River altimeter setting. For inoperative MALS when using Eagle River altimeter setting, increase LNAV Cats C, D, visibility ¼ mile.



MISSED APPROACH:
Climb to 3300 direct
MIGPY and hold.


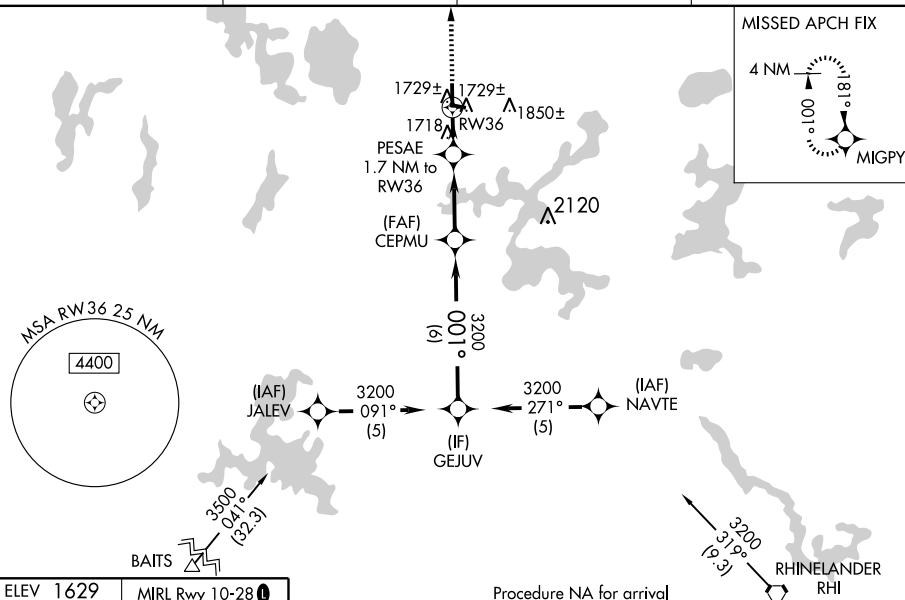
AWOS-3
121.125MINNEAPOLIS CENTER
133.65 281.5GREEN BAY RADIO
122.6UNICOM
122.7 (CTAF)

MISSED APCH FIX



ELEV 1629

MIRL Rwy 10-28
HIRL Rwy 18-36
REIL Rwy 18, 28
and 36

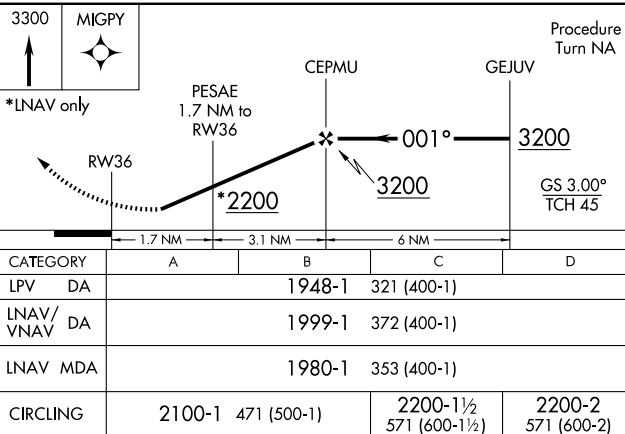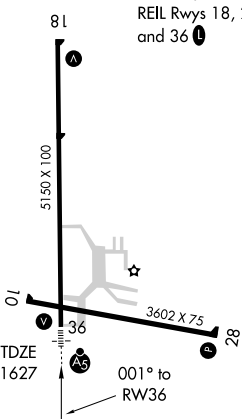


MINOCQUA-WOODRUFF**LAKELAND/NOBLE F LEE MEML FLD** (ARV) 3 NW UTC-6(-5DT) N45°55.68' W89°43.86'**GREEN BAY**

1629 B S2 FUEL 100LL, JET A1 + TPA-2629(1000) NOTAM FILE ARV

H-2K, L-14J**RWY 18-36:** H5150X100 (ASPH) S-90, D-150 HIRL (NSTD).**IAP****RWY 18:** REIL. VASI(V4L)—GA 3.0° TCH 44'.**RWY 36:** MALSR. REIL. VASI(V4L)—GA 3.0° TCH 45'. Trees.**RWY 10-28:** H3602X75 (ASPH) S-35 MIRL**RWY 10:** Trees.**RWY 28:** REIL. PAPI(P2L)—GA 3.0° TCH 37'. Trees.

AIRPORT REMARKS: Attended Oct-May 1400-2300Z, Jun-Sep 1300-0000Z. For attendant other hrs call 715-356-3891 or 715-356-2972. Deer on and in/ov arpt. HIRL Rwy 18-36 preset on low ints, to increase ints and ACTIVATE MIRL Rwy 10-28; REIL Rwy 18, Rwy 28 and Rwy 36; VASI Rwy 18; Rwy 36; PAPI Rwy 28 and MALSR Rwy 36—CTAF. Rwy 18-36 NSTD HIRL; NSTD thld lgtls MALS type thld lgt bar in addition to standard lighting.

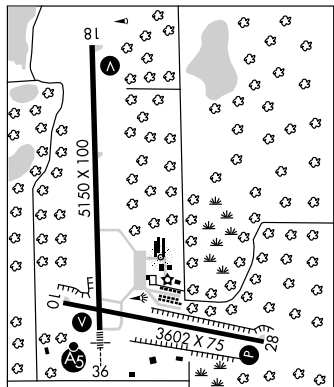WEATHER DATA SOURCES: AWOS-3 121.125 (715) 356-2417.**COMMUNICATIONS:** CTAF/UNICOM 122.7**WOODRUFF RCO 122.6** (GREEN BAY RADIO)**® MINNEAPOLIS CENTER APP/DEP CON 133.65****RADIO AIDS TO NAVIGATION:** NOTAM FILE RHI.**RHINELANDER (L) VORTAC 109.2** RHI Chan 29 N45°38.03'W89°27.47' 325° 21.1 NM to fld. 1590/2E. **HIWAS.****ARBOR VITAE NDB (MHW) 221** ARV N45°55.57' W89°43.76' at fld. NOTAM FILE ARV.**DOUGY NDB (MHW/LOM) 236** DO N45°50.07' W89°43.83' 001° 5.6 NM to fld. NDB unmonitored.**ILS/DME 111.7** I-DOF Chan 54 Rwy 36. LOM DOUGY NDB. LOC only. LOC/DME unmonitored.**MONAH** N43°03.76' W89°20.75' NOTAM FILE MSN.**CHICAGO**

NDB (MHW/LOM) 400 MS 005° 4.6 NM to Dane Co Rgnl-Truax Fld. Unmonitored
when twr clsd.

L-28H**MONROE MUNI** (EFT) 3 NE UTC-6(-5DT) N42°36.89' W89°35.42'**CHICAGO**

1086 B S4 FUEL 100LL, JET A NOTAM FILE EFT

H-5D, L-28G**RWY 12-30:** H5000X75 (ASPH-AFSC) S-12.5 MIRL**IAP****RWY 12:** REIL. PAPI(P2L)—GA 3.15° TCH 40'. Tree.**RWY 30:** REIL. PAPI(P2L)—GA 3.0° TCH 30'. Tree.**RWY 02-20:** H3000X75 (ASPH) MIRL 0.9% up N**RWY 02:** REIL. PAPI(P2L)—GA 3.0° TCH 25'. Tree.**RWY 20:** REIL. Tree.

AIRPORT REMARKS: Attended Apr-Oct 1300-2300Z, Nov-Mar 1400-2200Z. For attendant after hrs call 608-329-7777. Ultralight activity on and in/ov arpt. MIRL Rwy 12-30 ops low ints, to increase ints and ACTIVATE REIL Rwy 12 and 30 and Rwy 02 and 20 and PAPI Rwy 02 and 30 and MIRL Rwy 02-20—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.375 (608) 328-8359.**COMMUNICATIONS:** CTAF/UNICOM 123.05**® ROCKFORD APP/DEP CON 126.0****GCO 121.725** (FLIGHT SERVICES)**RADIO AIDS TO NAVIGATION:** NOTAM FILE FEP.**JANESVILLE (L) VOR/DME 114.3** JVL Chan 90 N42°33.48' W89°06.32' 276° 21.8 NM to fld. 931/3E.**MOSINEE** N44°46.93' W89°39.56'**GREEN BAY****RCO 122.525** (GREEN BAY RADIO).**H-2K, L-14J**

APP CRS	Rwy Idg	5000
121°	TDZE	1086
	Apt Elev	1086

RNAV (GPS) RWY 12

MONROE MUNI (EFT)

⚠ DME/DME RNP-0.3 NA. VDP NA when using Altimeter setting. When local altimeter setting not received, use Altimeter altimeter setting and increase all MDA 100 feet, increase LNAV Cat. C/D and Circling Cat. C visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct FALKN and via 143° track to DAVIS and hold.

AWOS-3
118.375

ROCKFORD APP CON
126.0 327.0

GCO
121.725

UNICOM
123.05 (CTAF) 0

1566

Procedure NA for arrivals at DALEY via V24-171 Northwest bound.

DALEY

3000
167°
(7.4)

(IAF) MARKM

3000
112°
(5)

(IF) ALOOF

3000
031°
(5)

(IAF) NUBUE

(FAF) IGOGY

2700
121°
(6.1)

RW12


1229 ±
1275 ±

FALKN

1513


3000
339°
(9.7)

MADDY



BAULK
3000
100°
(14.7)

ELEV 1086



MIRL Rwy 12-30 and 2-20 **0**
REIL Rwy 12, 30, 2 and 20 **0**

Procedure Turn NA

ALOOF

3000

IGOGY

2700

3000

FALKN

143° TRK

DAVIS

1.1 NM to RW12

RW12

6.1 NM

3.8 NM

1.1

CATEGORY

A

B

C

D

LNAV MDA

1480-1 394 (400-1)

1480-1¼ 394 (400-1¼)

CIRCLING

1540-1 454 (500-1)

1640-1 554 (600-1)

1640-1½ 554 (600-1½)

1640-2 554 (600-2)

APP CRS 301°	Rwy Idg 5000
	TDZE 1070
	Apt Elev 1086

RNAV (GPS) RWY 30

MONROE MUNI (EFT)

⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Altimeter
⚠ altimeter setting and increase all MDA 100 feet, increase LNAV Cat. C/D and Circling
 Cat. C visibility ¼ mile. VDP NA when using Altimeter altimeter setting.


MISSED APPROACH:
 Climbing left turn to 3000
 direct DAVIS and hold.

AWOS-3
118.375


ROCKFORD APP CON
126.0 327.0

GCO
121.725

UNICOM
123.05 (CTAF) 0




2049 **⚠**

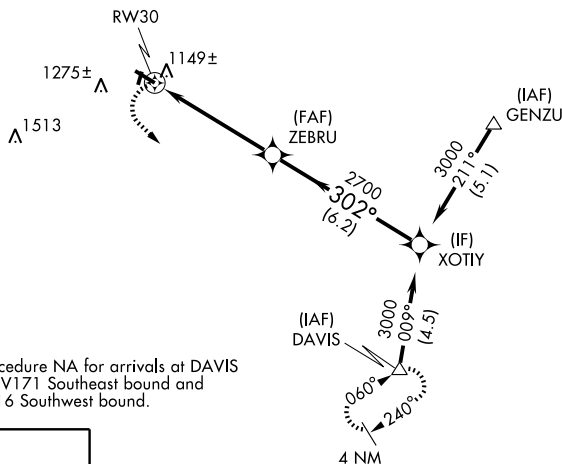

Procedure NA for arrivals at DAVIS
 via V171 Southeast bound and
 V216 Southwest bound.

ELEV 1086



	3000	DAVIS		XOTIY	3000
		⚠			
		1.2 NM to RWY 30		2700	
		301°		302°	
		≤ 3.04°			
		TCH 42			
		1.2	3.8 NM	6.2 NM	
CATEGORY	A	B	C	D	
LNAV MDA	1480-1	410 (400-1)	1480-1¼	410 (400-1¼)	
CIRCLING	1540-1 454 (500-1)	1640-1 554 (600-1)	1640-1½ 554 (600-1½)	1640-2 554 (600-2)	

MIRL Rwy 12-30 and 2-20 **0**
 REIL Rwy 12, 30, 2 and 20 **0**

MONROE, WISCONSIN
 Orig 09127

42°37'N-89°35'W

MONROE MUNI (EFT)
RNAV (GPS) RWY 30

VOR/DME JVL 114.3 Chan 90	APP CRS 276°	Rwy Idg TDZE Apt Elev	5000 1070 1086
---	------------------------	-----------------------------	---

VOR/DME RWY 30

MONROE MUNI (EFT)

▼ When local altimeter setting not received, use
▲ Albers altimeter setting and increase all MDA
100 feet, increase Circling Cat. C visibility ¼ mile.


MISSED APPROACH: Climb to 1800 then climbing
right turn to 2600 via JVL VOR/DME R-276 to
JUPER/JVL 17 DME and hold.

AWOS-3
118.375


ROCKFORD APP CON
126.0 327.0

GCO
121.725

UNICOM
123.05 (CTAF) **0**

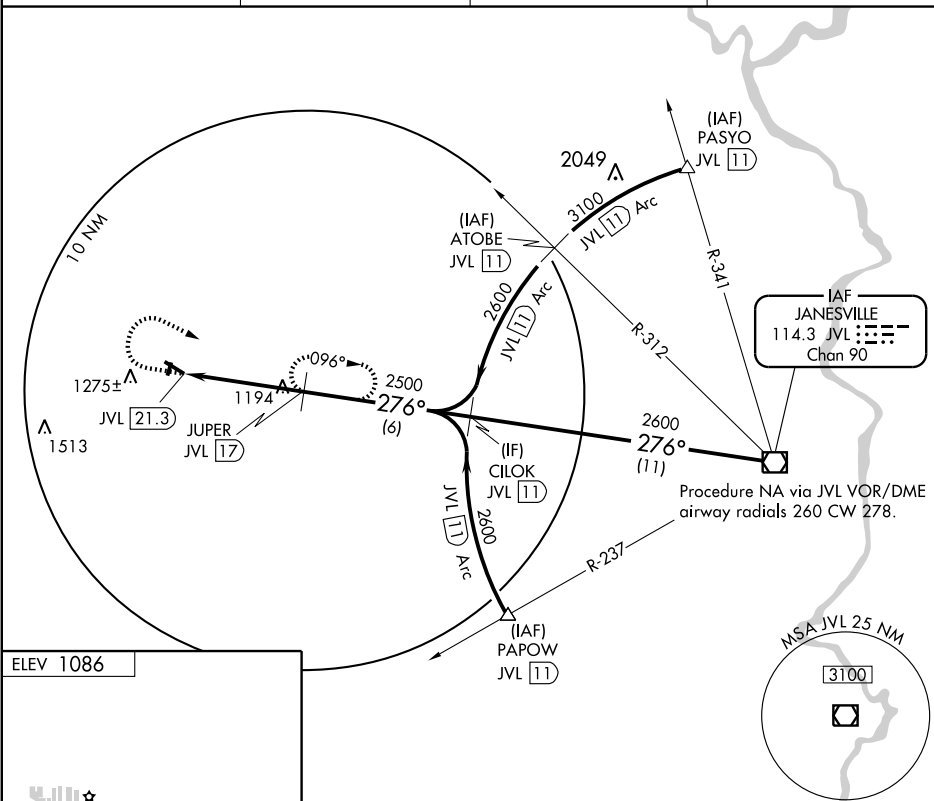

ELEV 1086



MIRL Rwy 12-30 and 2-20 **0**
REIL Rwy 12, 30, 2 and 20 **0**

MONROE, WISCONSIN
Amdt 8 09127

	1800	2600	JUPER JVL 17	JUPER JVL 17	CILOK JVL 11	276°	2700	Procedure Turn NA
	JVL R-276 114.3							
	JVL 21.3	3.04°	TCH 42	2500	2600			
	4.3 NM	6 NM	11 NM					
CATEGORY	A	B	C	D				
S-30	1460-1	1460-1¼	1460-1½	1460-1¾				
	390 (400-1)	390 (400-1¼)	390 (400-1½)	390 (400-1¾)				
CIRCLING	1540-1	1640-1¼	1640-1½	1640-2				
	454 (500-1)	554 (600-1¼)	554 (600-1½)	554 (600-2)				

42°37'N-89°35'W

MONROE MUNI (EFT)
VOR/DME RWY 30

AIRPORT DIAGRAM

AL-5674 (FAA)

MOSINEE/CENTRAL WISCONSIN (CWA)

MOSINEE, WISCONSIN

ATIS
127.45
CWA TOWER*
119.75 360.7
GND CON
121.9 360.7

D

△
1422 ±

VAR 2.3° W

JANUARY 2010
ANNUAL RATE OF CHANGE
0.1° W

HANGARS

CONTROL TOWER

FUEL FARM

TERMINAL

ELEV 1260

FIELD
ELEV 1277

ELEV 1273

6500 X 150

RWY 08-26
S-95, D-160, 2S-175, 2D-270
RWY 17-35
S-75, D-105, 2S-133, 2D-180

CAUTION: BE ALERT TO RUNWAY
CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING
INSTRUCTIONS IS REQUIRED.

ELEV 1225

89° 40' W

89° 39' W

AIRPORT DIAGRAM

MOSINEE, WISCONSIN
MOSINEE/CENTRAL WISCONSIN (CWA)

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

MOSINEE

CENTRAL WISCONSIN (CWA) 3 SE UTC-6(-5DT) N44°46.66' W89°40.01'

GREEN BAY

1277 B S4 FUEL 100LL, JET A OX 1 Class I, ARFF Index A NOTAM FILE CWA

H-2K, L-14J

RWY 08-26: H7647X150 (CONC-GRVD) S-95, D-160, 2S-175, 2D-270 HIRL

IAP, AD

RWY 08: MALSR. RWY 26: REIL. PAPI(P4L)—GA 3.0° TCH 49'.

RWY 17-35: H6500X150 (CONC-GRVD) S-75, D-105, 2S-133, 2D-180 HIRL 0.7% up N

RWY 17: REIL. PAPI(P4L)—GA 3.0° TCH 45'. RWY 35: MALSR.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 26	17-35	7300
RWY 35	08-26	5000

RUNWAY DECLARED DISTANCE INFORMATION

RWY 08: TORA-7647 TODA-7647 ASDA-7647 LDA-7647

RWY 17: TORA-6500 TODA-6500 ASDA-6500 LDA-6500

RWY 26: TORA-7647 TODA-7647 ASDA-7647 LDA-7647

RWY 35: TORA-6500 TODA-6500 ASDA-6500 LDA-6500

AIRPORT REMARKS: Attended 1100-0300Z†. 48 hr PPR for unscheduled air carrier ops with more than 30 passenger seats call arpt manager 715-693-2147. Twy E; north of Twy C is not avbl for air carrier ops over 60000 pounds. When twr closed ACTIVATE MALSR Rwy 08 and Rwy 35—CTAF. ACTIVATE HIRL Rws 17-35, Rwy 08-26, and PAPI Rwy 26—CTAF. PAPI Rwy 17 operates 24 hrs. Rwy 17 REIL OTS indef. Lnd fee for acft providing commercial svcs.

WEATHER DATA SOURCES: AWOS-3 127.45 (715) 693-1116**COMMUNICATIONS:** CTAF 119.75 ATIS 127.45 UNICOM 122.95

MOSINEE RCO 122.525 (GREEN BAY RADIO)

⑦ MINNEAPOLIS CENTER APP/DEP CON 124.4

CWA TOWER 119.75 (1200-0400Z†) GND CON 121.9

AIRSPACE: CLASS D svc 1200-0400Z† other times CLASS E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE AUW.

WAUSAU (L) VORTACW 111.6 AUW Chan 53 N44°50.81' W89°35.19' 218° 5.4 NM to or fld. 1205/2E.

STEVENS POINT (L) VORTAC 110.6 STE Chan 43 N44°32.60' W89°31.83' 339° 15.2 NM to fld. 1110/2E.


NOTAM FILE STE. HIWAS.

BAYYE NDB (LOM) 351 PH N44°40.59' W89°38.88' 353° 6.1 NM to fld.

DANCI NDB (LOM) 275 CW N44°45.62' W89°47.35' 079° 5.3 NM to fld.

ILS/DME 110.3 I-CWA Chan 40 Rwy 08. Class IA. LOM DANCI NDB.

ILS/DME 110.9 I-PHS Chan 46 Rwy 35. Class IE. LOM BAYYE NDB. DME unusable byd 14° right of course.

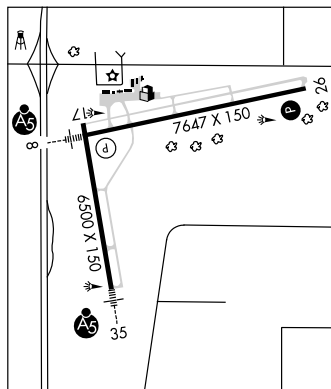

NECEDAH (DAF) 1 NW UTC-6(-5DT) N44°02.01' W90°05.11'

GREEN BAY

919 B S2 TPA—1919(1000) NOTAM FILE GRB

L-28G

RWY 18-36: H2700X60 (ASPH) LIRL 0.3% up S

IAP

RWY 18: Trees. RWY 36: Trees.

AIRPORT REMARKS: Unattended. During winter months call 608-565-7248 before ldg to determine status. ACTIVATE LIRL Rwy 18-36—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7

⑦ VOLK APP/DEP CON 135.25 (Mon-Fri 1400-2200Z† except holidays), other times ctc

⑦ CHICAGO CENTER APP/DEP CON 133.3

RADIO AIDS TO NAVIGATION: NOTAM FILE STE.

STEVENS POINT (L) VORTAC 110.6 STE Chan 43 N44°32.60' W89°31.83' 219° 38.8 NM to fld. 1110/2E.

HIWAS.

NEENAH

BRENNAND (79C) 4 SW UTC-6(-5DT) N44°09.60' W88°33.57'

GREEN BAY

850 S4 FUEL 100LL NOTAM FILE GRB

RWY 18-36: H2450X20 (ASPH) LIRL(NSTD)

RWY 18: Thld dspld 188'. Trees. RWY 36: Thld dspld 275'.

AIRPORT REMARKS: Attended Mon-Fri 1400-2230Z†, Sat 1400-1800Z†. Call 920-475-6179 for repair. Rwy 18-36 has 2 flashing lgts 75' N of Rwy 18 thld and 15' S of Rwy 36 thld. Rwy 18-36 NSTD LIRL 1 thld lgt each side of thld. Rwy 18 and Rwy 36 white bar and centerline. ACTIVATE NSTD LIRL Rwy 18-36 5 clicks on 8 clicks off—CTAF.

COMMUNICATIONS: CTAF 122.9

LOC/DME I-CWA
110.3
Chgn **40**

APP CRS
077°

Rwy Idg	7647
TDZE	1274
Apt Elev	1277

7647
1274
1033

ILS or LOC RWY 8
MOSINEE/CENTRAL WISCONSIN(CWA)

T For inoperative MALSR, increase S-LOC 8 Cat. D visibility to 1. When VGS
A Inop, circling to Rwy 26 NA at night. If local altimeter setting not received,
use Wausau Downtown altimeter setting and increase all DAs/MDAs 40
feet. VDP NA with Wausau Downtown altimeter setting. ADF Required.

MALSR



MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct Danci LOM/Int/I-CWA 6.5 DME and hold.

ATIS
127.45

MINNEAPOLIS CENTER
124.4 317.7

CWA TOWER★
119.75 (CTAF) **L** 360.7


GND CON	
121.9	360.7

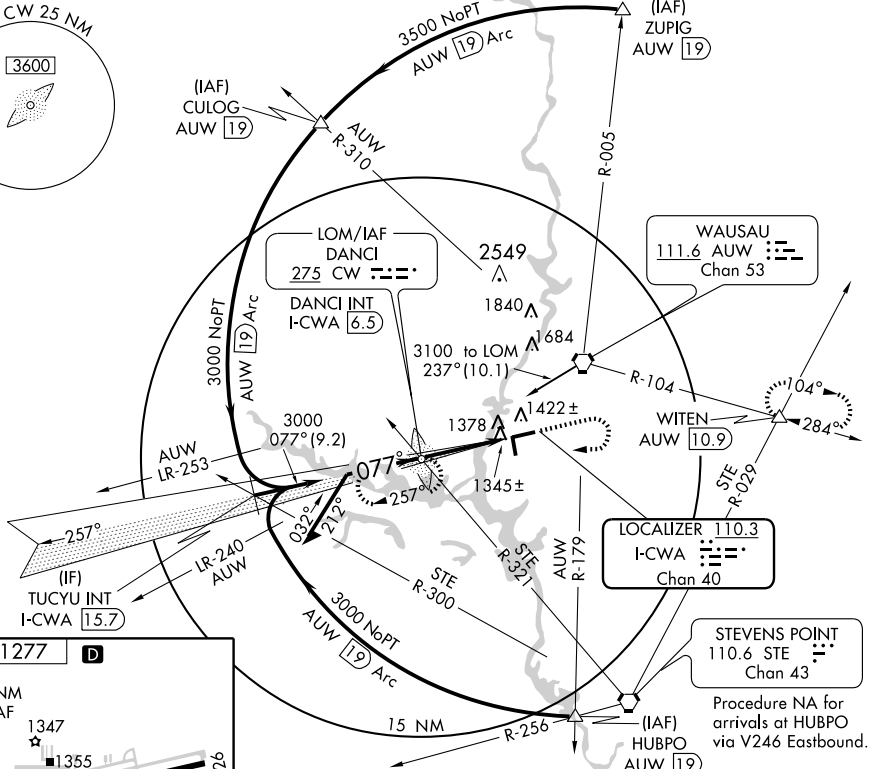UNICOM
122.95

ELEV 1277

D

077° 5 NM



REIL Rwy 17 and 26

HIRL Rwy 8-26 and 17-35 **L**

FAF to MAP 5 NM

Knots	60	90	120	150	180
-------	----	----	-----	-----	-----

Min:Sec	5:00	3:20	2:30	2:00	1:40
---------	------	------	------	------	------

Remain
within 10 NM

GS 3.00°
TCH 56

Use I-CWA DME when
on the localizer course

DANCI LOM/IN
I-CWA 6.5

2000

3000

CW

I-C
2

1-CWA

1

1.5



Diagram of a rectangular plate with dimensions 4.2 NM and 0.8 NM.

CATEGORY	A	B	C	D
S-ILS 8	1474- $\frac{1}{2}$ 200 (200- $\frac{1}{2}$)			
S-LOC 8	1600- $\frac{1}{2}$ 326 (400- $\frac{1}{2}$)			1600- $\frac{3}{4}$ 326 (400- $\frac{3}{4}$)
CIRCLING	1780-1	503 (600-1)	1800-1 $\frac{1}{2}$ 523 (600-1 $\frac{1}{2}$)	1840-2 563 (600-2)

MOSINEE, WISCONSIN

Amdt 12 10042

MOSINEE / CENTRAL WISCONSIN (CWA)

44° 47'N - 89° 40'W

ILS or LOC RWY 8

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3 23 SEP 2010 to 21 OCT 2010

LOC/DME I-PHS 110.9 Chan 46	APP CRS 350°	Rwy Idg 6500 TDZE 1256 Apt Elev 1277
---	------------------------	---

ILS or LOC RWY 35
MOSINEE/CENTRAL WISCONSIN(CWA)

▼▲ If local altimeter setting not received, use Wausau altimeter setting and increase all DAs/MDAs 40 feet.
ADF REQUIRED

MALSR


MISSED APPROACH: Climb to 2000, then climbing right turn to 3000 direct BAYYE LOM and hold.

ATIS
127.45


MINNEAPOLIS CENTER
124.4 317.7

CWA TOWER ★
119.75(CTAF) 360.7


GND CON
121.9 360.7

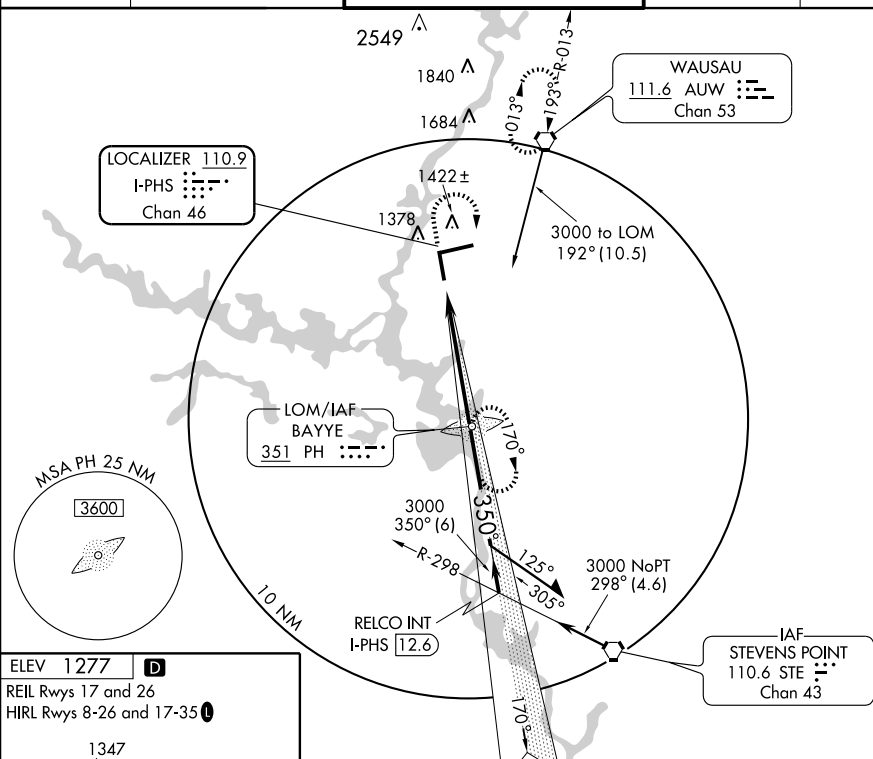UNICOM
122.95

ELEV 1277	D
REIL Rwy 17 and 26	
HIRL Rwy 8-26 and 17-35	

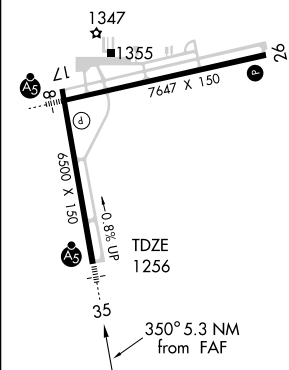

FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

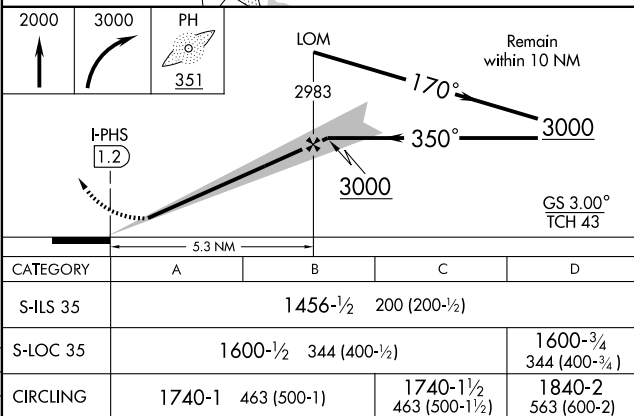

MOSINEE, WISCONSIN
Amdt 1 10042

MOSINEE/CENTRAL WISCONSIN(CWA)

44° 47' N - 89° 40' W

ILS or LOC RWY 35

LAND AND HOLD SHORT OPERATIONS (LAHSO)

LAHSO is an acronym for "Land and Hold Short Operations." These operations include landing and holding short of an intersection runway, an intersecting taxiway, or other predetermined points on the runway other than a runway or taxiway. Measured distance represents the available landing distance on the landing runway, in feet.

Specific questions regarding these distances should be referred to the air traffic manager of the facility concerned. The Aeronautical Information Manual contains specific details on hold-short operations and markings.

CITY/AIRPORT	LDG RWY	HOLD-SHORT POINT	MEASURED DISTANCE
ALTON/ST. LOUIS, IL			
ST. LOUIS RGNL (ALN)	29	17-35	6,850 feet
	35	11-29	5,100 feet
APPLETON, WI			
OUTAGAMIE COUNTY RGNL (ATW)	03	12-30	3,300 feet
	21	12-30	4,100 feet
	30	03-21	3,400 feet
BLOOMINGTON/NORMAL, IL			
CENTRAL IL REGL ARPT AT			
BLOOMINGTON-NORMAL (BMI)	02	11-29	4,600 feet
	11	02-20	6,200 feet
CARBONDALE-MURPHYSBORO, IL			
SOUTHERN ILLINOIS (MDH)	06	18L-36R	3,100 feet
	24	18R-36L	3,800 feet
	36R	06-24	3,000 feet
CHAMPAIGN-URBANA, IL			
UNIVERSITY OF ILLINOIS-WILLARD (CMI)	04	14L-32R	3,600 feet
	14L	04-22	3,550 feet
	18	04-22	4,100 feet
	22	18-36	4,700 feet
	32R	04-22	4,050 feet
	36	14L-32R	3,950 feet
CHICAGO, IL			
CHICAGO-O'HARE INTL (ORD)	09R	14L-32R	6,100 feet
	10	TWY S	12,156 feet
	22R	09R-27L	6,050 feet
	27L	04L-22R	5,700 feet
CHICAGO/AURORA, IL			
AURORA MUNI (ARR)	09	18-36	3,450 feet
	15	09-27	3,900 feet
	27	15-33	4,000 feet
CHICAGO/PROSPECT HEIGHTS/ WHEELING, IL			
CHICAGO EXECUTIVE (PWK)	16	12-30	3,623 feet
DECATUR, IL			
DECATUR (DEC)	06	12-30	4,800 feet
	12	06-24	4,450 feet
	18	06-24	4,450 feet
	24	12-30	3,000 feet
	24	18-36	8,000 feet
	30	18-36	5,050 feet
	36	12-30	4,800 feet

(SEE CONTINUATION PAGE FOR MORE LISTINGS)

LAND AND HOLD SHORT OPERATIONS (LAHSO)
(CONTINUED)

CITY/AIRPORT	LDG RWY	HOLD-SHORT POINT	MEASURED DISTANCE
GREEN BAY, WI			
AUSTIN STRAUBEL INTL (GRB)	18	06-24	2,692 feet
	24	18-36	6,050 feet
	36	06-24	4,932 feet
MADISON, WI			
DANE COUNTY RGNL- TRUAX FIELD (MSN)	03	14-32	3,400 feet
	18	03-21	4,850 feet
	21	18-36	6,450 feet
	32	18-36	5,300 feet
	36	14-32	7,050 feet
MARION, IL			
WILLIAMSON COUNTY RGNL (MWA)	20	11-29	6,650 feet
	29	02-20	4,650 feet
MOSINEE, WI			
CENTRAL WISCONSIN (CWA)	26	17-35	7,300 feet
	35	08-26	5,000 feet
ROCKFORD, IL			
CHICAGO/ROCKFORD INTL (RFD)	01	07-25	6,000 feet
	07	01-19	8,800 feet
SPRINGFIELD, IL			
ABRAHAM LINCOLN CAPITAL (SPI)	04	13-31	3,200 feet
	22	13-31	4,150 feet
	31	04-22	3,350 feet
	36	13-31	3,000 feet

APP CRS	Rwy Idg	7647
077°	TDZE	1274
	Apt Elev	1277

RNAV (GPS) RWY 8

MOSINEE/CENTRAL WISCONSIN (CWA)

T For Inoperative MALSR, increase LNAV/VNAV Cdr. D visibility to 1.
A NA Baro-VNAV NA below -17°C (1°F).
 GPS or RNP-0.3 Required.
 DME/DME RNP-0.3 NA.

MALSR


MISSED APPROACH: Climb to 3000 via 077° course to TETEE WP then via 077° course to ASARE WP and hold.

ATIS
127-45


MINNEAPOLIS CENTER
124.4 317.7

CWA TOWER★
119.75 (CTAF) 360.7


GND CON
121.9 360.7

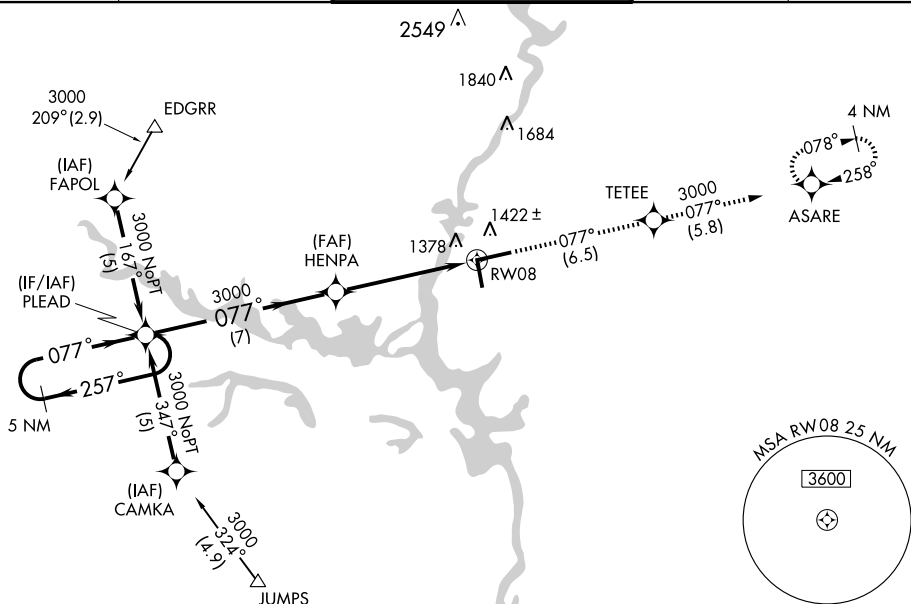UNICOM
122.95

5 NM
Holding Pattern

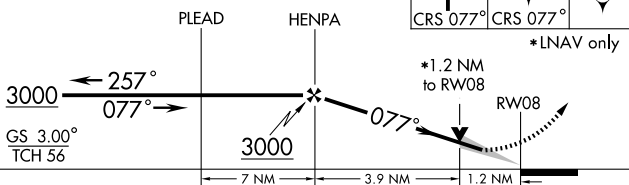

CATEGORY	A	B	C	D
GLS PA DA	NA			
LNAV/ VNAV DA	1600-1/2 326 (400-1/2)			1600-3/4 326 (400-3/4)
LNAV MDA	1720-1/2 446 (500-1/2)	1720-3/4 446 (500-3/4)		1720-1 446 (500-1)
CIRCLING	1740-1 463 (500-1)	1740-1 1/2 463 (500-1 1/2)		1840-2 563 (600-2)

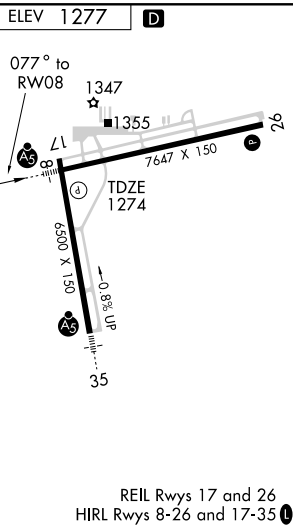

MOSINEE, WISCONSIN
Orig 10042

MOSINEE/CENTRAL WISCONSIN(CWA)

RNAV (GPS) RWY 8

44° 47' N - 89° 40' W

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

APP CRS	Rwy Idg	6500
170°	TDZE	1277
	Apt Elev	1277



RNAV (GPS) RWY 17

MOSINEE/CENTRAL WISCONSIN(CWA)


Baro-VNAV NA below -17°C (1° F). MISSED APPROACH: Climb to 2900 via 170° course to JONIS WP then via 170° course to LEERY WP and hold.

NA GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA.


ATIS	MINNEAPOLIS CENTER	CWA TOWER★	GND CON	UNICOM
127.45	124.4 317.7	119.75 (CTAF) 0 360.7	121.9 360.7	122.95

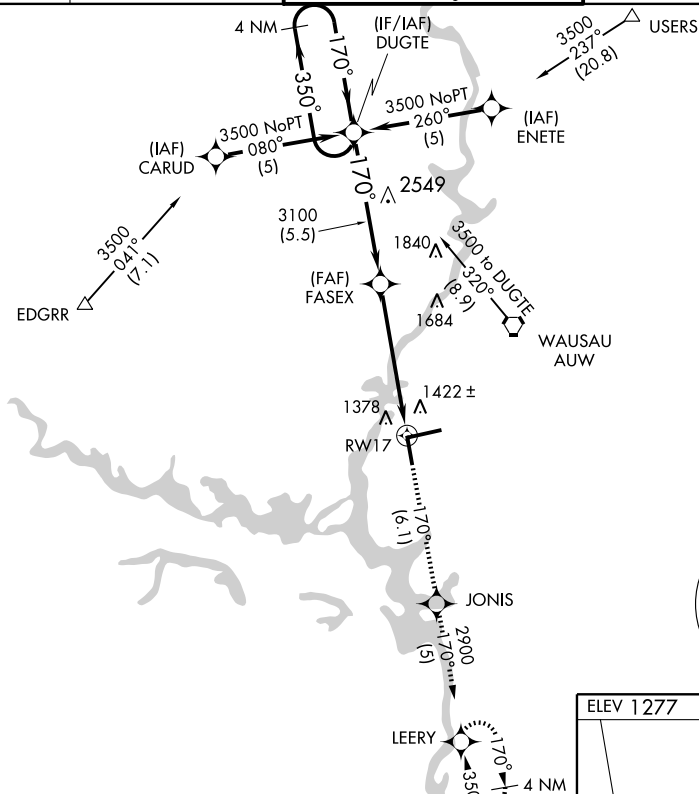

4 NM
Holding Pattern

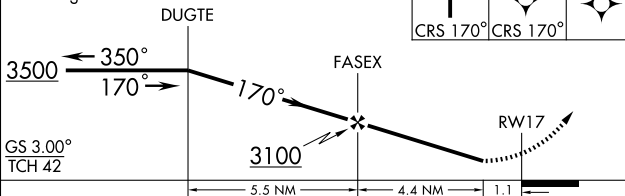

2900	JONIS	LEERY
CRS 170°	CRS 170°	

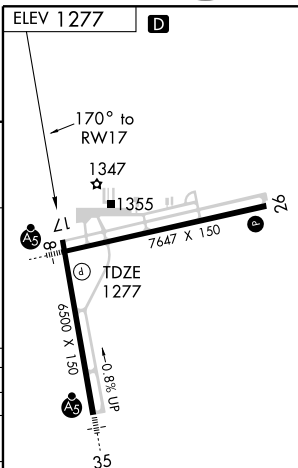

CATEGORY	A	B	C	D
GLS PA DA	NA			
INAV/ VNAV	1680-1½ 403 (500-1½)			
INAV MDA	1680-1	403 (500-1)	1680-1¼	403 (500-1¼)
CIRCLING	1740-1½	463 (500-1½)	1840-2	563 (600-2)

APP CRS	Rwy Idg	7647
257°	TDZE	1260
	Apt Elev	1277

RNAV (GPS) RWY 26

MOSINEE/CENTRAL WISCONSIN(CWA)

⚠ Baro-VNAV NA below -17°C (1° F).
⚠ NA GPS or RNP-0.3 Required.
 DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 via 257° course to HENPA WP then via 257° course to PLEAD WP and hold.



ATIS
127.45

MINNEAPOLIS CENTER
124.4 317.7


CWA TOWER ★
119.75 (CTAF) 360.7

GND CON
121.9 360.7

UNICOM
122.95

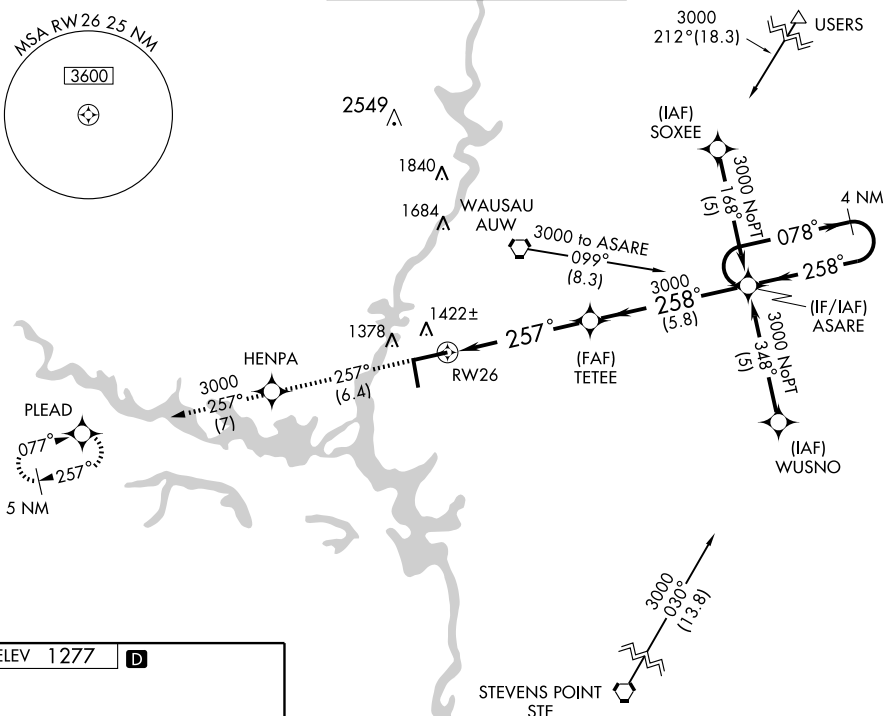

ELEV 1277



	3000	HENPA	PLEAD	
	CRS 257°	CRS 257°		
				4 NM Holding Pattern
		TETEE	ASARE	
				3000
				GS 3.00° TCH 54
	1.1	4.1 NM	5.8 NM	
CATEGORY	A	B	C	D
GLS PA DA	NA			
LNAV/VNAV DA	1660-1¼ 400 (400-1¼)			
LNAV MDA	1660-1 400 (400-1)			1660-1¼ 400 (400-1¼)
CIRCLING	1740-1¼ 463 (500-1¼)	1740-1½ 463 (500-1½)		1840-2 563 (600-2)

REIL Rwy 17 and 26
 HIRL Rwy 8-26 and 17-35

MOSINEE, WISCONSIN
 Orig 10042

MOSINEE/CENTRAL WISCONSIN(CWA)
RNAV (GPS) RWY 26

44° 47'N - 89° 40'W

APP CRS 350°	Rwy Idg TDZE 1256 Apt Elev 1277
------------------------	---

RNAV (GPS) RWY 35

MOSINEE/CENTRAL WISCONSIN (CWA)

▼ ▲ NA	For inoperative MALS, increase LNAV Cat. D visibility to 1¼.	MALS 	MISSED APPROACH: Climb to 3500 via 350° course to FASEX WP then via 350° course to DUGTE WP and hold.
	GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA. Baro-VNAV NA below -17°C (1° F).		


ATIS 127.45

MINNEAPOLIS CENTER 124.4 317.7
--


CWA TOWER★ 119.75 (CTAF) 360.7
--

GND CON 121.9 360.7

UNICOM 122.95

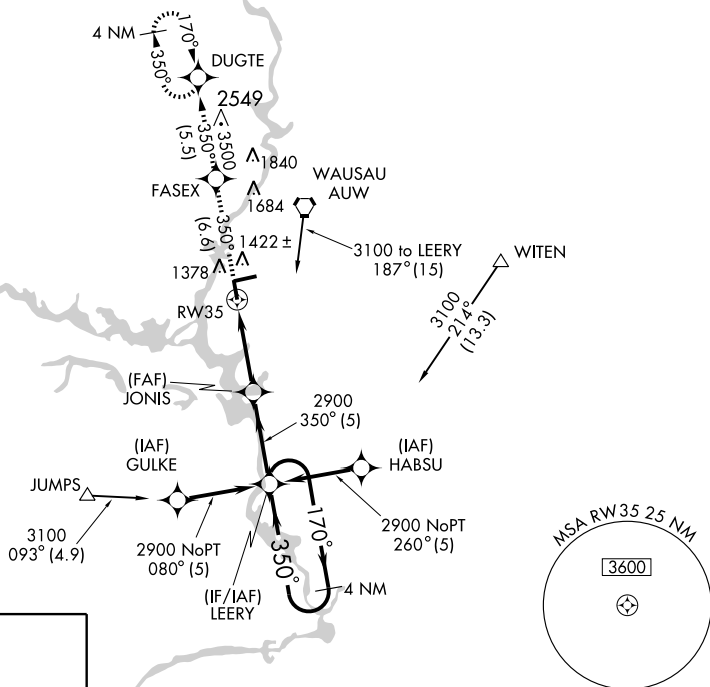

ELEV 1277

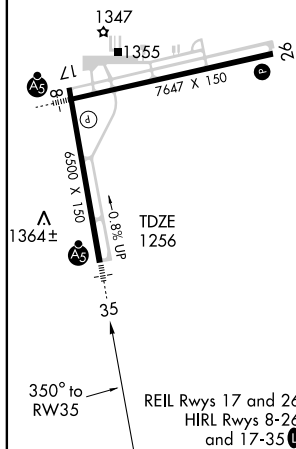D



3500 ↑ CRS 350° *LNAV only		FASEX ↑ CRS 350° *1.1 NM to RW35		DUGTE ↑ CRS 350°		JONIS		LEERY		4 NM Holding Pattern	
CATEGORY		A		B		C		D			
GLS PA DA				NA							
LNAV/ VNAV DA				1600-¾ 344 (400-¾)							
LNAV MDA		1620-½ 364 (400-½)						1620-1 364 (400-1)			
CIRCLING		1740-1¼ 463 (500-1¼)		1740-1½ 463 (500-1½)		1840-2 563 (600-2)					

VORTAC STE 110.6 Chan 43	APP CRS 336°	Rwy ldg TDZE Apt Elev	6500 1256 1277
--	------------------------	-----------------------------	---

VOR/DME RWY 35

MOSINEE/CENTRAL WISCONSIN (CWA)

		MALSR 	MISSED APPROACH: Climb to 1700 then climbing left turn to 2800 via STE R-336 to FELTS and hold.	
ATIS 127.45	MINNEAPOLIS CENTER 124.4 317.7	CWA TOWER ★ 119.75(CTAF) 360.7		GND CON 121.9 360.7
				UNICOM 122.95

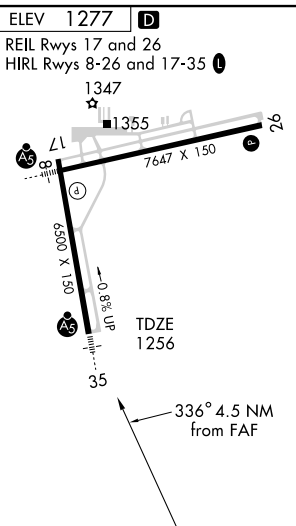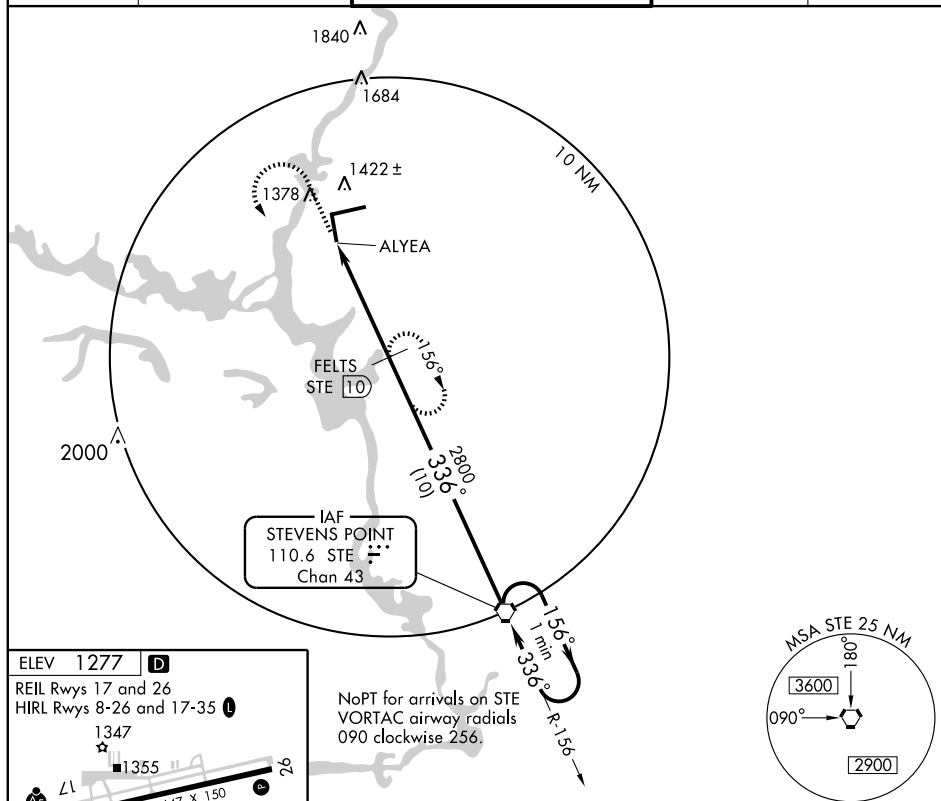

1700 ↑		2800 ↖ STE R-336 110.6	FELTS STE 10	FELTS STE 10	One Minute Holding Pattern	
ALYEA STE 14.5		STE 13.6	VORTAC		2800 156° → ← 336°	
↙		3.17° TCH 45	2800	336°	10 NM	
1 NM		3.6 NM	10 NM		D	
CATEGORY	A		B	C	D	
S-35	1600-1		344 (400-1)		1600-1¼ 344 (400-1¼)	
CIRCLING	1740-1		463 (500-1)		1840-2 563 (600-2)	
			1740-1½ 463 (500-1½)			

VORTAC AUV 111.6 Chan 53	APP CRS 217°	Rwy Idg TDZE Apt Elev	N/A N/A 1277
--	------------------------	-----------------------------	---

VOR or GPS-A



MOSINEE/CENTRAL WISCONSIN(CWA)



MISSED APPROACH: Climb to 3500 then
right turn direct AUV VORTAC and hold.

ATIS 127.45	MINNEAPOLIS CENTER 124.4 317.7	CWA TOWER ★ 119.75(CTAF) 360.7	GND CON 121.9 360.7	UNICOM 122.95
-----------------------	--	--	-------------------------------	-------------------------

NOTE: Do not confuse Wausau Downtown
Airport with Mosinee/Central Wisconsin
Airport.

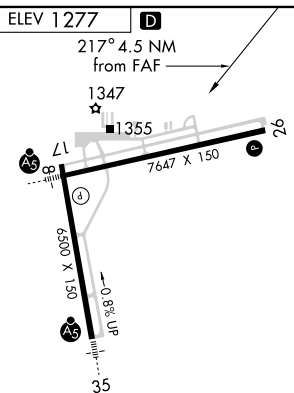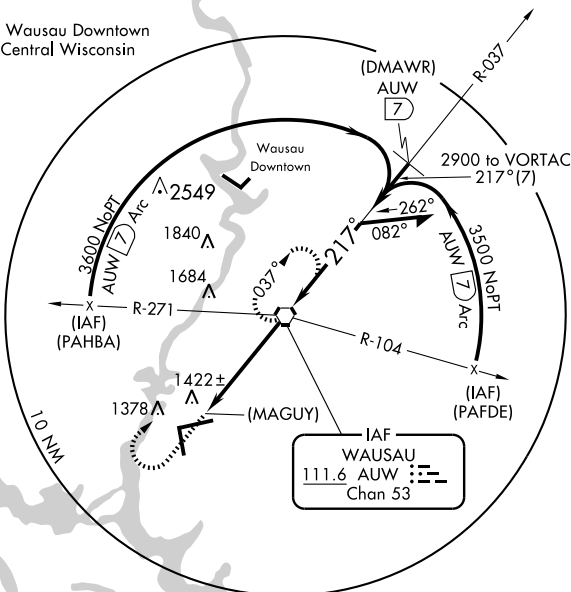

REIL Rwy 17 and 26
HIRL Rwy 8-26 and 17-35

FAF to MAP 4.5 NM					
Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

3500		AUV 111.6	VORTAC		Remain within 10 NM
(MAGUY) AUV 4.5		037°		3500	
2900		217°		4.5 NM	
CATEGORY	A	B	C	D	
CIRCLING	1740-1	463 (500-1)	1740-1½ 463 (500-1½)	1840-2 563 (600-2)	

MOSINEE, WISCONSIN

Amdt 8A 10042

MOSINEE/CENTRAL WISCONSIN(CWA)

44°47'N-89°40'W

VOR or GPS-A

MOSINEE

CENTRAL WISCONSIN (CWA) 3 SE UTC-6(-5DT) N44°46.66' W89°40.01'

GREEN BAY

1277 B S4 FUEL 100LL, JET A OX 1 Class I, ARFF Index A NOTAM FILE CWA

H-2K, L-14J

RWY 08-26: H7647X150 (CONC-GRVD) S-95, D-160, 2S-175, 2D-270 HIRL

IAP, AD

RWY 08: MALSR. RWY 26: REIL. PAPI(P4L)—GA 3.0° TCH 49'.

RWY 17-35: H6500X150 (CONC-GRVD) S-75, D-105, 2S-133, 2D-180 HIRL 0.7% up N

RWY 17: REIL. PAPI(P4L)—GA 3.0° TCH 45'. RWY 35: MALSR.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 26	17-35	7300
RWY 35	08-26	5000

RUNWAY DECLARED DISTANCE INFORMATION

RWY 08: TORA-7647 TODA-7647 ASDA-7647 LDA-7647

RWY 17: TORA-6500 TODA-6500 ASDA-6500 LDA-6500

RWY 26: TORA-7647 TODA-7647 ASDA-7647 LDA-7647

RWY 35: TORA-6500 TODA-6500 ASDA-6500 LDA-6500

AIRPORT REMARKS: Attended 1100-0300Z†. 48 hr PPR for unscheduled air carrier ops with more than 30 passenger seats call arpt manager 715-693-2147. Twy E; north of Twy C is not avbl for air carrier ops over 60000 pounds. When twr closed ACTIVATE MALSR Rwy 08 and Rwy 35—CTAF. ACTIVATE HIRL Rws 17-35, Rwy 08-26, and PAPI Rwy 26—CTAF. PAPI Rwy 17 operates 24 hrs. Rwy 17 REIL OTS indef. Lnd fee for acft providing commercial svcs.

WEATHER DATA SOURCES: AWOS-3 127.45 (715) 693-1116

COMMUNICATIONS: CTAF 119.75 ATIS 127.45 UNICOM 122.95

MOSINEE RCO 122.525 (GREEN BAY RADIO)

⑦ MINNEAPOLIS CENTER APP/DEP CON 124.4

CWA TOWER 119.75 (1200-0400Z†) GND CON 121.9

AIRSPACE: CLASS D svc 1200-0400Z† other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE AUW.

WAUSAU (L) VORTACW 111.6 AUW Chan 53 N44°50.81' W89°35.19' 218° 5.4 NM to or fld. 1205/2E.

STEVENS POINT (L) VORTAC 110.6 STE Chan 43 N44°32.60' W89°31.83' 339° 15.2 NM to fld. 1110/2E.


NOTAM FILE STE. HIWAS.

BAYYE NDB (LOM) 351 PH N44°40.59' W89°38.88' 353° 6.1 NM to fld.

DANCI NDB (LOM) 275 CW N44°45.62' W89°47.35' 079° 5.3 NM to fld.

ILS/DME 110.3 I-CWA Chan 40 Rwy 08. Class IA. LOM DANCI NDB.

ILS/DME 110.9 I-PHS Chan 46 Rwy 35. Class IE. LOM BAYYE NDB. DME unusable byd 14° right of course.

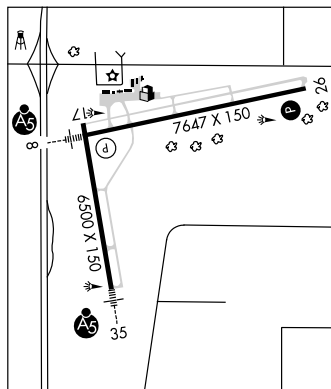

NECEDAH (DAF) 1 NW UTC-6(-5DT) N44°02.01' W90°05.11'

GREEN BAY

919 B S2 TPA—1919(1000) NOTAM FILE GRB

L-28G

RWY 18-36: H2700X60 (ASPH) LIRL 0.3% up S

IAP

RWY 18: Trees. RWY 36: Trees.

AIRPORT REMARKS: Unattended. During winter months call 608-565-7248 before ldg to determine status. ACTIVATE LIRL Rwy 18-36—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7

⑦ VOLK APP/DEP CON 135.25 (Mon-Fri 1400-2200Z† except holidays), other times ctc

⑦ CHICAGO CENTER APP/DEP CON 133.3

RADIO AIDS TO NAVIGATION: NOTAM FILE STE.

STEVENS POINT (L) VORTAC 110.6 STE Chan 43 N44°32.60' W89°31.83' 219° 38.8 NM to fld. 1110/2E.

HIWAS.

NEENAH

BRENNAND (79C) 4 SW UTC-6(-5DT) N44°09.60' W88°33.57'

GREEN BAY

850 S4 FUEL 100LL NOTAM FILE GRB

RWY 18-36: H2450X20 (ASPH) LIRL(NSTD)

RWY 18: Thld dspld 188'. Trees. RWY 36: Thld dspld 275'.

AIRPORT REMARKS: Attended Mon-Fri 1400-2230Z†, Sat 1400-1800Z†. Call 920-475-6179 for repair. Rwy 18-36 has 2 flashing lgts 75' N of Rwy 18 thld and 15' S of Rwy 36 thld. Rwy 18-36 NSTD LIRL 1 thld lgt each side of thld. Rwy 18 and Rwy 36 white bar and centerline. ACTIVATE NSTD LIRL Rwy 18-36 5 clicks on 8 clicks off—CTAF.

COMMUNICATIONS: CTAF 122.9

APP CRS **001°**
 Rwy Idg **2700**
 TDZE **919**
 Apt Elev **919**

RNAV (GPS) RWY 36

NECEDAH (DAF)

NA Use Wisconsin Rapids altimeter setting.
 GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA.
IAF ARM APPROACH MODE PRIOR TO IAF.


MISSED APPROACH: Climbing right turn to 2800 direct AJEPO WP and hold.

WISCONSIN RAPIDS ASOS
126.575

VOLK APP CON ★
135.25 290.8

UNICOM
122.7 (CTAF) 0

Procedure NA for arrival at BANKY via V228 northbound and bearings from CMY NDB 048 CW 168 and DLL VORTAC radials 262 CW 022.





MC COY
 CMY

A 2170

ELEV 919

(IAF) CAKIM



4 NM
 Holding Pattern

2800 ← 181°
 001° →

EYLAR

2700

3.05°
 TCH 40

2800

AJEPO



RW36

CATEGORY	A	B	C	D
LNAV MDA	1540-1	621 (700-1)	NA	NA
CIRCLING	1580-1	661 (700-1)	NA	NA

NEILLSVILLE MUNI (VIQ) 3 E UTC-6(-5DT) N44°33.49' W90°30.73'

GREEN BAY

1237 B S2 FUEL 100LL, MOGAS NOTAM FILE GRB

L-141

RWY 09-27: H3400X60 (ASPH) S-12 LIRL 0.9% up E

IAP

RWY 09: VASI(V2L)—GA 3.0° TCH 31'. Tree.

RWY 27: VASI(V2L)—GA 3.5° TCH 25'. Tree.

AIRPORT REMARKS: Attended 1400-2300Z†. Fuel avbl PPR, call 715-743-4400. PPR for hangar space call 715-743-4400. Rotating bcn OTS indef. LIRL Rwy 09-27 ops low ints, to increase ints and ACTIVATE VASI Rwy 09 and 27—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 124.4

RADIO AIDS TO NAVIGATION: NOTAM FILE STE.

STEVENS POINT (L) VORTAC 110.6 STE Chan 43 N44°32.60' W89°31.83' 273° 42.1 NM to fld. 1110/2E.
HIWAS.

NDB (MHW) 368 VIQ N44°33.43' W90°30.91' at fld. Unmonitored. NOTAM FILE GRB.

NEPCO N44°15.59' W89°53.27' NOTAM FILE ISW.

GREEN BAY

NDB (LOM) 326 EK 020° 6.4 NM to Alexander Fld South Wood Co. Unmonitored.

NEST OF EAGLES (See SPOONER)

NEW HOLSTEIN MUNI (8D1) 1 W UTC-6(-5DT) N43°56.66' W88°06.81'

CHICAGO

992 B S4 FUEL 100LL TPA-1792(800) NOTAM FILE GRB

L-28H

RWY 14-32: H3600X75 (ASPH) S-20 MIRL

IAP

RWY 14: REIL(NSTD). Road.

RWY 32: REIL(NSTD). Ground.

RWY 04-22: 2970X250 (TURF)

RWY 04: Tree.

RWY 22: Trees. Rgt ftc.


AIRPORT REMARKS: Attended 1500-2300Z†. Rwy 04-22 CLOSED Nov 1 thru May 1. Numerous birds invof arpt. ACTIVATE MIRL Rwy 14-32 and REILS Rwy 14 and Rwy 32—CTAF.

COMMUNICATIONS: CTAF/UNICOM 123.0

Ⓡ MILWAUKEE APP/DEP CON 127.0

RADIO AIDS TO NAVIGATION: NOTAM FILE OSH.

OSHKOSH (L) VORTAC 111.8 OSH Chan 55 N43°59.43'
W88°33.36' 096° 19.4 NM to fld. 780/2E.

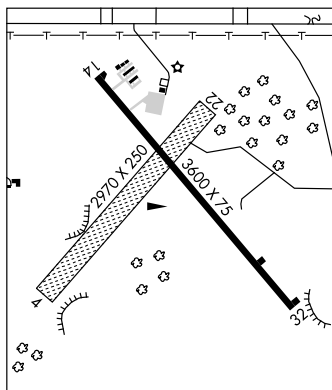

NEW LISBON

MAUSTON-NEW LISBON UNION (82C) 3 SE UTC-6(-5DT) N43°50.32' W90°08.26'

CHICAGO

906 B S2 FUEL 100LL, JET A NOTAM FILE GRB

L-28G

RWY 14-32: H3686X75 (ASPH) MIRL

IAP

RWY 14: VASI(V2L)—GA 3.5° TCH 30'. Road.

RWY 32: VASI(V2L)—GA 4.0° TCH 26'. Trees.

AIRPORT REMARKS: Unattended. For fuel and repairs ctc 608-562-3374. Deer on and invof arpt. Rwy 14-32 298' paved stopway SE end. ACTIVATE MIRL Rwy 14-32—122.8.


COMMUNICATIONS: CTAF 122.9

VOLK APP/DEP CON 135.25 (Mon-Fri 1400-2200Z† except holidays), other times ctc

Ⓡ CHICAGO CENTER APP/DEP CON 133.3

RADIO AIDS TO NAVIGATION: NOTAM FILE DLL.

DELLS (H) VORTAC 117.0 DLL Chan 117 N43°33.05'
W89°45.82' 314° 23.7 NM to fld. 1020/3E.

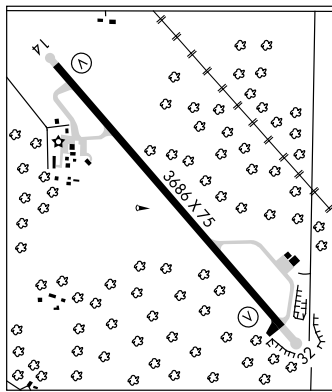

APP CRS **277°**
 Rwy Idg **3400**
 TDZE **1237**
 Apt Elev **1237**



GPS RWY 27
 NEILLSVILLE MUNI (VIQ)

▲ NA Use Marshfield altimeter setting.


MISSED APPROACH: Climb to 2200, then climbing right turn to 3000 direct BELGO WP and hold.

MINNEAPOLIS CENTER
124.4 317.7

UNICOM
122.8 (CTAF) 0

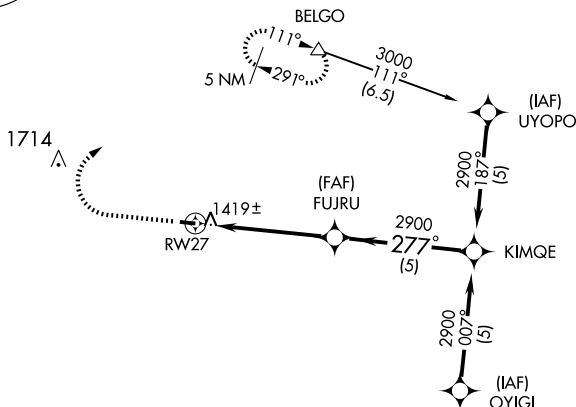


2200 3000 BELGO



CATEGORY	A	B	C	D
S-27	1720-1	483 (500-1)	NA	
CIRCLING	1760-1	523 (600-1)	NA	

ELEV 1237



LIRL Rwy 9-27 0

NDB VIQ 368	APP CRS 272°	Rwy Idg TDZE Apt Elev	3400 1237 1237
-----------------------	------------------------	-----------------------------	---

NDB RWY 27

NEILLSVILLE MUNI (VIQ)




Use Marshfield altimeter setting.




MISSED APPROACH: Climb to 3000 then right turn direct VIQ NDB and hold.

MINNEAPOLIS CENTER
124.4 317.7

UNICOM
122.8 (CTAF) **0**

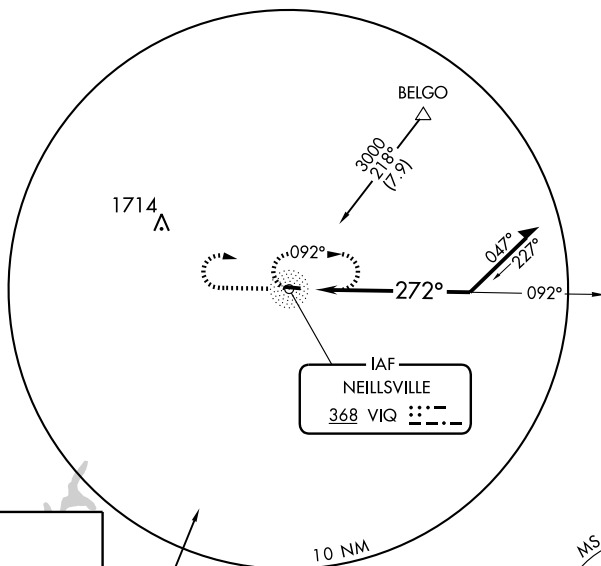

ELEV 1237

LIRL Rwy 9-27 **0**

CATEGORY	A	B	C	D
S-27	1840-1	603 (700-1)	NA	
S-CIRCLING	1840-1	603 (700-1)	NA	

NEILLSVILLE MUNI (VIQ) 3 E UTC-6(-5DT) N44°33.49' W90°30.73'

GREEN BAY

1237 B S2 FUEL 100LL, MOGAS NOTAM FILE GRB

L-14I

RWY 09-27: H3400X60 (ASPH) S-12 LIRL 0.9% up E

IAP

RWY 09: VASI(V2L)—GA 3.0° TCH 31'. Tree.

RWY 27: VASI(V2L)—GA 3.5° TCH 25'. Tree.

AIRPORT REMARKS: Attended 1400-2300Z†. Fuel avbl PPR, call 715-743-4400. PPR for hangar space call 715-743-4400. Rotating bcn OTS indef. LIRL Rwy 09-27 ops low ints, to increase ints and ACTIVATE VASI Rwy 09 and 27—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 124.4

RADIO AIDS TO NAVIGATION: NOTAM FILE STE.

STEVENS POINT (L) VORTAC 110.6 STE Chan 43 N44°32.60' W89°31.83' 273° 42.1 NM to fld. 1110/2E.
HIWAS.

NDB (MHW) 368 VIQ N44°33.43' W90°30.91' at fld. Unmonitored. NOTAM FILE GRB.

NEPCO N44°15.59' W89°53.27' NOTAM FILE ISW.

GREEN BAY

NDB (LOM) 326 EK 020° 6.4 NM to Alexander Fld South Wood Co. Unmonitored.

NEST OF EAGLES (See SPOONER)

NEW HOLSTEIN MUNI (8D1) 1 W UTC-6(-5DT) N43°56.66' W88°06.81'

CHICAGO

992 B S4 FUEL 100LL TPA-1792(800) NOTAM FILE GRB

L-28H

RWY 14-32: H3600X75 (ASPH) S-20 MIRL

IAP

RWY 14: REIL(NSTD). Road. RWY 32: REIL(NSTD). Ground.

RWY 04-22: 2970X250 (TURF)

RWY 04: Tree. RWY 22: Trees. Rgt ftc.


AIRPORT REMARKS: Attended 1500-2300Z†. Rwy 04-22 CLOSED Nov 1 thru May 1. Numerous birds invof arpt. ACTIVATE MIRL Rwy 14-32 and REILS Rwy 14 and Rwy 32—CTAF.

COMMUNICATIONS: CTAF/UNICOM 123.0

Ⓡ MILWAUKEE APP/DEP CON 127.0

RADIO AIDS TO NAVIGATION: NOTAM FILE OSH.

OSHKOSH (L) VORTAC 111.8 OSH Chan 55 N43°59.43'
W88°33.36' 096° 19.4 NM to fld. 780/2E.

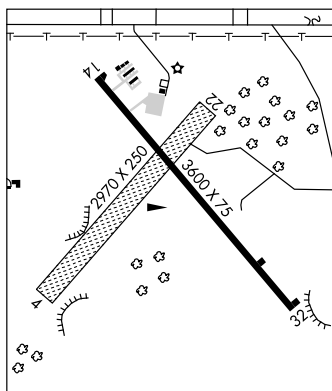

NEW LISBON

MAUSTON-NEW LISBON UNION (82C) 3 SE UTC-6(-5DT) N43°50.32' W90°08.26'

CHICAGO

906 B S2 FUEL 100LL, JET A NOTAM FILE GRB

L-28G

RWY 14-32: H3686X75 (ASPH) MIRL

IAP

RWY 14: VASI(V2L)—GA 3.5° TCH 30'. Road.

RWY 32: VASI(V2L)—GA 4.0° TCH 26'. Trees.

AIRPORT REMARKS: Unattended. For fuel and repairs ctc 608-562-3374. Deer on and invof arpt. Rwy 14-32 298' paved stopway SE end. ACTIVATE MIRL Rwy 14-32—122.8.


COMMUNICATIONS: CTAF 122.9

VOLK APP/DEP CON 135.25 (Mon-Fri 1400-2200Z† except holidays), other times ctc

Ⓡ CHICAGO CENTER APP/DEP CON 133.3

RADIO AIDS TO NAVIGATION: NOTAM FILE DLL.

DELLS (H) VORTAC 117.0 DLL Chan 117 N43°33.05'
W89°45.82' 314° 23.7 NM to fld. 1020/3E.

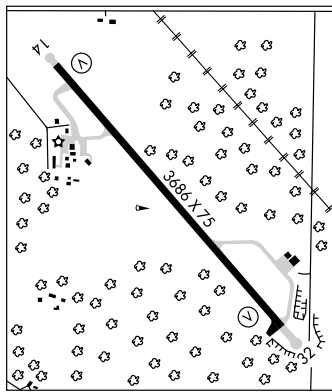




VORTAC OSH 111.8 Chgn 55	APP CRS 096°	Rwy Idg TDZE Apt Elev	N/A N/A 992
--	------------------------	-----------------------------	--

VOR/DME or GPS-A
NEW HOLSTEIN MUNI (8D1)

A NA Use OSHKOSH altimeter setting, when not available, use Green Bay altimeter setting.
Circling NA to Rwy 4-22.

MILWAUKEE APP CON
127.0 263,075

UNICOM
123.0 (CTAF) **L**

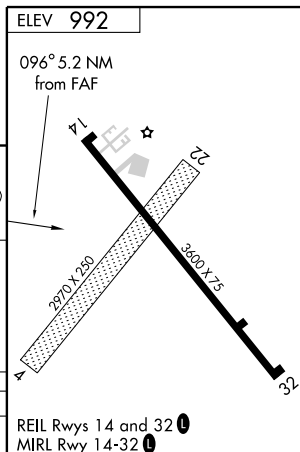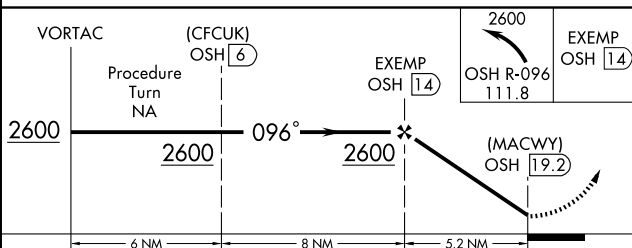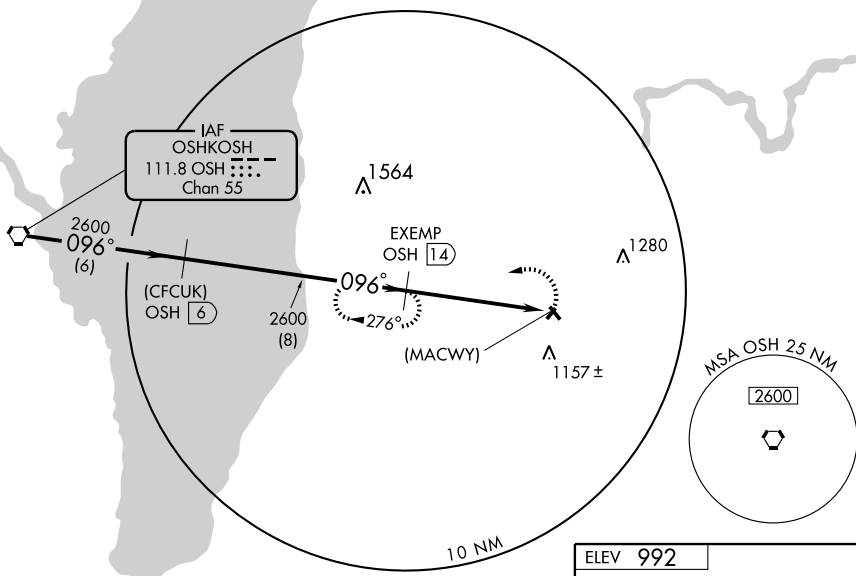

CATEGORY	A	B	C	D
CIRCLING	1520-1 528 (600-1)	1560-1 568 (600-1)	1560-1½ 568 (600-1½)	NA
GREEN BAY ALTIMETER SETTING MINIMUMS				
CIRCLING	1580-1 588 (600-1)	1620-1 628 (700-1)	1620-1½ 628 (700-1½)	NA

Knots	60	90	120	150	180
Min:Sec					

NEILLSVILLE MUNI (VIQ) 3 E UTC-6(-5DT) N44°33.49' W90°30.73'

GREEN BAY

1237 B S2 FUEL 100LL, MOGAS NOTAM FILE GRB

L-14I

RWY 09-27: H3400X60 (ASPH) S-12 LIRL 0.9% up E

IAP

RWY 09: VASI(V2L)—GA 3.0° TCH 31'. Tree.

RWY 27: VASI(V2L)—GA 3.5° TCH 25'. Tree.

AIRPORT REMARKS: Attended 1400-2300Z†. Fuel avbl PPR, call 715-743-4400. PPR for hangar space call 715-743-4400. Rotating bcn OTS indef. LIRL Rwy 09-27 ops low ints, to increase ints and ACTIVATE VASI Rwy 09 and 27—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 124.4

RADIO AIDS TO NAVIGATION: NOTAM FILE STE.

STEVENS POINT (L) VORTAC 110.6 STE Chan 43 N44°32.60' W89°31.83' 273° 42.1 NM to fld. 1110/2E.
HIWAS.

NDB (MHW) 368 VIQ N44°33.43' W90°30.91' at fld. Unmonitored. NOTAM FILE GRB.

NEPCO N44°15.59' W89°53.27' NOTAM FILE ISW.

GREEN BAY

NDB (LOM) 326 EK 020° 6.4 NM to Alexander Fld South Wood Co. Unmonitored.

NEST OF EAGLES (See SPOONER)

NEW HOLSTEIN MUNI (8D1) 1 W UTC-6(-5DT) N43°56.66' W88°06.81'

CHICAGO

992 B S4 FUEL 100LL TPA-1792(800) NOTAM FILE GRB

L-28H

RWY 14-32: H3600X75 (ASPH) S-20 MIRL

IAP

RWY 14: REIL(NSTD). Road.

RWY 32: REIL(NSTD). Ground.

RWY 04-22: 2970X250 (TURF)

RWY 04: Tree.

RWY 22: Trees. Rgt ftc.


AIRPORT REMARKS: Attended 1500-2300Z†. Rwy 04-22 CLOSED Nov 1 thru May 1. Numerous birds invof arpt. ACTIVATE MIRL Rwy 14-32 and REILS Rwy 14 and Rwy 32—CTAF.

COMMUNICATIONS: CTAF/UNICOM 123.0

Ⓡ MILWAUKEE APP/DEP CON 127.0

RADIO AIDS TO NAVIGATION: NOTAM FILE OSH.

OSHKOSH (L) VORTAC 111.8 OSH Chan 55 N43°59.43'
W88°33.36' 096° 19.4 NM to fld. 780/2E.

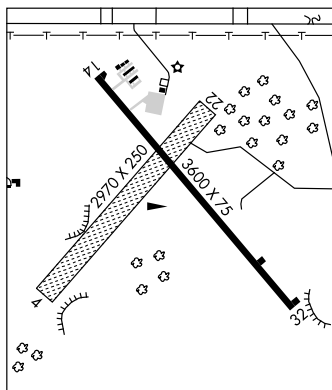

NEW LISBON

MAUSTON-NEW LISBON UNION (82C) 3 SE UTC-6(-5DT) N43°50.32' W90°08.26'

CHICAGO

906 B S2 FUEL 100LL, JET A NOTAM FILE GRB

L-28G

RWY 14-32: H3686X75 (ASPH) MIRL

IAP

RWY 14: VASI(V2L)—GA 3.5° TCH 30'. Road.

RWY 32: VASI(V2L)—GA 4.0° TCH 26'. Trees.

AIRPORT REMARKS: Unattended. For fuel and repairs ctc 608-562-3374. Deer on and invof arpt. Rwy 14-32 298' paved stopway SE end. ACTIVATE MIRL Rwy 14-32—122.8.


COMMUNICATIONS: CTAF 122.9

VOLK APP/DEP CON 135.25 (Mon-Fri 1400-2200Z† except holidays), other times ctc

Ⓡ CHICAGO CENTER APP/DEP CON 133.3

RADIO AIDS TO NAVIGATION: NOTAM FILE DLL.

DELLS (H) VORTAC 117.0 DLL Chan 117 N43°33.05'
W89°45.82' 314° 23.7 NM to fld. 1020/3E.

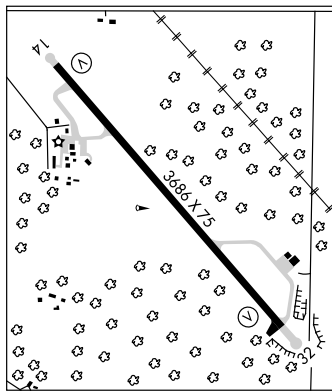

APP CRS **321°**
 Rwy Idg **3686**
 TDZE **903**
 Apt Elev **906**

GPS RWY 32

NEW LISBON/MAUSTON-NEW LISBON UNION (82°C)


▼ Use Volk Field altimeter setting; if not received
 ▲ NA use Wisconsin Dells altimeter setting.

MISSED APPROACH: Climb to 1900, then climbing left
 turn to 4000 direct RIRIQ WP and hold.


VOLK APP CON ★
123.8 291.7

CTAF
122.9

122.8 0

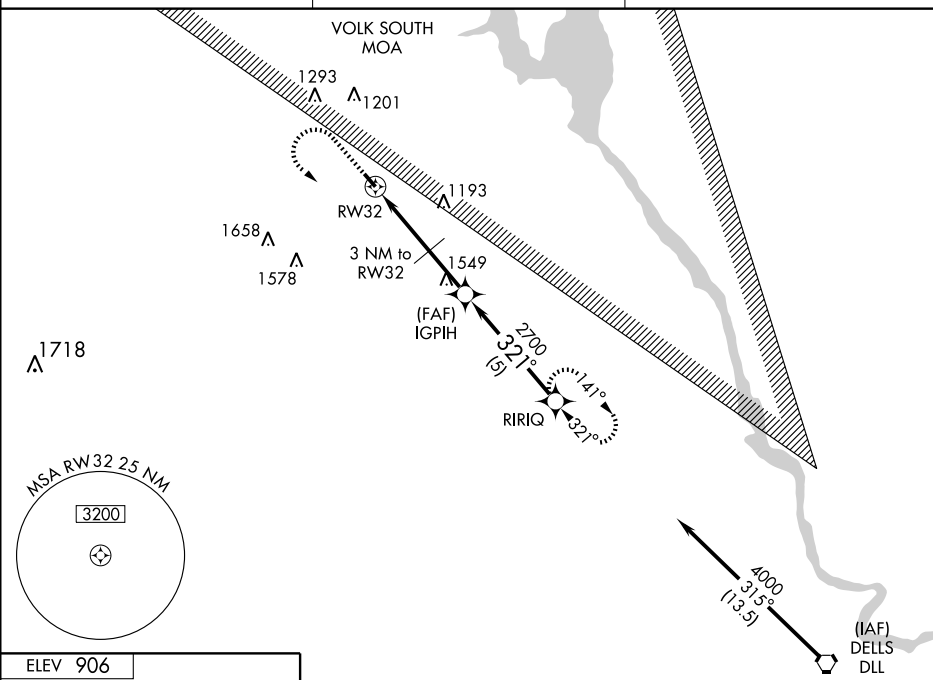

ELEV **906**

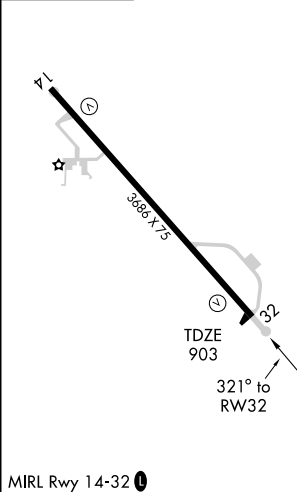

MRL Rwy 14-32 0


	1900	4000	RIRIQ	
	↑	↪	✳	
			IGPIH	
		3 NM to RW32		
		RW32		
		2000	2700	
		3 NM	2 NM	5 NM
				RIRIQ
				4000
				Procedure Turn NA
CATEGORY	A	B	C	D
S-32	1440-1	537 (600-1)	1440-1½ 537 (600-1½)	1440-1¾ 537 (600-1¾)
CIRCLING	1580-1	674 (700-1)	1580-2 674 (700-2)	1640-2¼ 734 (800-2¼)
WISCONSIN DELLS ALTIMETER SETTING MINIMUMS				
S-32	1500-1	597 (600-1)	1500-1½ 597 (600-1½)	1500-1¾ 597 (600-1¾)
CIRCLING	1620-1	714 (800-1)	1620-2 714 (800-2)	1700-2½ 794 (800-2½)

AGUDE TWO ARRIVAL

ST-263 (FAA)

MINNEAPOLIS-ST. PAUL, MINNESOTA

NC-1, 23 SEP 2010 to 21 OCT 2010

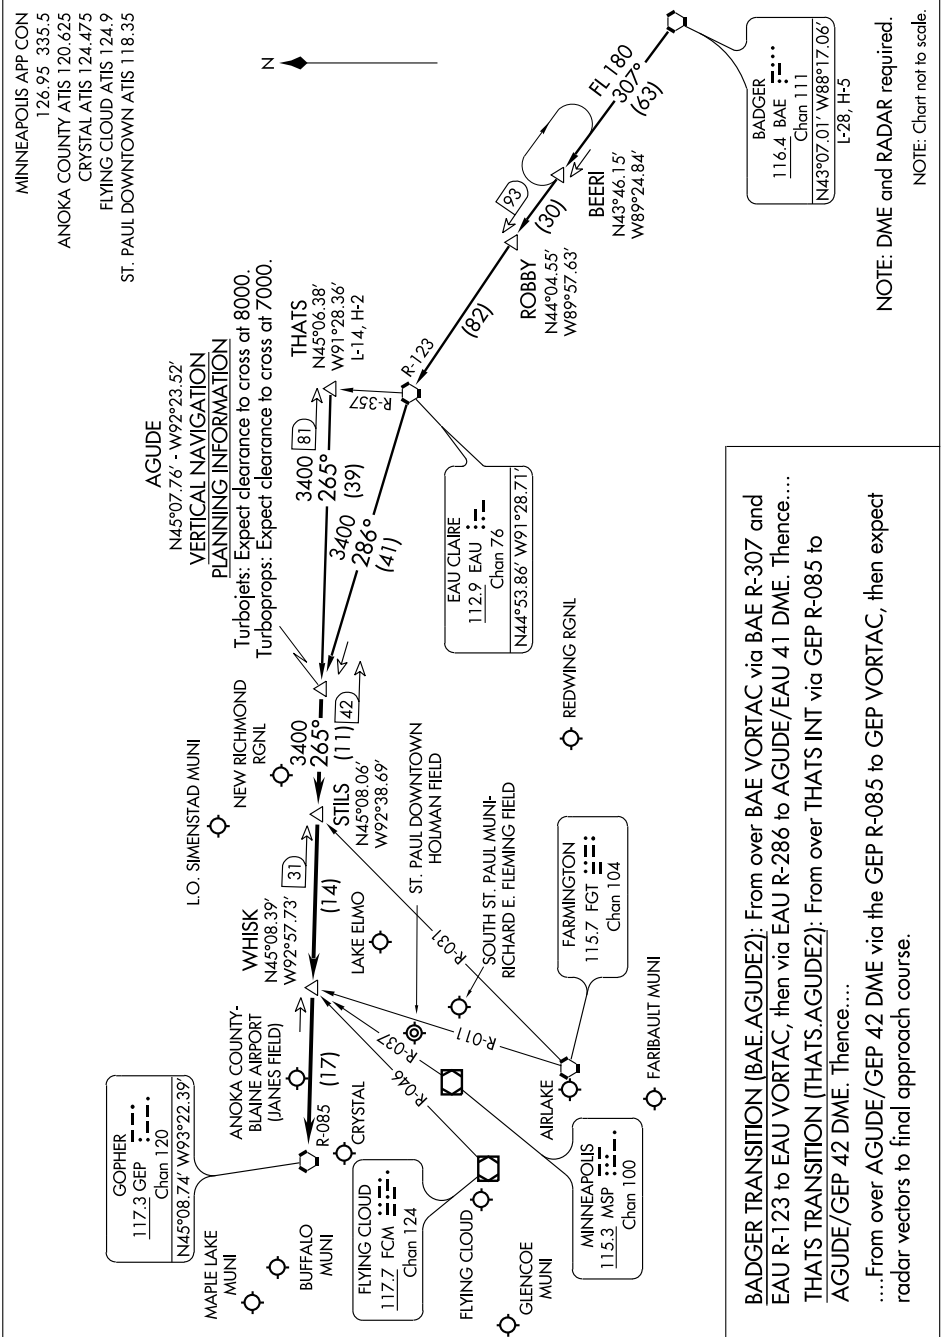

AGUDE TWO ARRIVAL

MINNEAPOLIS-ST. PAUL, MINNESOTA

NC-1, 23 SEP 2010 to 21 OCT 2010

NEW RICHMOND RGNL (RNH) 2 N UTC-6(-5DT) N45°08.87' W92°32.35'

GREEN BAY

998 B S4 FUEL 100LL JET A OX 4 TPA-1998(1000) NOTAM FILE RNH

H-21, L-141, A

RWY 14-32: H5507X75 (ASPH) S-12 MIRL

IAP

RWY 14: REIL. PAPI(P4L)—GA 3.0° TCH 40'.

RWY 32: REIL. PAPI(P4L)—GA 3.0° TCH 20'. Pole.

RWY 04-22: 2050X75 (TURF) 0.3% up NE

AIRPORT REMARKS: Attended continuously. 24 hr self fuel avbl for credit card users or call 715-246-7251. Seaplane t/c adjacent to S side of arpt. Deer and birds on and in/ov arpt. Aerobatic practice area 4NM NE of arpt. Ultralight activity on and in/ov arpt. Turbo-jet touch and go not authorized. Bright lgts from ball fields ½ mile S during evenings May thru Sep. Rwy 04-22 open to ski equipped acft winter months. Rwy distance markers on Rwy 14. Automobile and pedestrian access onto arpt property restricted by security fencing and gates from 0400-1200Z†. Contact arpt manager 715-246-7735 for access instructions. Rwy 32 VASI unusable byd 4° right of course. MIRL Rwy 14-32 preset on low inst; to increase ints and ACTIVATE PAPI and REIL Rwy 14 and 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.0 (715) 246-3202.

COMMUNICATIONS: CTAF/UNICOM 122.975

Ⓡ MINNEAPOLIS APP/DEP CON 121.2

GCO 121.725 (MINNEAPOLIS APP CON and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

GOPHER (H) VORTACW 117.3 GEP Chan 120 N45°08.74' W93°22.39' 084° 35.4 NM to fld. 877/6E.

HIWAS.

NDB (MHW) 257 RNH N45°08.83' W92°32.01' at fld. NOTAM FILE RNH.

NORTH COUNTRY SPB (See SOLON SPRINGS)

OCNTO N44°52.55' W87°54.74' NOTAM FILE GRB.

GREEN BAY

NDB (MHW) 388 OCQ at J. Douglas Bake Meml. NDB unusable 220°-360°.

L-31A

OCNTO

J. DOUGLAS BAKE MEML (OCQ) 2 SW UTC-6(-5DT) N44°52.44' W87°54.59'

GREEN BAY

604 B FUEL 100LL NOTAM FILE GRB

L-31A

RWY 11-29: H3198X75 (ASPH) S-40, D-55, 2D-90 MIRL

IAP

RWY 11: REIL. Tree.

RWY 29: Trees.

RWY 04-22: 1840X150 (TURF)

RWY 04: Trees.

RWY 22: Trees.

AIRPORT REMARKS: Attended 1400-2000Z†. 24 hour fuel avbl. Migratory waterfowl on and in/ov arpt. Confirm winter rwy conditions and snow removal with arpt manager 920-834-7727. Rwy 04-22 not plowed Nov-Apr. ACTIVATE MIRL Rwy 11-29—122.8. Rwy 11 REIL OTS indef. Rwy 04-22 thlds marked with white cones.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ GREEN BAY APP/DEP CON 119.5 (1130-0530Z†)

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 125.55 (0530-1130Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE GRB.

GREEN BAY (H) VORTACW 115.5 GRB Chan 102 N44°33.31' W88°11.69' 031° 22.7 NM to fld. 767/1E.

HIWAS.

OCNTO NDB (MHW) 388 OCQ N44°52.55' W87°54.74' at fld. NDB unusable 220°-360°.

SWEETWATER BAY SPB (30W) 6 NE UTC-6(-5DT) N44°57.12' W87°48.51'

GREEN BAY

579 NOTAM FILE GRB

WATERWAY ALL WAY: 10000X250 (WATER)

SEAPLANE REMARKS: Attended irregularly. Apch from the W or NW over western shoreline; trees up to 85' along shoreline.

COMMUNICATIONS: CTAF 122.9

NDB RNH 257	APP CRS 134°	Rwy Idg TDZE Apt Elev	5507 997 997
-----------------------	------------------------	-----------------------------	---

NDB RWY 14

NEW RICHMOND RGNL (RNH)



When local altimeter setting not received, use Osceola altimeter setting and increase all MDAs 40 feet and Cat. B, C and D visibilities 1/4 mile.


MISSED APPROACH: Climb to 2800 then left turn direct RNH NDB and hold.

AWOS-3
120.0

MINNEAPOLIS APP CON
121.2 357.4


GCO
121.725

UNICOM
122.975 (CTAF) 0

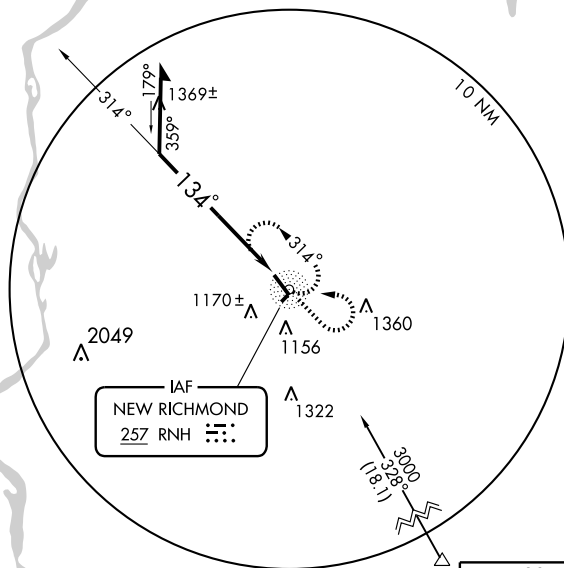

BITLR

Remain
within 10 NM

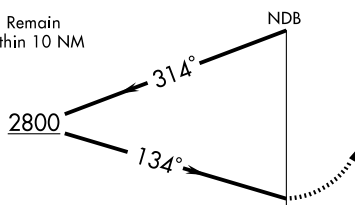

2800




RNH
257

ELEV 997

134° to
RNH NDB

TDZE
997



MIRL Rwy 14-32 0

REIL Rws 14 and 32 0

CATEGORY	A	B	C	D
S-14	1720-1	723 (800-1)	1720-2 723 (800-2)	1720-2 1/4 723 (800-2 1/4)
CIRCLING	1720-1	723 (800-1)	1720-2 723 (800-2)	1720-2 1/4 723 (800-2 1/4)

NEW RICHMOND, WISCONSIN

Amdt 3 09239

45°09'N - 92°32'W

NEW RICHMOND RGNL (RNH)

NDB RWY 14

APP CRS **141°**
Rwy Idg **5507**
TDZE **997**
Apt Elev **997**

RNAV (GPS) RWY 14

NEW RICHMOND RGNL (RNH)

▼ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Osceola altimeter setting and increase all MDAs 40 feet.



MISSED APPROACH: Climb to 2800 direct WUNTA and hold.

AWOS-3
120.0


MINNEAPOLIS APP CON
121.2 357.4

GCO
121.725

UNICOM
122.975 (CTAF) 0

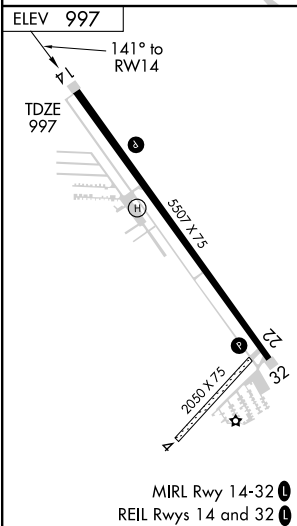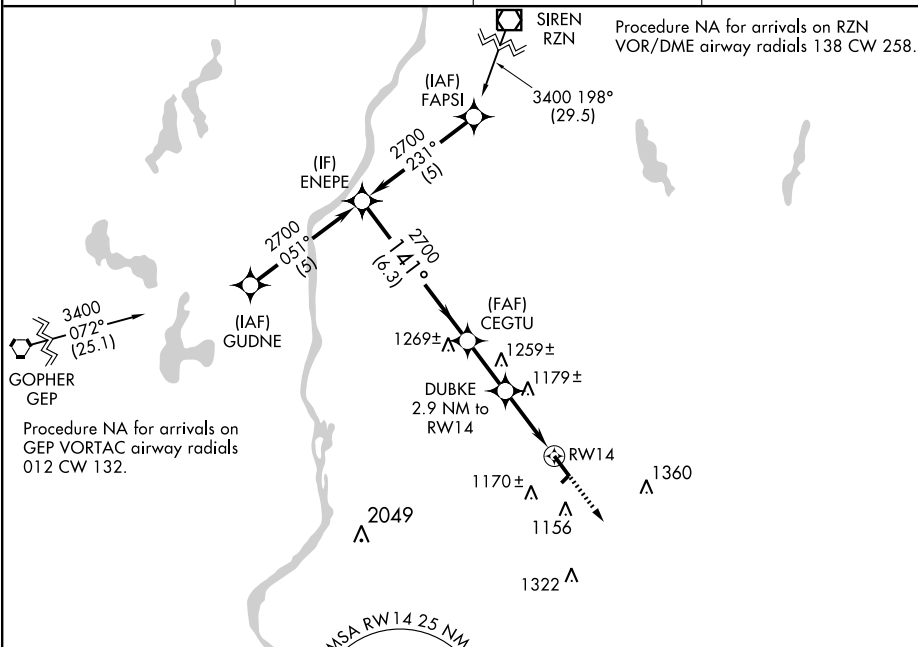

Procedure
Turn NA

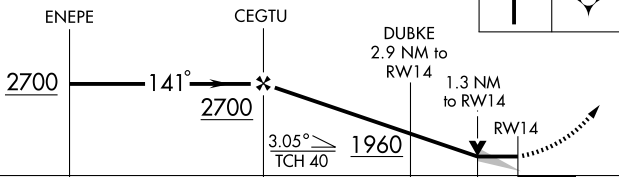

CATEGORY	A	B	C	D
LNNAV MDA	1440-1	443 (500-1)	1440-1½ 443 (500-1½)	1440-1½ 443 (500-1½)
CIRCLING	1520-1	523 (600-1)	1520-1½ 523 (600-1½)	1560-2 563 (600-2)

APP CRS	Rwy Idg	5507
321°	TDZE	996
	Apt Elev	997

RNAV (GPS) RWY 32
NEW RICHMOND RGNL (RNH)

**T
A** DME/DME RNP-0.3 NA. When local altimeter setting not received, use Osceola altimeter setting and increase all MDAs 40 feet and Cat D LNAV visibility $\frac{1}{4}$ mile.



MISSED APPROACH: Climb to 2700
direct ENEPE and hold.

AWOS-3
120.0

MINNEAPOLIS APP CON
121.2 357.4

GCO
121.725

UNICOM
122.975 (CTAF) **L**

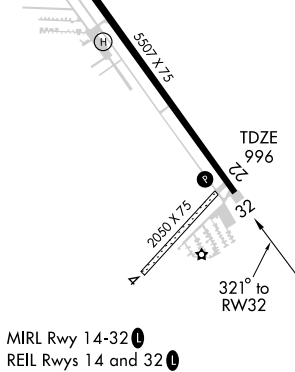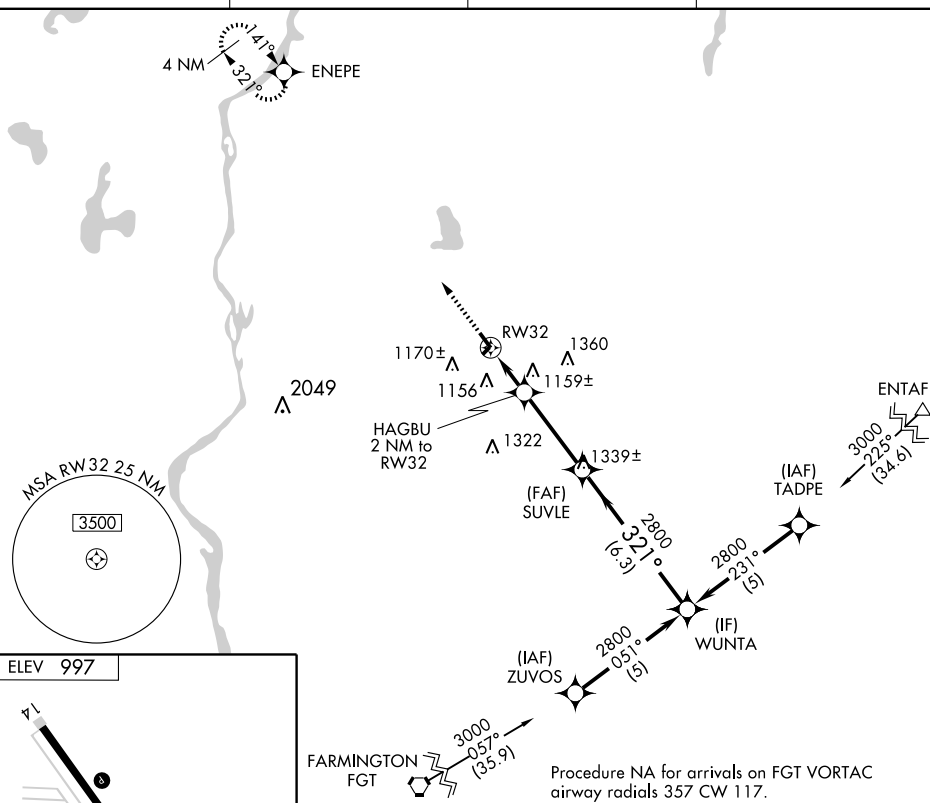

2700 ENEPE

HAGBU 2 NM to RW32

1.3 NM to RW32

RW32

SUVLE

WUNTA

321°

2800

1680 $\leq 3.05^\circ$ TCH 40

Procedure Turn NA

VGSI and descent angles not coincident.

CATEGORY	A	B	C	D
RNAV MDA	1420-1	424 (500-1)	1420-1 1/4	424 (500-1 1/4)
CIRCLING	1520-1	523 (600-1)	1520-1 1/2 523 (600-1 1/2)	1560-2 563 (600-2)

NEW RICHMOND, WISCONSIN

Amdt 1 09239

NEW RICHMOND RGNL (RNH)

RNAV (GPS) RWY 32

45°09'N - 92°32'W

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

TWOLF TWO ARRIVAL

ST-264 (FAA)

MINNEAPOLIS, MINNESOTA

MINNEAPOLIS APP CON

126.95 335.5

118.72 (MSP RWY 35)

MINNEAPOLIS ATIS

135.35 239.275

ANOKA COUNTY ATIS 120.625

CRYSTAL ATIS 124.475

FLYING CLOUD ATIS 124.9

ST. PAUL DOWNTOWN ATIS

118.35

GOPHER
117.3 GEP
Chan 120

FLYING CLOUD
117.7 FCM
Chan 124
N44°49.54'-W93°27.41'

TRGET

N44°13.88'-W93°27.73'

VERTICAL NAVIGATION

PLANNING INFORMATION

MSP: Expect clearance to cross at 11000.

All other airports:

Turbojets: Expect clearance to cross at 8000.

Turboprops: Expect clearance to cross at 7000.

MANKATO
110.8 MKT
Chan 45

FORT DODGE
113.5 FOD
Chan 82
N42°36.67'-W94°17.69'
L-12, H-5

TICKT
N42°53.71'-W93°59.01'

TWOLF
N43°17.00'-W93°33.09'

KGEE
N43°44.94'-W93°30.47'

LYNKS
N44°06.89'-W93°28.39'

PIKKL
N44°22.82'-W93°21.49'

GDNEE
N44°30.68'-W93°15.98'

FARMINGTON
115.7 FGT
Chan 104
N44°37.86'-W93°10.92'

SLIKK
N44°47.90'-W93°17.21'

MINNEAPOLIS-ST. PAUL INTL/
WOLD CHAMBERLAIN

ST. PAUL DOWNTOWN
HOLMAN FIELD

NEW RICHMOND
RGNL

ANOKA COUNTY-BLAINE AIRPORT
(JANES FIELD)

CRYSTAL

L.O. SIMENSTAD MUNI

NOTE: DME and RADAR Required.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

TWOLF TWO ARRIVAL

(TWOLF.TWOLF2) 10154

MINNEAPOLIS, MINNESOTA

NC-1, 23 SEP 2010 to 21 OCT 2010

NC-1, 23 SEP 2010 to 21 OCT 2010

ARRIVAL DESCRIPTION

FORT DODGE TRANSITION (FOD.TWOLF2): From over FOD VORTAC via FOD R-032 to TWOLF/FOD 52 DME, Thence

....From over TWOLF/GEP 112 DME via GEP R-178 to KGEED/GEP 84 DME, then as depicted to TRGET INT/GEP 55 DME. Thence....

LANDING MSP RWYS 12L/R: From over TRGET INT via FGT R-201 to FGT VORTAC, then via FGT R-330 to SLKK INT/FGT 11 DME, then via heading 300° for radar vectors to final approach course.

LANDING MSP RWYS 30L/R, 4, 22, 17, 35: From over TRGET INT via FGT R-201 to FGT VORTAC, then via radar vectors to final approach course.

LANDING ALL OTHER AIRPORTS: From over TRGET INT via FCM R-180 to FCM VOR/DME, then expect radar vectors to final approach course.

NC-1, 23 SEP 2010 to 21 OCT 2010

NC-1, 23 SEP 2010 to 21 OCT 2010

NEW RICHMOND RGNL (RNH) 2 N UTC-6(-5DT) N45°08.87' W92°32.35'

GREEN BAY

998 B S4 FUEL 100LL JET A OX 4 TPA-1998(1000) NOTAM FILE RNH

H-21, L-141, A

RWY 14-32: H5507X75 (ASPH) S-12 MIRL

IAP

RWY 14: REIL. PAPI(P4L)—GA 3.0° TCH 40'.

RWY 32: REIL. PAPI(P4L)—GA 3.0° TCH 20'. Pole.

RWY 04-22: 2050X75 (TURF) 0.3% up NE

AIRPORT REMARKS: Attended continuously. 24 hr self fuel avbl for credit card users or call 715-246-7251. Seaplane tfc adjacent to S side of arpt. Deer and birds on and in/ov arpt. Aerobatic practice area 4NM NE of arpt. Ultralight activity on and in/ov arpt. Turbo-jet touch and go not authorized. Bright lgts from ball fields ½ mile S during evenings May thru Sep. Rwy 04-22 open to ski equipped acft winter months. Rwy distance markers on Rwy 14. Automobile and pedestrian access onto arpt property restricted by security fencing and gates from 0400-1200Z†. Contact arpt manager 715-246-7735 for access instructions. Rwy 32 VASI unusable byd 4° right of course. MIRL Rwy 14-32 preset on low inst; to increase ints and ACTIVATE PAPI and REIL Rwy 14 and 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.0 (715) 246-3202.

COMMUNICATIONS: CTAF/UNICOM 122.975

(R) MINNEAPOLIS APP/DEP CON 121.2

GCO 121.725 (MINNEAPOLIS APP CON and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

GOPHER (H) VORTACW 117.3 GEP Chan 120 N45°08.74' W93°22.39' 084° 35.4 NM to fld. 877/6E.

HIWAS.

NDB (MHW) 257 RNH N45°08.83' W92°32.01' at fld. NOTAM FILE RNH.

NORTH COUNTRY SPB (See SOLON SPRINGS)

OCNTO N44°52.55' W87°54.74' NOTAM FILE GRB.

GREEN BAY

NDB (MHW) 388 OCQ at J. Douglas Bake Meml. NDB unusable 220°-360°.

L-31A

OCNTO

J. DOUGLAS BAKE MEML (OCQ) 2 SW UTC-6(-5DT) N44°52.44' W87°54.59'

GREEN BAY

604 B FUEL 100LL NOTAM FILE GRB

L-31A

RWY 11-29: H3198X75 (ASPH) S-40, D-55, 2D-90 MIRL

IAP

RWY 11: REIL. Tree.

RWY 29: Trees.

RWY 04-22: 1840X150 (TURF)

RWY 04: Trees.

RWY 22: Trees.

AIRPORT REMARKS: Attended 1400-2000Z†. 24 hour fuel avbl. Migratory waterfowl on and in/ov arpt. Confirm winter rwy conditions and snow removal with arpt manager 920-834-7727. Rwy 04-22 not plowed Nov-Apr. ACTIVATE MIRL Rwy 11-29—122.8. Rwy 11 REIL OTS indef. Rwy 04-22 thlds marked with white cones.

COMMUNICATIONS: CTAF/UNICOM 122.8

(R) GREEN BAY APP/DEP CON 119.5 (1130-0530Z†)

(R) MINNEAPOLIS CENTER APP/DEP CON 125.55 (0530-1130Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE GRB.

GREEN BAY (H) VORTACW 115.5 GRB Chan 102 N44°33.31' W88°11.69' 031° 22.7 NM to fld. 767/1E.

HIWAS.

OCNTO NDB (MHW) 388 OCQ N44°52.55' W87°54.74' at fld. NDB unusable 220°-360°.

SWEETWATER BAY SPB (30W) 6 NE UTC-6(-5DT) N44°57.12' W87°48.51'

GREEN BAY

579 NOTAM FILE GRB

WATERWAY ALL WAY: 10000X250 (WATER)

SEAPLANE REMARKS: Attended irregularly. Apch from the W or NW over western shoreline; trees up to 85' along shoreline.

COMMUNICATIONS: CTAF 122.9

APP CRS	Rwy Idg	3198
112°	TDZE	604
	Apt Elev	604

GPS RWY 11


OCONTO/J. DOUGLAS BAKE MEMORIAL (OCQ)

▲ NA Use Green Bay altimeter setting.


MISSED APPROACH: Climb to 1300 then climbing right turn to 2500 direct EGENY WP and hold.

GREEN BAY APP CON ★
119.5 338.2

UNICOM
122.8 (CTAF) 0

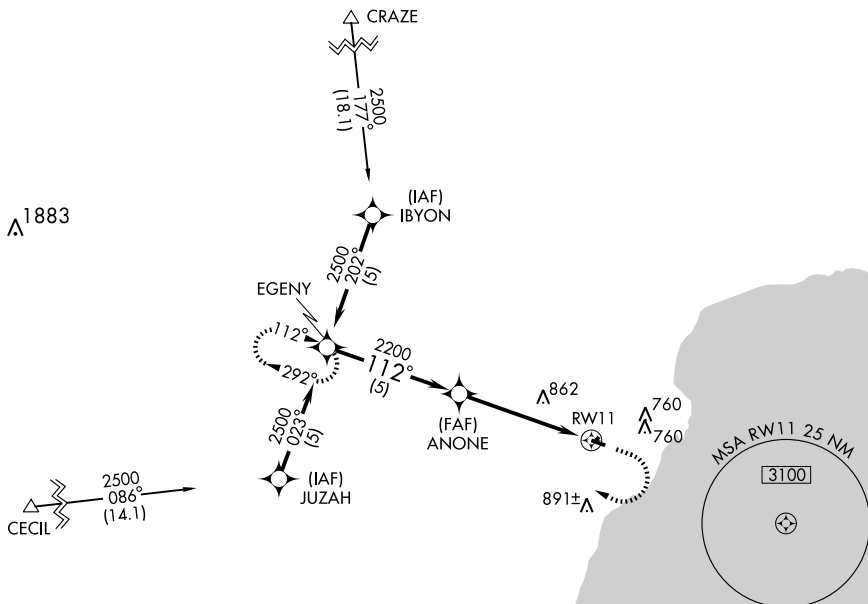


CECIL 2500 086° (14.1)

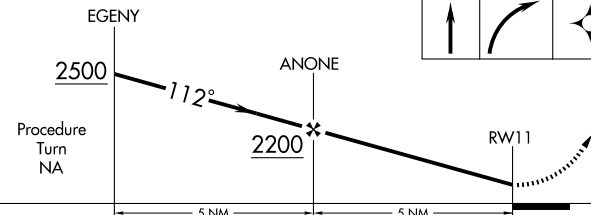

1300 2500 EGENY

ELEV 604



CATEGORY	A	B	C	D
S-11	1200-1	596 (600-1)	1200-1½ 596 (600-1½)	NA
CIRCLING	1200-1	596 (600-1)	1200-1½ 596 (600-1½)	NA

REIL Rwy 11
MIRL Rwy 11-29 0





NDB OCQ	APP CRS	Rwy Idg	3198
<u>388</u>	301°	TDZE	604
		Apt Elev	604

NDB or GPS RWY 29
OCONTO/J. DOUGLAS BAKE MEMORIAL (OCQ)


A NA Use Green Bay altimeter setting.

MISSED APPROACH: Climbing left turn to 2300 via heading 180° then left turn direct OCQ NDB and hold.

GREEN BAY APP CON ★
119.5 338.2

UNICOM
122.8 (CTAF) **L**

1482

GREEN BAY
115.5 GRB 
Chan 102




NDB

Remain
within 10 NM

(IHUPO)


2300



A diagram showing a horizontal line with a thick black bar on the left. A double-headed arrow below the line indicates a width of 4 nm.

CATEGORY	A	B	C	D
S-29	1240-1	636 (700-1)	1240-1 $\frac{3}{4}$ 636 (700-1 $\frac{3}{4}$)	NA
CIRCLING	1240-1	636 (700-1)	1240-1 $\frac{3}{4}$ 636 (700-1 $\frac{3}{4}$)	NA

ELEV 604




REIL Rwy 11
MIRL Rwy 11-29 **L**

AGUDE TWO ARRIVAL

ST-263 (FAA)

MINNEAPOLIS-ST. PAUL, MINNESOTA

NC-1, 23 SEP 2010 to 21 OCT 2010

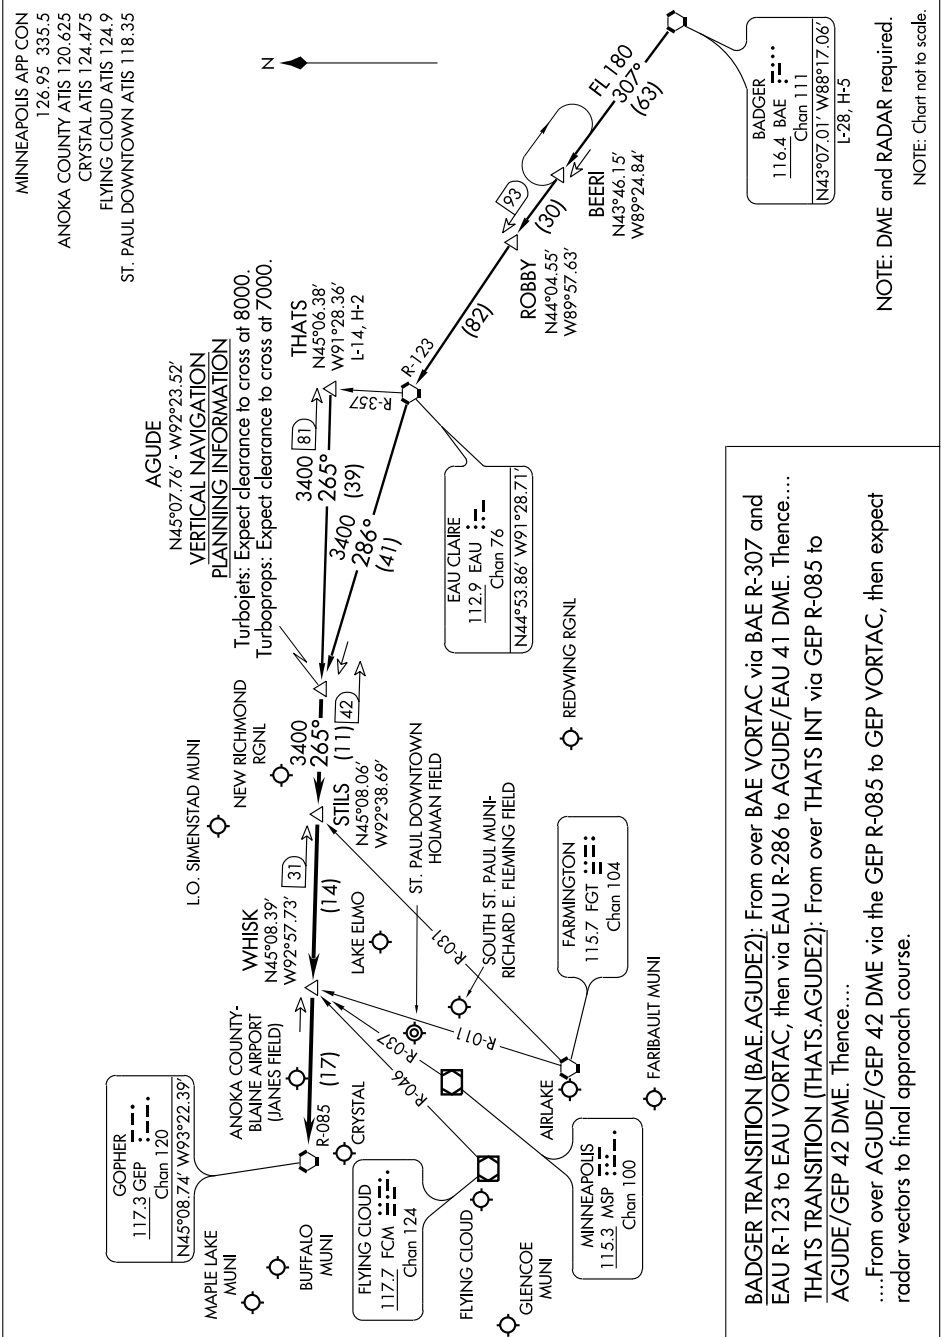

AGUDE TWO ARRIVAL

MINNEAPOLIS-ST. PAUL, MINNESOTA

NC-1, 23 SEP 2010 to 21 OCT 2010

OSCEOLA

L.O. SIMENSTAD MUNI (OEO) 0 SE UTC-6(-5DT) N45°18.57' W92°41.40'

903 B S4 **FUEL** 100LL, JET A TPA-1903(1000) NOTAM FILE GRB

RWY 10-28: H5005X75 (ASPH) S-20, D-30 MIRL 0.4% up E

RWY 10: PAPI(P2L)—GA 3.0° TCH 35'. Road.

RWY 28: REIL. PAPI(P4L)—GA 3.0° TCH 37'.

RWY 04-22: 2270X150 (TURF) 0.3% up SW

AIRPORT REMARKS: Attended Apr-Oct 1500-2200Z±, Nov-Mar irregularly. Self svc fuel avbl 24 hrs. Extensive flight training, glider and ultralight. Deer and birds on and invof arpt. PAEW on and adjacent to arpt sfcs. Rwy 04-22 CLOSED 1 Dec-15 Apr. Rwy 04-22 CLOSED to wheeled acft when covered with snow or ice; open to ski equipped acft during winter months. Ctc arpt manager 612-327-3297. Avoid overflight of St. Croix River National Scenic Bi-way blo 2000' AGL. MIRL Rwy 10-28 preset on low ints dusk to dawn to incr ints ACTIVATE PAPI Rwy 10 and Rwy 28 and REIL Rwy 28—CTAF. Reflectors on twy. Rwy 04-22 marked with yellow cones.

WEATHER DATA SOURCES: AWOS-3 119.925 (715) 294-3845. Wind unreliable.


COMMUNICATIONS: CTAF 122.9

® **MINNEAPOLIS APP/DEP CON** 121.2.

GCO 121.725 (MINNEAPOLIS CLNC and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

GOPHER (H) VORTACW 117.3 GEP Chan 120 N45°08.74' W93°22.39' 065° 30.6 NM to fld. 877/6E.
HIWAS.

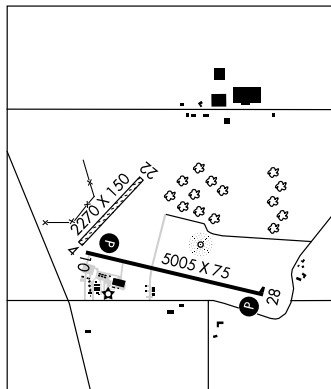

GREEN BAY
H-2J, L-141, A
IAP

OSHKOSH N43°59.43' W88°33.36' NOTAM FILE OSH.

(L) **VORTAC** 111.8 OSH Chan 55 at Wittman Rgnl. 780/2E.

RCD 122.25 122.1R 111.8T (GREEN BAY RADIO)

CHICAGO
L-28H

APP CRS	Rwy Idg	5005
283°	TDZE	906
	Apt Elev	906

RNAV (GPS) RWY 28

OSCEOLA / L.O. SIMENSTAD MUNI (OEO)

▼ If local altimeter setting not received, use Anoka County-Blaine Arpt (Janes Field) altimeter setting and increase all MDAs 60 feet.
▲ Circling to Rwy 04-22 NA at night. DME/DME PNP-0.3 NA.


MISSED APPROACH: Climbing right turn to 3000 direct ECLEY and hold.

AWOS-3
119.925

MINNEAPOLIS APP CON
121.2


GCO
121.725







CTAF
122.9

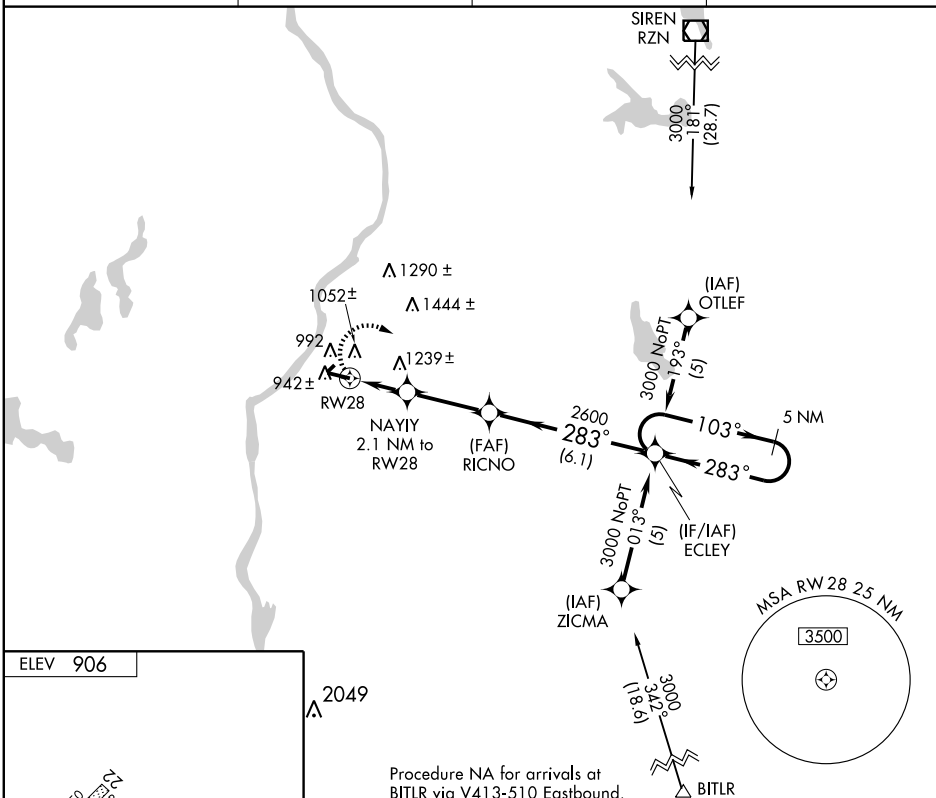

ELEV 906

2049



					
					
2.1 NM		3 NM		6.1 NM	
1560		2600		3000	
≤ 3.05°		283°		103°	
TCH 37		ECLEY		Holding Pattern	
CATEGORY	A		B	C	D
LNAV MDA	1480-1 574 (600-1)		1480-1½ 574 (600-1½)	NA	
CIRCLING	1480-1 574 (600-1)		1500-1½ 594 (600-1½)	NA	

ARRIVAL DESCRIPTION

FORT DODGE TRANSITION (FOD.TWOLF2): From over FOD VORTAC via FOD R-032 to TWOLF/FOD 52 DME, Thence

....From over TWOLF/GEP 112 DME via GEP R-178 to KGEED/GEP 84 DME, then as depicted to TRGET INT/GEP 55 DME. Thence....

LANDING MSP RWYS 12L/R: From over TRGET INT via FGT R-201 to FGT VORTAC, then via FGT R-330 to SLKK INT/FGT 11 DME, then via heading 300° for radar vectors to final approach course.

LANDING MSP RWYS 30L/R, 4, 22, 17, 35: From over TRGET INT via FGT R-201 to FGT VORTAC, then via radar vectors to final approach course.

LANDING ALL OTHER AIRPORTS: From over TRGET INT via FCM R-180 to FCM VOR/DME, then expect radar vectors to final approach course.

NC-1, 23 SEP 2010 to 21 OCT 2010

NC-1, 23 SEP 2010 to 21 OCT 2010

AIRPORT DIAGRAM

AL-730 (FAA)

OSHKOSH/ WITTMAN RGNL (OSH)
OSHKOSH, WISCONSIN

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.

READBACK OF ALL RUNWAY HOLDING INSTRUCTION IS REQUIRED.

ATIS

125.9


OSHKOSH TOWER ★

118.5 257.6

GND CON

121.9

EC-3, 23 SEP 2010 to 21 OCT 2010

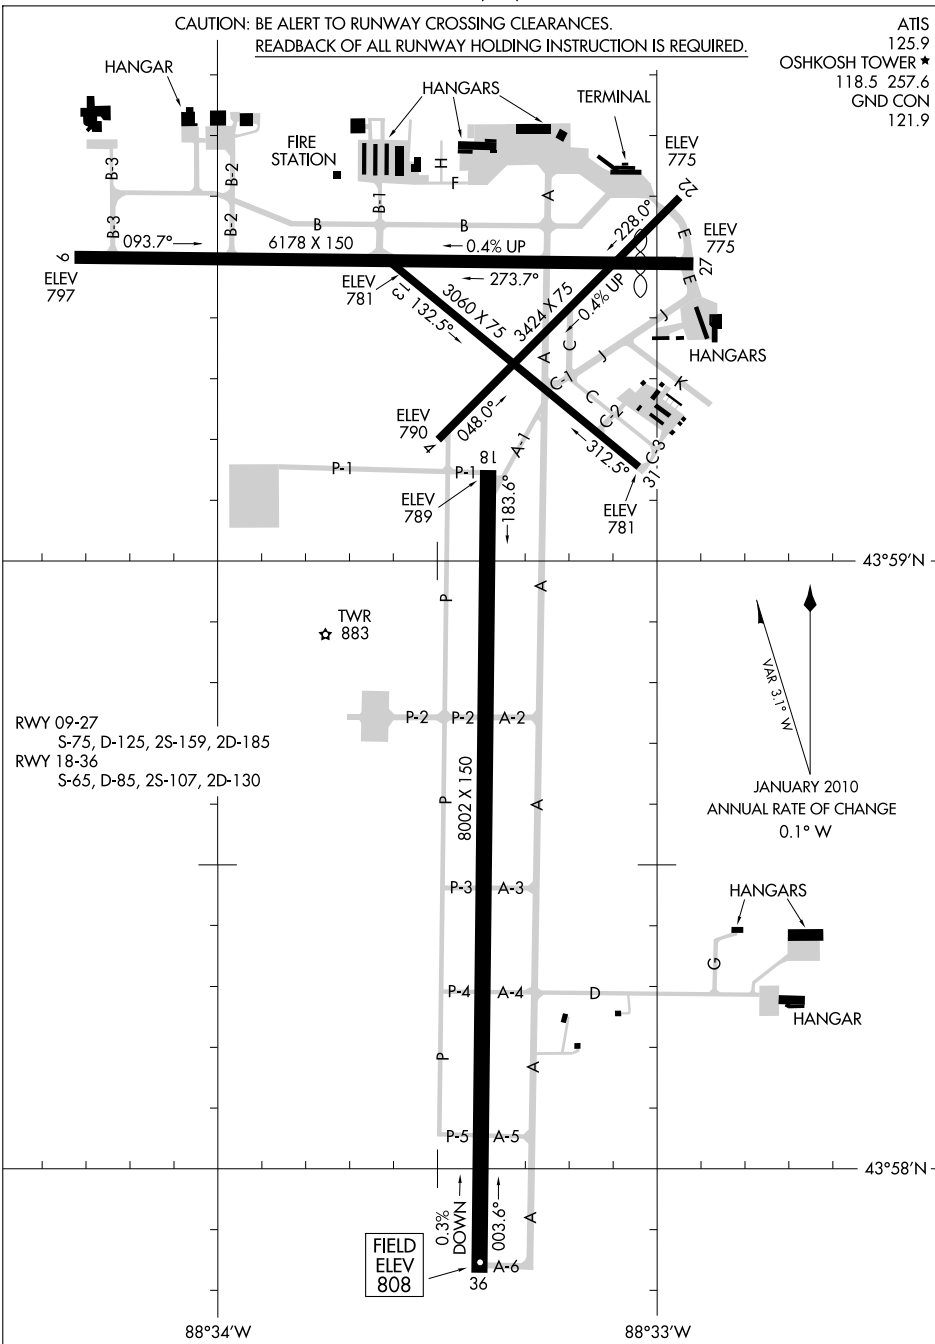

EC-3, 23 SEP 2010 to 21 OCT 2010

AIRPORT DIAGRAM

OSHKOSH, WISCONSIN
OSHKOSH/ WITTMAN RGNL (OSH)

OSHKOSH

WITTMAN RGNL (OSH) 2 S UTC-6(-5DT) N43°59.06' W88°33.42'

808 B S4 **FUEL** 100LL, JET A OX 1, 2 TPA-1808(1000) NOTAM FILE OSH

RWY 18-36: H8002X150 (CONC-GRVD) S-65, D-85, 2S-107,

2D-130 HIRL

RWY 18: REIL. VASI(V4L)—GA 3.0° TCH 47'.

RWY 36: MALSR. PAPI(P4L)—GA 3.0° TCH 52'. 0.3% down.

RWY 09-27: H6178X150 (CONC) S-75, D-125, 2S-159,

2D-185 HIRL 0.4% up W

RWY 09: REIL. VASI(V4L)—GA 3.0° TCH 50'. Pole.

RWY 27: REIL. PAPI(P4L)—GA 3.0° TCH 47'. Thld displcd 531'. Trees.

RWY 04-22: H3424X75 (ASPH) AUW-50 0.4% up SW

RWY 04: Pole. **RWY 22:** Pole.

RWY 13-31: H3060X75 (ASPH) AUW-50

RWY 31: Pole.

AIRPORT REMARKS: Attended 1300-0200Z†. For arpt attendant other hrs call 920-236-7827. Birds on and in/ov arpt especially gulls. Rwy 13-31 and Rwy 04-22; Twys C; H and P not avbl to air carrier ops with more than 30 passenger seats. Rwy 13-31 and Rwy 04-22 have heavy cracking and vegetation growing through rwy surface, full length. Rwy 22 and Rwy 27 apch ends are closely aligned. Verify correct rwy and compass heading prior to departure. When twr clsd VASI Rwy 09 on and HIRL Rwy 18-36 preset on medium ints, to increase HIRL Rwy 18-36 ints and ACTIVATE HIRL Rwy 09-27, PAPI Rwy 27, MALSR Rwy 36—CTAF.

WEATHER DATA SOURCES: ASOS (920) 426-1644. LAWRs.

COMMUNICATIONS: CTAF 118.5 ATIS 125.9 UNICOM 122.95

OSHKOSH RCO 122.25 122.1R 111.8T (GREEN BAY RADIO)

Ⓡ **MILWAUKEE APP/DEP CON** 127.0

OSHKOSH TOWER 118.5 (1200-0400Z†) **GND CON** 121.9

AIRSPACE: CLASS D svc 1200-0400Z† other times CLASS G.


RADIO AIDS TO NAVIGATION: NOTAM FILE OSH.

OSHKOSH (L) VORTAC 111.8 OSH Chan 55 N43°59.43' W88°33.36' at fld. 780/2E.

POBER NDB (LOM) 395 OS N43°52.43' W88°33.46' 358° 6.6 NM to fld. Unmonitored.

ILS 110.5 I-OSH Rwy 36 Class IT. LOM POBER NDB.

COMM/NAV/WEATHER REMARKS: LOC/GS unmonitored when twr clsd. LOM/OM unmonitored.

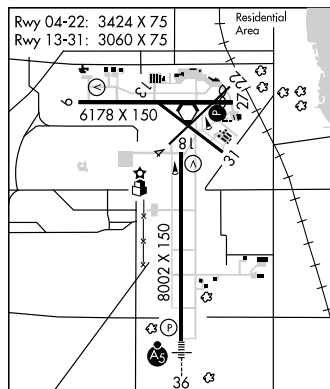

OUTAGAMIE CO (See APPLETON)

PALMYRA MUNI (88C) 0 NW UTC-6(-5DT) N42°53.01' W88°35.85'

851 S4 **FUEL** 100LL, MOGAS NOTAM FILE GRB

RWY 09-27: 2800X200 (TURF) LIRL

RWY 09: Tree. **RWY 27:** Tree.

AIRPORT REMARKS: Unattended. For fuel call 262-495-4342. Crane 190' AGL 300' south of AER 09 SR-SS.

ACTIVATE LIRL Rwy 09-27—CTAF. Rwy 09-27 marked by yellow cones.

COMMUNICATIONS CTAF 122.9

CHICAGO

H-2K, L-28H

IAP, AD

CHICAGO

LOC I-OSH <u>110.5</u>	APP CRS 359°	Rwy Idg TDZE Apt Elev	8002 808 808
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 36

OSHKOSH/ WITTMAN RGNL (OSH)





* RVR 1800 authorized with the use of FD or AP or HUD to DA.



MISSED APPROACH: Climb to 1300 then climbing right turn to 3000 via OSH R-090 to PINKY Int and hold.

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5 (CTAF) 0 257.6	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

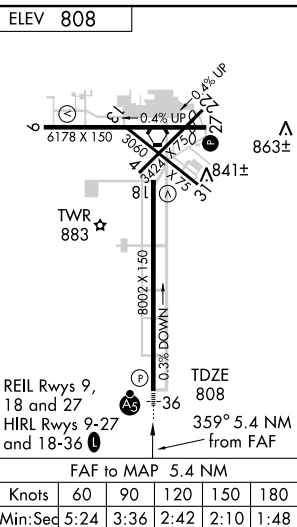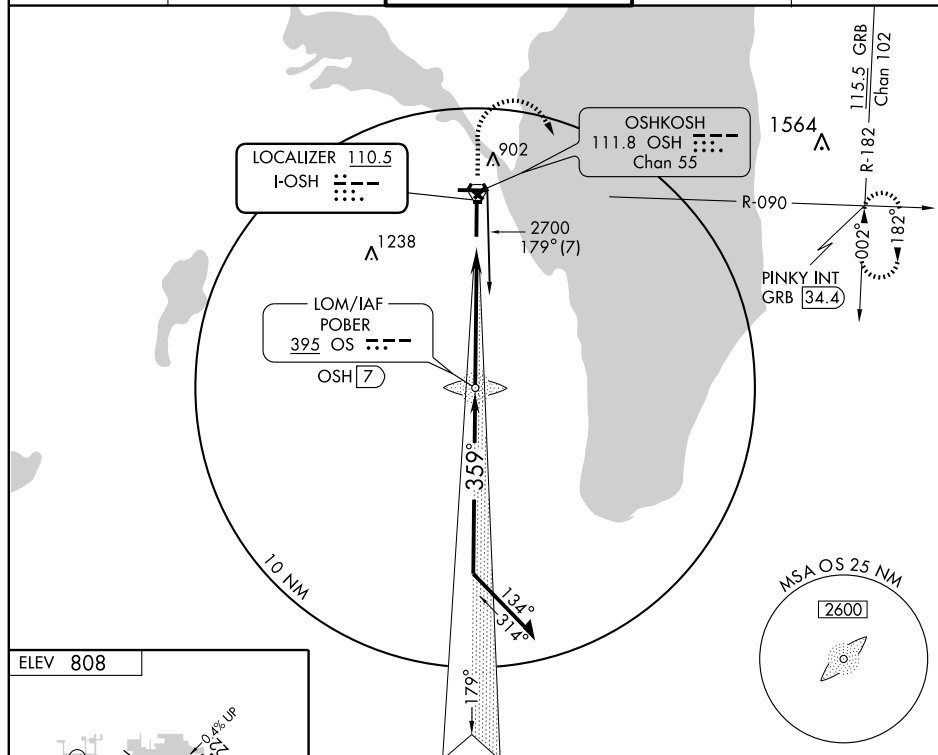

OSHKOSH, WISCONSIN

Amdt 6D 09295

OSHKOSH/WITTMAN RGNL (OSH)

ILS or LOC RWY 36

43° 59' N - 88° 33' W

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

LOC I-OSH 110.5	APP CRS 179°	Rwy Idg TDZE Apt Elev	8002 793 808
---------------------------	------------------------	-----------------------------	---

LOC/DME BC RWY 18



OSHKOSH/WITTMAN RGNL (OSH)

▼ Simultaneous reception of I-OSH and OSH DME required.
▲ DME from OSH VORTAC.

MISSED APPROACH: Climbing left turn to 3000 via OSH R-090 to PINKY Int and hold.

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5 (CTAF) 257.6	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

BACK COURSE

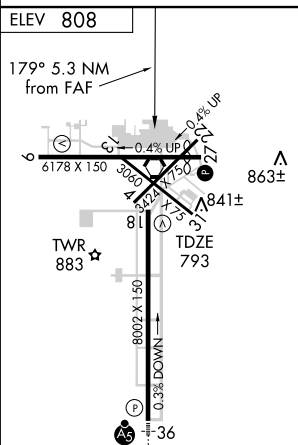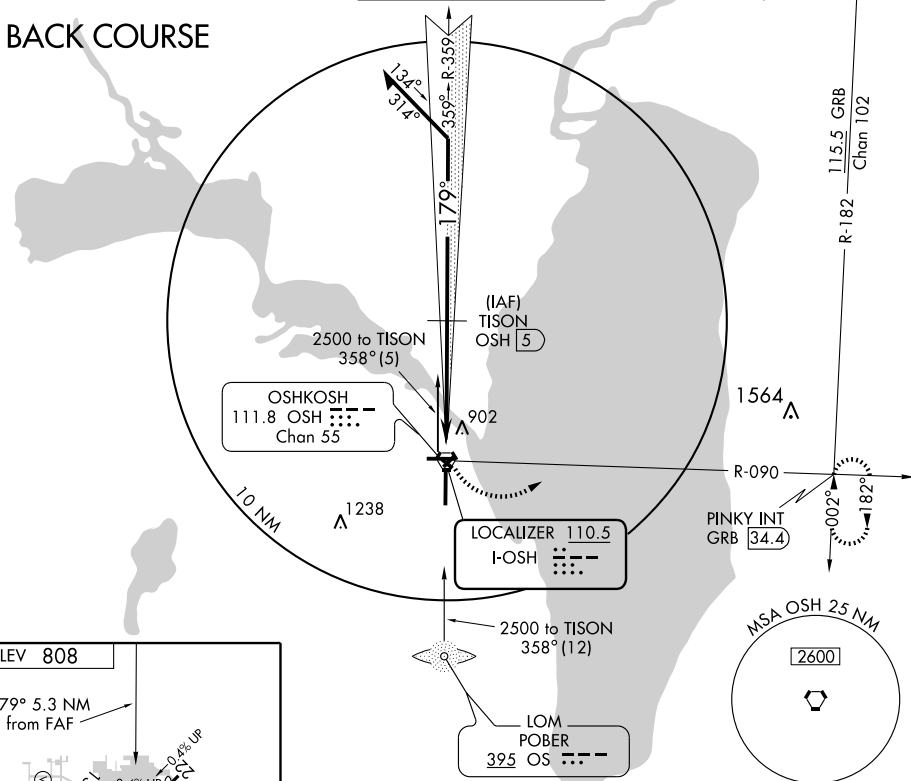

REIL Rwy 9, 18 and 27
HIRL Rwy 9-27 and 18-36

OSHKOSH, WISCONSIN
Amdt 6B 09295

CATEGORY	A		B		C		D	
	1160-1		367 (400-1)		1160-1½		367 (400-1½)	
CIRCLING	1260-1		452 (500-1)		1260-1½		1360-2	
					452 (500-1½)		552 (600-2)	

43° 59' N - 88° 33' W

OSHKOSH/WITTMAN RGNL (OSH)

LOC/DME BC RWY 18

EC-3, 23 SEP 2010 to 21 OCT 2010



NDB RWY 36

OSHKOSH/WITTMAN RGNL (OSH)

LOM OS 395	APP CRS 359°	Rwy Idg TDZE Apt Elev	8002 808 808
----------------------	------------------------	-----------------------------	---

NA		MISSED APPROACH: Climbing right turn to 3000 via 090° heading, then right turn direct OS LOM and hold.
----	--	--

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5 (CTAF) 257.6	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

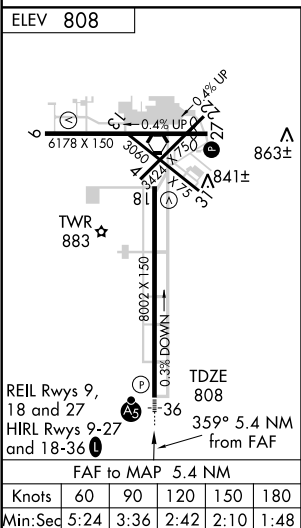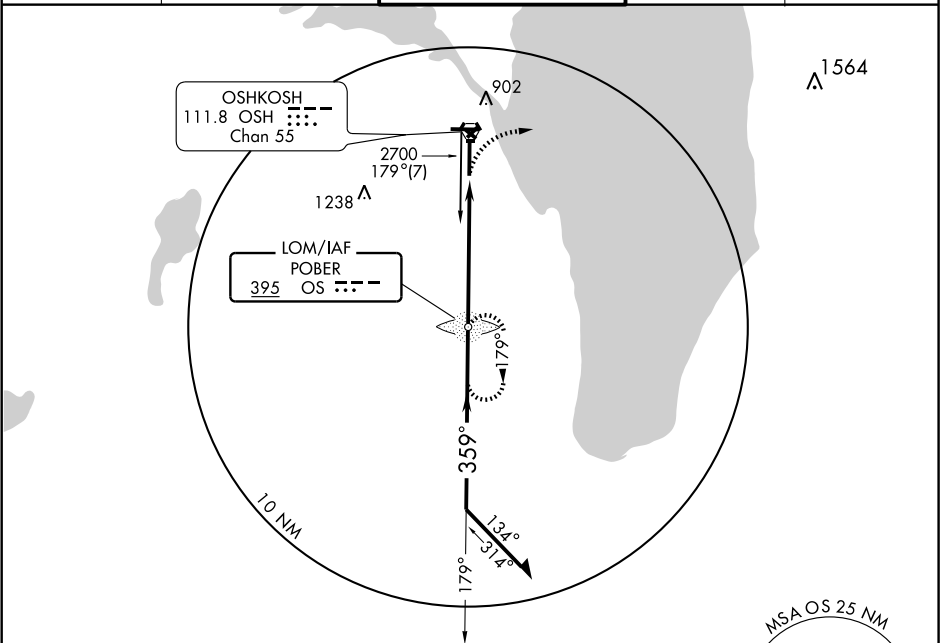

ELEV 808				
MSA OS 25 NM 2600				
3000 HDG 090° OS 395 POBER LOM 179° 2700 359° 2700				
Remain within 10 NM				
3.20° TCH 55				
5.4 NM				
CATEGORY	A	B	C	D
S-36	1340/40	532 (600-¾)	1340/50 532 (600-1)	1340-1½ 532 (600-1½)
CIRCLING	1340-1	532 (600-1)	1340-1½ 532 (600-1½)	1360-2 552 (600-2)

APP CRS	Rwy ldg	6178
089°	TDZE	797
	Apt Elev	808




RNAV (GPS) RWY 9

OSHKOSH/ WITTMAN RGNL (OSH)

▼ When local altimeter setting not received, use Fond Du Lac County altimeter setting and increase all MDA 40 feet, increase S-9 visibility Cat. C and Cat. D ¼ mile and circling Cat. C ¼ mile. VDP NA when using Fond Du Lac County altimeter setting. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct PEENA and right turn via 093° track to PINKY and hold.

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5(CTAF) 257.6	GND CON 121.9	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

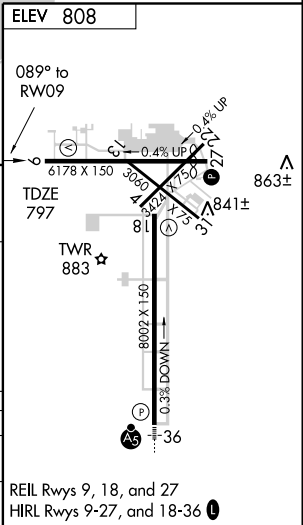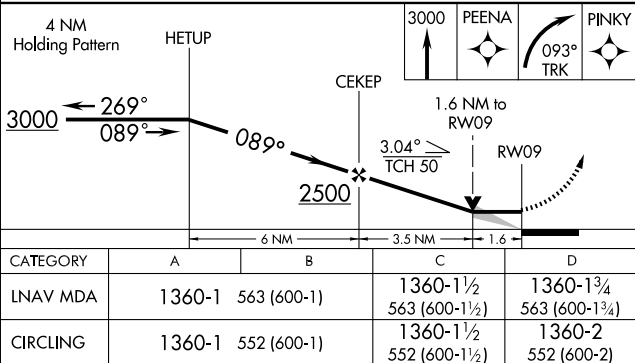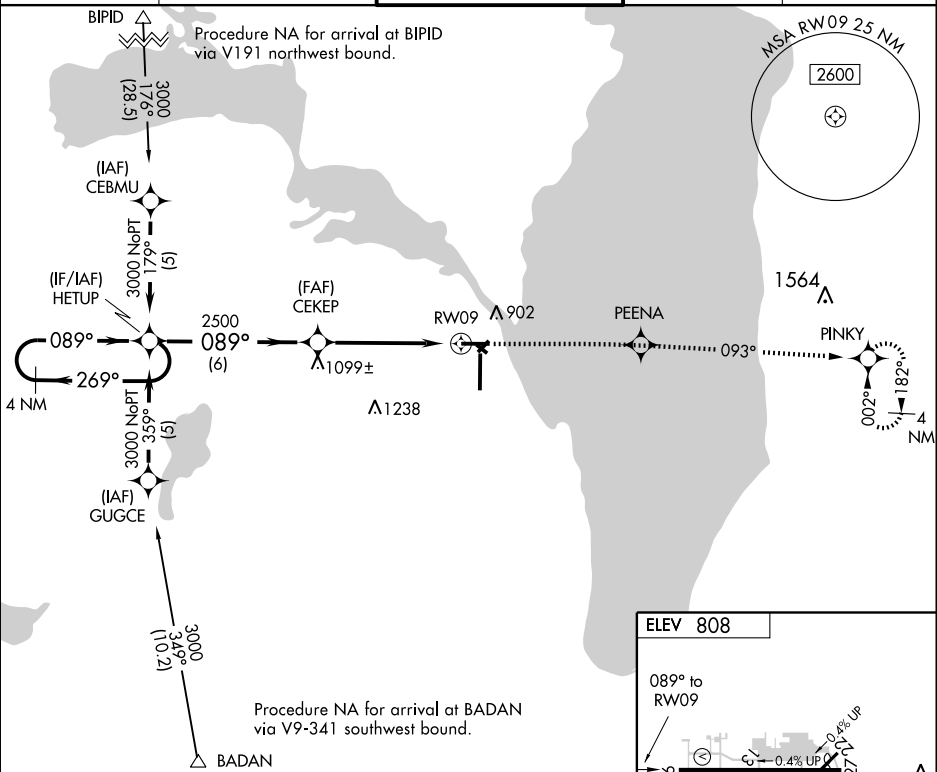

RNAV (GPS) RWY 18




OSHKOSH/ WITTMAN RGNL (OSH)

APP CRS	180°
Rwy Idg	8002
TDZE	793
Apt Elev	808

⚠ When local altimeter setting not received, use Fond Du Lac County altimeter setting and increase all MDAs 40 feet, and increase LNAV visibility Cat. C and D ¼ mile. VDP NA when using Fond Du Lac County altimeter setting. Visibility reduction by helicopters NA. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2800 direct DOCEN and hold.

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5 (CTAF) 257.6	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

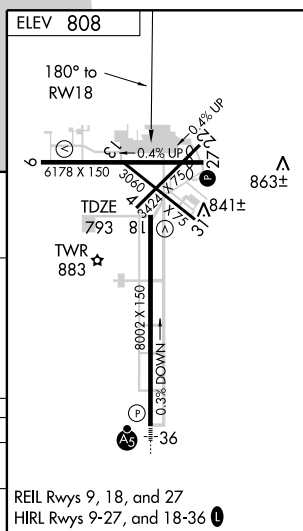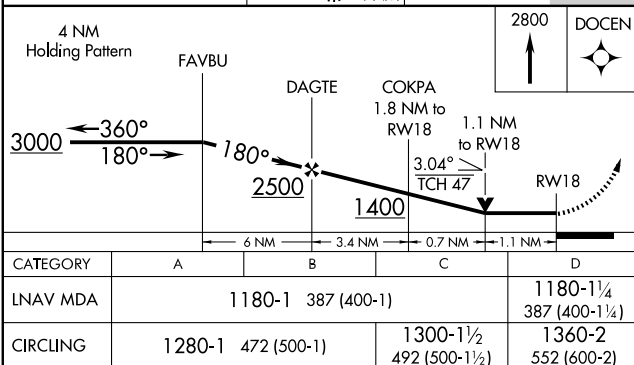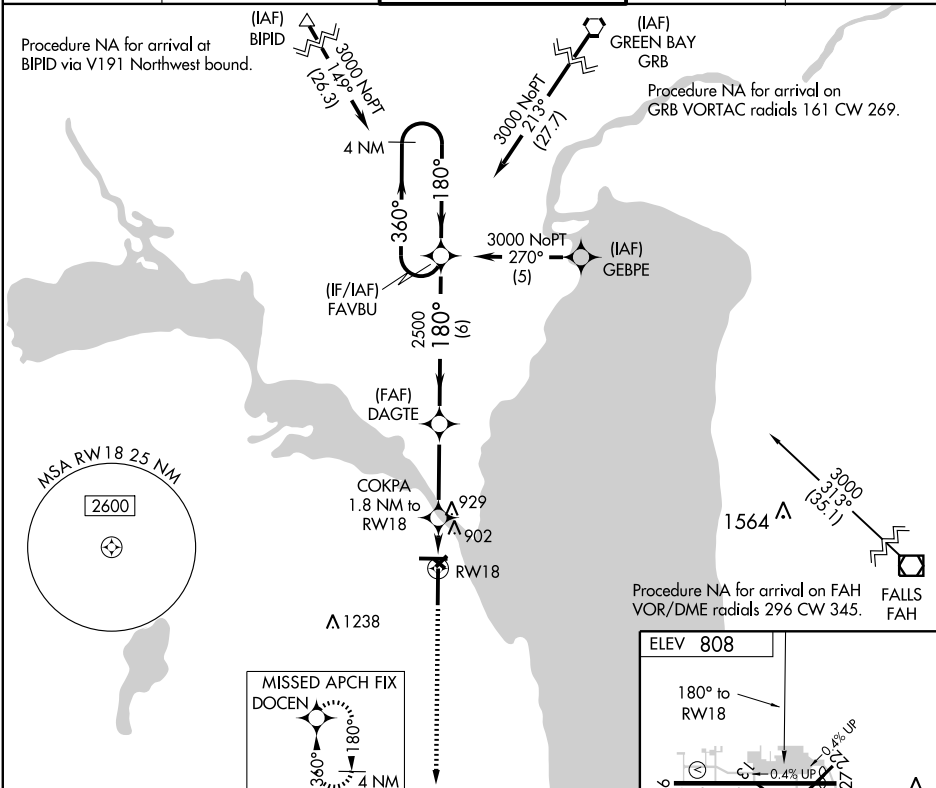

APP CRS	Rwy Idg	5647
270°	TDZE	782
	Apt Elev	808

RNAV (GPS) RWY 27

OSHKOSH/ WITTMAN RGNL (OSH)

- T** When local altimeter setting not received, use Fond Du Lac County altimeter setting and increase all MDAs 40 feet. Visibility reduction by helicopters NA.
- A** DME/DME RNP-0.3 NA.


MISSED APPROACH: Climb to 3000
direct HETUP and hold.

ATIS
125.9


MILWAUKEE APP CON
127.0 263.075

OSHKOSH TOWER ★
118.5 (CTAF) **L** 257.6


GND CON
121.9

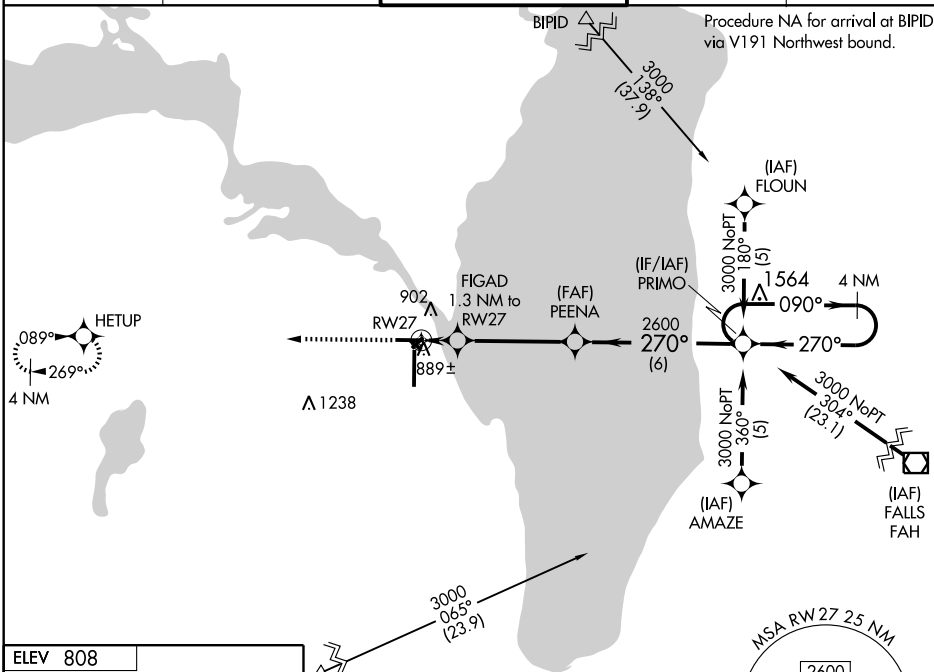UNICOM
122.95

ELEV	808
------	-----

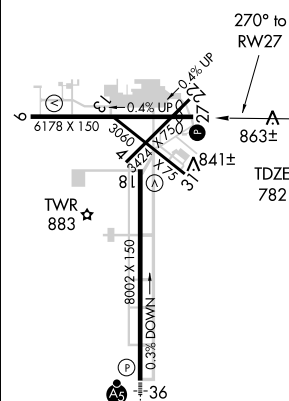

Procedure NA for arrival at
BADAN via V9-341 Southwest bound.

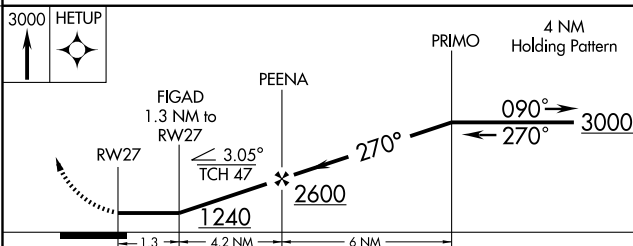

CATEGORY	A	B	C	D
LNAV MDA	1140-1 358 (400-1)			1140-1¼ 358 (400-1¼)
CIRCLING	1280-1 472 (500-1)		1300-1½ 492 (500-1½)	1360-2 552 (600-2)

OSHKOSH, WISCONSIN

Orig 09295

OSHKOSH/ WITTMAN RGNL (OSH)

RNAV (GPS) RWY 27

43°59'N-88°33'W


EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010



WAAS CH 65602 W36A	APP CRS 360°	Rwy ldg TDZE Apt Elev	8002 808 808
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 36


OSHKOSH/WITTMAN RGNL (OSH)

<p>Baro-VNAV NA below -16° C (4° F). GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA.</p>	<p>MALSR</p> 	<p>MISSED APPROACH: Climb to 2800 direct ZIQYU and hold.</p>
---	--	--

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5 (CTAF) 257.6	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

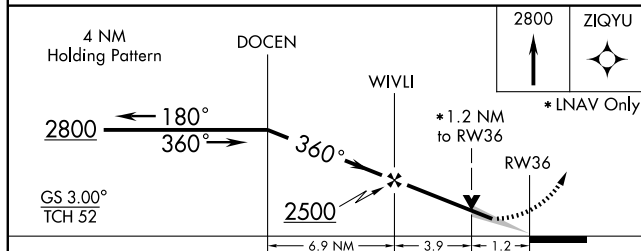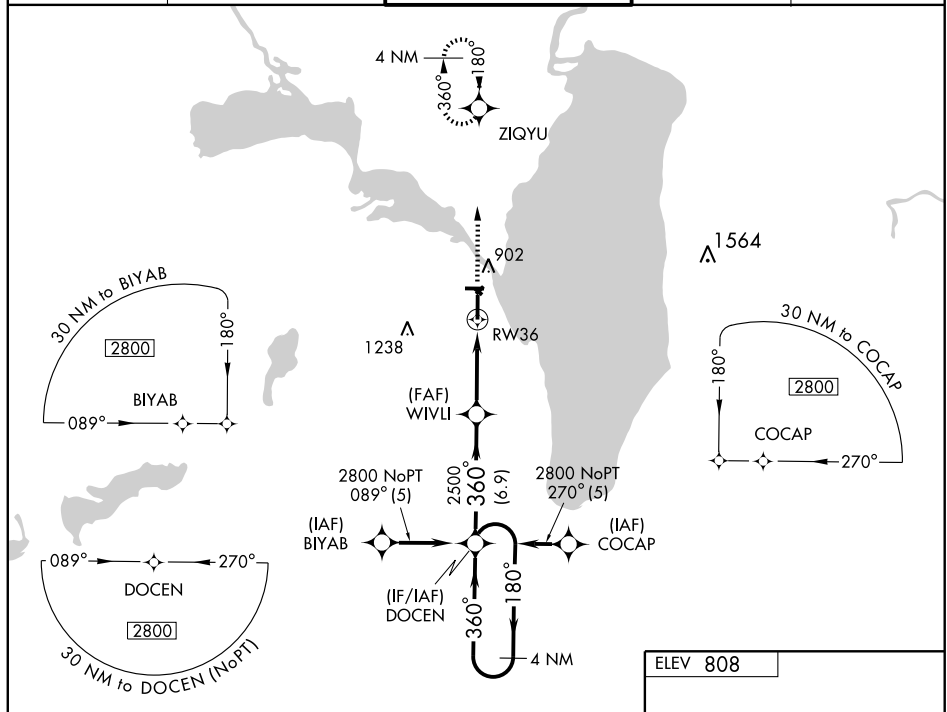

CATEGORY	A	B	C	D
LPV DA	1110/24 302 (400-½)			
LNAV/VNAV DA	1160/40 352 (400-¾)			
LNAV MDA	1240/24 432 (500-½)	1240/40 432 (500-¾)	1240/50 432 (500-1)	
CIRCLING	1260-1¼ 452 (500-1¼)	1260-1½ 452 (500-1½)	1360-2 552 (600-2)	

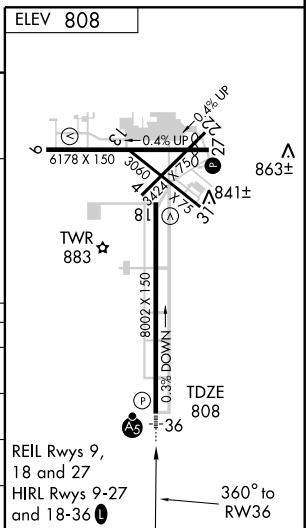

VORTAC OSH 111.8 Chan 55	APP CRS 090°	Rwy Idg TDZE 797 Apt Elev 808
--	------------------------	---



VOR RWY 9

OSHKOSH/ WITTMAN RGNL (OSH)


▼ When local altimeter setting not received, use Fond Du Lac County altimeter setting and increase all MDAs 40 feet and CETOL fix minimums visibility Cat. C and D ¼ mile and circling Cat. C ¼ mile.

MISSED APPROACH: Climb to 3000 via OSH VORTAC R-090 to PINKY Int/GRB 34.4 DME and hold.

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5 (CTAF) 257.6	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

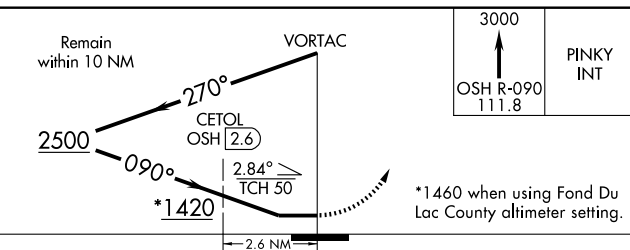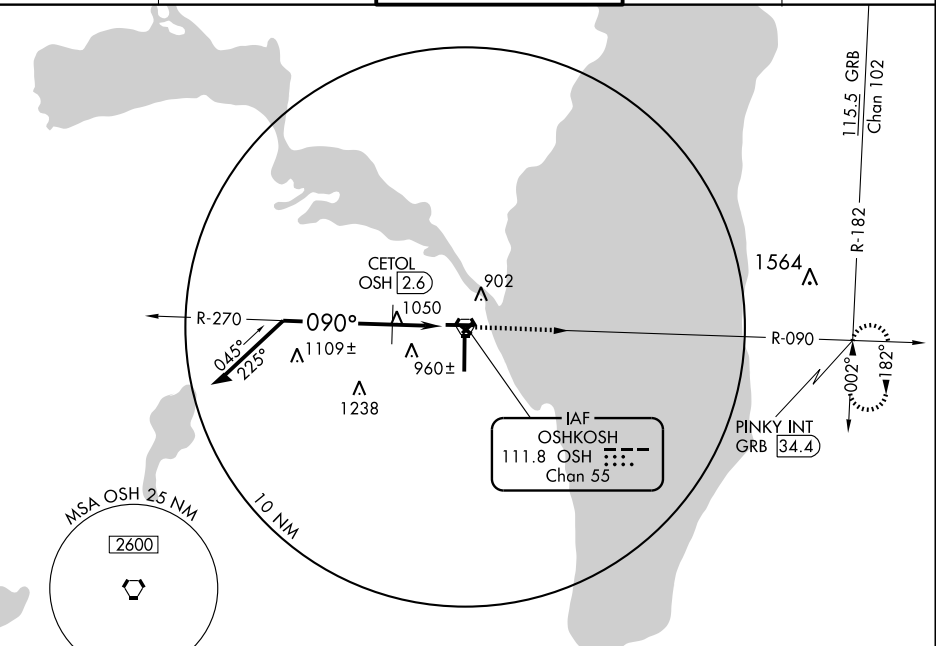

CATEGORY	A	B	C	D
S-9	1420-1	623 (700-1)	1420-1¾ 623 (700-1¾)	1420-2 623 (700-2)
CIRCLING	1420-1	612 (700-1)	1420-1¾ 612 (700-1¾)	1420-2 612 (700-2)
CETOL FIX MINIMUMS				
S-9	1360-1	563 (600-1)	1360-1½ 563 (600-1½)	1360-1¾ 563 (600-1¾)
CIRCLING	1360-1	552 (600-1)	1360-1½ 552 (600-1½)	1360-2 552 (600-2)

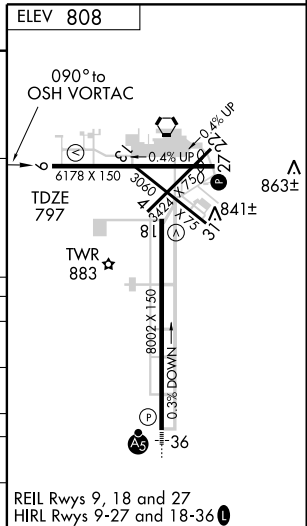

VOR RWY 18



OSHKOSH/ WITTMAN RGNL (OSH)

VORTAC OSH 111.8 Chan 55	APP CRS 186°	Rwy Idg TDZE 793 Apt Elev 808
--	------------------------	---

▼ Visibility reduction by helicopters NA. When local altimeter setting not received, use Fond Du Lac County altimeter setting and increase all MDAs 40 feet. Increase WOMEN S-18 Cat. C visibility ¼ mile. VDP NA when using Fond Du Lac County altimeter setting.

MISSED APPROACH: Climbing left turn to 3000 via OSH VORTAC R-090 to PINKY Int/GRB 34.4 DME and hold.

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5(CTAF) 257.6	GND CON 121.9	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

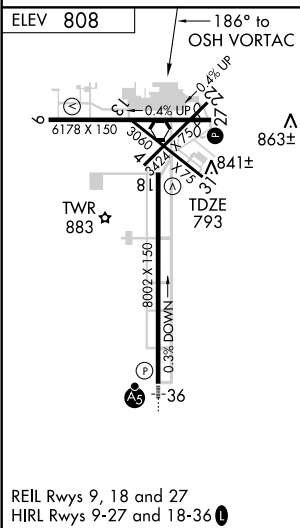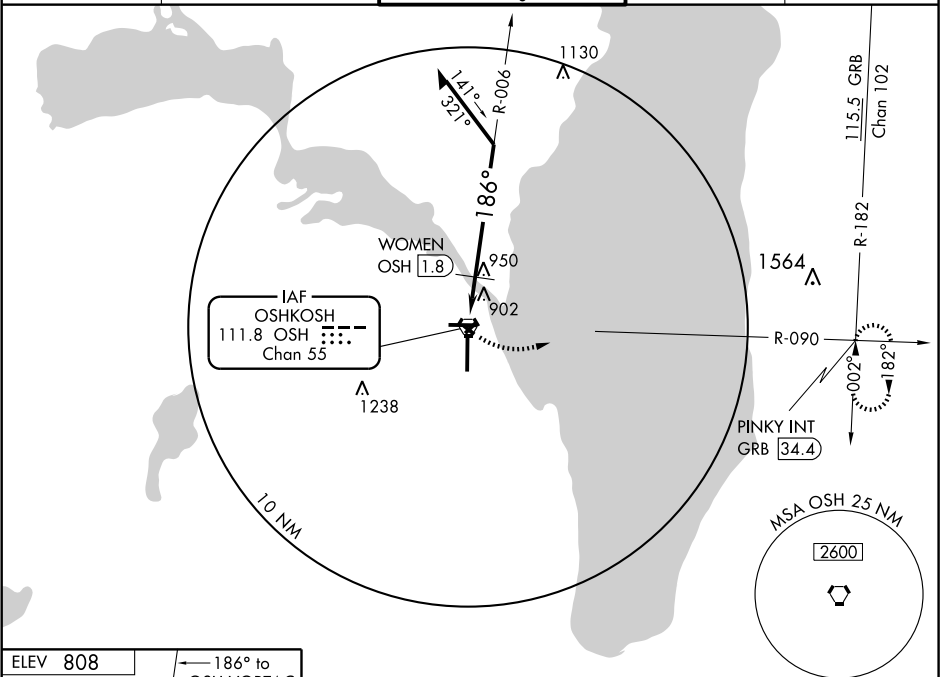



3000 OSHKOSH R-090 111.8	PINKY INT	VORTAC	006°	WOMEN OSHKOSH 1.8	2600	186°	*1480	2.92° TCH 47	0.3	1.1	0.7 NM	Remain within 10 NM
*1520 when using Fond Du Lac County altimeter setting.												
CATEGORY	A	B	C	D								
S-18	1480-1	687 (700-1)	1480-2 687 (700-2)	1480-2 ¼ 687 (700-2 ¼)								
CIRCLING	1480-1	672 (700-1)	1480-2 672 (700-2)	1480-2 ¼ 672 (700-2 ¼)								
WOMEN FIX MINIMUMS												
S-18	1260-1	467 (500-1)	1260-1 ¼ 467 (500-1 ¼)	1260-1 ½ 467 (500-1 ½)								
CIRCLING	1280-1	472 (500-1)	1300-1 ½ 492 (500-1 ½)	1360-2 552 (600-2)								

VORTAC OSH 111.8 Chan 55	APP CRS 265°	Rwy Idg TDZE Apt Elev	5647 781 808
--	------------------------	-----------------------------	---

VOR RWY 27

OSHKOSH/WITTMAN RGNL (OSH)

		MISSED APPROACH: Climb to 3000 via OSH R-270 to GRATE Int and hold.		
ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5 (CTAF) 257.6	GND CON 121.9	UNICOM 122.95

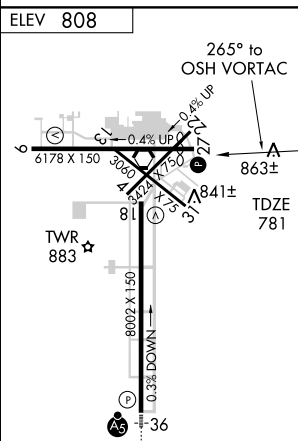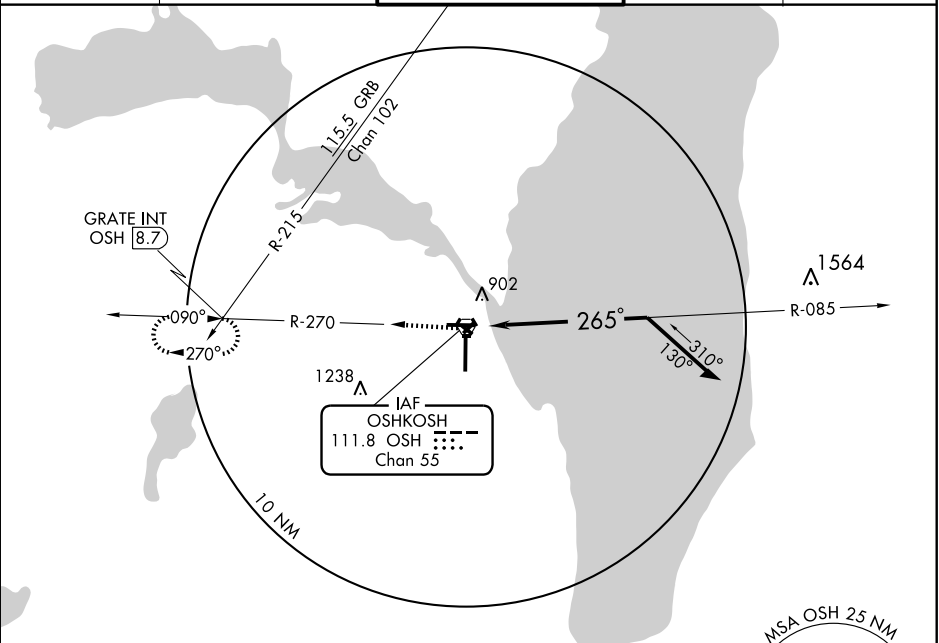

REIL Rws 9, 18 and 27
HIRL Rws 9-27 and 18-36

OSHKOSH, WISCONSIN
Amdt 4B 09295

3000 ↑ OSHKOSH R-270 111.8		GRATE INT				VORTAC 085° 265° 2600 Remain within 10 NM	
CATEGORY	A	B	C	D			
S-27	1220-1	439 (500-1)	1220-1½	439 (500-1½)			
CIRCLING	1260-1	452 (500-1)	1260-1½	452 (500-1½)	1360-2	552 (600-2)	


43° 59' N - 88° 33' W

OSHKOSH/WITTMAN RGNL (OSH)
VOR RWY 27



VORTAC OSH 111.8 Chan 55	APP CRS 360°	Rwy Idg TDZE Apt Elev 8002 808
--	------------------------	--

VOR RWY 36

OSHKOSH/WITTMAN RGNL (OSH)

<p>▼ Cat. D S-36 DME MINIMUMS visibility increased to RVR 6000 for inoperative MALSR.</p>	<p>MALSR </p>	<p>MISSED APPROACH: Climbing right turn to 3000 via OSH R-090 to PINKY Int and hold.</p>
--	--	---

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5 (CTAF) 257.6	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

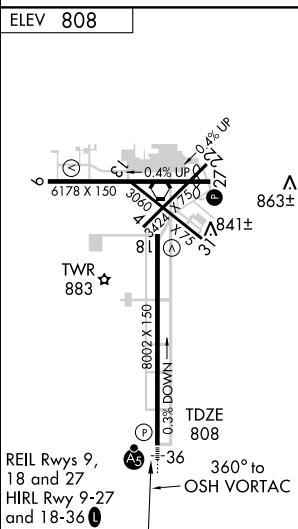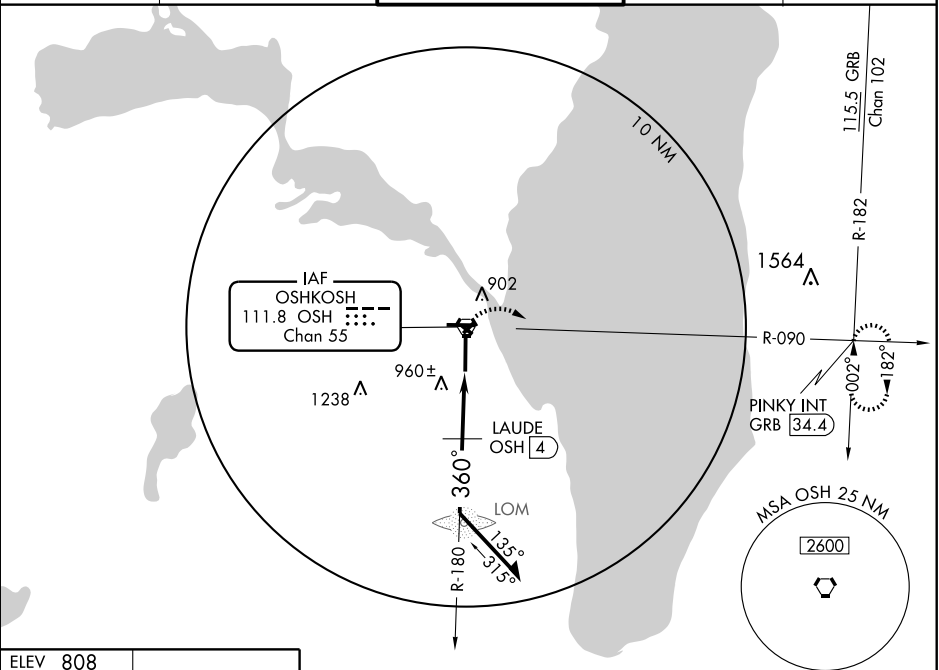

3000

OSH R-090
111.8

PINKY INT

VORTAC

180°

LAUDE
OSH 4

2600

360°

1340

4 NM

Remain within 10 NM

CATEGORY	A	B	C	D
S-36	1340/24	532 (600-½)	1340/50 532 (600-1)	1340/60 532 (600-¼)
CIRCLING	1340-1	532 (600-1)	1340-1½ 532 (600-1½)	1360-2 552 (600-2)
DME MINIMUMS				
S-36	1220/24	412 (500-½)	1220/40 412 (500-¾)	1220/50 412 (500-1)
CIRCLING	1260-1	452 (500-1)	1260-1½ 452 (500-1½)	1360-2 552 (600-2)

PARK FALLS MUNI (PKF) 2 NE UTC-6(-5DT) N45°57.30' W90°25.47'

GREEN BAY

1500 B FUEL 100LL, MOGAS NOTAM FILE GRB

L-141

RWY 18-36: H3200X60 (ASPH) S-20 MIRL 0.3% up S

IAP

RWY 18: PAPI(P2L)—GA 3.0 TCH 29'. Trees.

RWY 36: PAPI(P2L)—GA 3.0 TCH 29'. Trees.

AIRPORT REMARKS: Attended irregularly. For fuel call 715-762-3971.

PAEW on and adjacent to arpt sfcs. Rotating bcn OTS indef. Rwy 18-36 has loose snow over thin packed snow until spring.

ACTIVATE MIRL Rwy 18-36—CTAF.

COMMUNICATIONS: CTAF 122.9


⑧ MINNEAPOLIS CENTER APP/DEP CON 133.65

RADIO AIDS TO NAVIGATION: NOTAM FILE IWD.

IRONWOOD (L) VORTACW 108.8 IWD Chan 25 N46°31.94'

W90°07.55' 199° 36.8 NM to fld. 1230/1E. HIWAS.

NDB (MHW) 371 PKF N45°57.18' W90°25.57' at fld. NDB unmonitored. NOTAM FILE GRB.

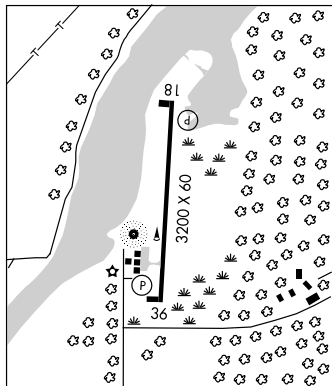**PASER** N42°40.95' W87°53.97' NOTAM FILE RAC.

CHICAGO

NDB (MHW/LOM) 206 RA 041° 6.0 NM to John H. Batten. Unmonitored.

A

NDB unusable byd 10 NM.

PHILLIPS N45°42.18' W90°24.74' NOTAM FILE PBH.

GREEN BAY

NDB (MHW) 263 PBH at Price Co.

L-141

RCO 122.05 (GREEN BAY RADIO)

PHILLIPS**PRICE CO** (PBH) 1 NW UTC-6(-5DT) N45°42.54' W90°24.15'

GREEN BAY

1497 B S4 FUEL 100LL, JET A, MOGAS NOTAM FILE PBH

H-2K, L-141

RWY 01-19: H5000X75 (ASPH) D-60 MIRL 0.6% up N

IAP

RWY 01: REIL. PAPI(P4L)—GA 3.0° TCH 35'.

RWY 19: REIL. PAPI(P4L)—GA 3.0° TCH 30'. Trees.

RWY 06-24: H3950X75 (ASPH) S-28, D-40 MIRL.

RWY 06: VASI(V2L)—GA 3.0° TCH 47'. Tree.

RWY 24: REIL. VASI(V2L)—GA 3.0° TCH 45'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2230Z, Sat

1500-2230Z, Sun 1600-2230Z. Fuel avbl 24 hrs with credit

card. Birds on and invof arpt. Rwy 19 PAPI OTS indef. ACTIVATE

MIRL Rwy 06-24 and Rwy 01-19 and VASI Rwy 06 and 24; PAPI

Rwy 01 and 19; REIL Rwy 01, Rwy 19 and Rwy 24—CTAF.

WEATHER DATA SOURCES: AWOS-3 125.875 (715) 339-4520.**COMMUNICATIONS:** CTAF/UNICOM 122.8

PHILLIPS RCO 122.05 (GREEN BAY RADIO)

MINNEAPOLIS CENTER APP/DEP CON 133.65


RADIO AIDS TO NAVIGATION: NOTAM FILE RHI.

RHINELANDER (L) VORTAC 109.2 RHI Chan 29 N45°38.03'

W89°27.47' 275° 40 NM to fld. 1590/2E. HIWAS.

PHILLIPS NDB (MHW) 263 PBH N45°42.18' W90°24.74' at fld.

NOTAM FILE PBH.

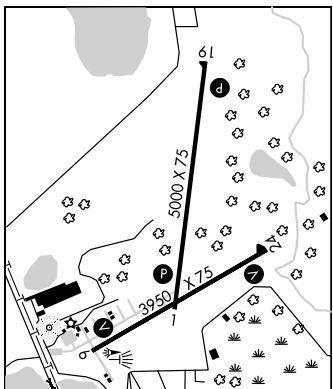

NDB PKF	APP CRS	Rwy Idg	3200
<u>371</u>	336°	TDZE	1500
		Apt Elev	1500

NDB RWY 36
PARK FALLS MUNI (PKF)




Use Phillips altimeter setting.


MISSED APPROACH: Climb to 2600 then climbing left turn to 3200 direct PKF NDB and hold.

MINNEAPOLIS CENTER
133.65 281.5

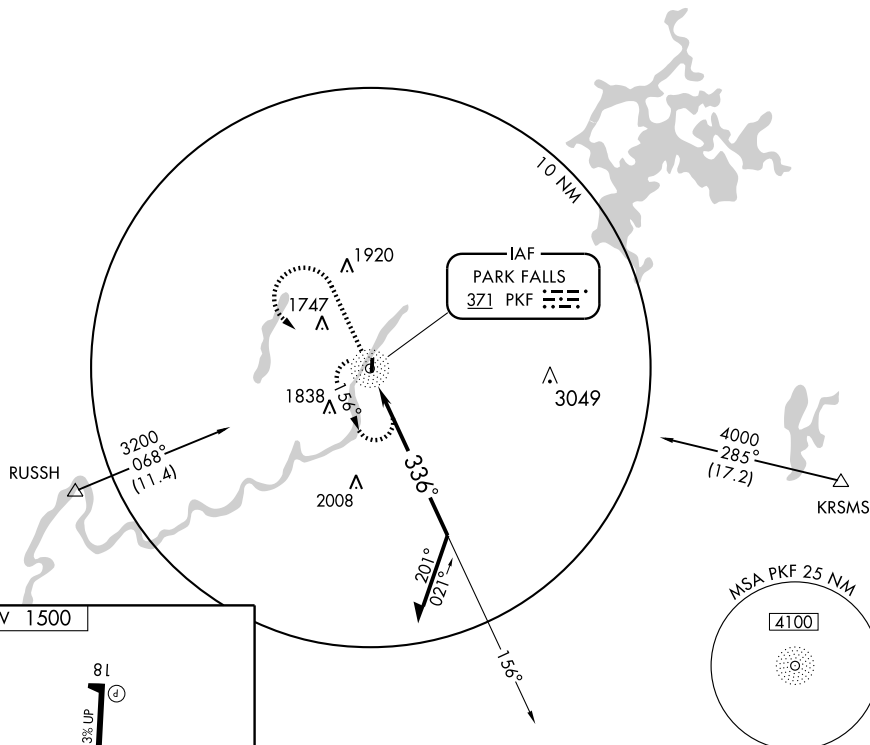


CTAF
122.9 




ELEV 1500

MIRL Rwy 18-36 **L**

Knots	60	90	120	150	180
Min:Sec					

2600	3200	PKF
		
		371

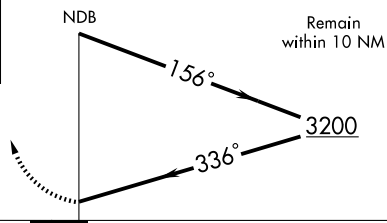

CATEGORY	A	B	C	D
S-36	2200-1	700 (700-1)	NA	NA
CIRCLING	2200-1	700 (700-1)	NA	NA

APP CRS	Rwy Idg	3200
184°	TDZE	1494
	Apt Elev	1500

RNAV (GPS) RWY 18

PARK FALLS MUNI (PKF)




Use Phillips altimeter setting.
GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3200
direct FARIM WP and hold.




MINNEAPOLIS CENTER

133.65 281.5

CTAF

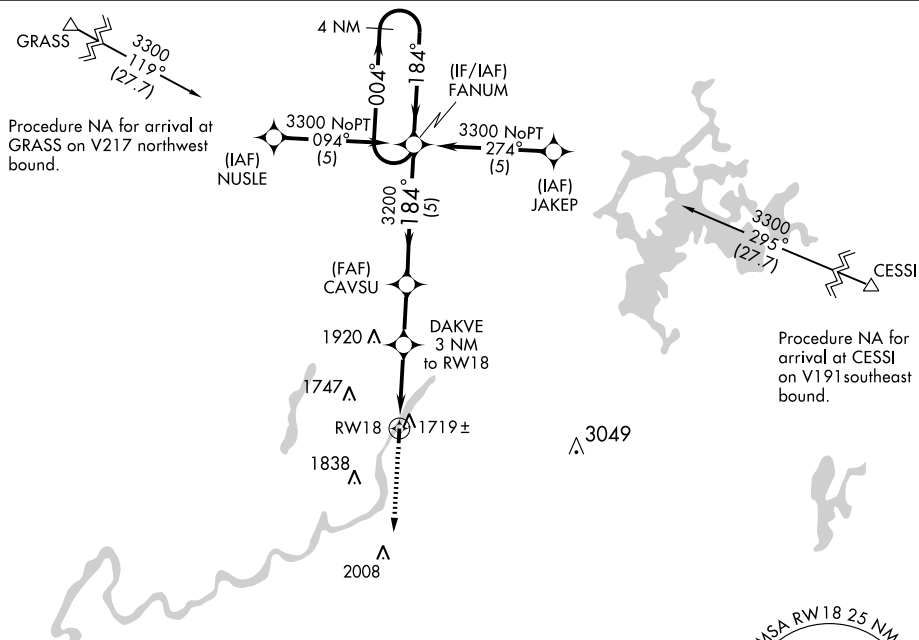122.9 0

ELEV 1500

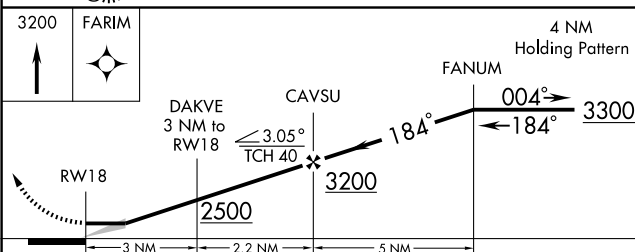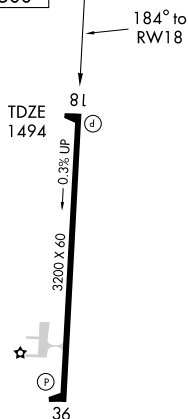

CATEGORY	A	B	C	D
RNAV MDA	2020-1	526 (600-1)	2020-1½ 526 (600-1½)	NA
CIRCLING	2060-1	560 (600-1)	2060-1½ 560 (600-1½)	NA

MIRL Rwy 18-36 0

APP CRS	Rwy Idg	3200
004°	TDZE	1500
	Apt Elev	1500

RNAV (GPS) RWY 36



PARK FALLS MUNI (PKF)

V GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA.
NA Use Phillips altimeter setting.

MISSED APPROACH: Climb to 3300
 direct FANUM WP and hold.

MINNEAPOLIS CENTER
133.65 281.5

CTAF
122.90

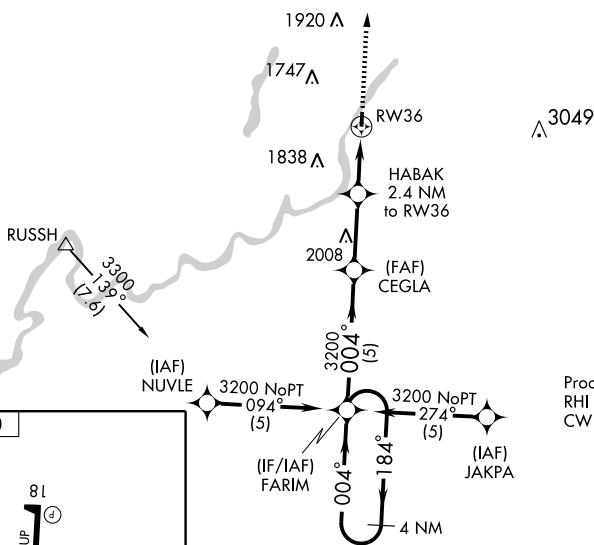

ELEV 1500



004° to RW36

MIRL Rwy 18-36

4 NM
 Holding Pattern

3200 ← 184°
 004° →

VGSI and descent
 angles not coincident.

FARIM

CEGLA

3.06°
 TCH 40
 HABAK 2.4 NM to RW36

2320

RW36

3300

FANUM



CATEGORY	A	B	C	D
RNAV MDA	2000-1	500 (500-1)	2000-1½ 500 (500-1½)	NA
CIRCLING	2060-1	560 (600-1)	2060-1½ 560 (600-1½)	NA

PARK FALLS MUNI (PKF) 2 NE UTC-6(-5DT) N45°57.30' W90°25.47'

GREEN BAY

1500 B FUEL 100LL, MOGAS NOTAM FILE GRB

L-141

RWY 18-36: H3200X60 (ASPH) S-20 MIRL 0.3% up S

IAP

RWY 18: PAPI(P2L)—GA 3.0 TCH 29'. Trees.

RWY 36: PAPI(P2L)—GA 3.0 TCH 29'. Trees.

AIRPORT REMARKS: Attended irregularly. For fuel call 715-762-3971.

PAEW on and adjacent to arpt sfcs. Rotating bcn OTS indef. Rwy

18-36 has loose snow over thin packed snow until spring.

ACTIVATE MIRL Rwy 18-36—CTAF.

COMMUNICATIONS: CTAF 122.9


⑧ MINNEAPOLIS CENTER APP/DEP CON 133.65

RADIO AIDS TO NAVIGATION: NOTAM FILE IWD.

IRONWOOD (L) VORTACW 108.8 IWD Chan 25 N46°31.94'

W90°07.55' 199° 36.8 NM to fld. 1230/1E. HIWAS.

NDB (MHW) 371 PKF N45°57.18' W90°25.57' at fld. NDB unmonitored. NOTAM FILE GRB.

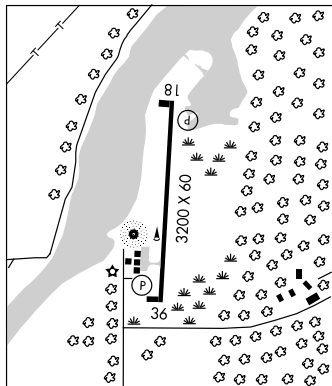**PASER** N42°40.95' W87°53.97' NOTAM FILE RAC.

CHICAGO

NDB (MHW/LOM) 206 RA 041° 6.0 NM to John H. Batten. Unmonitored.

A

NDB unusable byd 10 NM.

PHILLIPS N45°42.18' W90°24.74' NOTAM FILE PBH.

GREEN BAY

NDB (MHW) 263 PBH at Price Co.

L-141

RCO 122.05 (GREEN BAY RADIO)

PHILLIPS**PRICE CO** (PBH) 1 NW UTC-6(-5DT) N45°42.54' W90°24.15'

GREEN BAY

1497 B S4 FUEL 100LL, JET A, MOGAS NOTAM FILE PBH

H-2K, L-141

RWY 01-19: H5000X75 (ASPH) D-60 MIRL 0.6% up N

IAP

Rwy 01: REIL. PAPI(P4L)—GA 3.0° TCH 35'.

RWY 19: REIL. PAPI(P4L)—GA 3.0° TCH 30'. Trees.

RWY 06-24: H3950X75 (ASPH) S-28, D-40 MIRL.

RWY 06: VASI(V2L)—GA 3.0° TCH 47'. Tree.

RWY 24: REIL. VASI(V2L)—GA 3.0° TCH 45'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2230Z, Sat

1500-2230Z, Sun 1600-2230Z. Fuel avbl 24 hrs with credit

card. Birds on and invof arpt. Rwy 19 PAPI OTS indef. ACTIVATE

MIRL Rwy 06-24 and Rwy 01-19 and VASI Rwy 06 and 24; PAPI

Rwy 01 and 19; REIL Rwy 01, Rwy 19 and Rwy 24—CTAF.

WEATHER DATA SOURCES: AWOS-3 125.875 (715) 339-4520.**COMMUNICATIONS:** CTAF/UNICOM 122.8

PHILLIPS RCO 122.05 (GREEN BAY RADIO)

MINNEAPOLIS CENTER APP/DEP CON 133.65


RADIO AIDS TO NAVIGATION: NOTAM FILE RHI.

RHINELANDER (L) VORTAC 109.2 RHI Chan 29 N45°38.03'

W89°27.47' 275° 40 NM to fld. 1590/2E. HIWAS.

PHILLIPS NDB (MHW) 263 PBH N45°42.18' W90°24.74' at fld.

NOTAM FILE PBH.

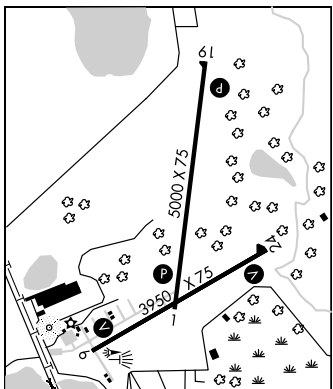

NDB PBH 263	APP CRS 047°	Rwy Idg TDZE Apt Elev	3950 1471 1497
-----------------------	------------------------	-----------------------------	---

NDB or GPS RWY 6

PHILLIPS/ PRICE COUNTY (PBH)



▼ If local altimeter setting not received, use Minocqua-Woodruff altimeter setting and increase all MDA 100 ft.

MISSED APPROACH: Climb to 3300 then left turn direct PBH NDB and hold.


AWOS-3
125.875

MINNEAPOLIS CENTER
133.65 281.5

UNICOM
122.8 (CTAF) 0

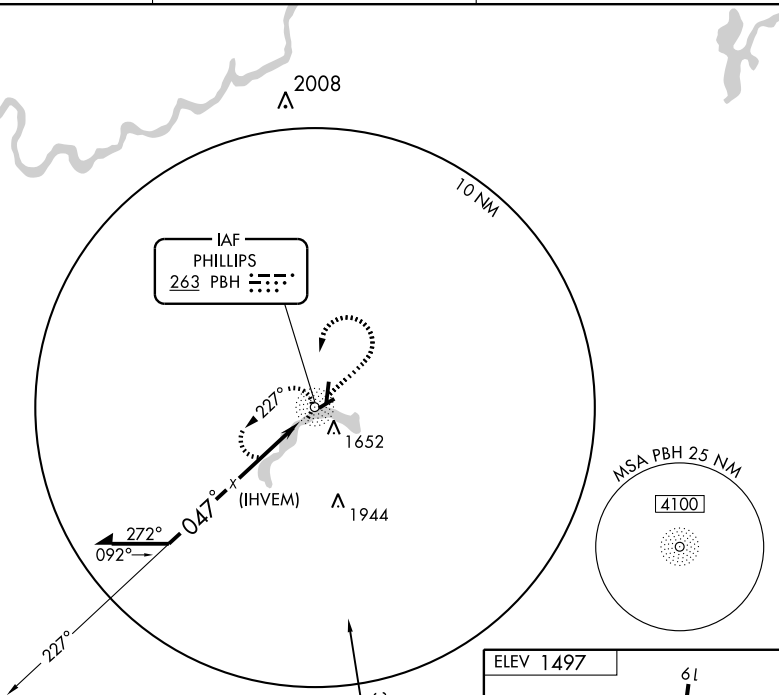


Remain within 10 NM

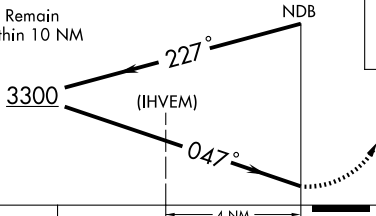

3300



ELEV 1497

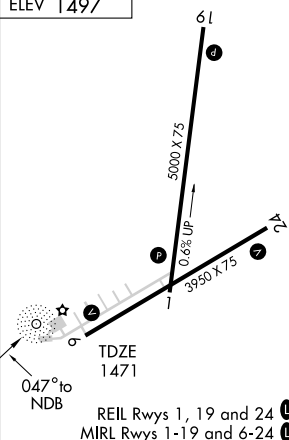

REIL Rwy 1, 19 and 24
MIRL Rwy 1-19 and 6-24

CATEGORY	A	B	C	D
S-6	2100-1	629 (700-1)	2100-1¾ 629 (700-1¾)	NA
CIRCLING	2100-1	603 (700-1)	2100-1¾ 603 (700-1¾)	NA

Knots	60	90	120	150	180
Min:Sec					

NDB PBH 263	APP CRS 240°	Rwy ldg TDZE Apt Elev	3950 1472 1497
-----------------------	------------------------	-----------------------------	---

NDB or GPS RWY 24

PHILLIPS/ PRICE COUNTY (PBH)



▼ If local altimeter setting not received, use Minocqua-Woodruff altimeter setting and increase all MDA 100 ft.

MISSED APPROACH: Climb to 3300 then right turn direct PBH NDB and hold.

AWOS-3
125.875

MINNEAPOLIS CENTER
133.65 281.5

UNICOM
122.8 (CTAF) 0

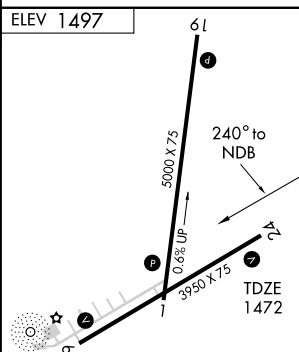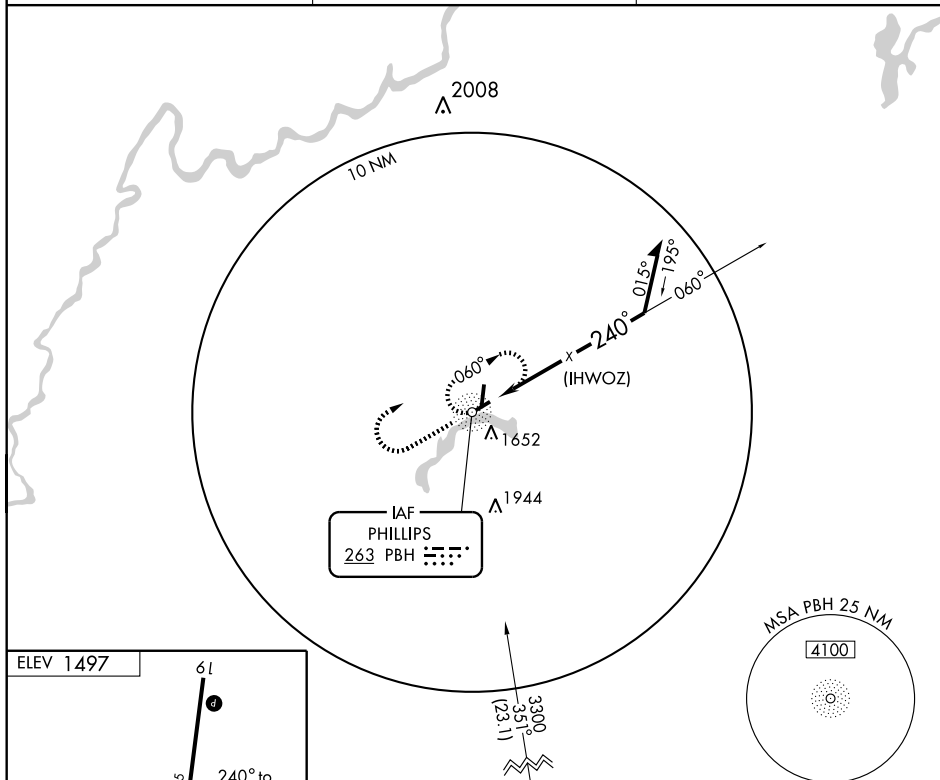

REIL Rwy 1, 19 and 24
MIRL Rwy 1-19 and 6-24

Knots	60	90	120	150	180
Min:Sec					

<div> <div>3300</div> <div>BAITS</div> <div>PBH</div> <div>263</div> </div>				
<div> <div>NDB</div> <div>060°</div> <div>(IHW0Z)</div> <div>240°</div> <div>3300</div> <div>4 NM</div> </div>				
<div>Remain within 10 NM</div>				
CATEGORY	A	B	C	D
S-24	2140-1	668 (700-1)	2140-1¾ 668 (700-1¾)	NA
CIRCLING	2140-1	643 (700-1)	2140-1¾ 643 (700-1¾)	NA

WAAS CH 56305 W01A	APP CRS 007°	Rwy Idg 5000 TDZE 1484 Apt Elev 1497
--	------------------------	---

RNAV (GPS) RWY 1

PHILLIPS/ PRICE COUNTY (PBH)


T Baro-VNAV NA when using Minocqua-Woodruff altimeter setting. If local altimeter setting not received, use Minocqua-Woodruff altimeter setting and increase all DAs 90 feet and all MDAs 100 feet. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA when using Minocqua-Woodruff altimeter setting.

MISSED APPROACH:
Climb to 4100 direct
LODVY and hold.

AWOS-3
125.875

MINNEAPOLIS CENTER
133.65 281.5


UNICOM
122.8 (CTAF) **L**

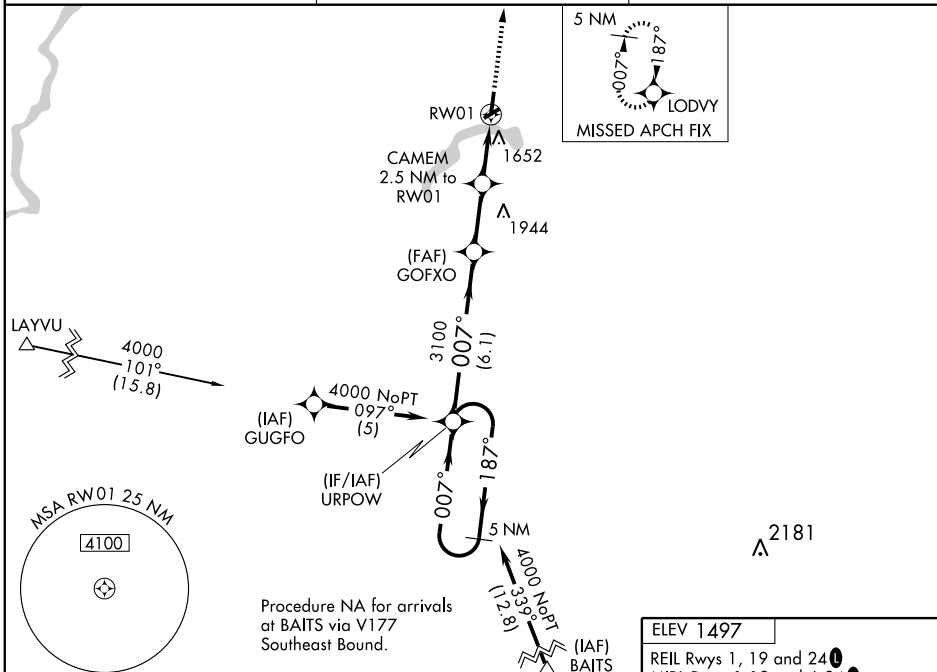


Procedure NA for arrivals at BAITS via V177 Southeast Bound.

ELEV 1497

REIL Rwy 1, 19 and 24 **L**
MIRL Rwy 1-19 and 6-24 **L**

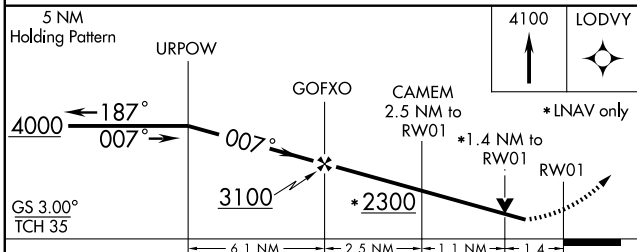

CATEGORY	A	B	C	D
LPV DA	1809-1¼ 325 (400-1¼)			
LNAV/ VNAV DA	1945-1¾ 461 (500-1¾)			
LNAV MDA	1940-1 456 (500-1)		1940-1¼ 456 (500-1¼)	1940-1½ 456 (500-1½)
CIRCLING	2100-1 603 (700-1)		2100-1¾ 603 (700-1¾)	2100-2 603 (700-2)

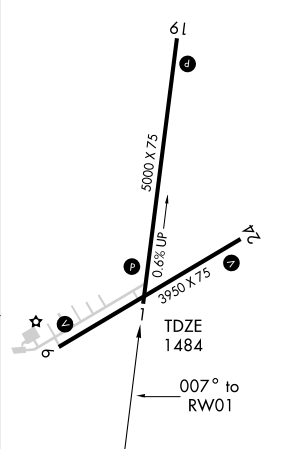

PLATTEVILLE MUNI (PVB) 3 SE UTC-6(-5DT) N42°41.36' W90°26.66'

CHICAGO

1025 B FUEL 100LL, JET A NOTAM FILE GRB

L-28G

RWY 15-33: H3999X75 (ASPH) S-12.5 MIRL

IAP

RWY 15: REIL. RWY 33: REIL. PAPI(2PL)—GA 3.0° TCH 25'.

RWY 07-25: H3599X75 (ASPH) S-30, D-35 MIRL 0.6% up NE.

RWY 25: Road.

AIRPORT REMARKS: Attended Apr-Sep 1330-0130Z†, Oct-Mar

1330-2330Z†. 24 hr self svc fuel avbl with credit card. ACTIVATE

MIRL Rwy 15-33 and Rwy 07-25; REIL Rwy 15 and Rwy

33—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.575 (609) 348-3637.**COMMUNICATIONS:** CTAF/UNICOM 122.7

RCO 122.5 (GREEN BAY RADIO).

⑧ CHICAGO CENTER APP/DEP CON 133.95


RADIO AIDS TO NAVIGATION: NOTAM FILE DBQ.

DUBUQUE (H) VORTACW 115.8 DBQ Chan 105 N42°24.09'

W90°42.54' 030° 20.9 NM to fld. 1051/4E.

NDB (MHW) 203 PVB N42°41.27' W90°26.18' at fld. NOTAM

FILE GRB.

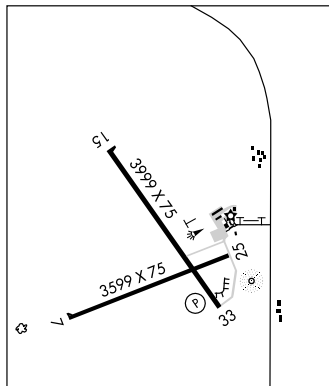**POBER** N43°52.43' W88°33.44' NOTAM FILE OSH.

CHICAGO

NDB (LOM) 395 OS 358° 6.6 NM to Wittman Rgnl. Unmonitored.

PORTAGE MUNI (C47) 2 NW UTC-6(-5DT) N43°33.62' W89°28.97'

CHICAGO

825 B FUEL 100LL, MOGAS TPA-1825(1000) NOTAM FILE GRB

L-28G

RWY 17-35: H3775X60 (ASPH) MIRL (NSTD) 0.3% up S

IAP

RWY 17: REIL(NSTD). PVASI(PSSL). Thld dspcd 103'. Road.

RWY 35: Thld dspcd 262'. Road.

RWY 04-22: H2560X40 (ASPH) 0.3% up SW

RWY 04: Thld dspcd 60'. Road.

RWY 22: Road.

AIRPORT REMARKS: Attended Mon-Fri 1400-2200Z†, Sat-Sun 1600-2200Z†. Fuel avbl 24 hrs with credit card. Rwy

04-22 CLOSED Nov 15 to Apr 15, rwy not plowed during winter. 115' crane 200' southwest Rwy intersection

Mon-Thu 1900-0400Z†. PAEW AER 04 indef. Numerous deer on and invof arpt. Rwy 04-22 severe cracking and

plants growing thru pavement. P-line 110' AGL 1580' from dspcd thld Rwy 35. Rwy 35 large hangars and trees

200' W of rwy cause wind shear with strong NW winds. Rwy 17-35 NSTD MIRL. Rwy 17 first 100' not lgtd; Rwy

35 first 193' not lgtd. Rwy 04-22 marked with numbers only.

COMMUNICATIONS: CTAF/UNICOM 122.7

DELLS RCO 122.1R 117.0T (GREEN BAY RADIO)

⑧ MADISON APP/DEP CON 135.45 120.1 (1200-0500Z†)

⑧ CHICAGO CENTER APP/DEP CON 133.3 (0500-1200Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE DLL.

DELLS (H) VORTAC 117.0 DLL Chan 117 N43°33.05' W89°45.82' 084° 12.3 NM to fld. 1020/3E.

PRAIRIE DU CHIEN MUNI (PDC) 2 SE UTC-6(-5DT) N43°01.16' W91°07.42'

CHICAGO

661 B FUEL 100LL, JET A TPA-1661(1000) NOTAM FILE PDC

H-5D, L-28G

RWY 14-32: H5000X75 (ASPH) S-30, D-60 MIRL

IAP

RWY 14: REIL. PAPI(2PL)—GA 3.0° TCH 28'. Pole.

RWY 32: REIL. PAPI(2PL)—GA 4.0° TCH 30'. Trees.

RWY 11-29: H3999X75 (ASPH) S-24, D-40 MIRL

RWY 11: Stack.

RWY 29: Trees.

AIRPORT REMARKS: Attended 1600-2200Z†. Fuel 24 hr self svc. ACTIVATE MIRL Rwy 11-29, Rwy 14-32, PAPI Rwy 14

and Rwy 32 and REIL Rwy 14 and Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.925 (608) 326-9122.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 122.25 (GREEN BAY RADIO).

⑧ CHICAGO CENTER APP/DEP CON 133.95

RADIO AIDS TO NAVIGATION: NOTAM FILE FOD.

WAUKON (L) VORTAC 116.6 UKN Chan 113 N43°16.81' W91°32.24' 126° 24 NM to fld. 1288/5E.

WAAS
CH 82315
W07A

APP CRS
069°

Rwy Idg	3599
TDZE	1016
Apt Elev	1025

RNAV (GPS) RWY 7


PLATTEVILLE MUNI (PVB)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Dubuque altimeter setting and increase all DA 56 feet and all MDA 60 feet, increase LPV all Cats and LNAV Cat C visibility ¼ mile. Baro-VNAV NA when using Dubuque altimeter setting.



MISSED APPROACH:
Climb to 3000 direct
CERIG and hold.


AWOS-3
120,575

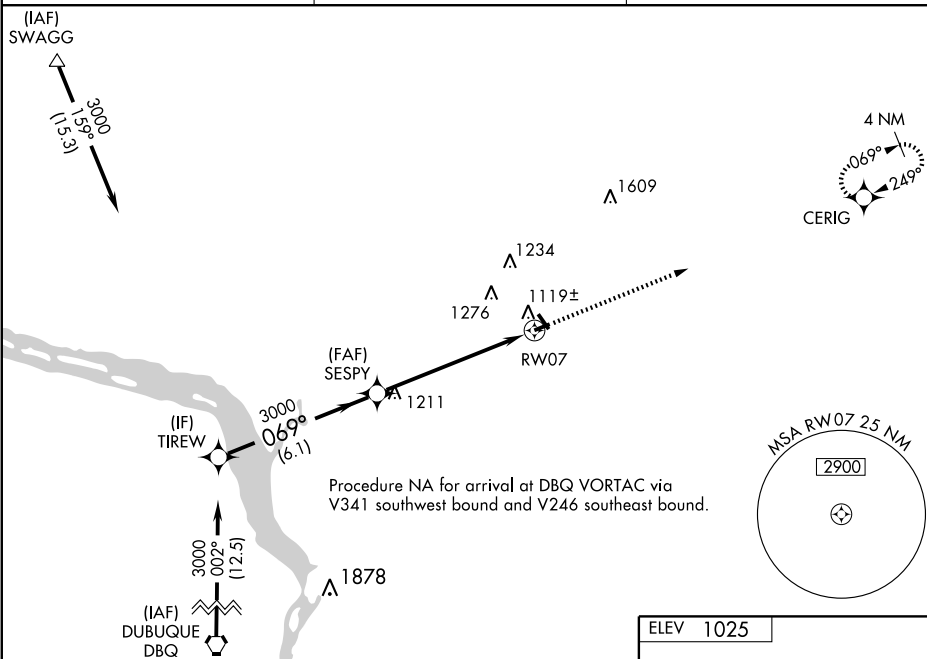CHICAGO CENTER
133.95 281.4

UNICOM
122.7 (CTAF) **L**


Procedure
Turn
NA

3000	CERIG
	

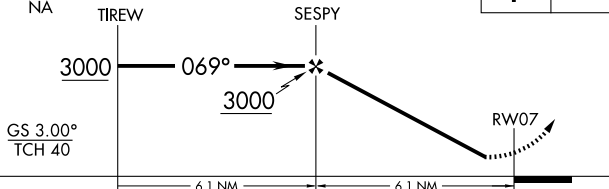

CATEGORY	A	B	C	D
LPV DA	1266-1	250 (300-1)		NA
LNAV/ VNAV DA	1389-1½	373 (400-1½)		NA
LNAV MDA	1380-1	364 (400-1)		NA
CIRCLING	1440-1 415 (500-1)	1480-1 455 (500-1)	1480-1½ 455 (500-1½)	NA

ELEV 1025



REIL Rwy 15 and 33 **L**
MIRL Rwy 7-25 and 15-33 **L**

PLATTEVILLE, WISCONSIN
Orig 09295

42°41'N - 90°27'W

PLATTEVILLE MUNI (PVB) RNAV (GPS) RWY 7

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

WAAS
CH **42615**
W15A

APP CRS
146°

Rwy Idg
TDZE
Apt Elev
3999
1025
1025

RNAV (GPS) RWY 15

PLATTEVILLE MUNI (PVB)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Dubuque altimeter setting and increase all DA 56 feet, all MDA 60 feet, increase LNAV/VNAV all Cats and LNAV Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Dubuque altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
ZAWDI and hold.


AWOS-3
120.575

CHICAGO CENTER
133.95 281.4


UNICOM
122.7 (CTAF) 0

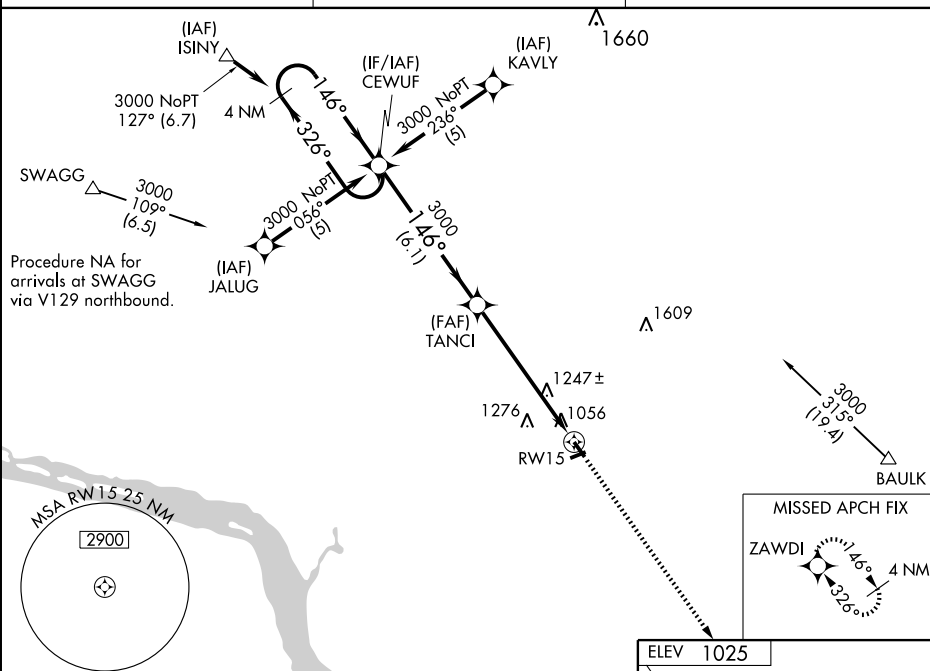

4 NM
Holding Pattern

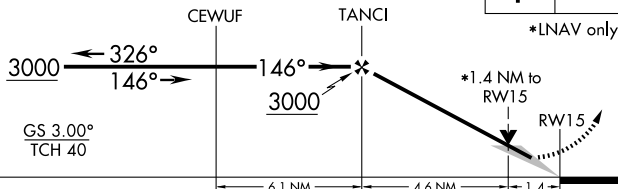

CATEGORY	A	B	C	D
LPV DA	1275-1	250 (300-1)		NA
LNAV/VNAV DA	1338-1	313 (400-1)		NA
LNAV MDA	1500-1	475 (500-1)	1500-1¼ 475 (500-1¼)	NA
CIRCLING	1500-1	475 (500-1)	1500-1½ 475 (500-1½)	NA

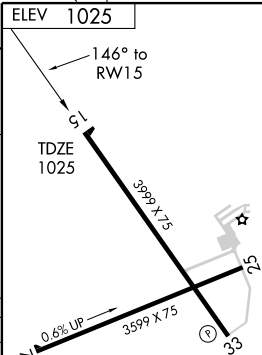

REIL Rwy 15 and 33 0
MIRL Rwy 7-25 and 15-33 0

APP CRS	Rwy Idg	3599
249°	TDZE	1022
	Apt Elev	1025

RNAV (GPS) RWY 25

PLATTEVILLE MUNI (PVB)



DME/DME RNP-0.3 NA.

Visibility reduction by helicopters NA.


When local altimeter setting not received, use Dubuque altimeter setting and increase all MDA 60 feet.

MISSED APPROACH: Climbing right turn to 3000 direct CERIG and hold.


AWOS-3
120.575

CHICAGO CENTER
133.95 281.4


UNICOM
122.7 (CTAF) 0

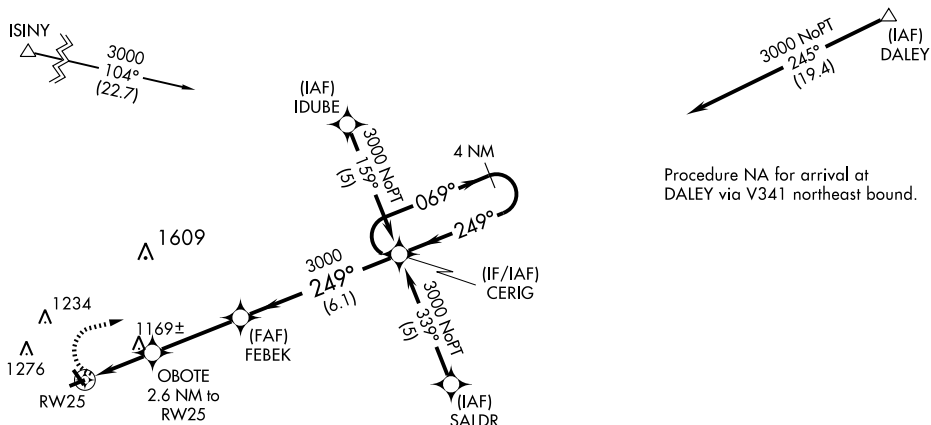

ELEV 1025




REIL Rws 15 and 33 0
MIRL Rws 7-25 and 15-33 0




Procedure NA for arrival at MADDY via V246 eastbound.

MADDY



4 NM
Holding Pattern

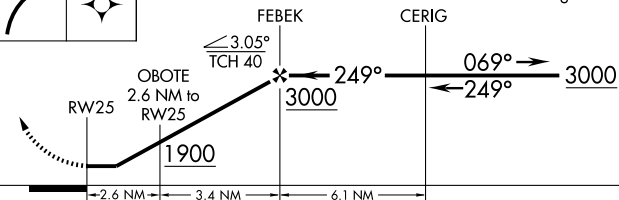

CATEGORY	A	B	C	D
INAV MDA	1440-1	418 (500-1)	1440-1¼ 418 (500-1¼)	NA
CIRCLING	1440-1 415 (500-1)	1480-1 455 (500-1)	1480-1½ 455 (500-1½)	NA

WAAS CH 40115 W33A	APP CRS 326°	Rwy Idg TDZE Apt Elev	3999 1025 1025
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 33

PLATTEVILLE MUNI (PVB)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Dubuque altimeter setting and increase all DA 56 feet, all MDA 60 feet, increase LNAV/VNAV all Cats and LNAV Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Dubuque altimeter setting.



MISSED APPROACH:
Climb to 3000 direct CEWUF and hold.

AWOS-3
120.575

CHICAGO CENTER
133.95 281.4

UNICOM
122.7 (CTAF) 0


MISSED APCH FIX

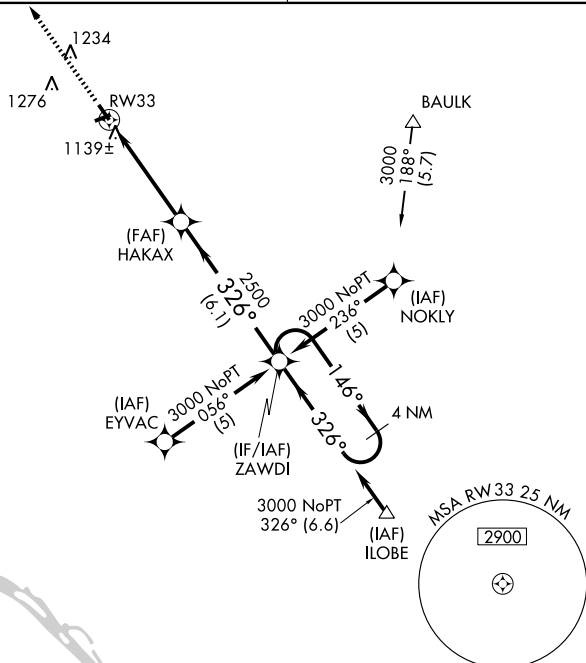

Procedure NA for arrivals on DBQ
VORTAC airway radials 094 CW 112.

DUBUQUE
DBQ

ELEV 1025

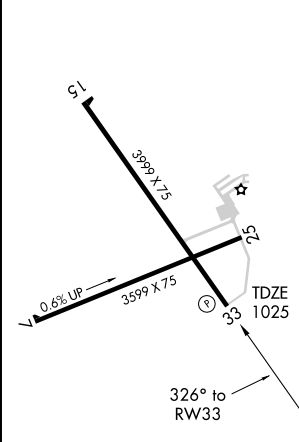

REIL Rwy 15 and 33 0
MIRL Rwy 7-25 and 15-33 0

<div> <div>3000</div> <div>CEWUF</div> </div>				
* LNAV only				
<div> <div>RW33</div> <div>HAKAX</div> <div>ZAWDI</div> <div>1.1 NM to RW33</div> <div>3.4 NM</div> <div>6.1 NM</div> </div>				
<div> <div>1.1 NM</div> <div>3.4 NM</div> <div>6.1 NM</div> </div>				
CATEGORY	A	B	C	D
LPV DA	1275-1	250 (300-1)		NA
LNAV/VNAV DA	1441-1½	416 (500-1½)		NA
LNAV MDA	1400-1	375 (400-1)		NA
CIRCLING	1440-1 415 (500-1)	1480-1 455 (500-1)	1480-1½ 455 (500-1½)	NA

PLATTEVILLE MUNI (PVB) 3 SE UTC-6(-5DT) N42°41.36' W90°26.66'

CHICAGO

1025 B FUEL 100LL, JET A NOTAM FILE GRB

L-28G

RWY 15-33: H3999X75 (ASPH) S-12.5 MRL

IAP

RWY 15: REIL. RWY 33: REIL. PAPI(2PL)—GA 3.0° TCH 25'.

RWY 07-25: H3599X75 (ASPH) S-30, D-35 MRL 0.6% up NE.

RWY 25: Road.

AIRPORT REMARKS: Attended Apr-Sep 1330-0130Z†, Oct-Mar

1330-2330Z†. 24 hr self svc fuel avbl with credit card. ACTIVATE

MRL Rwy 15-33 and Rwy 07-25; REIL Rwy 15 and Rwy

33—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.575 (609) 348-3637.**COMMUNICATIONS:** CTAF/UNICOM 122.7

RCO 122.5 (GREEN BAY RADIO).

⑧ CHICAGO CENTER APP/DEP CON 133.95


RADIO AIDS TO NAVIGATION: NOTAM FILE DBQ.

DUBUQUE (H) VORTACW 115.8 DBQ Chan 105 N42°24.09'

W90°42.54' 030° 20.9 NM to fld. 1051/4E.

NDB (MHW) 203 PVB N42°41.27' W90°26.18' at fld. NOTAM

FILE GRB.

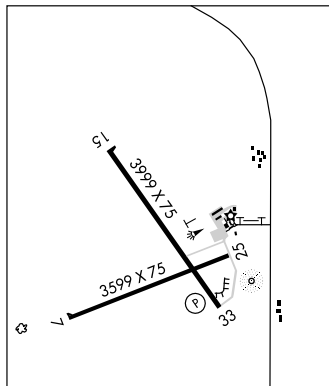**POBER** N43°52.43' W88°33.44' NOTAM FILE OSH.

CHICAGO

NDB (LOM) 395 OS 358° 6.6 NM to Wittman Rgnl. Unmonitored.

PORTAGE MUNI (C47) 2 NW UTC-6(-5DT) N43°33.62' W89°28.97'

CHICAGO

825 B FUEL 100LL, MOGAS TPA-1825(1000) NOTAM FILE GRB

L-28G

RWY 17-35: H3775X60 (ASPH) MRL (NSTD) 0.3% up S

IAP

RWY 17: REIL(NSTD). PVASI(PSSL). Thld dspcd 103'. Road.

RWY 35: Thld dspcd 262'. Road.

RWY 04-22: H2560X40 (ASPH) 0.3% up SW

RWY 04: Thld dspcd 60'. Road.

RWY 22: Road.

AIRPORT REMARKS: Attended Mon-Fri 1400-2200Z†, Sat-Sun 1600-2200Z†. Fuel avbl 24 hrs with credit card. Rwy

04-22 CLOSED Nov 15 to Apr 15, rwy not plowed during winter. 115' crane 200' southwest Rwy intersection

Mon-Thu 1900-0400Z†. PAEW AER 04 indef. Numerous deer on and invof arpt. Rwy 04-22 severe cracking and

plants growing thru pavement. P-line 110' AGL 1580' from dspcd thld Rwy 35. Rwy 35 large hangars and trees

200' W of rwy cause wind shear with strong NW winds. Rwy 17-35 NSTD MRL. Rwy 17 first 100' not lgtd; Rwy

35 first 193' not lgtd. Rwy 04-22 marked with numbers only.

COMMUNICATIONS: CTAF/UNICOM 122.7

DELLS RCO 122.1R 117.0T (GREEN BAY RADIO)

⑧ MADISON APP/DEP CON 135.45 120.1 (1200-0500Z†)

⑧ CHICAGO CENTER APP/DEP CON 133.3 (0500-1200Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE DLL.

DELLS (H) VORTAC 117.0 DLL Chan 117 N43°33.05' W89°45.82' 084° 12.3 NM to fld. 1020/3E.

PRAIRIE DU CHIEN MUNI (PDC) 2 SE UTC-6(-5DT) N43°01.16' W91°07.42'

CHICAGO

661 B FUEL 100LL, JET A TPA-1661(1000) NOTAM FILE PDC

H-5D, L-28G

RWY 14-32: H5000X75 (ASPH) S-30, D-60 MRL

IAP

RWY 14: REIL. PAPI(2PL)—GA 3.0° TCH 28'. Pole.

RWY 32: REIL. PAPI(2PL)—GA 4.0° TCH 30'. Trees.

RWY 11-29: H3999X75 (ASPH) S-24, D-40 MRL

RWY 11: Stack.

RWY 29: Trees.

AIRPORT REMARKS: Attended 1600-2200Z†. Fuel 24 hr self svc. ACTIVATE MRL Rwy 11-29, Rwy 14-32, PAPI Rwy 14

and Rwy 32 and REIL Rwy 14 and Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.925 (608) 326-9122.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 122.25 (GREEN BAY RADIO).

⑧ CHICAGO CENTER APP/DEP CON 133.95

RADIO AIDS TO NAVIGATION: NOTAM FILE FOD.

WAUKON (L) VORTAC 116.6 UKN Chan 113 N43°16.81' W91°32.24' 126° 24 NM to fld. 1288/5E.

VORTAC DLL 117.0 Chan 117	APP CRS 084°	Rwy Idg TDZE Apt Elev	N/A N/A 825
---	------------------------	-----------------------------	--


VOR/DME or GPS-A
PORTAGE MUNI (C47)

T
A NA Use Baraboo Wisconsin Dells altimeter setting.

MISSED APPROACH: Climbing left turn to 3000 direct DLL VORTAC and hold.

MADISON APP CON ★
135.45 343.7

UNICOM
122.7 (CTAF)

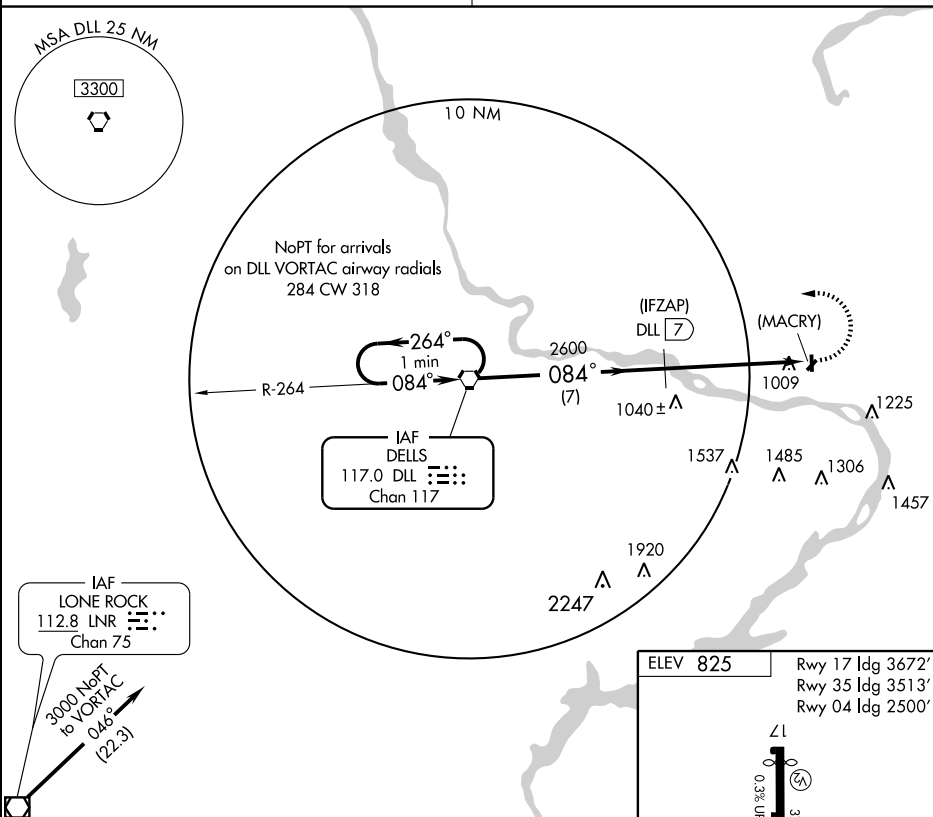

One Minute Holding Pattern

VORTAC

(IFZAP)

A diagram showing a horizontal line. To the left of the line is the number 3000. Above the line, an arrow points left towards the number 3000, labeled 264° . Below the line, an arrow points right, labeled 084° . The line continues to the right and then bends downwards at an angle labeled 084° .

1

DLL 12.1

CATEGORY	A	B	C
CIRCLING	1440-1 615 (700-1)		NA

ELEV 825	Rwy 17 ldg 3672'
	Rwy 35 ldg 3513'
	Rwy 04 ldg 2500'

Knots	60	90	120	150	180
Min:Sec					

PORTAGE, WISCONSIN
Amdt 6 08157

43° 34' N-89° 29' W

PORTAGE MUNI (C47)
VOR/DME or GPS-A

EC-3, 23 SEP 2010 to 21 OCT 2010

VORTAC DLL 117.0 Chan 117	APP CRS 175°	Rwy Idg 3672 TDZE 818 Apt Elev 825
---	------------------------	---

VOR/DME RNAV or GPS RWY 17

PORTAGE MUNI (C47)






Use Baraboo Wisconsin Dells altimeter setting.

MISSED APPROACH: Climbing left turn to 2600 direct HOPES WP and hold.

MADISON APP CON ★
135.45 343.7

UNICOM
122.7 (CTAF)

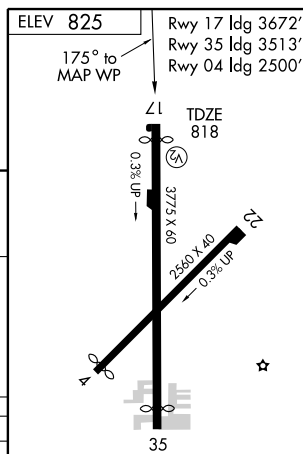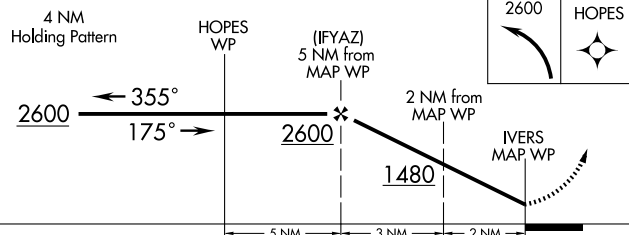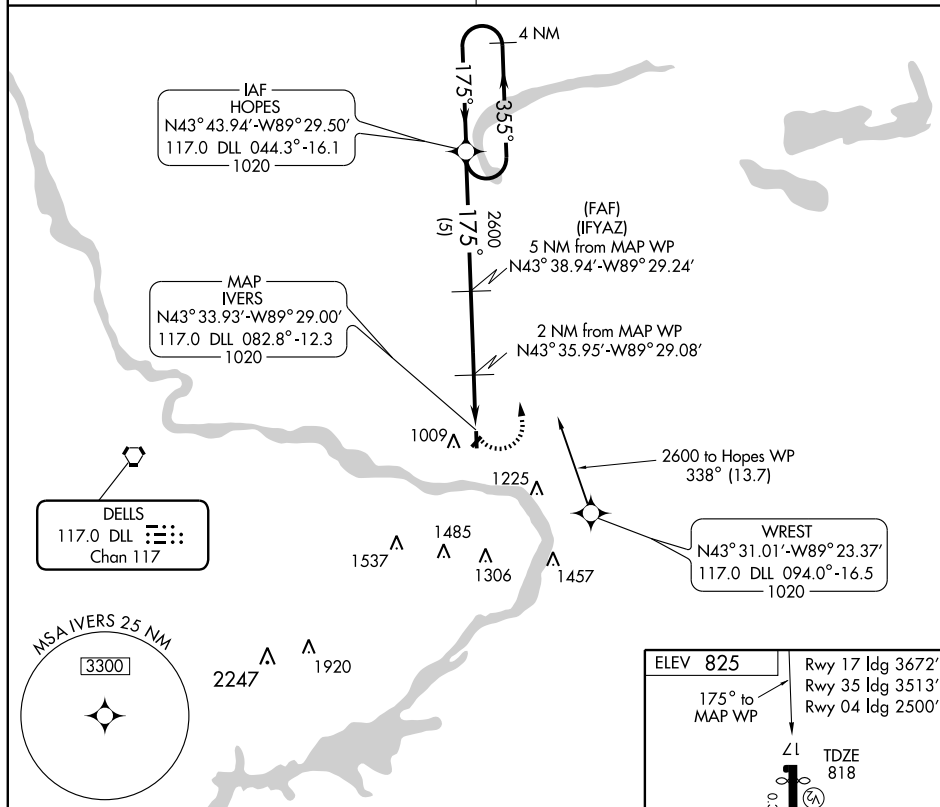

CATEGORY	A	B	C	D
S-17	1400-1	582 (600-1)	NA	
CIRCLING	1440-1	615 (700-1)	NA	

PORTAGE, WISCONSIN
Amdt 4 08157

43° 34'N-89° 29'W

PORTAGE MUNI (C47)

VOR/DME RNAV or GPS RWY 17

-3. 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

PLATTEVILLE MUNI (PVB) 3 SE UTC-6(-5DT) N42°41.36' W90°26.66'

CHICAGO

1025 B FUEL 100LL, JET A NOTAM FILE GRB

L-28G

RWY 15-33: H3999X75 (ASPH) S-12.5 MRL

IAP

RWY 15: REIL. RWY 33: REIL. PAPI(2PL)—GA 3.0° TCH 25'.

RWY 07-25: H3599X75 (ASPH) S-30, D-35 MRL 0.6% up NE.

RWY 25: Road.

AIRPORT REMARKS: Attended Apr-Sep 1330-0130Z†, Oct-Mar

1330-2330Z†. 24 hr self svc fuel avbl with credit card. ACTIVATE

MRL Rwy 15-33 and Rwy 07-25; REIL Rwy 15 and Rwy

33—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.575 (609) 348-3637.**COMMUNICATIONS:** CTAF/UNICOM 122.7

RCO 122.5 (GREEN BAY RADIO).

Ⓡ CHICAGO CENTER APP/DEP CON 133.95


RADIO AIDS TO NAVIGATION: NOTAM FILE DBQ.

DUBUQUE (H) VORTACW 115.8 DBQ Chan 105 N42°24.09'

W90°42.54' 030° 20.9 NM to fld. 1051/4E.

NDB (MHW) 203 PVB N42°41.27' W90°26.18' at fld. NOTAM

FILE GRB.

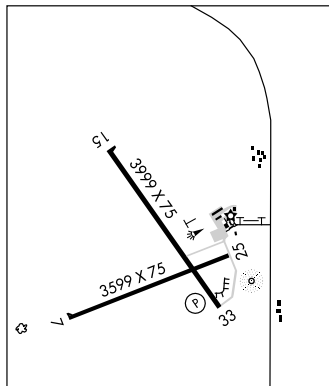**POBER** N43°52.43' W88°33.44' NOTAM FILE OSH.

CHICAGO

NDB (LOM) 395 OS 358° 6.6 NM to Wittman Rgnl. Unmonitored.

PORTAGE MUNI (C47) 2 NW UTC-6(-5DT) N43°33.62' W89°28.97'

CHICAGO

825 B FUEL 100LL, MOGAS TPA-1825(1000) NOTAM FILE GRB

L-28G

RWY 17-35: H3775X60 (ASPH) MRL (NSTD) 0.3% up S

IAP

RWY 17: REIL(NSTD). PVASI(PSSL). Thld dspcd 103'. Road.

RWY 35: Thld dspcd 262'. Road.

RWY 04-22: H2560X40 (ASPH) 0.3% up SW

RWY 04: Thld dspcd 60'. Road.

RWY 22: Road.

AIRPORT REMARKS: Attended Mon-Fri 1400-2200Z†, Sat-Sun 1600-2200Z†. Fuel avbl 24 hrs with credit card. Rwy

04-22 CLOSED Nov 15 to Apr 15, rwy not plowed during winter. 115' crane 200' southwest Rwy intersection

Mon-Thu 1900-0400Z†. PAEW AER 04 indef. Numerous deer on and invof arpt. Rwy 04-22 severe cracking and

plants growing thru pavement. P-line 110' AGL 1580' from dspcd thld Rwy 35. Rwy 35 large hangars and trees

200' W of rwy cause wind shear with strong NW winds. Rwy 17-35 NSTD MRL. Rwy 17 first 100' not lgtd; Rwy

35 first 193' not lgtd. Rwy 04-22 marked with numbers only.

COMMUNICATIONS: CTAF/UNICOM 122.7

DELLS RCO 122.1R 117.0T (GREEN BAY RADIO)

Ⓡ MADISON APP/DEP CON 135.45 120.1 (1200-0500Z†)

Ⓡ CHICAGO CENTER APP/DEP CON 133.3 (0500-1200Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE DLL.

DELLS (H) VORTAC 117.0 DLL Chan 117 N43°33.05' W89°45.82' 084° 12.3 NM to fld. 1020/3E.

PRAIRIE DU CHIEN MUNI (PDC) 2 SE UTC-6(-5DT) N43°01.16' W91°07.42'

CHICAGO

661 B FUEL 100LL, JET A TPA-1661(1000) NOTAM FILE PDC

H-5D, L-28G

RWY 14-32: H5000X75 (ASPH) S-30, D-60 MRL

IAP

RWY 14: REIL. PAPI(2PL)—GA 3.0° TCH 28'. Pole.

RWY 32: REIL. PAPI(2PL)—GA 4.0° TCH 30'. Trees.

RWY 11-29: H3999X75 (ASPH) S-24, D-40 MRL

RWY 11: Stack.

RWY 29: Trees.

AIRPORT REMARKS: Attended 1600-2200Z†. Fuel 24 hr self svc. ACTIVATE MRL Rwy 11-29, Rwy 14-32, PAPI Rwy 14

and Rwy 32 and REIL Rwy 14 and Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.925 (608) 326-9122.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 122.25 (GREEN BAY RADIO).

Ⓡ CHICAGO CENTER APP/DEP CON 133.95

RADIO AIDS TO NAVIGATION: NOTAM FILE FOD.

WAUKON (L) VORTAC 116.6 UKN Chan 113 N43°16.81' W91°32.24' 126° 24 NM to fld. 1288/5E.

APP CRS 140°	Rwy Idg 5000
	TDZE 655
	Apt Elev 661

RNAV (GPS) RWY 14



PRAIRIE DU CHIEN MUNI (PDC)


 GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct TEVEE WP and hold.

 AWOS-3
119.925


 CHICAGO CENTER
133.95 281.4

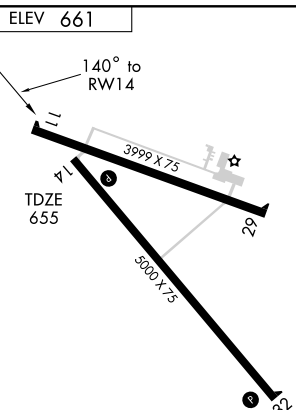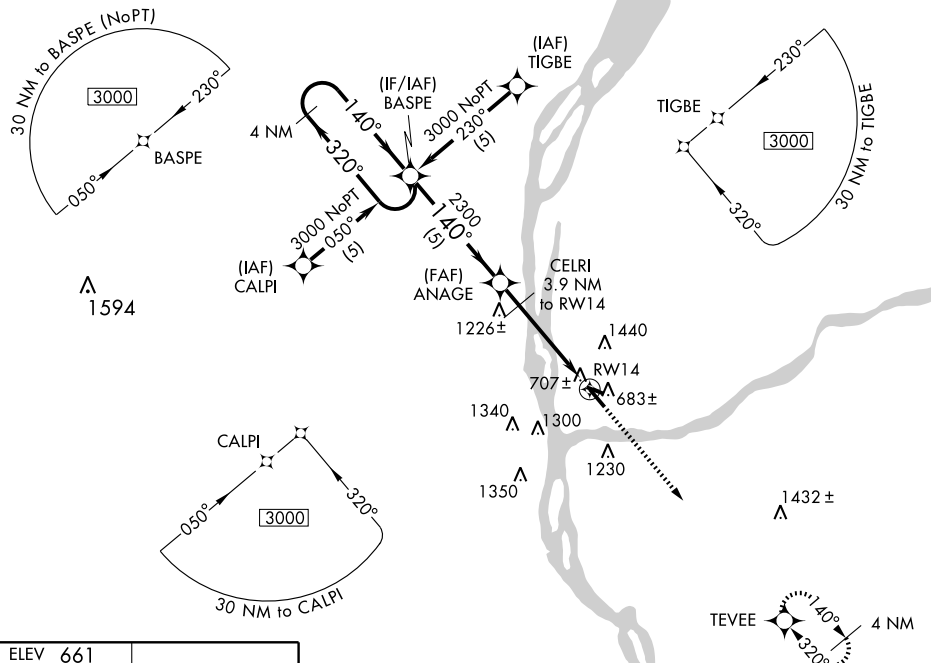 UNICOM
122.8 (CTAF) 0

 REIL Rwy 14 and 32 0
MRL Rwy 11-29 and 14-32 0



4 NM Holding Pattern				3000	TEVEE
BASPE ANAGE CELRI 3.9 NM to RW14 1.6 NM to RW14 RW14					
3000 ← 320° 140° → 2300 140° 1960 3.04° ≥ TCH 40 5 NM 1.1 NM 2.3 1.6					
VGSI and descent angles not coincident.					
CATEGORY	A	B	C	D	
LNAV MDA	1180-1	525 (600-1)	1180-1½ 525 (600-1½)	1180-1¾ 525 (600-1¾)	
CIRCLING	1580-1¼	919 (1000-1¼)	1800-3	1139 (1200-3)	

APP CRS
290°Rwy Idg **3999**
TDZE **661**
Apt Elev **661****RNAV (GPS) RWY 29**
PRAIRIE DU CHIEN MUNI (PDC)GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

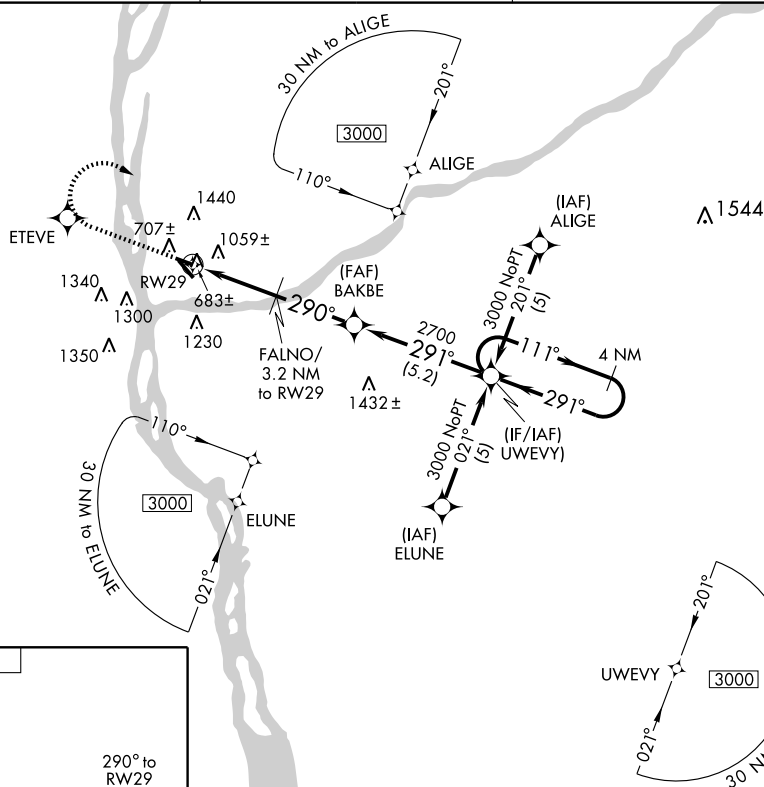MISSED APPROACH: Climb to 2000 via 290° course to ETEVE WP then climbing right turn to 3000 direct UWEVY WP and hold.

AWOS-3
119.925CHICAGO CENTER
133.95 281.4UNICOM
122.8 (CTAF) 0

ELEV 661

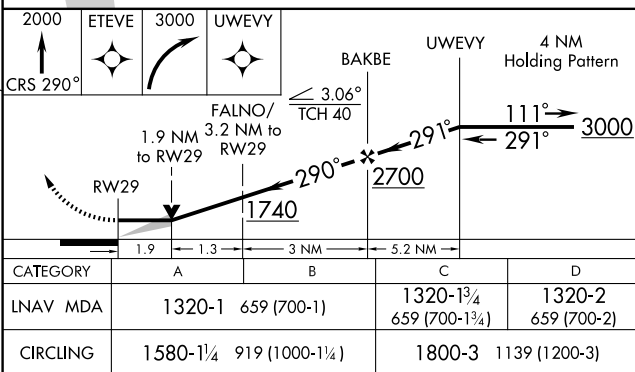REIL Rwy 14 and 32 0
MIRL Rwy 11-29 and 14-32 0


APP CRS
320°Rwy Idg **5000**
TDZE **655**
Apt Elev **661****RNAV (GPS) RWY 32**
PRAIRIE DU CHIEN MUNI (PDC)GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct BASPE WP and hold.




AWOS-3
119.925CHICAGO CENTER
133.95 281.4UNICOM
122.8 (CTAF) ①

4 NM

BASPE

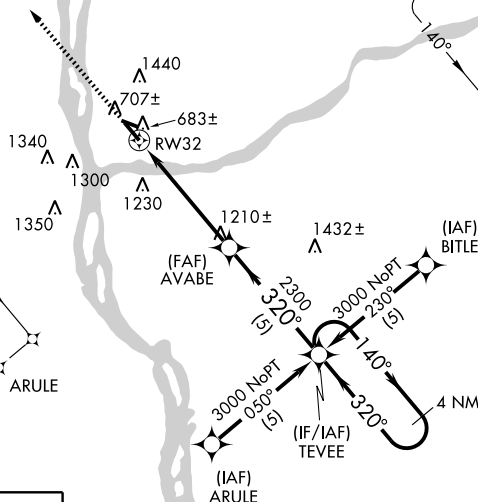

ELEV 661

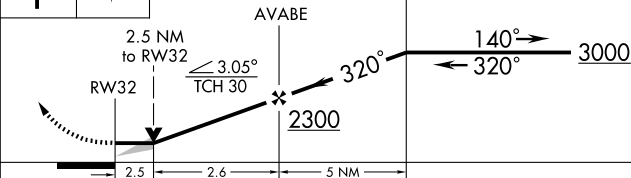REIL Rwy 14 and 32 ①
MIRL Rwy 14-32 and 11-29 ①

CATEGORY	A	B	C	D
LNAV MDA	1460-1 805 (900-1)	1460-1¼ 805 (900-1¼)	1460-2¼ 805 (900-2¼)	1460-2½ 805 (900-2½)
CIRCLING	1580-1¼ 919 (1000-1¼)		1800-3 1139 (1200-3)	

VORTAC UKN	APP CRS	Rwy Idg	3999
116.6	305°	TDZE	661
Chan 113		Apt Elev	661

VOR/DME RWY 29
PRAIRIE DU CHIEN MUNI (PDC)




MISSED APPROACH: Climb to 2000, then climbing right turn to 2700 via UKN R-125 to BAGEY/30 DME and hold.


AWOS-3
119.925

CHICAGO CENTER
133.95 281.4

UNICOM
122.8 (CTAF) **L**

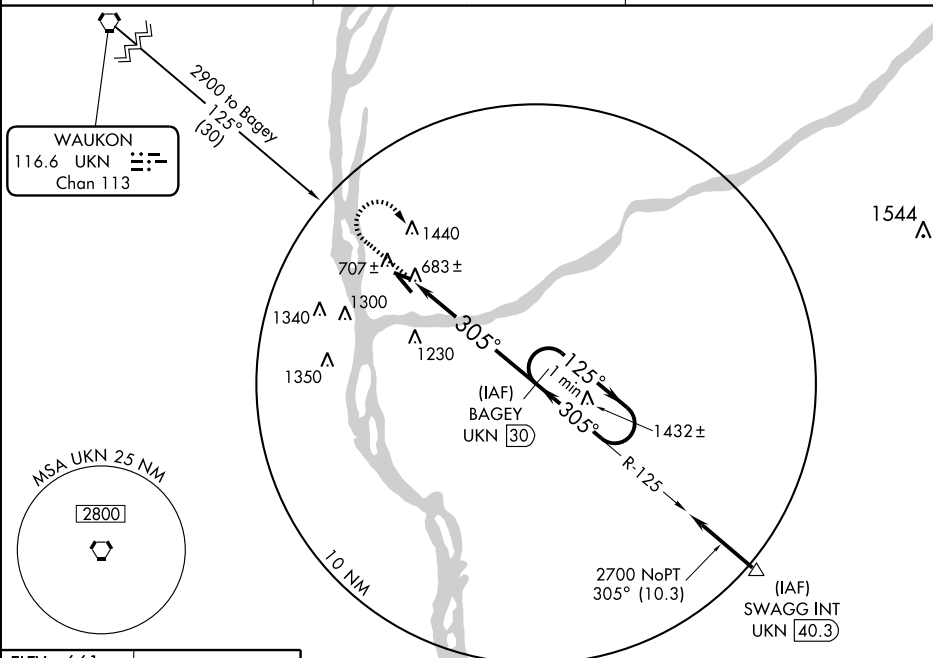

ELEV 661



REIL Rwy 14 and 32 **L**
MIRL Rwy 14-32 and 11-29 **L**

Knots	60	90	120	150	180
Min:Sec					

Diagram illustrating a One Minute Holding Pattern for BAGEY 30 DME. The pattern is a racetrack shape. The inbound leg is 3.22° TCH 40, starting from a 305° heading and turning to a 125° heading. The outbound leg is 125° heading. The pattern is centered on the 305° heading. The distance from the start of the pattern to the end of the outbound leg is 5.9 NM. The pattern is labeled 'One Minute Holding Pattern'.

CATEGORY	A	B	C	D
S-29	1560-1¼ 899 (900-1¼)		1560-2¾ 899 (900-2¾)	1560-3 899 (900-3)
CIRCLING	1580-1¼ 919 (1000-1¼)		1800-3 1139 (1200-3)	

PRAIRIE DU CHIEN, WISCONSIN
Amdt 8 07074

43° 01' N-91° 07' W

PRAIRIE DU CHIEN MUNI (PDC)
VOR/DME RWY 29

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

PRAIRIE DU SAC

SAUK—PRAIRIE (91C) 2 W UTC-6(-5DT) N43°17.87' W89°45.35'

CHICAGO

832 B S4 NOTAM FILE GRB

L-28G

RWY 18-36: H2936X60 (ASPH) MIRL 0.4% up N

IAP

RWY 18: REIL. RWY 36: REIL. Tree.

AIRPORT REMARKS: Unattended. Ultralight activity on and invof arpt. Maintenance vehicle tfc on and invof arpt. W ramp and twy pvt, clsd transient. ACTIVATE MIRL Rwy 18-36 and REIL Rwy 18 and Rwy 36—CTAF.

COMMUNICATIONS: CTAF 122.9

① MADISON APP/DEP CON 135.45 (1200-0500Z)

① CHICAGO CENTER APP/DEP CON 133.3 (0500-1200Z)

RADIO AIDS TO NAVIGATION: NOTAM FILE DLL.

DELLS (H) VORTAC 117.0 DLL Chan 117 N43°33.05' W89°45.82' 176° 15.2 NM to fld. 1020/3E.

PRENTICE (5N2) 1 E UTC-6(-5DT) N45°32.58' W90°16.76'

GREEN BAY

1578 B NOTAM FILE GRB

L-14I

RWY 09-27: H3250X60 (ASPH) MIRL

RWY 09: Thld dsplcd 350'. Railroad.


RWY 27: Thld dsplcd 120'. Tree.

AIRPORT REMARKS: Unattended. ACTIVATE twy and MIRL Rwy 09-27—CTAF.

COMMUNICATIONS: CTAF/UNICOM 123.0

RADIO AIDS TO NAVIGATION: NOTAM FILE RHI.

RHINELANDER (L) VORTAC 109.2 RHI Chan 29 N43°38.03' W89°27.47' 259° 35 NM to fld. 1590/2E. HIWAS.

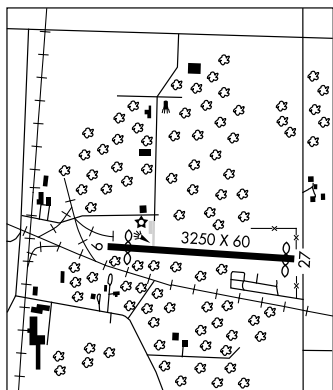

PRICE CO (See PHILLIPS)

PULASKI

CARTER (92C) 2 S UTC-6(-5DT) N44°38.47' W88°12.91'

GREEN BAY

785 S4 FUEL 100LL, MOGAS TPA-1585(800) NOTAM FILE GRB

L-31A

RWY 12-30: H2555X30 (ASPH) LIRL (NSTD) 0.3% up NW

IAP

RWY 12: Thld dsplcd 375'. Tree. RWY 30: Thld dsplcd 130'. Trees.

RWY 03-21: 1610X80 (TURF)

RWY 03: Road. RWY 21: Road.

AIRPORT REMARKS: Attended dalgt hrs. Parachute Jumping. Ultralight flying on and invof arpt. Rwy 12-30 large cracks in rwy. Limited line-of-sight between Rwy 03 and 12, Rwy 03 and 30. Rwy 12-30 NSTD LIRL, spaced every 300'. For NSTD LIRL Rwy 12-30 ACTIVATE 3 clicks on 5 clicks off—CTAF.

COMMUNICATIONS: CTAF 122.9

① GREEN BAY APP/DEP CON 119.4 (1130-0530Z) ① GREEN BAY DEP CON 126.55 (1130-0530Z)

① MINNEAPOLIS CENTER APP/DEP CON 125.55 (0530-1130Z)

RADIO AIDS TO NAVIGATION: NOTAM FILE GRB.

GREEN BAY (H) VORTACW 115.5 GRB Chan 102 N44°33.31' W88°11.69' 349° 5.2 NM to fld. 767/1E. HIWAS.

QUAMS MARINA SPB (See STOUGHTON)

APP CRS	Rwy Idg	2936
177°	TDZE	832
	Apt Elev	832

RNAV (GPS) RWY 18




PRAIRIE DU SAC/SAUK-PRAIRIE (91C)

V Use Dane County Rgnl-Truax Field altimeter setting; if not received
NA use Baraboo altimeter setting. DME/DME RNP-0.3 NA.


MISSED APPROACH: Climb to
 3200 direct SOCNO and hold.

MADISON APP CON*
135.45 343.7


CTAF
122.9

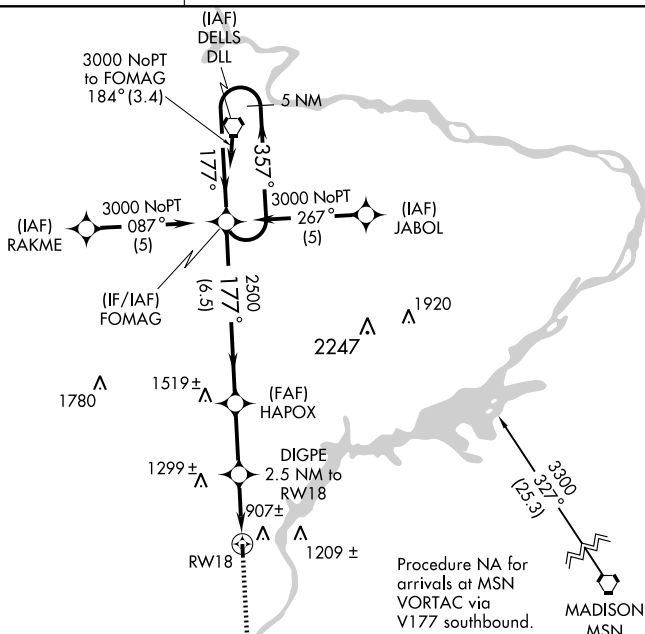

5 NM
 Holding Pattern

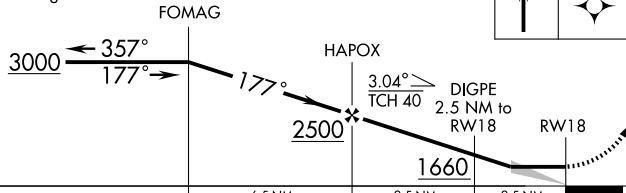

CATEGORY	A	B	C	D
RNAV MDA	1400-1	568 (600-1)	NA	NA
CIRCLING	1400-1	568 (600-1)	NA	NA

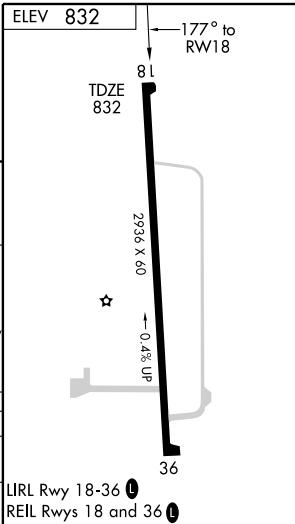

APP CRS **357°**
Rwy Idg **2936**
TDZE **832**
Apt Elev **832**

RNAV (GPS) RWY 36


PRAIRIE DU SAC/ SAUK-PRAIRIE (91C)

Use Dane County Rgnl-Truax Field altimeter setting; if not received, use Baraboo altimeter setting.
DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 3000 direct FOMAG and hold.



MADISON APP CON★
135.45 343.7

CTAF
122.9






Procedure NA for arrivals at LNR VOR/DME airway radials 134 CW 147.

LONE ROCK
LNR

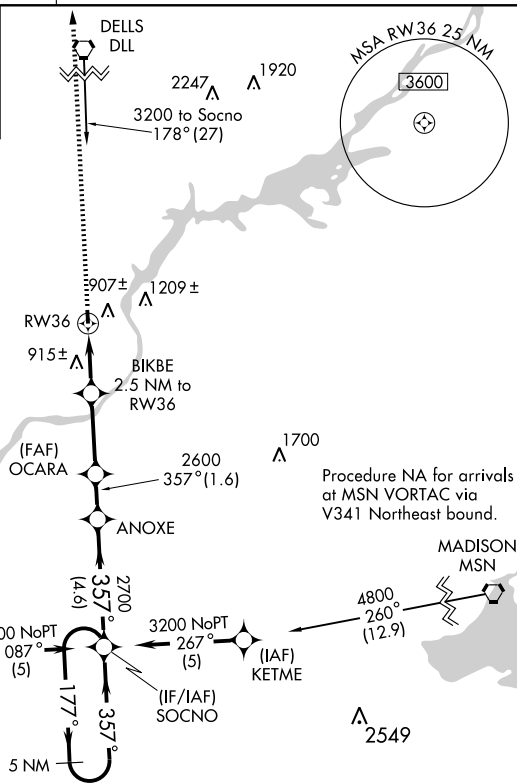

ELEV 832

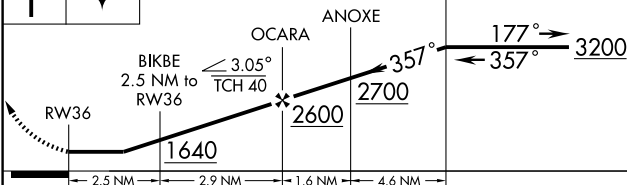

CATEGORY	A	B	C	D
LNAV MDA	1400-1	568 (600-1)	NA	NA
CIRCLING	1400-1	568 (600-1)	NA	NA

PRAIRIE DU SAC

SAUK—PRAIRIE (91C) 2 W UTC-6(-5DT) N43°17.87' W89°45.35'

CHICAGO

832 B S4 NOTAM FILE GRB

L-28G

RWY 18-36: H2936X60 (ASPH) MIRL 0.4% up N

IAP

RWY 18: REIL. RWY 36: REIL. Tree.

AIRPORT REMARKS: Unattended. Ultralight activity on and invof arpt. Maintenance vehicle tfc on and invof arpt. W ramp and twy pvt, clsd transient. ACTIVATE MIRL Rwy 18-36 and REIL Rwy 18 and Rwy 36—CTAF.

COMMUNICATIONS: CTAF 122.9

① MADISON APP/DEP CON 135.45 (1200-0500Z)

① CHICAGO CENTER APP/DEP CON 133.3 (0500-1200Z)

RADIO AIDS TO NAVIGATION: NOTAM FILE DLL.

DELLS (H) VORTAC 117.0 DLL Chan 117 N43°33.05' W89°45.82' 176° 15.2 NM to fld. 1020/3E.

PRENTICE (5N2) 1 E UTC-6(-5DT) N45°32.58' W90°16.76'

GREEN BAY

1578 B NOTAM FILE GRB

L-14I

RWY 09-27: H3250X60 (ASPH) MIRL

RWY 09: Thld dsplcd 350'. Railroad.


RWY 27: Thld dsplcd 120'. Tree.

AIRPORT REMARKS: Unattended. ACTIVATE twy and MIRL Rwy 09-27—CTAF.

COMMUNICATIONS: CTAF/UNICOM 123.0

RADIO AIDS TO NAVIGATION: NOTAM FILE RHI.

RHINELANDER (L) VORTAC 109.2 RHI Chan 29 N43°38.03' W89°27.47' 259° 35 NM to fld. 1590/2E. HIWAS.

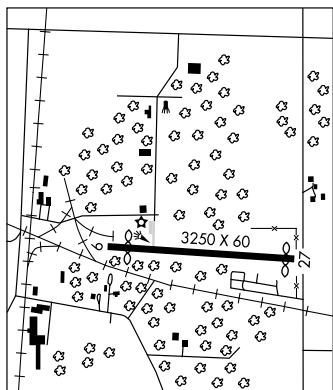

PRICE CO (See PHILLIPS)

PULASKI

CARTER (92C) 2 S UTC-6(-5DT) N44°38.47' W88°12.91'

GREEN BAY

785 S4 FUEL 100LL, MOGAS TPA-1585(800) NOTAM FILE GRB

L-31A

RWY 12-30: H2555X30 (ASPH) LIRL (NSTD) 0.3% up NW

IAP

RWY 12: Thld dsplcd 375'. Tree. RWY 30: Thld dsplcd 130'. Trees.

RWY 03-21: 1610X80 (TURF)

RWY 03: Road. RWY 21: Road.

AIRPORT REMARKS: Attended daltg hrs. Parachute Jumping. Ultralight flying on and invof arpt. Rwy 12-30 large cracks in rwy. Limited line-of-sight between Rwy 03 and 12, Rwy 03 and 30. Rwy 12-30 NSTD LIRL, spaced every 300'. For NSTD LIRL Rwy 12-30 ACTIVATE 3 clicks on 5 clicks off—CTAF.

COMMUNICATIONS: CTAF 122.9

① GREEN BAY APP/DEP CON 119.4 (1130-0530Z) ① GREEN BAY DEP CON 126.55 (1130-0530Z)

① MINNEAPOLIS CENTER APP/DEP CON 125.55 (0530-1130Z)

RADIO AIDS TO NAVIGATION: NOTAM FILE GRB.

GREEN BAY (H) VORTACW 115.5 GRB Chan 102 N44°33.31' W88°11.69' 349° 5.2 NM to fld. 767/1E. HIWAS.

QUAMS MARINA SPB (See STOUGHTON)

VORTAC GRB 115.5 Chan 102	APP CRS 350°	Rwy Idg TDZE Apt Elev	N/A N/A 785
---	------------------------	-----------------------------	--


VOR or GPS-A
PULASKI/CARTER (92C)

NA Use Green Bay altimeter setting.
Procedure not authorized at night.


MISSED APPROACH: Climbing left turn to 2500,
direct GRB VORTAC and hold.

GREEN BAY APP CON ★
119.4 338.2

CTAF
122.90

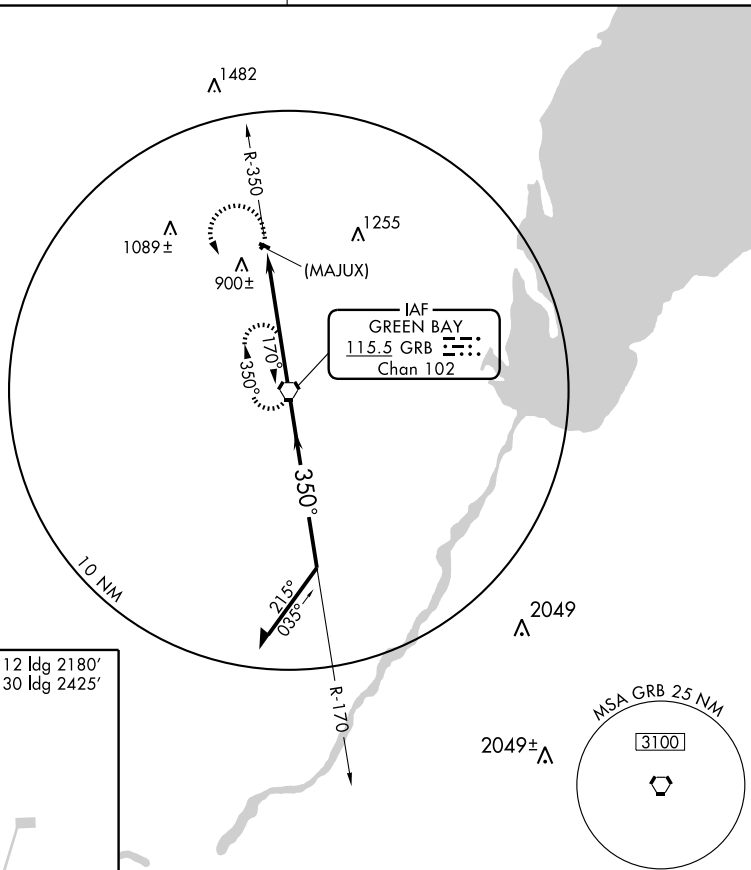

ELEV 785 Rwy 12 Idg 2180'
Rwy 30 Idg 2425'








350° 5.1 NM
from FAF

LIRL Rwy 12-30 **0**

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

<div><div>2500</div><div></div></div>		<div><div>GRB</div><div></div><div>115.5</div></div>		<div><div>VORTAC</div><div></div></div>		<div><div>Remain within 10 NM</div></div>	
<div><div>(MAJUX)</div><div>GRB</div><div>5.1</div></div>		<div><div>2500</div><div></div></div>		<div><div>170°</div></div>		<div><div>2500</div></div>	
<div><div></div></div>		<div><div>5.1 NM</div></div>		<div><div>350°</div></div>		<div><div>2500</div></div>	
CATEGORY	A	B	C	D			
CIRCLING	1280-1	495 (500-1)		NA			

RACINE

JOHN H. BATTEN (RAC) 2 NW UTC-6(-5DT) N42°45.67' W87°48.84'

674 B S2 FUEL 100LL, JET A LRA NOTAM FILE RAC

RWY 04-22: H6574X100 (CONC-GRVD) S-50, D-65, 2S-83 HIRL

RWY 04: MALSF. REIL. PAPI(P4L). Thld dsplcd 734'. Road.

RWY 22: REIL. PAPI(P4L)—GA 3.0° TCH 46'. Thld dsplcd 390'.

Railroad.

RWY 14-32: H4422X100 (ASPH) S-25, D-35 MIRL 0.4% up NW

RWY 14: REIL. PAPI(P4L). Thld dsplcd 806'. Road.

RWY 32: REIL. Tree.

AIRPORT REMARKS: Attended Mon-Fri 1300-2300Z†, Sat-Sun 1400-2300Z†. Migratory waterfowl on and invof arpt. PAEW AER 22. Rwy 22 REIL intermittent west side. ACTIVATE HIRL Rwy 04-22 and MIRL Rwy 14-32; PAPI Rwys 04 and 14; REIL Rwys 04; 22; 14 and 32; MALSF Rwy 04—CTAF. PAPI Rwy 22 opr 24 hrs. Flight Notification Service (ADCUS) avbl.

WEATHER DATA SOURCES: ASOS 117.7 HRK (262) 635-0959.

COMMUNICATIONS: CTAF/UNICOM 123.075

Ⓡ MILWAUKEE APP/DEP CON 119.65

RADIO AIDS TO NAVIGATION: NOTAM FILE RAC.


HORLICK (T) VORW/DME 117.7 HRK Chan 124 N42°45.73' W87°48.88' at fld. 669/2W. ASOS.

PASER NDB (MHW/LOM) 206 RA N42°40.95' W87°53.97' 041° 6.0 NM to fld. Unmonitored.

NDB unusable byd 10 NM.

ILS 108.7 I-RAC Rwy 04 LOM PASER NDB. Unmonitored 0500-1200Z†.

GS unusable blo 819'.

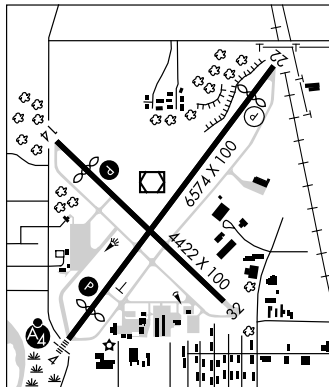

CHICAGO

H-5E, L-28H, A

IAP

RED WING MUNI (See RED WING MUNI Minnesota)

REEDSBURG MUNI (C35) 1 E UTC-6(-5DT) N43°31.55' W89°58.99'

907 B S4 FUEL 100LL, JET A TPA-1907(1000) NOTAM FILE GRB

RWY 18-36: H4840X75 (ASPH) S-30 MIRL 0.5% up N

RWY 18: REIL. PAPI(P2L)—GA 3.0° TCH 25'. Thld dsplcd 440'. Road.

RWY 36: REIL. Thld dsplcd 300'. Railroad.

RWY 07-25: H2510X50 (ASPH) S-30 MIRL 0.6% up NE

RWY 07: Thld dsplcd 230'. Road. RWY 25: Thld dsplcd 300'. Road.

AIRPORT REMARKS: Attended Jun-Aug 1400-0200Z†, Sep-May 1400-2300Z†. Deer on and invof arpt. 160' crane E of AER 07 flagged/lgt'd. MIRL Rwys 18-36 and 07-25 preset on low ints, to increase ints and ACTIVATE REIL Rwys 18 and 36 and PAPI Rwy 18—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

DELLS RCO 122.1R 117.0T (GREEN BAY RADIO)

Ⓡ MADISON APP/DEP CON 135.45 (1200-0500Z†) GCO 121.725 (FLIGHT SERVICES)

Ⓡ CHICAGO CENTER APP/DEP CON 133.3 (0500-1200Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE DLL.

DELLS (H) VORTAC 117.0 DLL Chan 117 N43°33.05' W89°45.82' 258° 9.7 NM to fld. 1020/3E.

CHICAGO



L-28G

IAP


LOC I-RAC 108.7	APP CRS 041°	Rwy Idg TDZE Apt Elev	5840 667 674
---------------------------	------------------------	-----------------------------	---

NA	MALS 	MISSED APPROACH: Climb to 2000 then climbing right turn to 2600 direct PASER LOM and hold.
----	----------	--

ASOS 117.7	MILWAUKEE APP CON 119.65 (SOUTH) 317.725	UNICOM 123.075 (CTAF) 0
----------------------	---	--

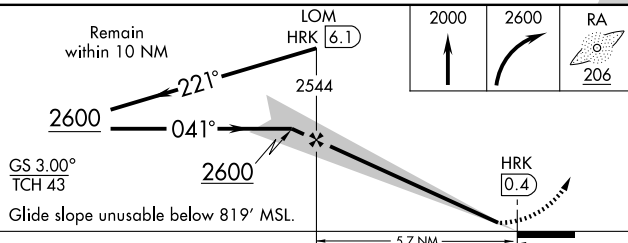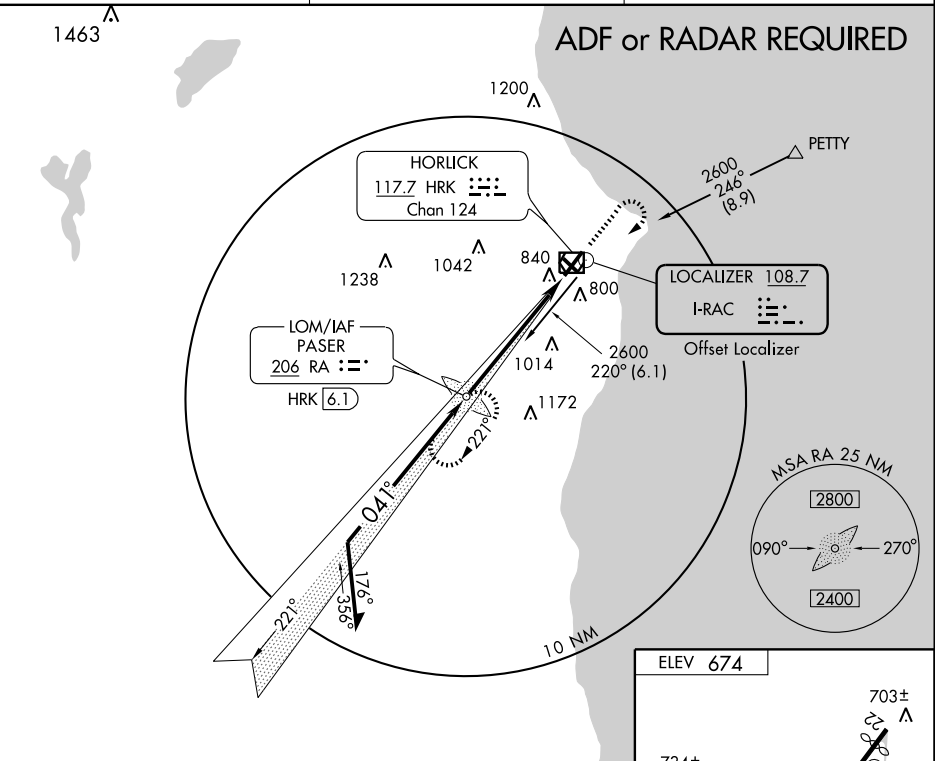

CATEGORY	A	B	C	D
S-ILS 4	917-1 250 (300-1)			
S-LOC 4	1100-1 433 (500-1)	1100-1 433 (500-1 1/4)	1100-1 433 (500-1 1/2)	
CIRCLING	1160-1 486 (500-1)	1160-1 486 (500-1 1/2)	1240-2 566 (600-2)	

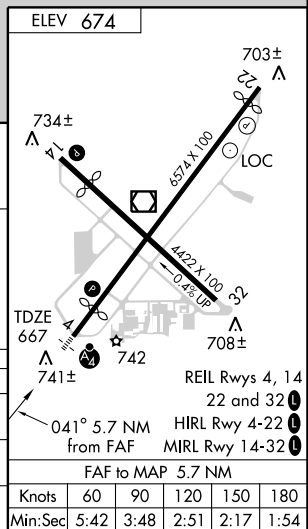

WAAS CH 97516 W04A	APP CRS 039°	Rwy Idg 5840 TDZE 668 Apt Elev 674
--	------------------------	---

RNAV (GPS) RWY 4

RACINE/JOHN H. BATTEN (RAC)

▼ Baro-VNAV NA when using General Mitchell Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F).
▲ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use General Mitchell Intl altimeter setting and increase all DA 34 feet and all MDA 40 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ mile; LNAV Cats C and D visibility ½ mile. Inoperative table does not apply.

MALSF



MISSED APPROACH: Climb to 2600 direct PUYAF and right turn via track 129° to MOXUE and right turn via track 235° to PASQO and hold.


ASOS

117.7

MILWAUKEE APP CON



119.65 (SOUTH) 317.725

UNICOM

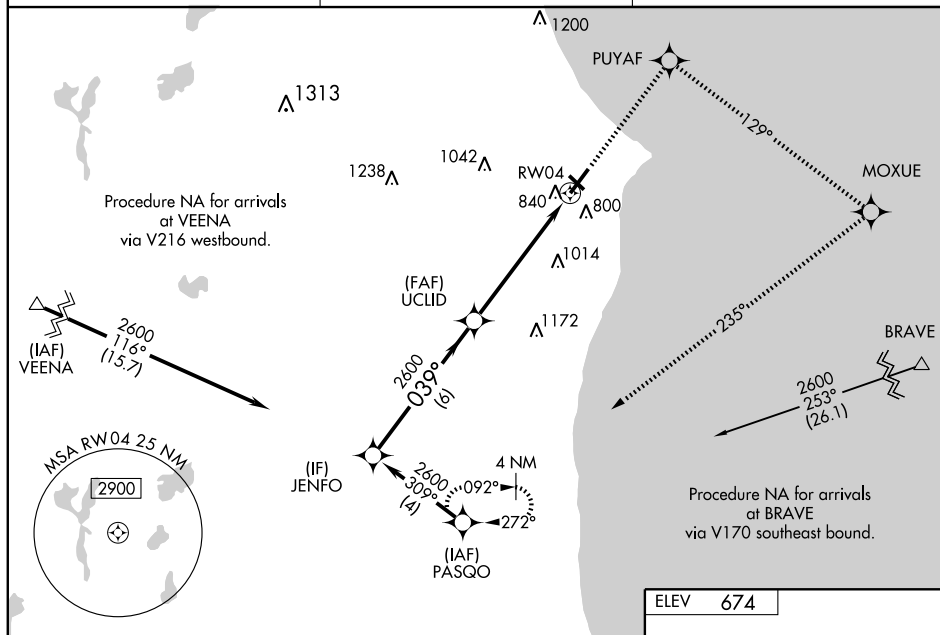
123,075 (CTAF) **L**

Procedure

Turn NA

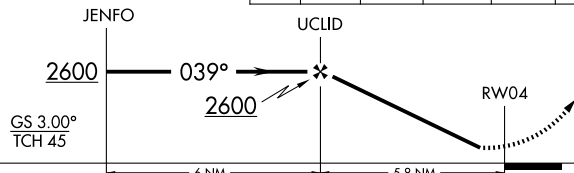

CATEGORY	0.5 NM		0.5 NM	
	A	B	C	D
LPV DA	988-1 320 (400-1)			
RNAV/ VNAV DA	1100-1½ 432 (500-1½)			
RNAV MDA	1160-1 492 (500-1)		1160-1¼ 492 (500-1¼)	1160-1½ 492 (500-1½)
CIRCLING	1160-1 486 (500-1)		1160-1½ 486 (500-1½)	1240-2 566 (600-2)

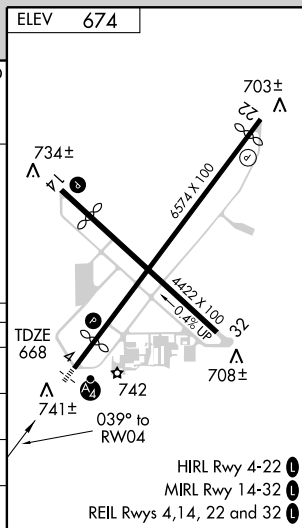

RACINE, WISCONSIN

Orig 11FEB10

42°46'N - 87°49'W

RACINE/JOHN H. BATTEN (RAC)

RNAV (GPS) RWY 4

EC-3. 23 SEP 2010 to 21 OCT 2010


WAAS CH 53516 W22A	APP CRS 219°	Rwy Idg TDZE Apt Elev	6185 666 674
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22


RACINE/JOHN H. BATTEN (RAC)

- ▼ Baro-VNAV NA when using General Mitchell Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.
- ▲ Visibility reduction by helicopters NA. When local altimeter setting not received, use General Mitchell Intl altimeter setting and increase all DA 34 feet, all MDA 40 feet and LNAV/VNAV all Cats visibility ¼ mile.

MISSED APPROACH:
Climb to 3000 direct UCLID and via track 277° to VEENA and hold.

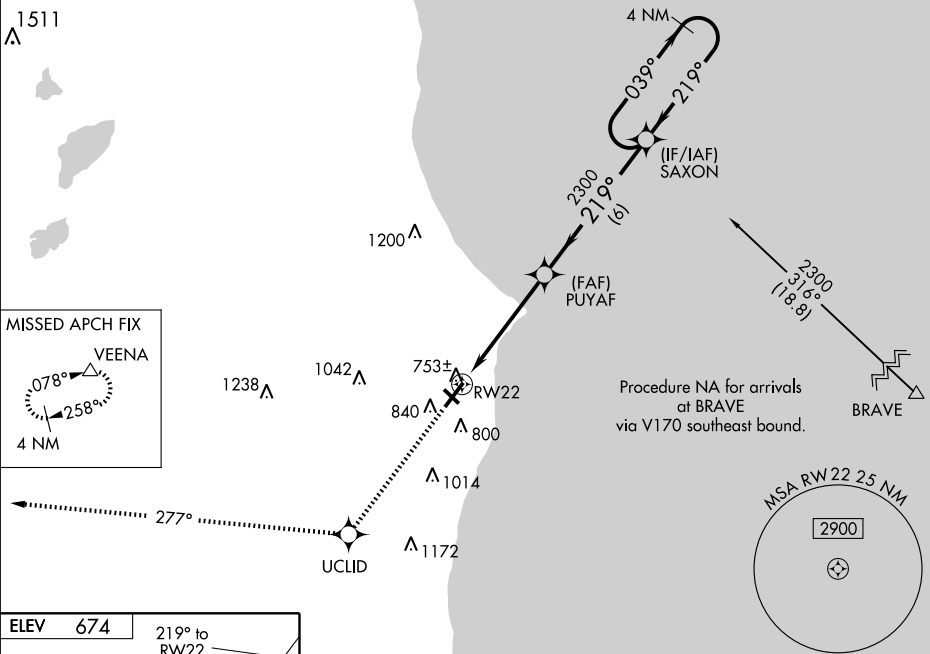ASOS
117.7MILWAUKEE APP CON
119.65 (SOUTH) 317.725UNICOM
123.075 (CTAF) 0

ELEV 674

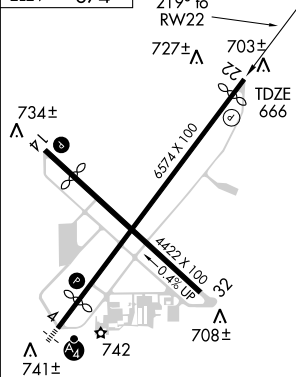

3000	UCLID	track 277°	VEENA	VGSI and RNAV glidepath not coincident.			
				PUYAF	SAXON	4 NM Holding Pattern	
				2300	219°	039°	2300
				RW22	2300	219°	GS 3.00° TCH 55
				4.9 NM	6 NM		
CATEGORY	A	B	C	D			
LPV DA	949-1 283 (300-1)						
LNAV/VNAV DA	997-1 331 (400-1)						
LNAV MDA	1020-1 354 (400-1)						1020-1½ 354 (400-1½)
CIRCLING	1140-1 466 (500-1)		1140-1½ 466 (500-1½)		1240-2 566 (600-2)		

APP CRS	Rwy Idg	4422
315°	TDZE	667
	Apt Elev	674

RNAV (GPS) RWY 32

RACINE/JOHN H. BATTEN (RAC)

▼ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use General Mitchell Intl altimeter setting and increase all MDA 40 feet and LNAV Cat C and D visibility ¼ mile.

▲

MISSED APPROACH: Climb to 3000 direct CIRIP and via track 257° to VEENA and hold.


ASOS

117.7


MILWAUKEE APP CON

119.65 (SOUTH) 317.725

UNICOM

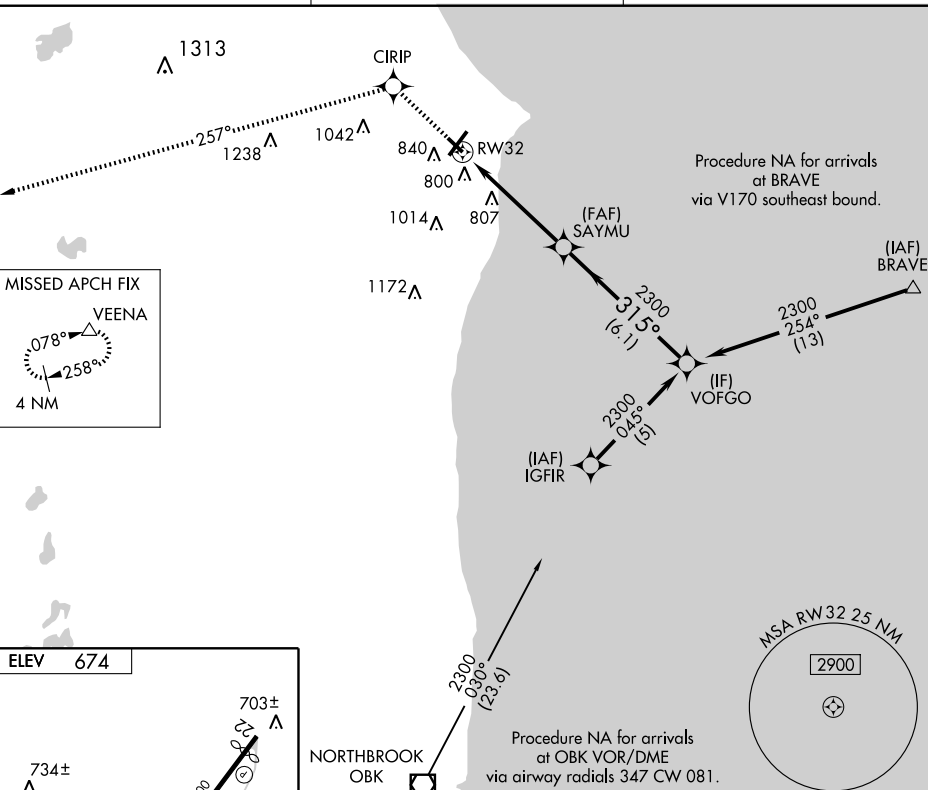
123.075 (CTAF) 0


ELEV 674

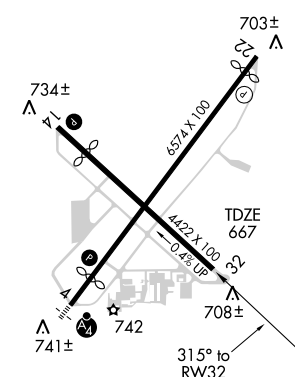

HIRL Rwy 4-22 **0**
MIRL Rwy 14-32 **0**
REIL Rws 4,14, 22 and 32 **0**

3000	CIRIP	track 257°	VEENA
------	-------	------------	-------

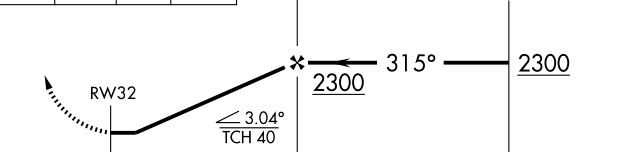

CATEGORY	A	B	C	D
LNAV MDA	1060-1	393 (400-1)	1060-1 ½	393 (400-1 ½)
CIRCLING	1140-1	466 (500-1)	1140-1 ½	1240-2
			466 (500-1 ½)	566 (600-2)

RACINE, WISCONSIN

Orig 11FEB10

42°46'N - 87°49'W

RACINE/JOHN H. BATTEN (RAC)

RNAV (GPS) RWY 32

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

VEENA TWO ARRIVAL (VEENA.VEENA2)


MILWAUKEE, WISCONSIN

MILWAUKEE APP CON
126.5 307.0
GENERAL MITCHELL ATIS
126.4
TIMMERMAN ATIS
128.3
WAUKEGAN ATIS
132.4
KENOSHA ATIS
127.175
WAUKESHA ATIS
118.875

BADGER
116.4 BAE
Chan 111

JANESVILLE
114.3 JVL
Chan 90
N42° 33.48' - W89° 06.32'
L-28

JOLIET
112.3 JOT
Chan 70
N41° 32.79' - W88° 19.10'
L-28, H-5

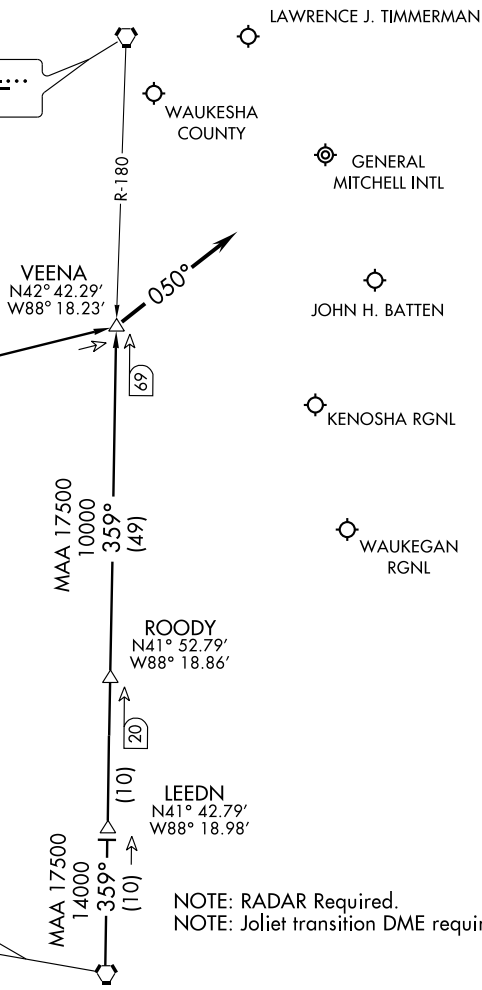

NOTE: Chart not to scale.

JANESVILLE TRANSITION (JVL.VEENA2): From over JVL VOR/DME via JVL R-073 to VEENA INT. Thence

JOLIET TRANSITION (JOT.VEENA2): From over JOT VORTAC via JOT R-359 to VEENA INT. Thence

. . . . Depart VEENA INT heading 050° for initial vector to final approach.

LOST COMMUNICATIONS: From VEENA INT proceed direct IAF for destination airport.

VEENA TWO ARRIVAL (VEENA.VEENA2)

MILWAUKEE, WISCONSIN




VOR/DME HRK 117.7 Chan 124	APP CRS 038°	Rwy Idg TDZE Apt Elev 5840 668 674
--	------------------------	--

VOR RWY 4

RACINE/ JOHN H. BATTEN (RAC)

<p>Visibility reduction by helicopters NA. When local altimeter setting not received, use General Mitchell Intl altimeter setting and increase all MDA 40 feet. Inoperative table does not apply.</p>	<p>MALSF</p>	<p>MISSED APPROACH: Climb to 2000 then climbing right turn to 2500 direct HRK VOR/DME and hold.</p>
---	--------------	---

ASOS 117.7	MILWAUKEE APP CON 119.65 (SOUTH) 317.725	UNICOM 123.075 (CTAF) 0
----------------------	--	-----------------------------------

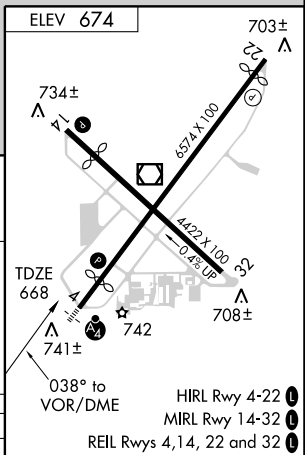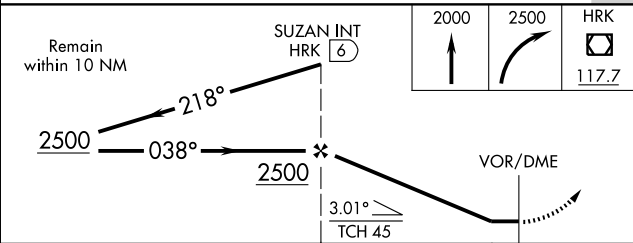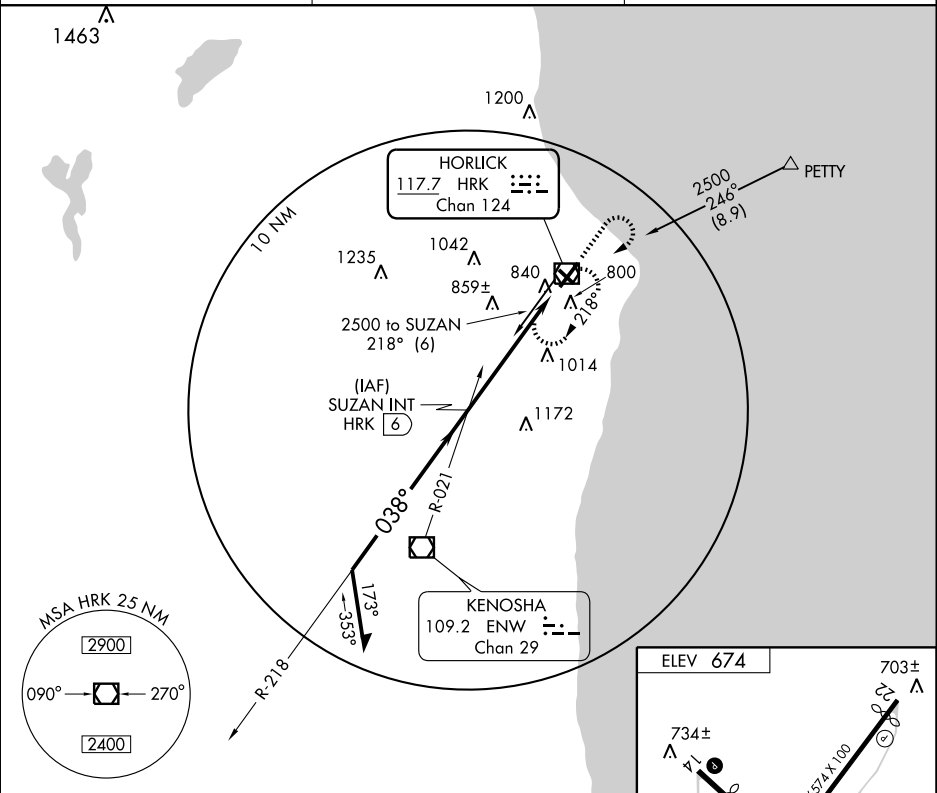

CATEGORY	A	B	C	D
S-4	1100-1	432 (500-1)	1100-1¼ 432 (500-1¼)	1100-1½ 432 (500-1½)
CIRCLING	1140-1	466 (500-1)	1140-1½ 466 (500-1½)	1240-2 566 (600-2)

RACINE

JOHN H. BATTEN (RAC) 2 NW UTC-6(-5DT) N42°45.67' W87°48.84'

674 B S2 FUEL 100LL, JET A LRA NOTAM FILE RAC

RWY 04-22: H6574X100 (CONC-GRVD) S-50, D-65, 2S-83 HIRL

RWY 04: MALSF. REIL. PAPI(P4L). Thld dsplcd 734'. Road.

RWY 22: REIL. PAPI(P4L)—GA 3.0° TCH 46'. Thld dsplcd 390'.

Railroad.

RWY 14-32: H4422X100 (ASPH) S-25, D-35 MIRL 0.4% up NW

RWY 14: REIL. PAPI(P4L). Thld dsplcd 806'. Road.

RWY 32: REIL. Tree.

AIRPORT REMARKS: Attended Mon-Fri 1300-2300Z†, Sat-Sun 1400-2300Z†. Migratory waterfowl on and invof arpt. PAEW AER 22. Rwy 22 REIL intermittent west side. ACTIVATE HIRL Rwy 04-22 and MIRL Rwy 14-32; PAPI Rwys 04 and 14; REIL Rwys 04; 22; 14 and 32; MALSF Rwy 04—CTAF. PAPI Rwy 22 opr 24 hrs. Flight Notification Service (ADCUS) avbl.

WEATHER DATA SOURCES: ASOS 117.7 HRK (262) 635-0959.

COMMUNICATIONS: CTAF/UNICOM 123.075

Ⓡ MILWAUKEE APP/DEP CON 119.65

RADIO AIDS TO NAVIGATION: NOTAM FILE RAC.


HORLICK (T) VORW/DME 117.7 HRK Chan 124 N42°45.73' W87°48.88' at fld. 669/2W. ASOS.

PASER NDB (MHW/LOM) 206 RA N42°40.95' W87°53.97' 041° 6.0 NM to fld. Unmonitored.

NDB unusable byd 10 NM.

ILS 108.7 I-RAC Rwy 04 LOM PASER NDB. Unmonitored 0500-1200Z†.

GS unusable blo 819'.

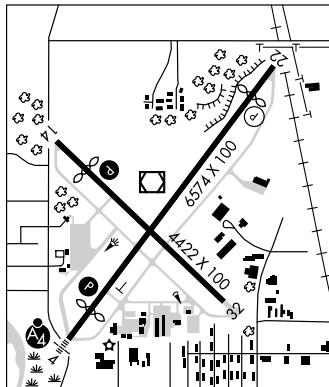

CHICAGO

H-5E, L-28H, A

IAP

RED WING MUNI (See RED WING MUNI Minnesota)

REEDSBURG MUNI (C35) 1 E UTC-6(-5DT) N43°31.55' W89°58.99'

907 B S4 FUEL 100LL, JET A TPA-1907(1000) NOTAM FILE GRB

RWY 18-36: H4840X75 (ASPH) S-30 MIRL 0.5% up N

RWY 18: REIL. PAPI(P2L)—GA 3.0° TCH 25'. Thld dsplcd 440'. Road.

RWY 36: REIL. Thld dsplcd 300'. Railroad.

RWY 07-25: H2510X50 (ASPH) S-30 MIRL 0.6% up NE

RWY 07: Thld dsplcd 230'. Road. RWY 25: Thld dsplcd 300'. Road.

AIRPORT REMARKS: Attended Jun-Aug 1400-0200Z†, Sep-May 1400-2300Z†. Deer on and invof arpt. 160' crane E of AER 07 flagged/lgt'd. MIRL Rwys 18-36 and 07-25 preset on low ints, to increase ints and ACTIVATE REIL Rwys 18 and 36 and PAPI Rwy 18—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

DELLS RCO 122.1R 117.0T (GREEN BAY RADIO)

Ⓡ MADISON APP/DEP CON 135.45 (1200-0500Z†) GCO 121.725 (FLIGHT SERVICES)

Ⓡ CHICAGO CENTER APP/DEP CON 133.3 (0500-1200Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE DLL.

DELLS (H) VORTAC 117.0 DLL Chan 117 N43°33.05' W89°45.82' 258° 9.7 NM to fld. 1020/3E.

CHICAGO

L-28G

IAP

VORTAC DLL 117.0 Chan 117	APP CRS 258°	Rwy Idg TDZE Apt Elev	N/A N/A 907
---	------------------------	-----------------------------	--


VOR or GPS-A
REEDSBURG MUNI (C35)

T
A NA Use Lone Rock altimeter setting; if not received, use Madison altimeter setting.

MISSED APPROACH: Climbing left turn to 2700 direct DLL VORTAC and hold.


MADISON APP CON ★
135.45 343.7

GCO
121.725

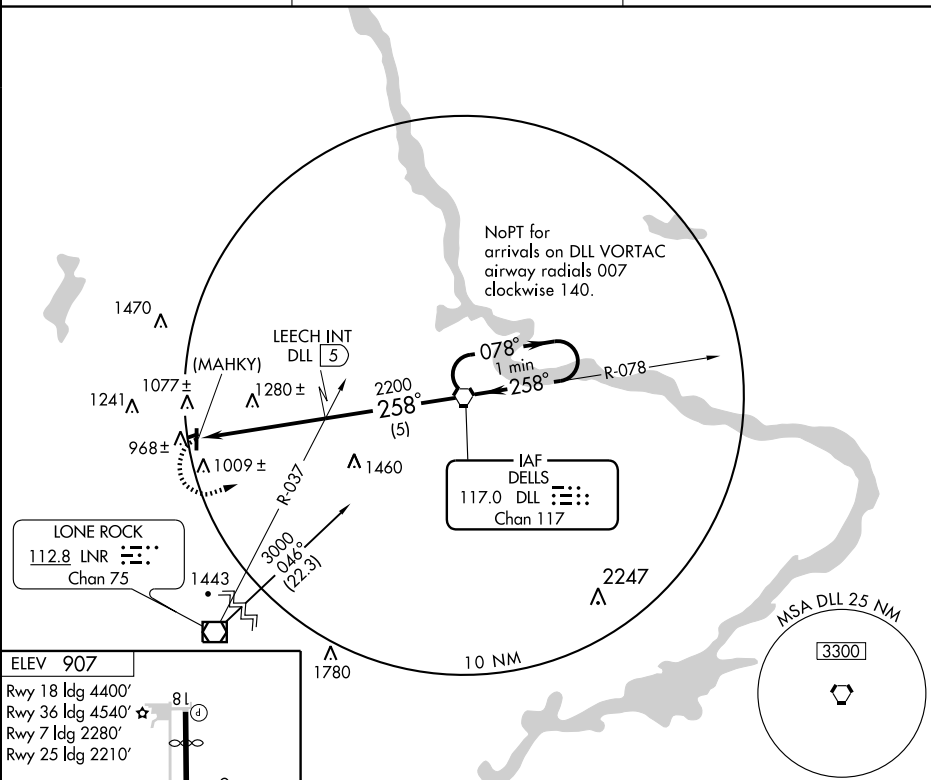UNICOM
122.8 (CTAF) **L**

FIFV 907

Rwy 18 ldg 4400'
Rwy 36 ldg 4540'
Rwy 7 ldg 2280'
Rwy 25 ldg 2210'

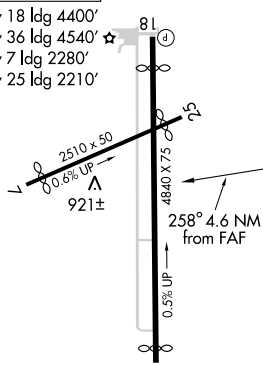



REIL Rwy 18 and 36 **L**
MIRL Rwy 7-25 and 18-36 **L**

FAF to MAP 4.6 NM


Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

REEDSBURG, WISCONSIN

Amdt 4 05020

2700	DLL
	
	117.0

VORTAC One Minute
| Holding Pattern

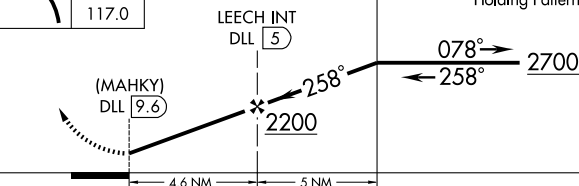

CATEGORY	A	B	C	D
CIRCLING	1660-1 755 (800-1)	1660-1½ 755 (800-1½)	1660-2¼ 755 (800-2¼)	1660-2½ 755 (800-2½)
MADISON ALTIMETER SETTING MINIMUMS				
CIRCLING	1740-1 835 (900-1)	1740-1½ 835 (900-1½)	1740-2½ 835 (900-2½)	1740-2¾ 835 (900-2¾)

REEDSBURG MUNI (C35)

VOR or GPS-A

43° 32'N-89° 59'W

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

RHINELANDER—ONEIDA CO (RHI) 2 SW UTC-6(-5DT) N45°37.85' W89°28.00'

1624 B S4 FUEL 100LL, JET A Class I, ARFF Index A NOTAM FILE RHI

RWY 09-27: H6800X150 (CONC-GRVD) S-95, D-150, 2D-235 HIRL 0.4% up W

RWY 09: MALSR. PAPI(P4L)—GA 3.0° TCH 53'.

RWY 27: REIL. VASI(V4L)—GA 3.0° TCH 49'. Trees.

RWY 15-33: H5201X100 (ASPH) S-55, D-95, 2D-235 HIRL

RWY 15: REIL. VASI(V4L)—GA 3.75° TCH 50'. Tree.

RWY 33: REIL. PAPI(P4L)—GA 3.0° TCH 25'.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 09: TORA-6799 TODA-6799 ASDA-6799 LDA-6799

RWY 27: TORA-6799 TODA-6799 ASDA-6799 LDA-6799

AIRPORT REMARKS: Attended 1200-0100Z. Birds and coyote on and in/ovf arpt. PPR for unscheduled air carrier ops with more than 9 passenger seats ctc arpt manager 715-365-3416 or 715-365-3419. Rwy 15 VASI OTS indef. HIRL Rwy 09-27 preset on low ints; to increase ints and ACTIVATE HIRL Rwy 15-33, PAPI Rwy 09, VASI Rwy 27, Rwy 15, PAPI Rwy 33; REIL Rwy 15, Rwy 33, and Rwy 27 and MALSR Rwy 09—CTAF.

WEATHER DATA SOURCES: ASOS 126.825 (715) 362-7980. HIWAS 109.2 RHI.

COMMUNICATIONS: CTAF/UNICOM 123.0

RCO 122.1 (GREEN BAY RADIO)

® MINNEAPOLIS CENTER APP/DEP CON 133.65

AIRSPACE: CLASS E svc Mon-Fri 1200-0400Z, Sat 1200-0130Z, Sun 1600-0400Z other times CLASS G.


RADIO AIDS TO NAVIGATION: NOTAM FILE RHI.

(L) VORTAC 109.2 RHI Chan 29 N45°38.03' W89°27.47' at fld. 1590/2E. HIWAS.

VOR portion unusable 171°-228° byd 10 NM, 310°-340° byd 20 NM blo 5000'. DME unusable byd 35 NM blo 3500'.

ARSHA NDB (LOM) 272 RH N45°37.69' W89°37.13' 087° 6.4 NM to fld.

ILS 111.3 I-RHI Rwy 09. Class IE. ILS unmonitored.

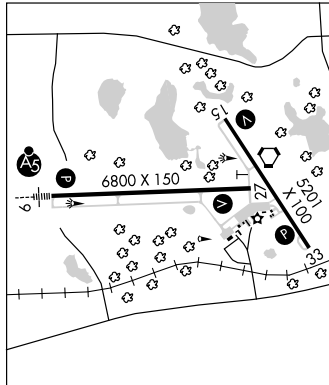

RICE LAKE RGNL—CARL'S FLD (RPD) 5 SW UTC-6(-5DT) N45°25.21' W91°46.40'

1109 B S4 FUEL 100LL, JET A NOTAM FILE RPD

RWY 01-19: H6700X100 (ASPH) S-30, D-30 MIRL

RWY 01: MALSR. PAPI(P2L)—GA 3.0° TCH 38'. Thld dspcd 200'. Rgt tfc.

RWY 19: REIL. PAPI(P2L)—GA 3.0° TCH 38'.

RWY 13-31: H3500X75 (ASPH) MIRL

RWY 13: REIL. PAPI(P2L)—GA 3.15° TCH 41'. Trees. RWY 31: REIL. PAPI(P2L)—GA 3.0° TCH 33'. Trees. Rgt tfc.

AIRPORT REMARKS: Attended 1200-0300Z. Rwy 19 PAPI OTS indef. MIRL Rwy 01-19 preset on low ints dusk-dawn, to increase ints and ACTIVATE REIL Rwy 01 and Rwy 19, PAPI Rwy 01 and Rwy 19 and MALSR Rwy 01—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.525 (715) 458-4481.

COMMUNICATIONS: CTAF/UNICOM 122.7

RCO 122.3 (GREEN BAY RADIO)

® MINNEAPOLIS CENTER APP/DEP CON 125.3

RADIO AIDS TO NAVIGATION: NOTAM FILE RPD.

(T) VOR/DME 110.0 RPD Chan 37 N45°24.91' W91°46.68' at fld. 1092/1E. OTS indef.

DME unusable 050°-080° byd 20 NM blo 2800'.

WICKR NDB (LOM) 221 RP N45°19.05' W91°48.17' 010° 6.3 NM to fld.

ILS 108.3 I-RPD Rwy 01. LOM WICKR NDB. ILS unmonitored indef.

RICHARD I BONG (See SUPERIOR)

RICHLAND (See RICHLAND CENTER)

GREEN BAY

H-21, L-141

IAP

LOC I-RHI	APP CRS	Rwy Idg	6799
111.3	091°	TDZE	1624
		Apt Elev	1624

ILS or LOC RWY 9

RHINELANDER-ONEIDA COUNTY (RHI)

▼ **NA** When VGSI inoperative, Circling Rwy 15 NA at night. ADF REQUIRED. When local altimeter setting not received, use Tomahawk altimeter setting and increase DA 59 feet and MDA 60 feet, increase S-LOC 9 and Circling Cats C and D visibility $\frac{1}{4}$ mile, and increase ZINGI Fix Minimums S-LOC 9 and Circling Cats C and D visibility $\frac{1}{4}$ mile.

MALSR





MISSED APPROACH: Climb to 2100 then climbing right turn to 3500 direct ARSHA LOM/RHI 6.8 DME and hold.

ASOS
126.825

MINNEAPOLIS CENTER
133.65 281.5

UNICOM
123.0 (CTAF) 0


ADF or DME REQUIRED

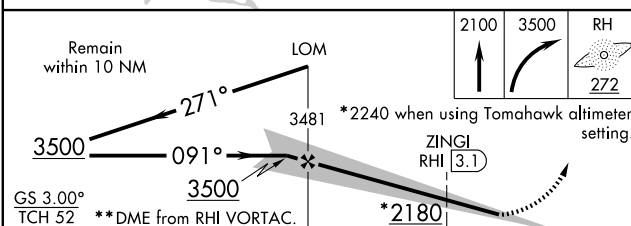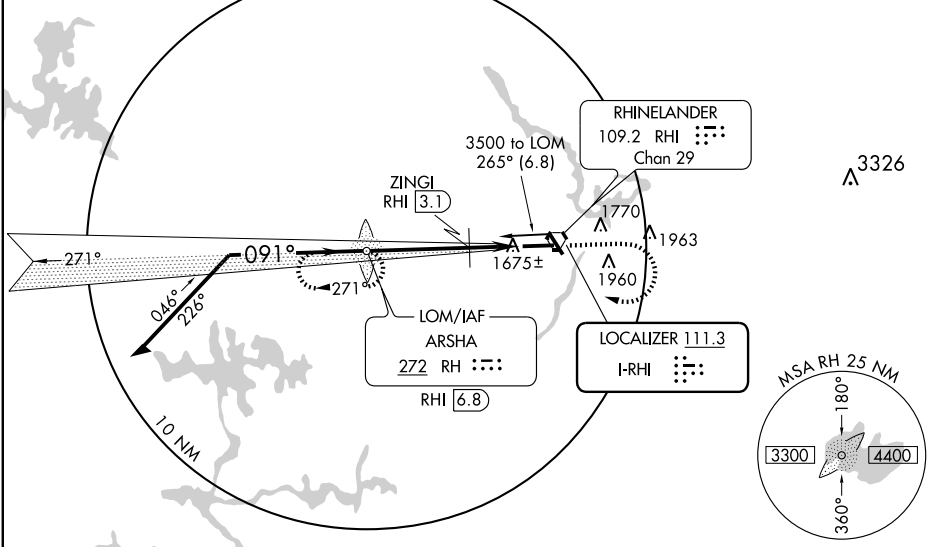

CATEGORY	A	B	C	D
S-ILS 9	1824- $\frac{1}{2}$ 200 (200- $\frac{1}{2}$)			
S-LOC 9	2180- $\frac{1}{2}$ 556 (600- $\frac{1}{2}$)	2180-1 556 (600-1)	2180-1 $\frac{1}{4}$ 556 (600-1 $\frac{1}{4}$)	
CIRCLING	2180-1 556 (600-1)	2220-1 596 (600-1)	2260-1 $\frac{3}{4}$ 636 (700-1 $\frac{3}{4}$)	2260-2 636 (700-2)
ZINGI FIX MINIMUMS**				
S-LOC 9	2020- $\frac{1}{2}$ 396 (400- $\frac{1}{2}$)			2020- $\frac{3}{4}$ 396 (400- $\frac{3}{4}$)
CIRCLING	2020-1 396 (400-1)	2220-1 596 (600-1)	2260-1 $\frac{3}{4}$ 636 (700-1 $\frac{3}{4}$)	2260-2 636 (700-2)

ELEV 1624

D

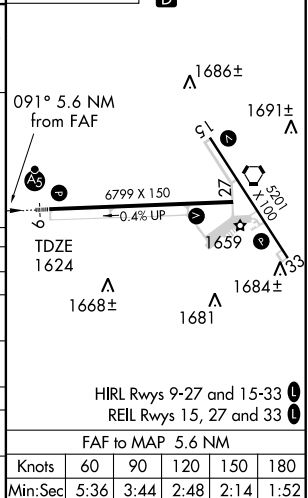

WAAS CH 97715 W09A	APP CRS 091°	Rwy Idg TDZE Apt Elev	6799 1624 1624
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 9

RHINELANDER-ONEIDA COUNTY (RHI)

When VGSI inoperative, Circling Rwy 15 NA at night. Inoperative table does not apply to LNAV Cat D. For inoperative MALSR, increase LNAV/VNAV Cat D visibility to 1 mile. Baro-VNAV NA when using Tomahawk altimeter setting.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Tomahawk altimeter setting and increase all DA 59 feet and MDA 60 feet, increase LNAV/VNAV Cats A/B/C and Circling Cats C/D visibility ¼ mile. For inoperative MALSR when using Tomahawk altimeter setting, increase LNAV Cat D visibility by ¼ mile. VDP NA when using Tomahawk altimeter setting.

MALSR




MISSED APPROACH: Climb to 4500 direct BADAY and hold.

ASOS
126.825


MINNEAPOLIS CENTER
133.65 281.5

UNICOM
123.0 (CTAF) 1

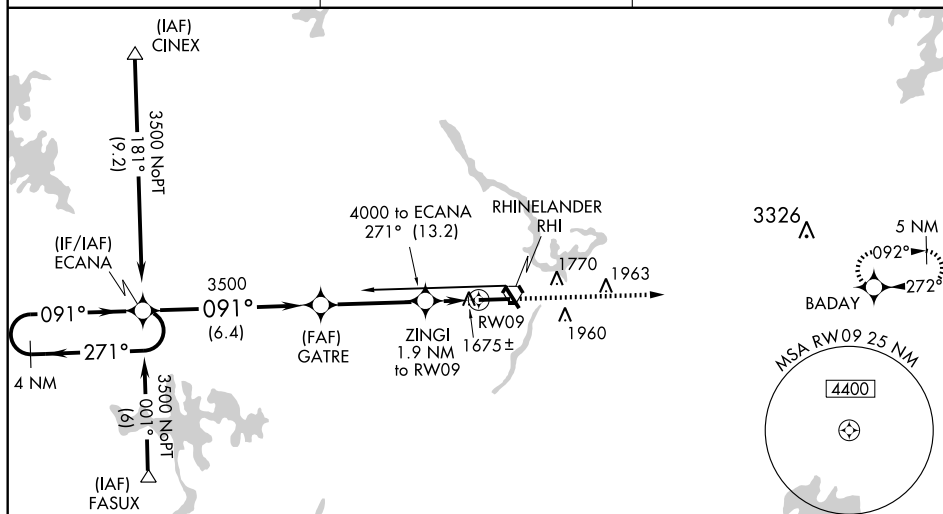


EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

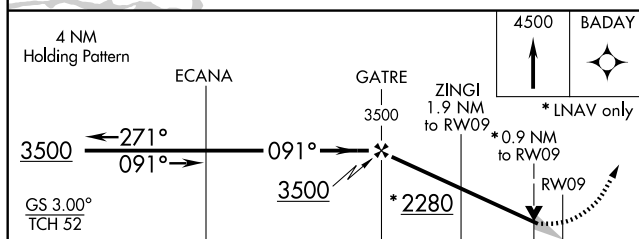

CATEGORY	A	B	C	D
LPV DA	1824-1/2 200 (200-1/2)			
LNAV/VNAV DA	1936-1/2	312 (400-1/2)	1936-3/4 312 (400-3/4)	
LNAV MDA	1960-1/2	336 (400-1/2)	1960-1 336 (400-1)	
CIRCLING	2020-1 396 (400-1)	2220-1 596 (600-1)	2260-1 3/4 636 (700-1 3/4)	2260-2 636 (700-2)

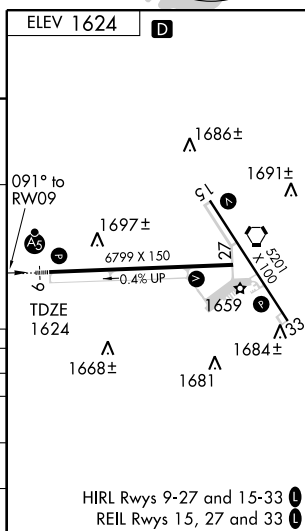

APP CRS **150°**
Rwy Idg **5201**
TDZE **1600**
Apt Elev **1624**

RNAV (GPS) RWY 15

RHINELANDER-ONEIDA COUNTY (RHI)


When VGSI inoperative, Straight-in/Circling Rwy 15 procedure NA at night.
DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
When local altimeter setting not received, use Tomahawk altimeter setting and increase all MDA 60 feet, increase LNAV and Circling visibility Cts C/D ¼ mile.

MISSED APPROACH: Climb to 3500 direct CIREN and hold.


ASOS
126.825

MINNEAPOLIS CENTER
133.65 281.5


UNICOM
123.0 (CTAF) 0

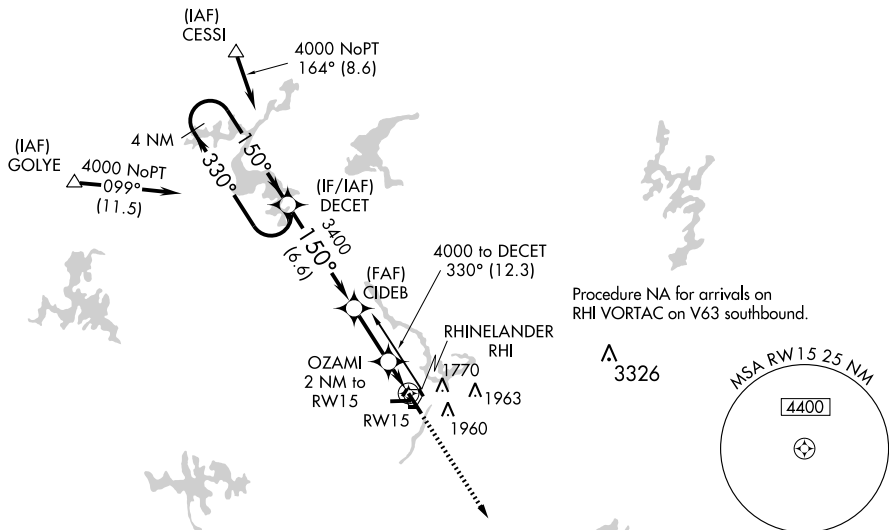

4 NM
Holding Pattern

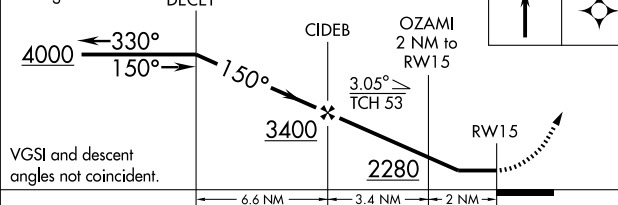

CATEGORY	A	B	C	D
LNAV MDA	1980-1 380 (400-1)			1980-1¼ 380 (400-1¼)
CIRCLING	2020-1 396 (400-1)	2220-1 596 (600-1)	2260-1¾ 636 (700-1¾)	2260-2 636 (700-2)

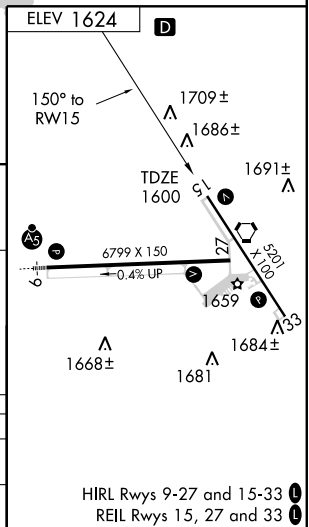

WAAS CH 50217 W27A	APP CRS 271°	Rwy Idg TDZE Apt Elev	6799 1606 1624
--------------------------	-----------------	-----------------------------	----------------------

RNAV (GPS) RWY 27

RHINELANDER-ONEIDA COUNTY (RHI)


When VGSI inoperative, Circling Rwy 15 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, **A** use Tomahawk altimeter setting and increase all DA and MDA 60 feet, increase LPV and LNAV/VNAV visibility all Cats, LNAV and Circling visibility Cats C/D ¼ mile. Baro-VNAV and VDP NA when using Tomahawk altimeter setting.

MISSED APPROACH: Climb to 4000 direct ECANA and hold.

ASOS
126,825


MINNEAPOLIS CENTER
133.65 281.5

UNICOM
123.0 (CTAF) **L**

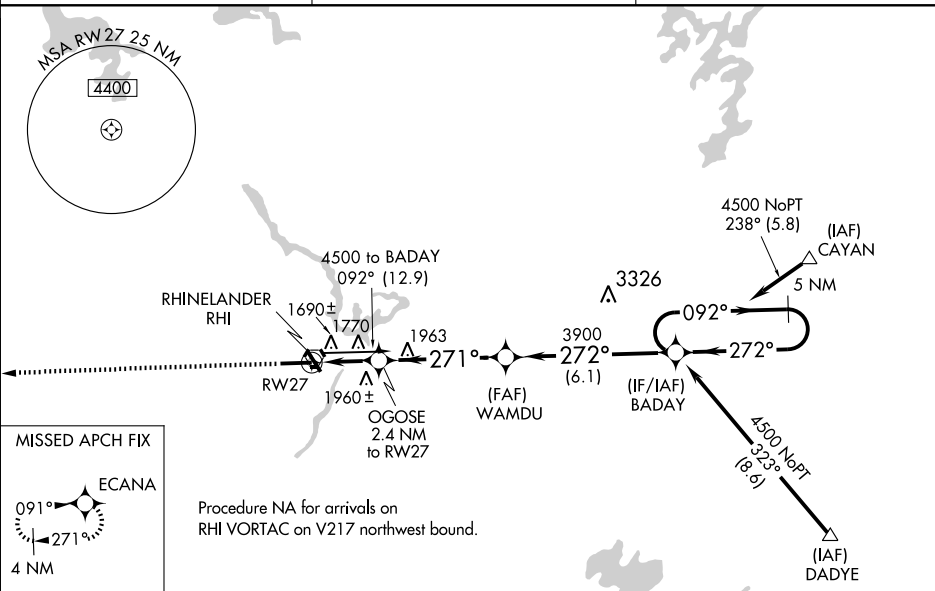


ELEV 1624

D

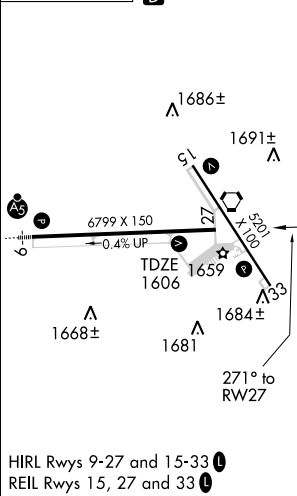

HIRL Rwy 9-27 and 15-33 **L**
BEIL Rwy 15-27 and 23 **L**

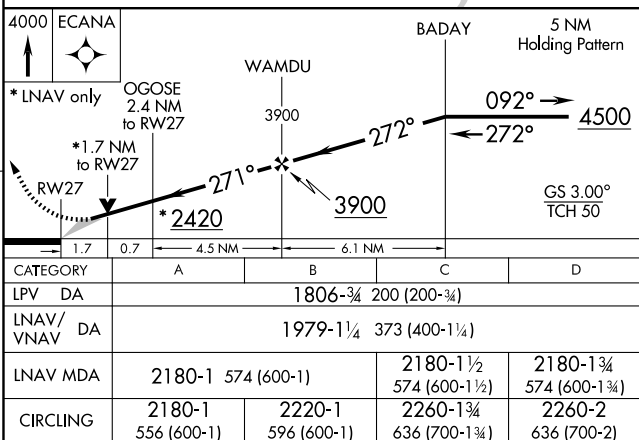

RHINELANDER, WISCONSIN

Amdt 1 08APR10

RHINELANDER-ONEIDA COUNTY (R.H.T)

45°38'N - 89°28'W

RNAV (GPS) RWY 27

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

WAAS CH 69407 W33A	APP CRS 330°	Rwy Idg TDZE Apt Elev	5201 1612 1624
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 33

RHINELANDER-ONEIDA COUNTY (R.H.I.)

When VGSI inoperative, Straight-in/Circling Rwy 33 procedure NA at night.
When VGSI inoperative, Circling Rwy 15 NA at night. Baro-VNAV NA when using Tomahawk altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Tomahawk altimeter setting and increase all DA and MDA 60 feet, increase visibility LNAV/VNAV all Cats ¼, LNAV Cat D and Circling Cats C/D ¼ mile.


MISSED APPROACH: Climb to 4000 direct CIDEB and via track 245° to ECANA and hold.

ASOS
126.825

MINNEAPOLIS CENTER
133.65 281.5

UNICOM
123.0 (CTAF) 0


EC-3, 23 SEP 2010 to 21 OCT 2010

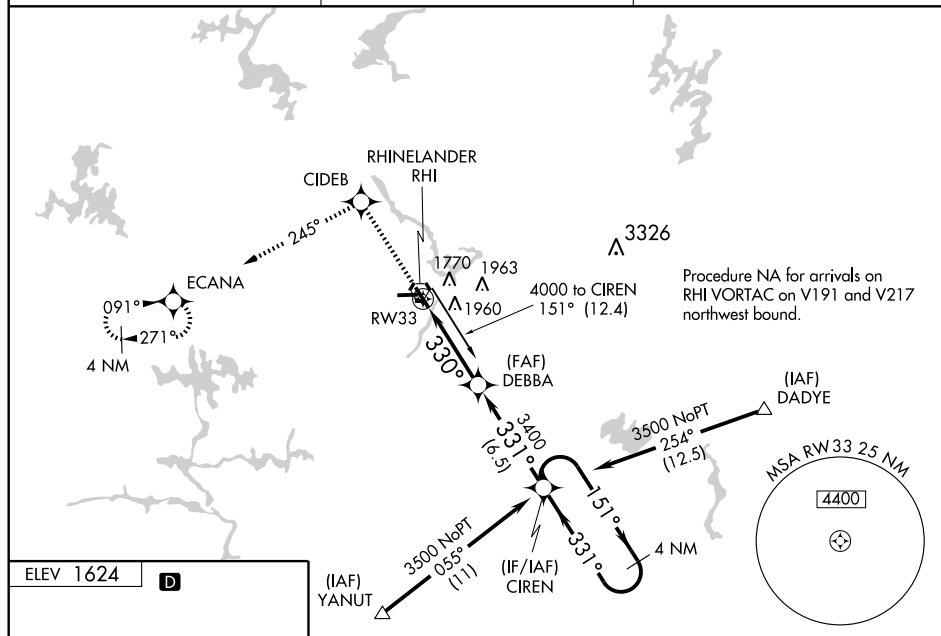

EC-3, 23 SEP 2010 to 21 OCT 2010

ELEV 1624

D



HIRL Rwy 9-27 and 15-33
REIL Rwy 15, 27 and 33

RHINELANDER, WISCONSIN

Amdt 1 08APR10

45°38'N - 89°28'W

RHINELANDER-ONEIDA COUNTY (R.H.I.)

RNAV (GPS) RWY 33

VORTAC RHI 109.2 Chan 29	APP CRS 281°	Rwy Idg 6799 TDZE 1606 Apt Elev 1623
--	------------------------	---

VOR/DME RWY 27
RHINELANDER-ONEIDA COUNTY (RHI)




Circling NA at night to Rwy 15.

MISSED APPROACH: Climb to 3900 then left turn direct RHI VORTAC and hold.

ASOS
126.825


MINNEAPOLIS CENTER
133.65 281.5

UNICOM
123.0 (CTAF) **L**

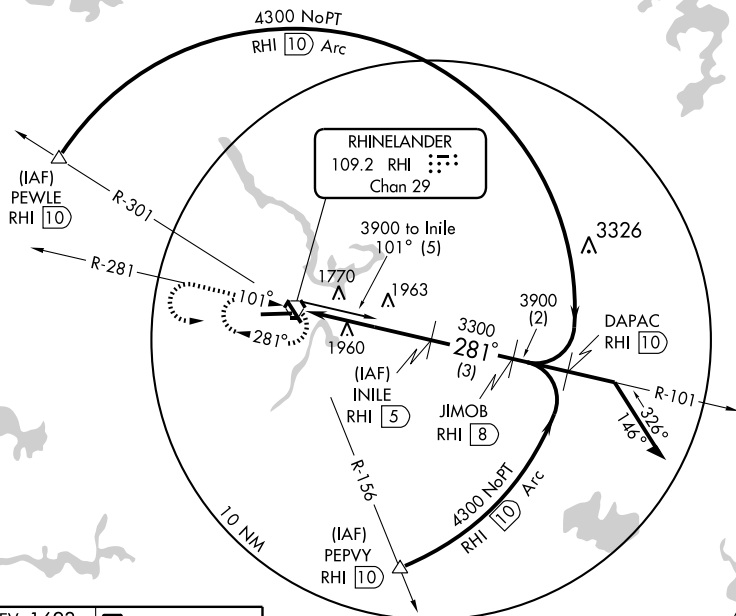


ELEV 1623

D



HIRL Rwy 9-27 and 15-33 **L**
REIL Rwy 15, 27 and 33 **L**

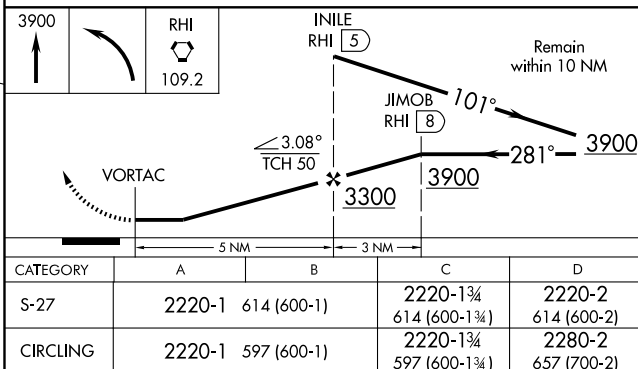

RHINELANDER, WISCONSIN

Orig-E 09351

RHINELANDER-ONEIDA COUNTY (RHI)

VOR/DME RWY 27

45°38'N-89°28'W

EC-3. 23 SEP 2010 to 21 OCT 2010

VORTAC RHI 109.2 Chan 29	APP CRS 081°	Rwy Idg TDZE 1623 Apt Elev 1623
--	------------------------	---

VOR RWY 9

RHINELANDER-ONEIDA COUNTY (RHI)



For inoperative MALS, increase S-9 Cat. D DME minimums visibility to 1½.
Circling NA at night to Rwy 15.

MALSR




MISSED APPROACH: Climb to 2600 then climbing right turn to 3200 direct RHI VORTAC and hold.



ASOS
126.825

MINNEAPOLIS CENTER
133.65 281.5


UNICOM
123.0 (CTAF)

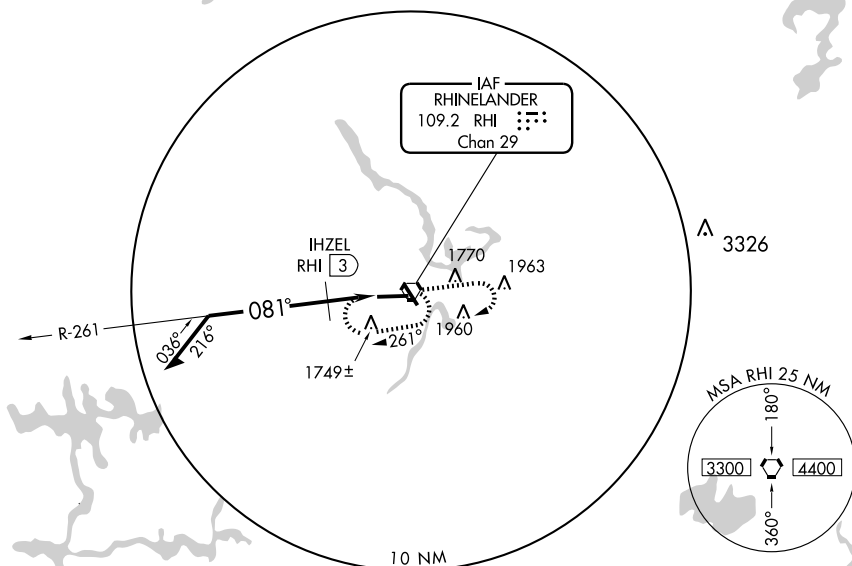

Remain
within 10 NM

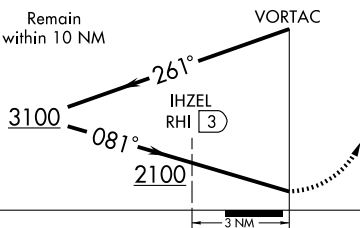

ELEV 1623

D

CATEGORY	A	B	C	D
S-9	2100-½	477 (500-½)	2100-¾ 477 (500-¾)	2100-1 477 (500-1)
CIRCLING	2100-1 477 (500-1)	2220-1 597 (600-1)	2220-1½ 597 (600-1½)	2280-2 657 (700-2)
DME MINIMUMS				
S-9	2000-½ 377 (400-½)			2000-1 377 (400-1)
CIRCLING	2060-1 437 (500-1)	2220-1 597 (600-1)	2220-1½ 597 (600-1½)	2280-2 657 (700-2)

HIRL Rwy 9-27 and 15-33
REIL Rwy 15, 27 and 33

RHINELANDER—ONEIDA CO (RHI) 2 SW UTC-6(-5DT) N45°37.85' W89°28.00'

1624 B S4 FUEL 100LL, JET A Class I, ARFF Index A NOTAM FILE RHI

RWY 09-27: H6800X150 (CONC-GRVD) S-95, D-150, 2D-235 HIRL 0.4% up W

RWY 09: MALSR. PAPI(P4L)—GA 3.0° TCH 53'.

RWY 27: REIL. VASI(V4L)—GA 3.0° TCH 49'. Trees.

RWY 15-33: H5201X100 (ASPH) S-55, D-95, 2D-235 HIRL

RWY 15: REIL. VASI(V4L)—GA 3.75° TCH 50'. Tree.

RWY 33: REIL. PAPI(P4L)—GA 3.0° TCH 25'.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 09: TORA-6799 TODA-6799 ASDA-6799 LDA-6799

RWY 27: TORA-6799 TODA-6799 ASDA-6799 LDA-6799

AIRPORT REMARKS: Attended 1200-0100Z. Birds and coyote on and in/ovf arpt. PPR for unscheduled air carrier ops with more than 9 passenger seats ctc arpt manager 715-365-3416 or 715-365-3419. Rwy 15 VASI OTS indef. HIRL Rwy 09-27 preset on low ints; to increase ints and ACTIVATE HIRL Rwy 15-33, PAPI Rwy 09, VASI Rwy 27, Rwy 15, PAPI Rwy 33; REIL Rwy 15, Rwy 33, and Rwy 27 and MALSR Rwy 09—CTAF.

WEATHER DATA SOURCES: ASOS 126.825 (715) 362-7980. HIWAS 109.2 RHI.

COMMUNICATIONS: CTAF/UNICOM 123.0

RCO 122.1 (GREEN BAY RADIO)

® MINNEAPOLIS CENTER APP/DEP CON 133.65

AIRSPACE: CLASS E svc Mon-Fri 1200-0400Z, Sat 1200-0130Z, Sun 1600-0400Z other times CLASS G.


RADIO AIDS TO NAVIGATION: NOTAM FILE RHI.

(L) VORTAC 109.2 RHI Chan 29 N45°38.03' W89°27.47' at fld. 1590/2E. HIWAS.

VOR portion unusable 171°-228° byd 10 NM, 310°-340° byd 20 NM blo 5000'. DME unusable byd 35 NM blo 3500'.

ARSHA NDB (LOM) 272 RH N45°37.69' W89°37.13' 087° 6.4 NM to fld.

ILS 111.3 I-RHI Rwy 09. Class IE. ILS unmonitored.

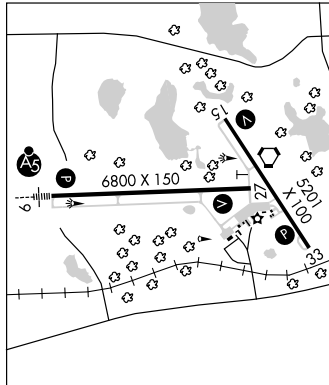

GREEN BAY

H-2K, L-14J

IAP

RICE LAKE RGNL—CARL'S FLD (RPD) 5 SW UTC-6(-5DT) N45°25.21' W91°46.40'

1109 B S4 FUEL 100LL, JET A NOTAM FILE RPD

RWY 01-19: H6700X100 (ASPH) S-30, D-30 MIRL

RWY 01: MALSR. PAPI(P2L)—GA 3.0° TCH 38'. Thld dspcd 200'. Rgt tfc.

RWY 19: REIL. PAPI(P2L)—GA 3.0° TCH 38'.

RWY 13-31: H3500X75 (ASPH) MIRL

RWY 13: REIL. PAPI(P2L)—GA 3.15° TCH 41'. Trees. RWY 31: REIL. PAPI(P2L)—GA 3.0° TCH 33'. Trees. Rgt tfc.

AIRPORT REMARKS: Attended 1200-0300Z. Rwy 19 PAPI OTS indef. MIRL Rwy 01-19 preset on low ints dusk-dawn, to increase ints and ACTIVATE REIL Rwy 01 and Rwy 19, PAPI Rwy 01 and Rwy 19 and MALSR Rwy 01—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.525 (715) 458-4481.

COMMUNICATIONS: CTAF/UNICOM 122.7

RCO 122.3 (GREEN BAY RADIO)

® MINNEAPOLIS CENTER APP/DEP CON 125.3

RADIO AIDS TO NAVIGATION: NOTAM FILE RPD.

(T) VOR/DME 110.0 RPD Chan 37 N45°24.91' W91°46.68' at fld. 1092/1E. OTS indef.

DME unusable 050°-080° byd 20 NM blo 2800'.

WICKR NDB (LOM) 221 RP N45°19.05' W91°48.17' 010° 6.3 NM to fld.

ILS 108.3 I-RPD Rwy 01. LOM WICKR NDB. ILS unmonitored indef.

GREEN BAY

H-2J, L-14J

IAP

RICHARD I BONG (See SUPERIOR)

RICHLAND (See RICHLAND CENTER)

LOC I-RPD 108.3	APP CRS 010°	Rwy Idg TDZE Apt Elev	6500 1101 1107
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 1

RICE LAKE RGNL-CARL'S FIELD (RPD)

▼ If local altimeter setting not received, use Chippewa Valley Rgnl altimeter setting; increase DA to 1410 feet and increase all MDA's 120 feet. Circling to Rwy 13-31 NA at night. ADF REQUIRED.




MISSED APPROACH: Climb to 2200 then climbing right turn to 3200 direct WICKR LOM and hold.

AWOS-3
120.525


MINNEAPOLIS CENTER
125.3 335.6

UNICOM
122.7 (CTAF) 0

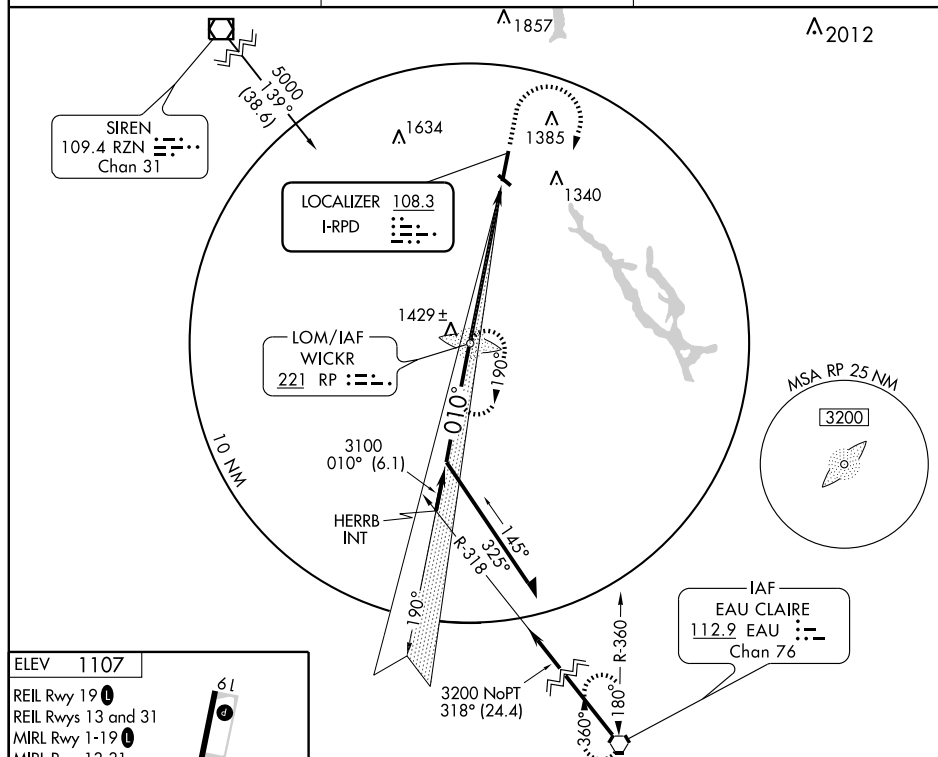

ELEV 1107

REIL Rwy 19
REIL Rwy 13 and 31
MIRL Rwy 1-19
MIRL Rwy 13-31
Rwy 1 Idg 6500'



FAF to MAP 5.9 NM

Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

RICE LAKE, WISCONSIN
Orig 08157

<p>Remain within 10 NM</p> <p>LOM</p> <p>3200</p> <p>3065</p> <p>3100</p> <p>GS 3.00° TCH 45</p> <p>VGSI and ILS glidepath not coincident.</p> <p>5.9 NM</p>				
CATEGORY	A	B	C	D
S-ILS 1	1301-1/2 200 (200-1/2)			
S-LOC 1	1620-1/2 519 (600-1/2)	1620-1 519 (600-1)	1640-1/2 1740-2	1620-1/4 519 (600-1/4)
CIRCLING	1620-1 513 (600-1)	1640-1/2 533 (600-1/2)	1740-2 633 (700-2)	

RICE LAKE RGNL-CARL'S FIELD (RPD)

ILS or LOC RWY 1

45° 25'N - 91° 46'W

WAAS CH 86217 W01A	APP CRS 010°	Rwy ldg TDZE Apt Elev	6500 1101 1107
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 1

RICE LAKE RGNL-CARL'S FIELD (RPD)



If local altimeter setting not received, use Chippewa Valley Rgnl altimeter setting and increase all DAs/MDAs 120 feet. DME/DME RNP-0.3 NA. Baro-VNAV NA below -17° C (3° F). Baro VNAV and VDP NA when using Chippewa Valley Rgnl altimeter setting. For inoperative MALSR, increase LPV visibility to 1 and LNAV Cat D visibility to 1¼.




MISSED APPROACH:
Climb to 3200 direct
ORBEW and hold.


AWOS-3
120.525

MINNEAPOLIS CENTER
125.3 335.6

UNICOM
122.7 (CTAF) 0

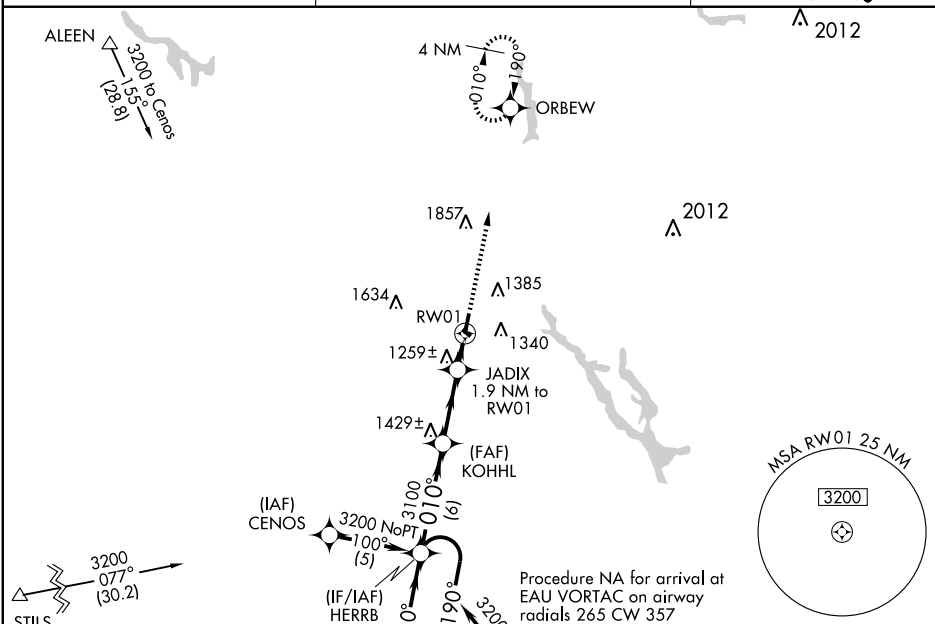

<p>4 NM Holding Pattern</p> <p>3200 ← 190°</p> <p>GS 3.00°</p> <p>TCH 45°</p> <p>VGSI and RNAV glidepath not coincident.</p>				
CATEGORY	A	B	C	D
LPV DA		1390-1/2	289 (300-1/2)	
LNAV/ VNAV		1440-3/4	339 (400-3/4)	
LNAV MDA	1520-1/2	419 (500-1/2)	1520-3/4	1520-1
			419 (500-3/4)	419 (500-1)
CIRCLING	1600-1 1/4	493 (500-1 1/4)	1640-1 1/2	1740-2
			533 (600-1 1/2)	633 (700-2)

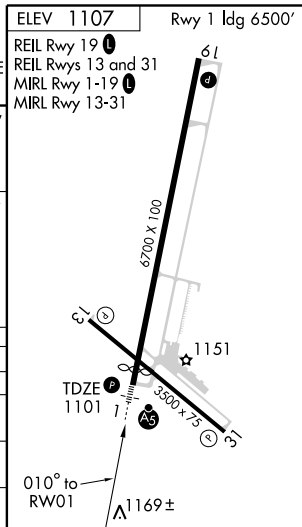

APP CRS	Rwy ldg	6700
190°	TDZE	1109
	Apt Elev	1109

RNAV (GPS) RWY 19

RICE LAKE RGNL-CARL'S FIELD (RPD)





T When local altimeter setting not received, use Chippewa Valley Rgnl altimeter setting and increase all MDAs 120 feet, increase LNAV Cat C/D visibility ¼ mile and circling Cat C/D visibility ½ mile. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3200 direct HERRB and hold.

AWOS-3
120.525

MINNEAPOLIS CENTER
125.3 335.6

UNICOM
122.7 (CTAF) 0

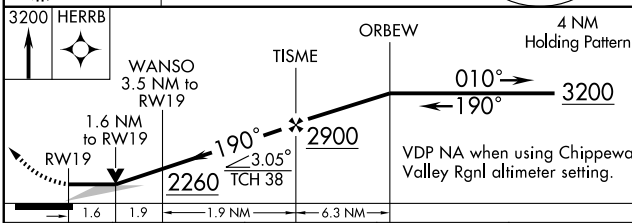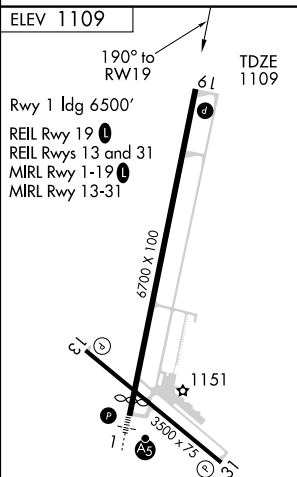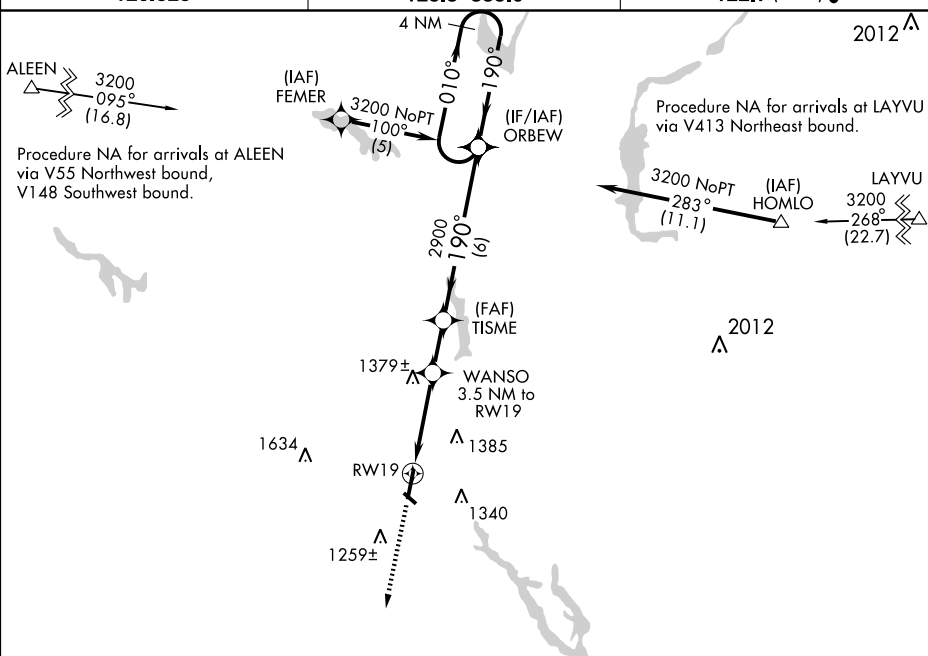

CATEGORY	A	B	C	D
LNAV MDA	1640-1	531 (600-1)	1640-1½ 531 (600-1½)	1640-1¾ 531 (600-1¾)
CIRCLING	1640-1	531 (600-1)	1700-1½ 591 (600-1½)	1740-2 631 (700-2)

VOR/DME RPD 110.0 Chan 37	APP CRS 196°	Rwy Idg 6700 TDZE 1109 Apt Elev 1109
---	------------------------	---

VOR/DME RWY 19
RICE LAKE RGNL-CARL'S FIELD (RPD)

T
A




If local altimeter setting not received, use Chippewa Valley
Rgnl altimeter setting and increase all MDAs 120 feet.
VDP NA when using Chippewa Valley Rgnl altimeter setting.

MISSED APPROACH: Climb to 2200 then climbing left turn to 3200 via RPD R-016 to GROES/ 6.9 DME and hold.

AWOS-3
120.525

MINNEAPOLIS CENTER
125.3 335.6

UNICOM
122.7 (CTAF) **L**

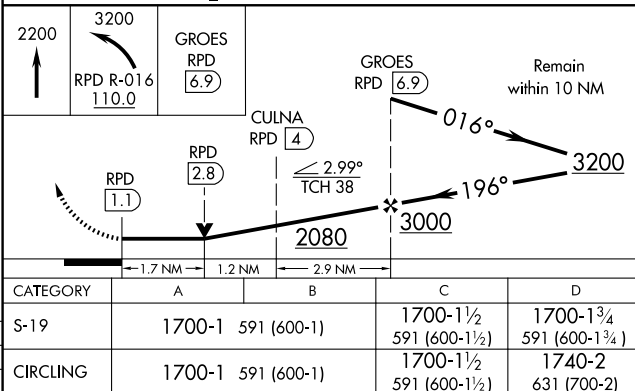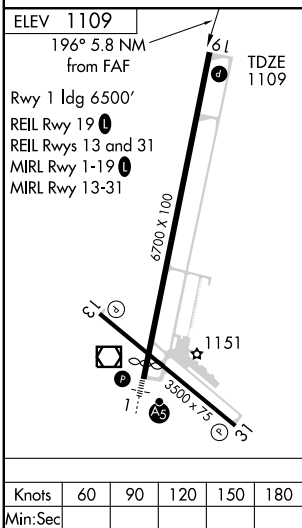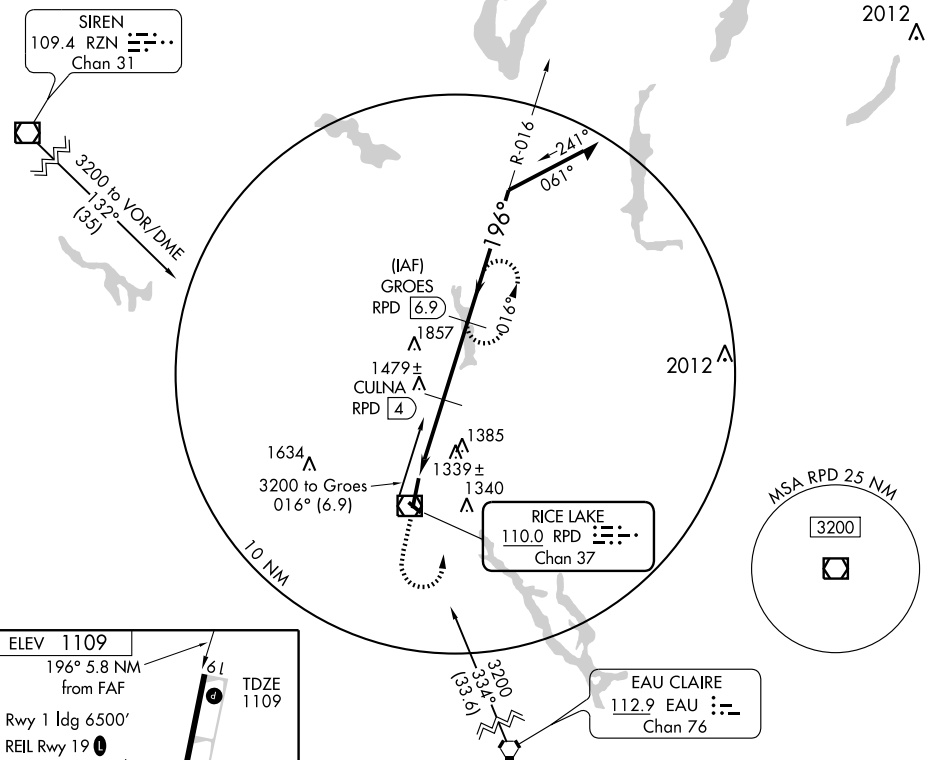

RICE LAKE, WISCONSIN
Amdt 1 08157

RICE LAKE RGNL-CARL'S FIELD (RPD)
VOR/DME RWY 19

45° 25'N-91° 46'W

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

VOR/DME RPD APP CRS Rwy Idg **6500**
110.0 **359°** TDZE **1101**
 Chan **37** Apt Elev **1109**

VOR RWY 1

RICE LAKE RGNI-CARL'S FIELD (RPD)

⚠ If local altimeter setting not received, use Chippewa Valley Rgnl altimeter setting and increase all MDAs 120 feet. VDP NA when using Chippewa Valley Rgnl altimeter setting. For inoperative MALSR increase JIBUR fix minimums S-1 CAT D visibility to 1¼ mile.

MALSR





MISSED APPROACH: Climb to 2200, then climbing right turn to 3200 direct RPD VOR/DME and hold.

AWOS-3
120.525

MINNEAPOLIS CENTER
125.3 335.6



UNICOM
122.7 (CTAF) 0

SIREN
 109.4 RZN
 Chan 31

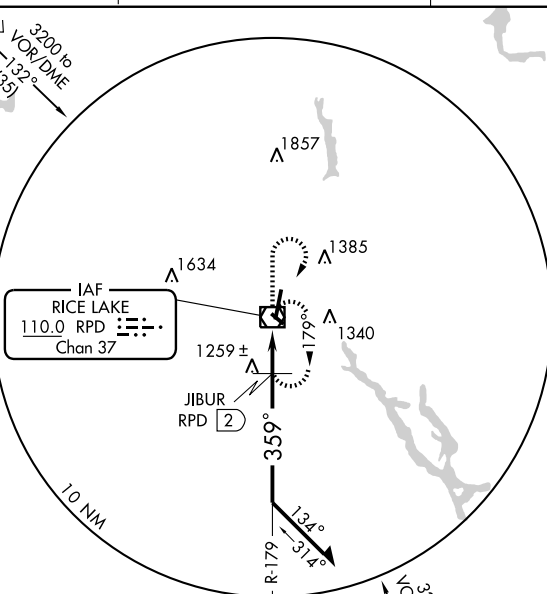

ELEV 1109

Rwy 1 Idg 6500'
 REIL Rwy 19
 REIL Rws 13 and 31
 MRL Rwy 1-19
 MRL Rwy 13-31

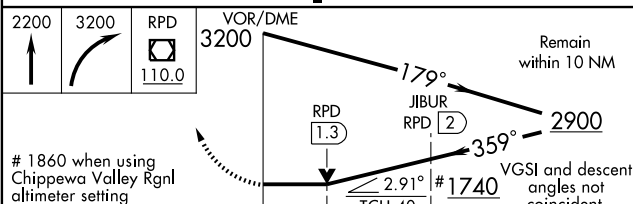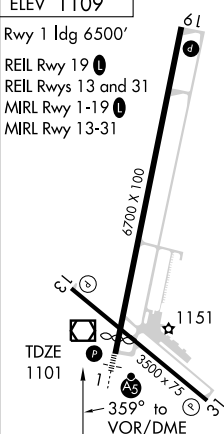

CATEGORY	A	B	C	D
S-1	1740-½ 639 (700-½)		1740-1¼ 639 (700-1¼)	1740-1½ 639 (700-1½)
CIRCLING	1740-1 631 (700-1)		1740-1¾ 631 (700-1¾)	1740-2 631 (700-2)
JIBUR FIX MINIMUMS				
S-1	1520-½ 419 (500-½)		1520-¾ 419 (500-¾)	1520-1 419 (500-1)
CIRCLING	1600-1 491 (500-1)		1700-1½ 591 (600-1½)	1740-2 631 (700-2)

RICHLAND CENTER

RICHLAND (93C) 4 SE UTC−6(−5DT) N43°17.00' W90°17.90'

CHICAGO

742 B **FUEL** 100LL NOTAM FILE GRB

L-28G

RWY 17-35: H3200X60 (ASPH) S−12.5 MIRL 0.6% up N.

IAP

RWY 17: REIL. PAPI(P2L)—GA 3.5° TCH 33'. Trees.

RWY 35: REIL. PAPI(P2L)—GA 3.5° TCH 24'. Tree.

RWY 09-27: 1500X100 (TURF) 0.7% up E.

RWY 09: Road.

RWY 27: Tree.

AIRPORT REMARKS: Attended irregularly. Call 608-647-8804 for fuel. Ultralight activity on and in/ovf arpt. Deer on and in/ovf arpt. Rwy 09-27 not plowed; confirm winter and spring rwy conditions with arpt manager 608-647-8804.

Rwy 09-27 marked with white and orange panels. **ACTIVATE** MIRL Rwy 17-35, PAPI and REIL Rwys 17 and 35—CTAF.

COMMUNICATIONS: CTAF 122.9

Ⓡ CHICAGO CENTER APP/DEP CON 133.3

RADIO AIDS TO NAVIGATION: NOTAM FILE LNR.

LONE ROCK (L) VORW/DME 112.8 LNR Chan 75 N43°17.66' W90°07.99' 265° 7.3 NM to fld. 1184/0E.
HIWAS.

RIO

GILBERT FLD (94C) 1 W UTC−6(−5DT) N43°27.00' W89°15.01'

CHICAGO

925 TPA—1925(1000) NOTAM FILE GRB

RWY 09-27: 1092X65 (TURF)

RWY 09: Trees.

RWY 27: Trees.

AIRPORT REMARKS: Unattended. Confirm winter rwy conditions and snow removal call 920-429-3513. E twy CLOSED indef. Rwy 09-27 thlds marked with orange cones.

COMMUNICATIONS: CTAF 122.9

ROCHESTER

FOX RIVER (96C) 2 NW UTC−6(−5DT) N42°45.00' W88°15.06'

CHICAGO

822 NOTAM FILE GRB

RWY 01-19: H2500X36 (ASPH)

RWY 01: Trees.

RWY 19: Trees.

AIRPORT REMARKS: Attended Mon-Fri 1200-2230Z†. Rwy 01-19 rwy asph is 10'-15' wider last 300' each end.

COMMUNICATIONS: CTAF 122.9

ROCK RIVER N43°10.42' W88°43.52' NOTAM FILE RYV.

CHICAGO

NDB (MHW) 371 RYV at Watertown Muni. NDB unmonitored 0500-1000Z†.

L-28H

RUSK CO (See LADYSMITH)

SAUK-PRAIRIE (See PRAIRIE DU SAC)

SAWYER CO (See HAYWARD)

SEELEY N46°06.73' W91°23.08' NOTAM FILE GRB.

GREEN BAY

NDB (MHW) 344 SLY 205° 5.8 NM to Sawyer Co.

L-141

NDB unusable byd 15 NM.

VOR/DME LNR
112.8
Chan **75**

APP CRS
264°

Rwy Idg	TDZE	Apt Elev
18L	100	100
18R	100	100
9	100	100
10	100	100
11	100	100
12	100	100
13	100	100
14	100	100
15	100	100
16	100	100
17	100	100
18	100	100
19	100	100
20	100	100
21	100	100
22	100	100
23	100	100
24	100	100
25	100	100
26	100	100
27	100	100
28	100	100
29	100	100
30	100	100
31	100	100
32	100	100
33	100	100
34	100	100
35	100	100
36	100	100
37	100	100
38	100	100
39	100	100
40	100	100
41	100	100
42	100	100
43	100	100
44	100	100
45	100	100
46	100	100
47	100	100
48	100	100
49	100	100
50	100	100
51	100	100
52	100	100
53	100	100
54	100	100
55	100	100
56	100	100
57	100	100
58	100	100
59	100	100
60	100	100
61	100	100
62	100	100
63	100	100
64	100	100
65	100	100
66	100	100
67	100	100
68	100	100
69	100	100
70	100	100
71	100	100
72	100	100
73	100	100
74	100	100
75	100	100
76	100	100
77	100	100
78	100	100
79	100	100
80	100	100
81	100	100
82	100	100
83	100	100
84	100	100
85	100	100
86	100	100
87	100	100
88	100	100
89	100	100
90	100	100
91	100	100
92	100	100
93	100	100
94	100	100
95	100	100
96	100	100
97	100	100
98	100	100
99	100	100
100	100	100

N/A
N/A
742




VOR or GPS-A
RICHLAND (93C)

T Use Lone Rock altimeter setting; if not received,
A NA use Madison altimeter setting.

MISSED APPROACH: Climb to 3000 then right turn direct LNR VOR/DME and hold.

CHICAGO CENTER
133.3 380.35

CTAF
122.9 **L**

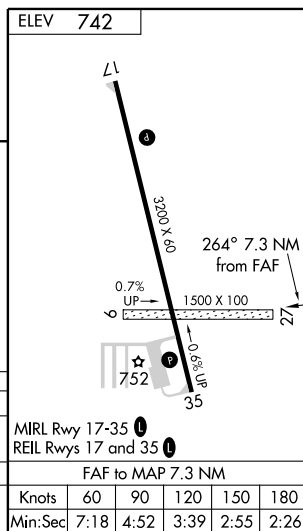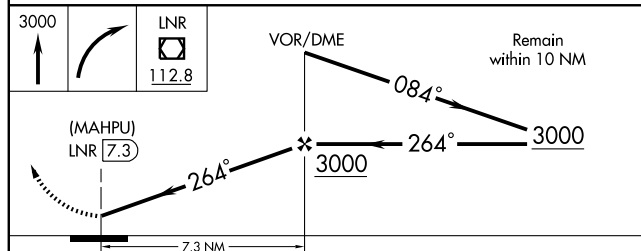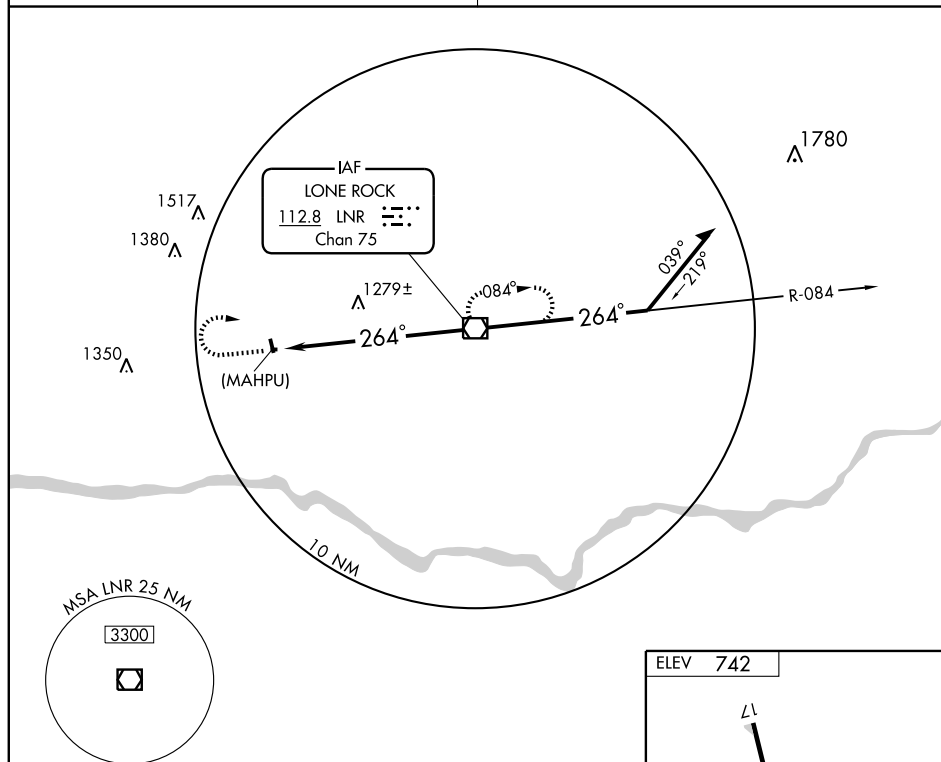

RICHLAND CENTER, WISCONSIN

Amdt 4A 07130

43°17'N - 90°18'W

RICHLAND (93C)

VOR or GPS-A

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

SHAWANO MUNI (EZS) 1 NE UTC-6(-5DT) N44°47.24' W88°33.60'

GREEN BAY

L-31A

IAP

813 B S4 FUEL 100LL NOTAM FILE GRB

RWY 11-29: H3900X75 (ASPH) S-17 MIRL

RWY 11: Road. RWY 29: Trees.

RWY 17-35: H2225X60 (ASPH) MIRL

RWY 17: Road. RWY 35: Trees.

AIRPORT REMARKS: Attended 1400Z±-dusk. Waterfowl and deer on and in/ovf arpt. ACTIVATE MIRL Rwy 11-29 and 17-35—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.65 (715) 526-2967.**COMMUNICATIONS:** CTAF/UNICOM 122.8

Ⓡ GREEN BAY APP/DEP CON 119.4 (1130-0530Z±)

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 125.55 (0530-1130Z±)

GCO 121.725 (FLIGHT SERVICES)


RADIO AIDS TO NAVIGATION: NOTAM FILE GRB.

GREEN BAY (H) VORTACW 115.5 GRB Chan 102 N44°33.31'

W88°11.69' 311° 20.9 NM to fld. 767/1E. HIWAS.

WATERWAY ALL WAY: 12,000X1000 (WATER)

SEAPLANE REMARKS: Seaplane waterway CLOSED early Nov to early May, call arpt manager 715-526-2465 for conditions. Rotating bcn located on arpt ½ mile SW of sealane. Seaplane base has floating tie downs and beaching ramp.

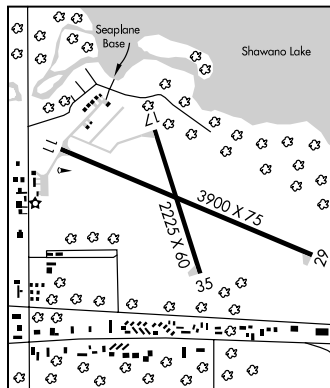**SHEBOYGAN CO MEML** (SBM) 3 NW UTC-6(-5DT) N43°46.19' W87°51.10'

CHICAGO

H-2K, L-28H

IAP

755 B S4 FUEL 100LL, JET A TPA-1554(800) NOTAM FILE SBM

RWY 03-21: H6802X100 (CONC-GRVD) S-60, D-60 HIRL

RWY 03: REIL. PAPI(P4L)—GA 3.0° TCH 52'. Trees.

RWY 21: MALSR. PAPI(P4L)—GA 3.0° TCH 49'.

RWY 13-31: H5000X75 (ASPH) S-23, D-32 MIRL 0.3% up NW

RWY 13: PAPI(P4L)—GA 3.0° TCH 40'. Trees.

RWY 31: PAPI(P4L)—GA 3.0° TCH 40'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1200Z±-dusk, Sat-Sun dawn-dusk. Ultralight activity on and in/ovf arpt. Waterfowl and deer on and in/ovf arpt. Twy A clsd indef. For services call 920-467-6151—frequency 129.85 or 920-467-0370—frequency 131.35. HIRL Rwy 03-21 and MIRL Rwy 13-31 preset low ints, to increase ints and ACTIVATE PAPI Rwy 03 and Rwy 21; REIL Rwy 03 and MALSR Rwy 21—CTAF. PAPI Rwy 13 and Rwy 31 opr continuously.

WEATHER DATA SOURCES: ASOS 110.0 FAH (920) 467-0744.**COMMUNICATIONS:** CTAF/UNICOM 122.7

FALLS RCO 122.1R 110.0T (GREEN BAY RADIO)

Ⓡ MILWAUKEE TOWER APP/DEP CON 127.0 CLNC DEL 127.375


GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE OSH.

OSHKOSH (L) VORTAC 111.8 OSH Chan 55 N43°59.43' W88°33.36' 111° 33.3 NM to fld. 780/2E.

FALLS (L) VOR/DME 110.0 FAH Chan 37 N43°46.13' W87°50.93' at fld. 744/2W. NOTAM FILE SBM. ASOS.

ILS/DME 110.7 I-HEV Chan 44 Rwy 21.

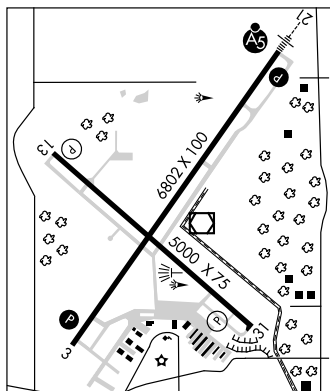

APP CRS	Rwy Idg	3900
295°	TDZE	811
	Apt Elev	811

GPS RWY 29

SHAWANO MUNI (EZS)

V Use Green Bay (Austin Straubel Intl) altimeter setting.
Δ NA

MISSED APPROACH: Climb to 2500 via 295° course to DIVLY WP and hold.


AWOS-3
118.65

GREEN BAY APP CON ★
119.4 338.2


GCO
121.725

UNICOM
122.8 (CTAF) 0

Δ 1650±

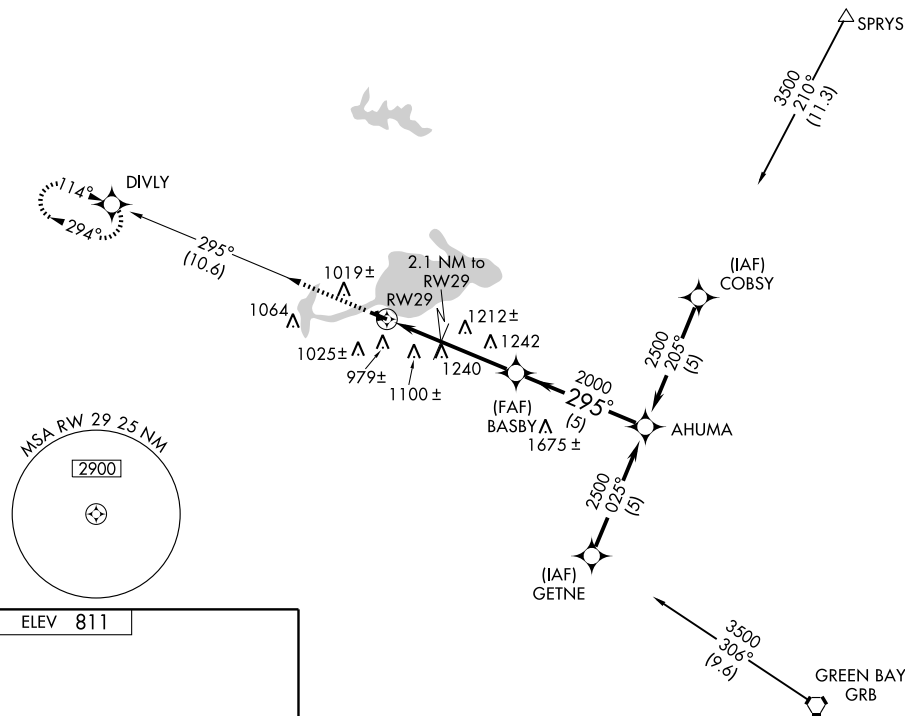

ELEV 811



<div>2500</div> <div>CRS 295°</div> <div>DIVLY</div>			
<div>2.1 NM to RW29</div> <div>2.9 NM</div> <div>5 NM</div>			
<div>RW29</div> <div>BASBY</div> <div>AHUMA</div>			
<div>1640</div> <div>2000</div> <div>2500</div>			
<div>Procedure Turn NA</div>			
CATEGORY	A	B	D
S-29	1460-1	649 (700-1)	1460-2 649 (700-2)
CIRCLING	1460-1	649 (700-1)	1480-1 3/4 669 (700-1 3/4)

MIRL Rwy 11-29 and 17-35 0

SHAWANO, WISCONSIN

Orig-A 08269

SHAWANO MUNI (EZS)

GPS RWY 29

44°47'N-88°34'W

SHAWANO MUNI (EZS) 1 NE UTC-6(-5DT) N44°47.24' W88°33.60'

GREEN BAY

L-31A

IAP

813 B S4 FUEL 100LL NOTAM FILE GRB

RWY 11-29: H3900X75 (ASPH) S-17 MIRL

RWY 11: Road. RWY 29: Trees.

RWY 17-35: H2225X60 (ASPH) MIRL

RWY 17: Road. RWY 35: Trees.

AIRPORT REMARKS: Attended 1400Z±-dusk. Waterfowl and deer on and in/ovf arpt. ACTIVATE MIRL Rwy 11-29 and 17-35—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.65 (715) 526-2967.**COMMUNICATIONS:** CTAF/UNICOM 122.8

Ⓡ GREEN BAY APP/DEP CON 119.4 (1130-0530Z±)

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 125.55 (0530-1130Z±)

GCO 121.725 (FLIGHT SERVICES)


RADIO AIDS TO NAVIGATION: NOTAM FILE GRB.

GREEN BAY (H) VORTACW 115.5 GRB Chan 102 N44°33.31'

W88°11.69' 311° 20.9 NM to fld. 767/1E. HIWAS.

WATERWAY ALL WAY: 12,000X1000 (WATER)

SEAPLANE REMARKS: Seaplane waterway CLOSED early Nov to early May, call arpt manager 715-526-2465 for conditions. Rotating bcn located on arpt ½ mile SW of sealane. Seaplane base has floating tie downs and beaching ramp.

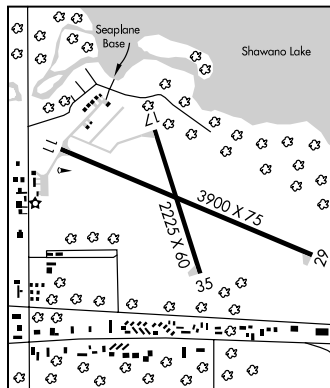**SHEBOYGAN CO MEML** (SBM) 3 NW UTC-6(-5DT) N43°46.19' W87°51.10'

CHICAGO

H-2K, L-28H

IAP

755 B S4 FUEL 100LL, JET A TPA-1554(800) NOTAM FILE SBM

RWY 03-21: H6802X100 (CONC-GRVD) S-60, D-60 HIRL

RWY 03: REIL. PAPI(P4L)—GA 3.0° TCH 52'. Trees.

RWY 21: MALSR. PAPI(P4L)—GA 3.0° TCH 49'.

RWY 13-31: H5000X75 (ASPH) S-23, D-32 MIRL 0.3% up NW

RWY 13: PAPI(P4L)—GA 3.0° TCH 40'. Trees.

RWY 31: PAPI(P4L)—GA 3.0° TCH 40'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1200Z±-dusk, Sat-Sun dawn-dusk. Ultralight activity on and in/ovf arpt. Waterfowl and deer on and in/ovf arpt. Twy A clsd indef. For services call 920-467-6151—frequency 129.85 or 920-467-0370—frequency 131.35. HIRL Rwy 03-21 and MIRL Rwy 13-31 preset low ints, to increase ints and ACTIVATE PAPI Rwy 03 and Rwy 21; REIL Rwy 03 and MALSR Rwy 21—CTAF. PAPI Rwy 13 and Rwy 31 opr continuously.

WEATHER DATA SOURCES: ASOS 110.0 FAH (920) 467-0744.**COMMUNICATIONS:** CTAF/UNICOM 122.7

FALLS RCO 122.1R 110.0T (GREEN BAY RADIO)

Ⓡ MILWAUKEE TOWER APP/DEP CON 127.0 CLNC DEL 127.375


GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE OSH.

OSHKOSH (L) VORTAC 111.8 OSH Chan 55 N43°59.43' W88°33.36' 111° 33.3 NM to fld. 780/2E.

FALLS (L) VOR/DME 110.0 FAH Chan 37 N43°46.13' W87°50.93' at fld. 744/2W. NOTAM FILE SBM. ASOS.

ILS/DME 110.7 I-HEV Chan 44 Rwy 21.

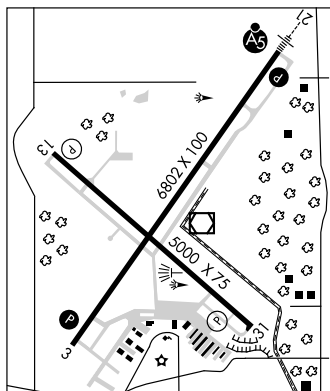

LOC/DME I-HEV 110.7 Chan 44	APP CRS 217°	Rwy Idg 6802 TDZE 743 Apt Elev 755
---	------------------------	---

ILS or LOC/DME RWY 21

SHEBOYGAN COUNTY MEMORIAL (SBM)





▼ When VGSI inop, Circling Rwy 13-31 NA at night. When local altimeter setting not received, use Manitowoc altimeter setting and increase DA 67 feet and increase all MDA 80 feet, increase S-LOC 21 Cat C/D visibility ¼ mile. VDP NA when using Manitowoc altimeter setting. For inoperative MALSR when using Manitowoc altimeter setting increase S-ILS 21 all Cats visibility to 1 mile.

MALSR



MISSED APPROACH: Climb to 2500 then climbing left turn to 3000 direct FAH VOR/DME and hold.

ASOS 110.0	MILWAUKEE APP CON 127.0 263.075	GCO 121.725	CLNC DEL 127.375	UNICOM 122.7 (CTAF) 0
----------------------	---	-----------------------	----------------------------	---------------------------------

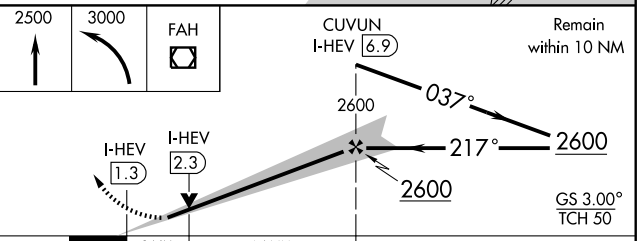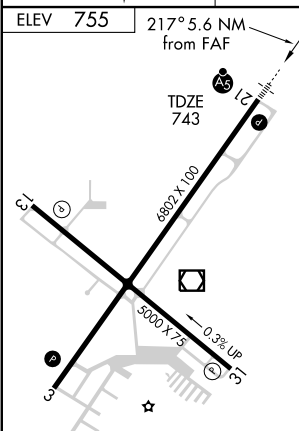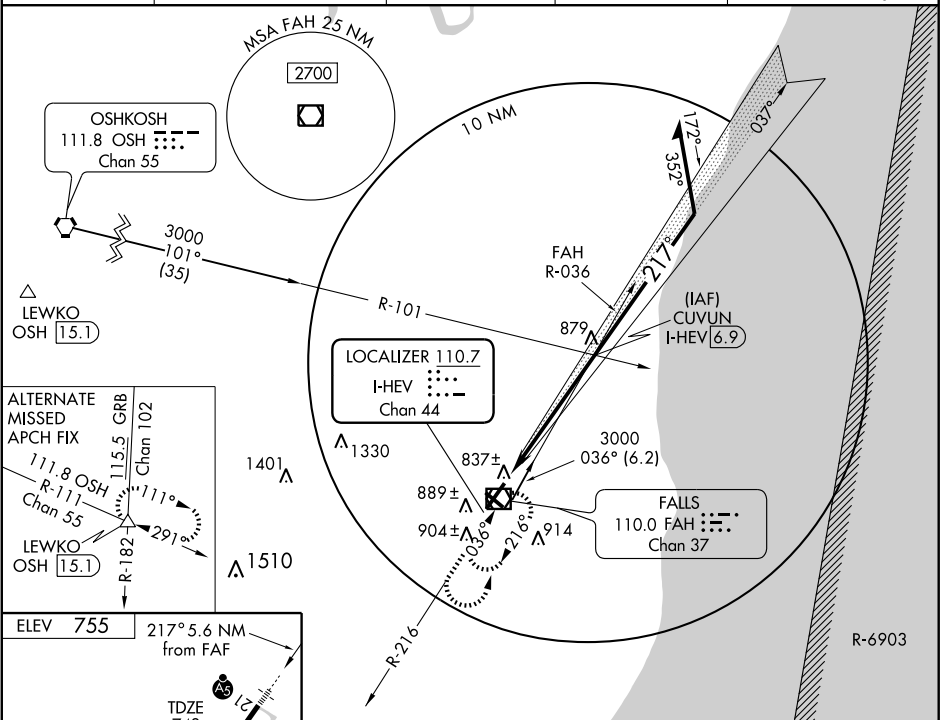

CATEGORY	A	B	C	D
S-ILS 21	992-½ 249 (300-½)			
S-LOC 21	1120-½ 377 (400-½)			1120-¾ 377 (400-¾)
CIRCLING	1220-1 465 (500-1)		1220-½ 465 (500-½)	1320-2 565 (600-2)


WAAS CH 61104 W03A	APP CRS 037°	Rwy Idg TDZE 744 Apt Elev 755	6802 744 755
--	------------------------	---	---

RNAV (GPS) RWY 3


SHEBOYGAN COUNTY MEMORIAL (SBM)

<p>▼ When VGSI inop, Circling Rwy 13-31 NA at night. Baro-VNAV NA when using Manitowoc altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Manitowoc altimeter setting and increase all DA 67 feet and all MDA 80 feet, increase LPV, LNAV/VNAV all Cats and LNAV Cat D visibility ¼ mile.</p>	<p>MISSED APPROACH: Climb to 3000 direct JADNI and hold.</p>
--	---

ASOS 110.0	MILWAUKEE APP CON 127.0 263.075	GCO 121.725	CLNC DEL 127.375	UNICOM 122.7 (CTAF) 0
----------------------	---	-----------------------	----------------------------	---------------------------------

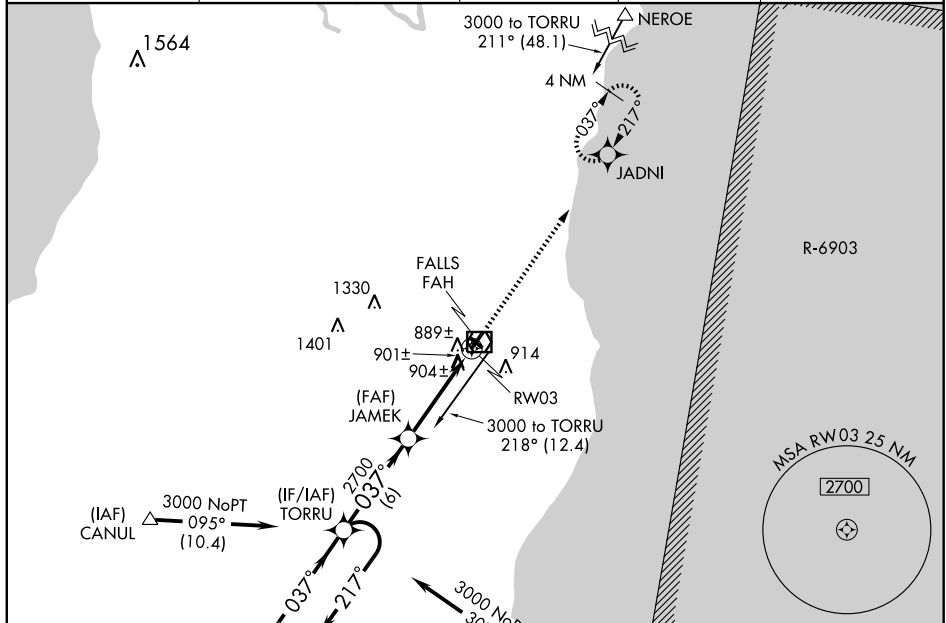

4 NM Holding Pattern				
<p>TORRU</p> <p>3000 ← 217°</p> <p>037° →</p> <p>JAMEK</p> <p>2700</p> <p>RW03</p> <p>6 NM</p> <p>5.9 NM</p> <p>GS 3.00° TCH 52</p>				
CATEGORY	A	B	C	D
LPV DA	1041-1 297 (300-1)			
LNAV/VNAV DA	1214-1¾ 470 (500-1¾)			
LNAV MDA	1160-1	416 (500-1)	1160-1¼	416 (500-1¼)
CIRCLING	1220-1	465 (500-1)	1220-1½	1320-2
			465 (500-1½)	565 (600-2)

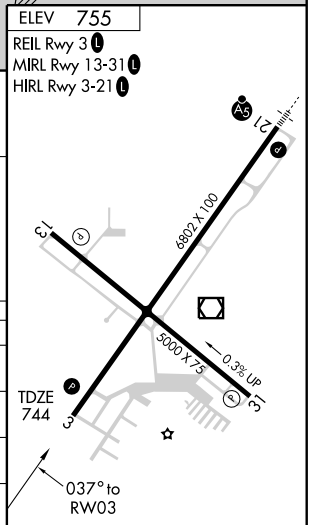

APP CRS **131°**
Rwy ldg **5000**
TDZE **755**
Apt Elev **755**

RNAV (GPS) RWY 13

SHEBOYGAN COUNTY MEMORIAL (SBM)

▼ When VGSI inop, straight-in/circling Rwy 13-31 procedure NA at night. If local altimeter setting not received, use Manitowoc County altimeter setting and increase all MDAs 80 feet. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climbing right turn to 3000 direct ORMEE and hold.


ASOS
110.0

MILWAUKEE APP CON
127.0 263.075

GCO
121.725



CLNC DEL
127.375

UNICOM
122.7 (CTAF) ①

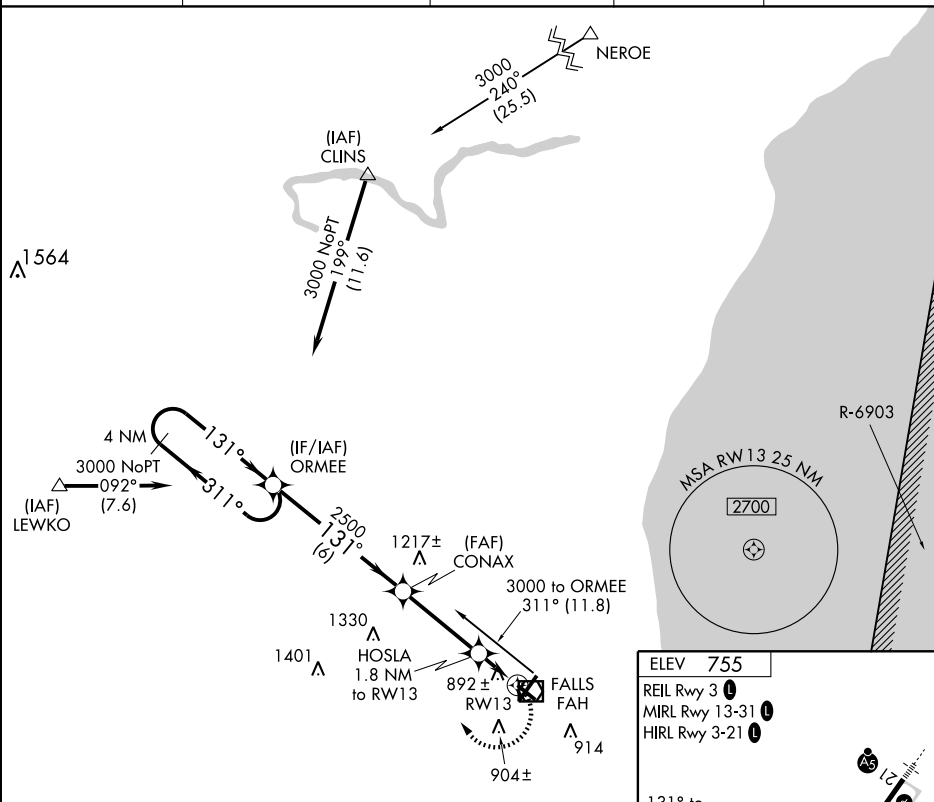

ELEV 755
REIL Rwy 3 ①
MIRL Rwy 13-31 ①
HIRL Rwy 3-21 ①

4 NM Holding Pattern VGSI and descent angles not coincident.

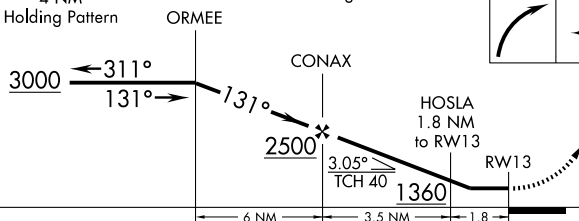


CATEGORY	A	B	C	D
LNAV MDA	1160-1	405 (500-1)	1160-1¼	405 (500-1¼)
CIRCLING	1220-1	465 (500-1)	1220-1½ 465 (500-1½)	1320-2 565 (600-2)



WAAS CH 65904 W21A	APP CRS 217°	Rwy Idg TDZE 743 Apt Elev 755
--	------------------------	---

RNAV (GPS) RWY 21

SHEBOYGAN COUNTY MEMORIAL (SBM)

<p>When VGSI inop, Circling Rwy 13-31 NA at night. For inoperative MALS, increase LPV all Cats visibility to 1 and LNAV Cat D visibility to 1¼. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.</p> <p>When local altimeter setting not received, use Manitowoc altimeter setting and increase all DA 67 feet and all MDA 80 feet, increase LPV all Cats visibility ¼ mile. Baro-VNAV and VDP NA when using Manitowoc altimeter setting. For inoperative MALS when using Manitowoc altimeter setting, increase LPV all Cats visibility to 1¼ mile.</p>	<p>MALS</p> 	<p>MISSED APPROACH: Climb to 3000 direct TORRU and hold.</p>
---	---	--

ASOS 110.0	MILWAUKEE APP CON 127.0 263.075	GCO 121.725	CLNC DEL 127.375	UNICOM 122.7 (CTAF) 0
----------------------	---	-----------------------	----------------------------	---------------------------------

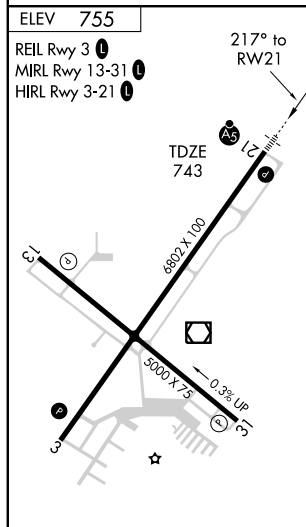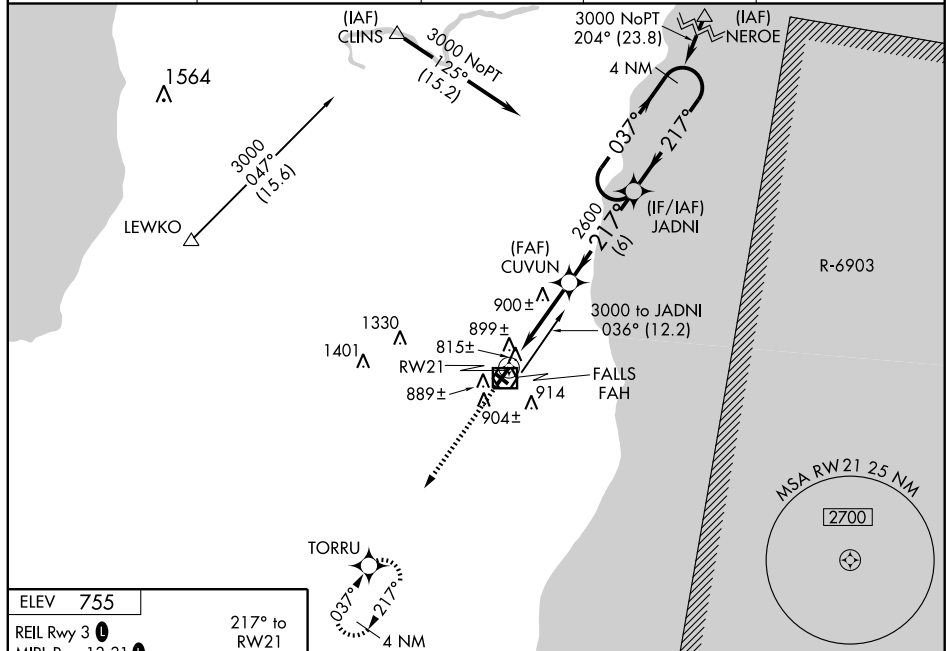

ELEV 755	REIL Rwy 3 0	MIRL Rwy 13-31 0	HIRL Rwy 3-21 0	217° to RWY 21	TDZE 743	AS 12
3000	TORRU	4 NM	3000	TORRU	4 NM	Holding Pattern
*LNAV only	*1.2 NM to RWY 21	CUVUN	217°	3000	GS 3.00°	TCH 50
1.2 NM	4.4 NM	6 NM				
CATEGORY	A	B	C	D		
LPV DA	1059-½	316 (400-½)				
LNAV/VNAV DA	1209-¼	466 (500-¼)				
LNAV MDA	1160-½	417 (500-½)	1160-¾ 417 (500-¾)	1160-1 417 (500-1)		
CIRCLING	1220-1	465 (500-1)	1220-1½ 465 (500-1½)	1320-2 565 (600-2)		

APP CRS	Rwy Idg	5000
311°	TDZE	744
	Apt Elev	754

RNAV (GPS) RWY 31

SHEBOYGAN COUNTY MEMORIAL (SBM)

▼ If local altimeter setting not received, use Manitowoc County altimeter setting and increase all MDAs 80 feet. When VGSI inop, Straight-in/ Circling Rwy 13-31 procedure NA at night. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climbing left turn to 3000 direct WOKNO and hold.


ASOS
110.0

MILWAUKEE APP CON
127.0 263.075

GCO
121.725


CLNC DEL
127.375

UNICOM
122.7 (CTAF) ①

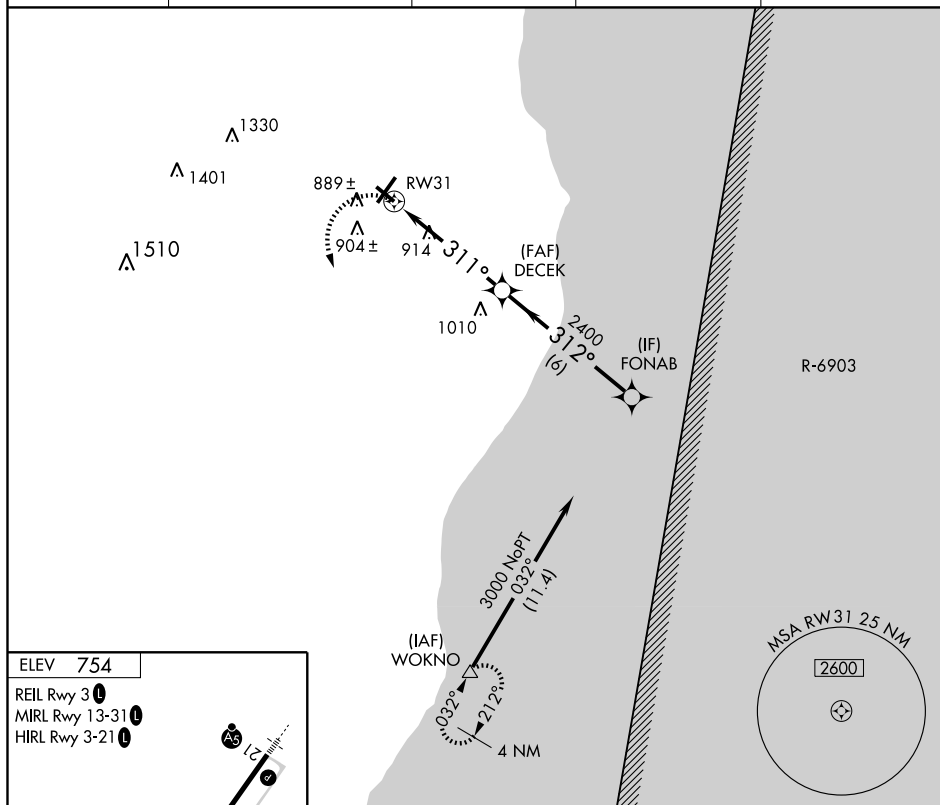


ELEV 754

REIL Rwy 31
MIRL Rwy 13-31
HIRL Rwy 3-21

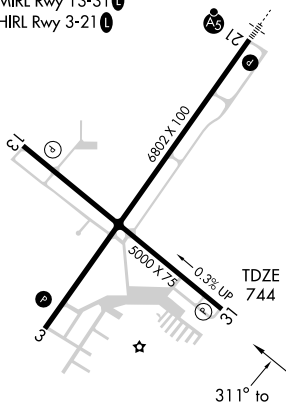

3000 WOKNO
△

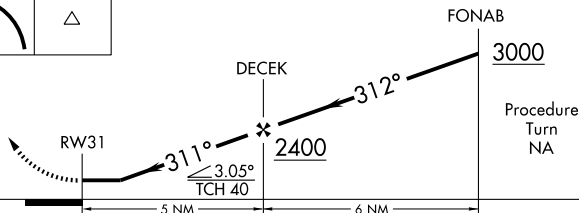

CATEGORY	A	B	C	D
LNNAV MDA	1220-1 476 (500-1)	1220-1¼ 476 (500-1¼)	1220-1½ 476 (500-1½)	1220-1½ 476 (500-1½)
CIRCLING	1220-1 466 (500-1)	1220-1½ 466 (500-1½)	1320-2 566 (600-2)	

VOR/DME FAH
110.0
 Chan **37**

APP CRS
046°

Rwy Idg
 TDZE **744**
 Apt Elev **755**



VOR RWY 3

SHEBOYGAN COUNTY MEMORIAL (SBM)

⚠ When VGSI inop, Circling to Rwy 13-31 NA at night. When local altimeter setting not received, use Manitowoc altimeter setting and increase all MDA 80 feet, increase Cat B/C visibility ¼ mile, WUDLO fix minimums Cat D visibility ¼ mile. When using Manitowoc altimeter setting Cat D and straight-in WUDLO fix minimums NA.

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct FAH VOR/DME and hold.

ASOS 110.0	MILWAUKEE APP CON 127.0 263.075	GCO 121.725	CLNC DEL 127.375	UNICOM 122.7 (CTAF) 0
----------------------	---	-----------------------	----------------------------	---------------------------------

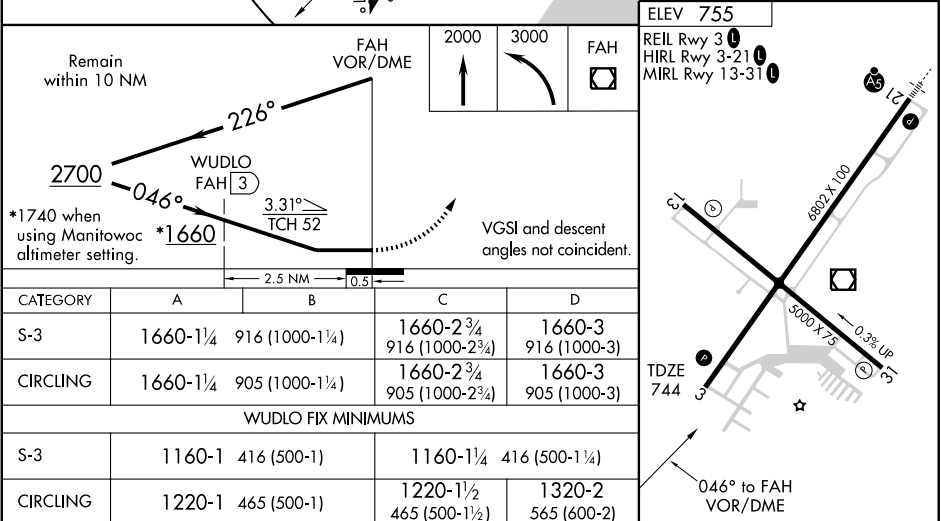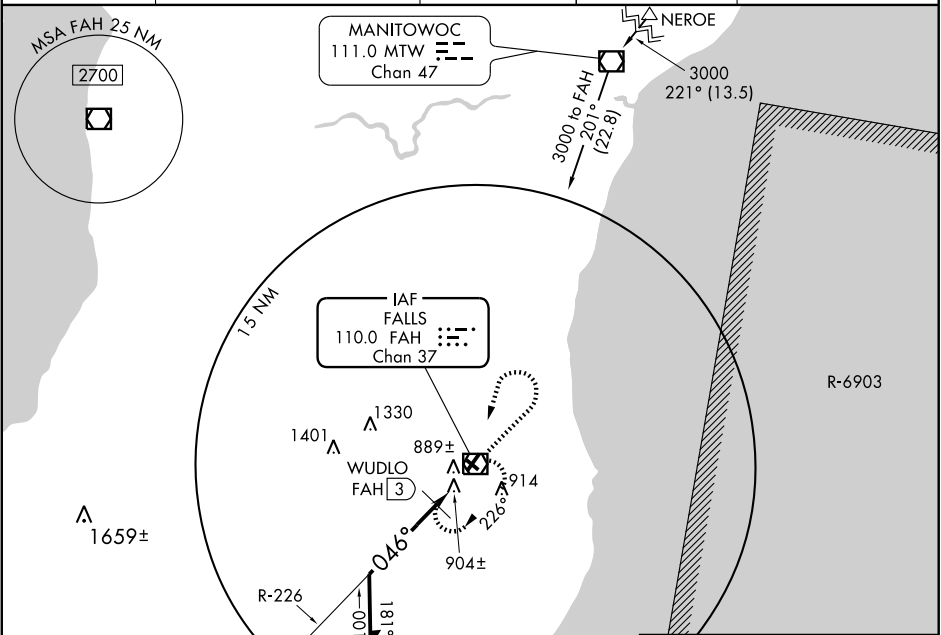

VOR/DME FAH 110.0 Chan 37	APP CRS 209°	Rwy Idg TDZE 743 Apt Elev 755	6802 743 755
---	------------------------	---	---

VOR RWY 21




SHEBOYGAN COUNTY MEMORIAL (SBM)

⚠ When VGSI inop, Circling to Rwy 13-31 NA at night. When local altimeter setting not received, use Manitowoc altimeter setting and increase all MDA 80 feet, increase S-21 Cat C/D visibility ¼ mile. VDP NA when using Manitowoc altimeter setting.



MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct FAH VOR/DME and hold.

ASOS 110.0	MILWAUKEE APP CON 127.0 263.075	GCO 121.725	CLNC DEL 127.375	UNICOM 122.7 (CTAF) 0
----------------------	---	-----------------------	----------------------------	---------------------------------

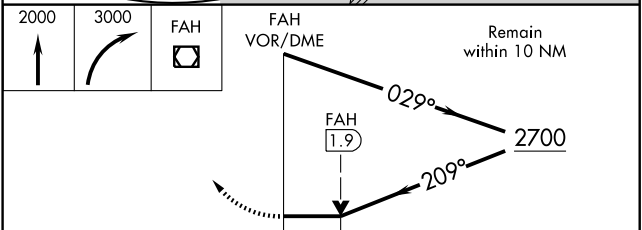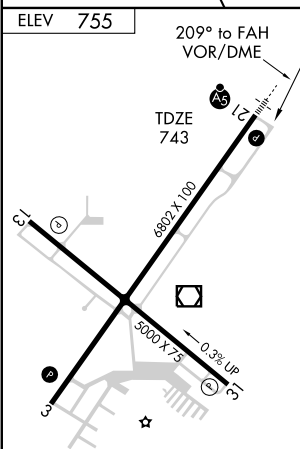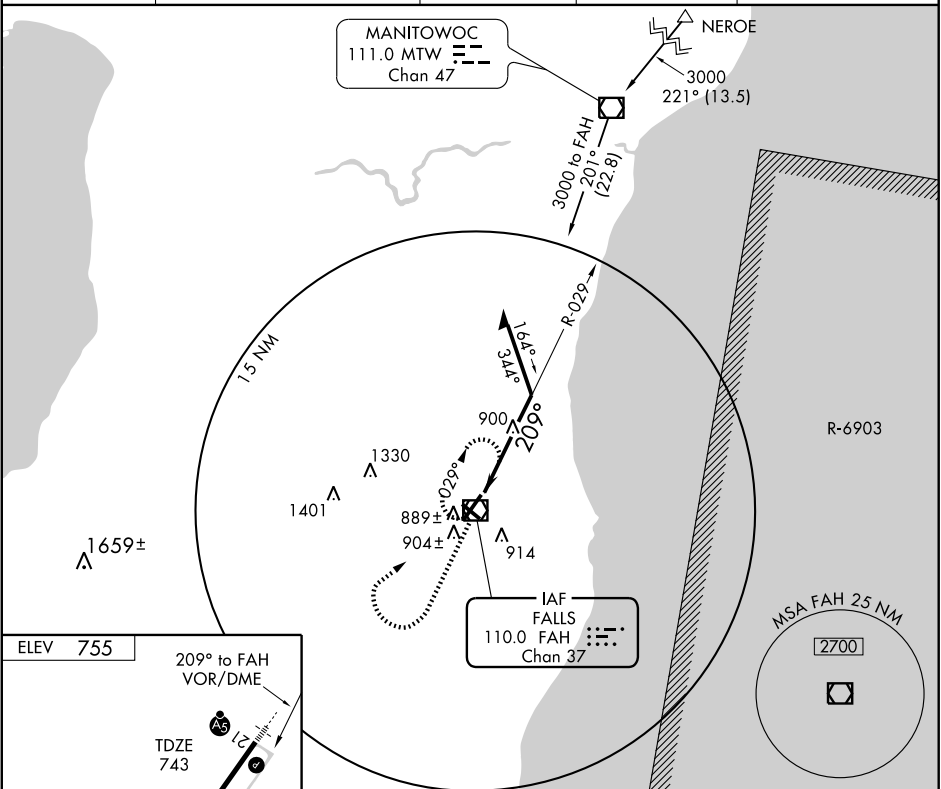

CATEGORY	A	B	C	D
S-21	1200-½ 457 (500-½)		1200-¾ 457 (500-¾)	1200-1 457 (500-1)
CIRCLING	1220-1 465 (500-1)		1220-1½ 465 (500-1½)	1320-2 565 (600-2)

SHELL LAKE MUNI (SSQ) 1 SE UTC-6(-5DT) N45°43.88' W91°55.24'

GREEN BAY

1233 B NOTAM FILE GRB

L-141

RWY 14-32: H3711X75 (ASPH) MIRL

IAP

RWY 14: PAPI(P2L)—GA 4.0° TCH 21'. Thld dspcd 619'. Trees.

RWY 32: REIL. PAPI(P2L)—GA 3.0° TCH 21'. Thld dspcd 211'. Boat.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 14: TORA-3711 TODA-3711 ASDA-3500 LDA-2881

RWY 32: TORA-3286 TODA-3711 ASDA-3711 LDA-3500

AIRPORT REMARKS: Unattended. Birds on and invof arpt. ACTIVATE MIRL

Rwy 14-32; PAPI Rwy 14 and Rwy 32; REIL Rwy 32—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RICE LAKE RCO 122.3 (FLIGHT SERVICES)


Ⓡ MINNEAPOLIS CENTER APP/DEP CON 126.45

GCO 121.725 (GREEN BAY FSS)

RADIO AIDS TO NAVIGATION: NOTAM FILE RPD.

RICE LAKE (T) VOR/DME 110.0 RPD Chan 37 N45°24.91'

W91°46.68' 341° 19.9 NM to fld. 1092/1E. OTS indef.

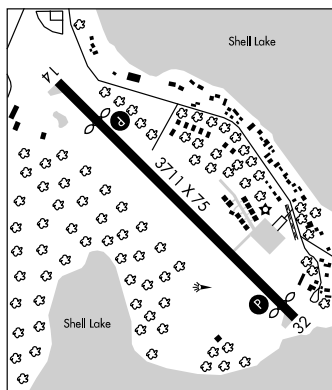

SHIOCTON (W34) 1 NE UTC-6(-5DT) N44°27.28' W88°33.71'

GREEN BAY

769 NOTAM FILE GRB

RWY 18-36: 2340X110 (TURF)

RWY 18: REIL(NSTD). Trees.

RWY 36: REIL(NSTD). Antenna.

RWY 09-27: 1415X110 (TURF)

RWY 09: Tree.

RWY 27: Road.

AIRPORT REMARKS: Unattended. Arpt CLOSED 15 Mar-25 Apr. Parachute Jumping. Ultralight activity on and invof arpt.

Deer activity on and invof arpt. Rwy 09-27 marked by orange and white barrels. Rwy 18-36 marked with orange

and white barrels. Rwy 18-36 NSTD REIL; solar powered. Rwy 18-36 cones marking drain ditch W of rwy where

Rwy 09-27 crosses.

COMMUNICATIONS: CTAF 122.9

SIREN N45°49.23' W92°22.47' NOTAM FILE RZN.

GREEN BAY

(L) VOR/DME 109.4 RZN Chan 31 at Burnett Co. 987/2E. HIWAS.

L-141

VOR unusable 125°-135° byd 25NM

DME unusable 115°-320° byd 25NM blo 4000'.

RCO 122.1 R 109.4T (GREEN BAY RADIO)

SIREN

BURNETT CO (RZN) 3 N UTC-6(-5DT) N45°49.36' W92°22.35'

GREEN BAY

989 B FUEL 100LL, JET A, MOGAS NOTAM FILE RZN

L-141

RWY 05-23: H3900X75 (ASPH) S-8 MIRL

IAP

RWY 05: REIL. PAPI(P2L)—GA 3.45 TCH 27'. Trees.

RWY 23: REIL. PAPI(P2L)—GA 3.0 TCH 28'. Road.

RWY 14-32: H3500X75 (ASPH) S-8 MIRL

RWY 14: REIL. PAPI(P2L)—GA 3.0 TCH 28'. Trees.

RWY 32: REIL. PAPI(P2L)—GA 3.45 TCH 26'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2230Z†, Sat-Sun

1500-2200Z†. Fuel 24 hr self svc. Occasional deer and bear on

rwy. Rwy 14 and Rwy 32 REIL OTS indef. ACTIVATE MIRL Rlys

05-23 and Rwy 14-32, REIL Rwy 05, Rwy 23, Rwy 14 and Rwy

32, and PAPI Rwy 05, Rwy 23 and Rwy 14 and Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.325 (715) 349-8563. HIWAS

109.4 RZN.

COMMUNICATIONS: CTAF/UNICOM 122.8

SIREN RCO 122.1R 109.4T (GREEN BAY RADIO)

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 121.05


RADIO AIDS TO NAVIGATION: NOTAM FILE RZN.

SIREN (L) VOR/DME 109.4 RZN Chan 31 N45°49.23'

W92°22.47' at fld. 987/2E. HIWAS.

BIG DOCTOR NDB (MHW) 203 BXR N45°49.28' W92°21.99' at fld.

NOTAM FILE GRB. VFR only.

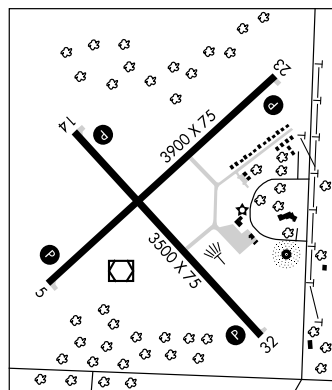

APP CRS **136°**
Rwy Idg **2881**
TDZE **1232**
Apt Elev **1232**

RNAV (GPS) RWY 14

SHELL LAKE MUNI (SSQ)


▼ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
▲ NA Use Rice Lake altimeter setting; when not received, use Siren altimeter setting and increase all MDAs 20 feet and LNAV Cat D visibility ¼ mile.

MISSED APPROACH: Climb to 4000 direct QESCA and hold.


MINNEAPOLIS CENTER
126.45 276.4

GCO
121.725


UNICOM
122.8 (CTAF) 0

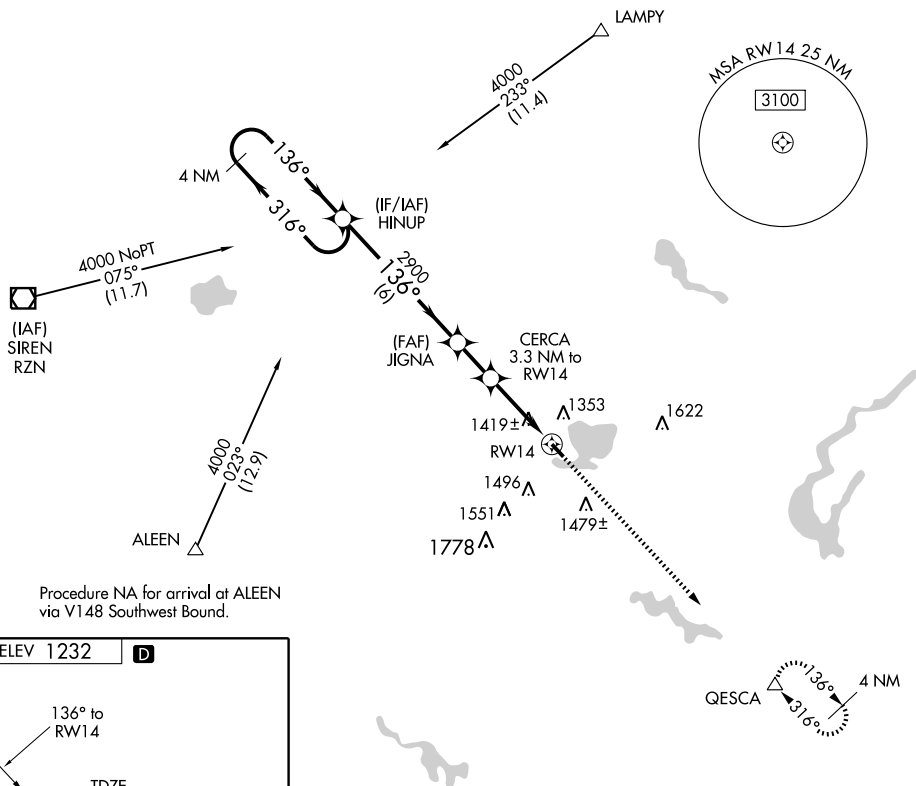

ELEV 1232

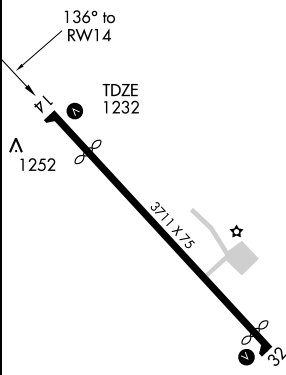

REIL Rwy 32 **0**
MIRL Rwy 14-32 **0**

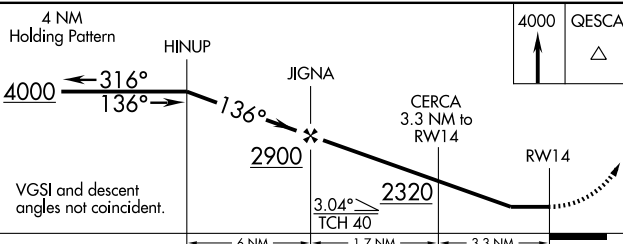

CATEGORY	A	B	C	D
LNAV MDA	1740-1 508 (600-1)	1740-1½ 508 (600-1½)		
CIRCLING	1840-1 608 (700-1)	1840-1¾ 608 (700-1¾)	1860-2 628 (700-2)	

APP CRS **316°**
 Rwy Idg **3500**
 TDZE **1232**
 Apt Elev **1232**

RNAV (GPS) RWY 32

SHELL LAKE MUNI (SSQ)


▼ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
▲ NA Use Rice Lake altimeter setting; when not received use Siren altimeter setting and increase all MDAs 20 feet.

MISSED APPROACH: Climb to 4000 direct HINUP and hold.

MINNEAPOLIS CENTER
126.45 276.4


GCO
121.725

UNICOM
122.8 (CTAF) 0

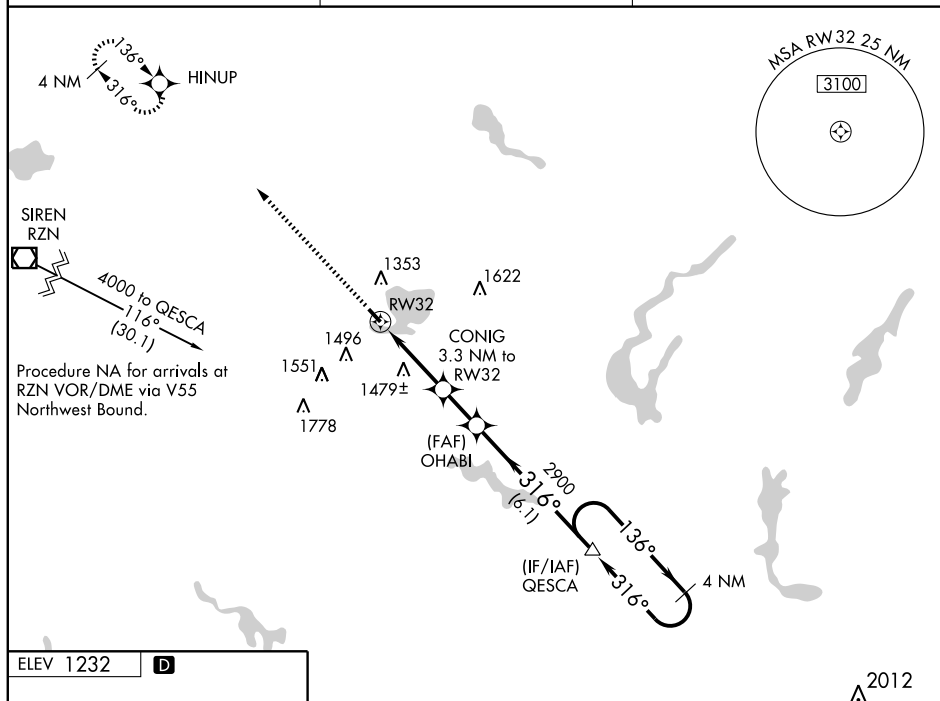

ELEV 1232

D



REIL Rwy 32 **0**
 MIRL Rwy 14-32 **0**

<div>4000 HINUP</div> <div>CONIG 3.3 NM to RW32</div> <div>OHABI</div> <div>QESCA 4 NM Holding Pattern</div> <div> <div>136° → 4000</div> <div>← 316°</div> </div> <div> <div>3.05° TCH 40</div> <div>2320</div> <div>2900</div> </div> <div> <div>3.3 NM</div> <div>1.8</div> <div>6.1 NM</div> </div> <div>VGSI and descent angles not coincident.</div>				
CATEGORY	A	B	C	D
RNAV MDA	1800-1 568 (600-1)		1800-1½ 568 (600-1½)	1800-1¾ 568 (600-1¾)
CIRCLING	1840-1 608 (700-1)		1840-1¾ 608 (700-1¾)	1860-2 628 (700-2)

VOR/DME RPD 110.0 Chan 37	APP CRS 342°	Rwy Idg TDZE Apt Elev 1232
--	------------------------	--

VOR/DME RWY 32

SHELL LAKE MUNI (SSQ)






Use Rice Lake altimeter setting.

MISSED APPROACH: Climb to 2500 then climbing right turn to 3200 direct RPD VOR/DME and hold.

MINNEAPOLIS CENTER
126.45 276.4

GCO
121.725

UNICOM
122.8 (CTAF) 0

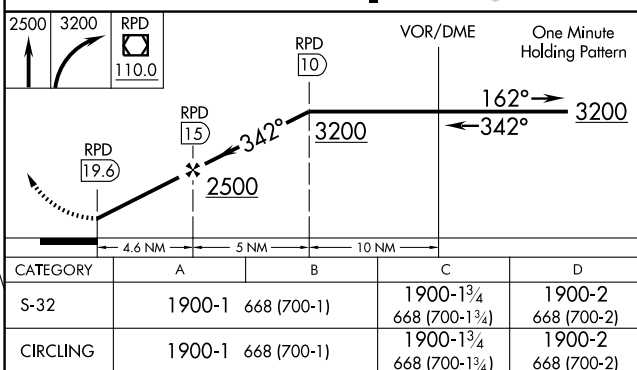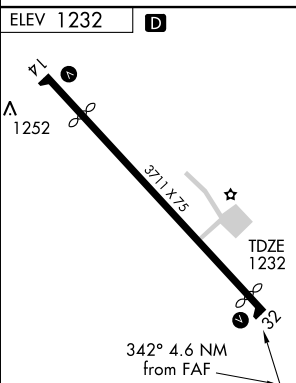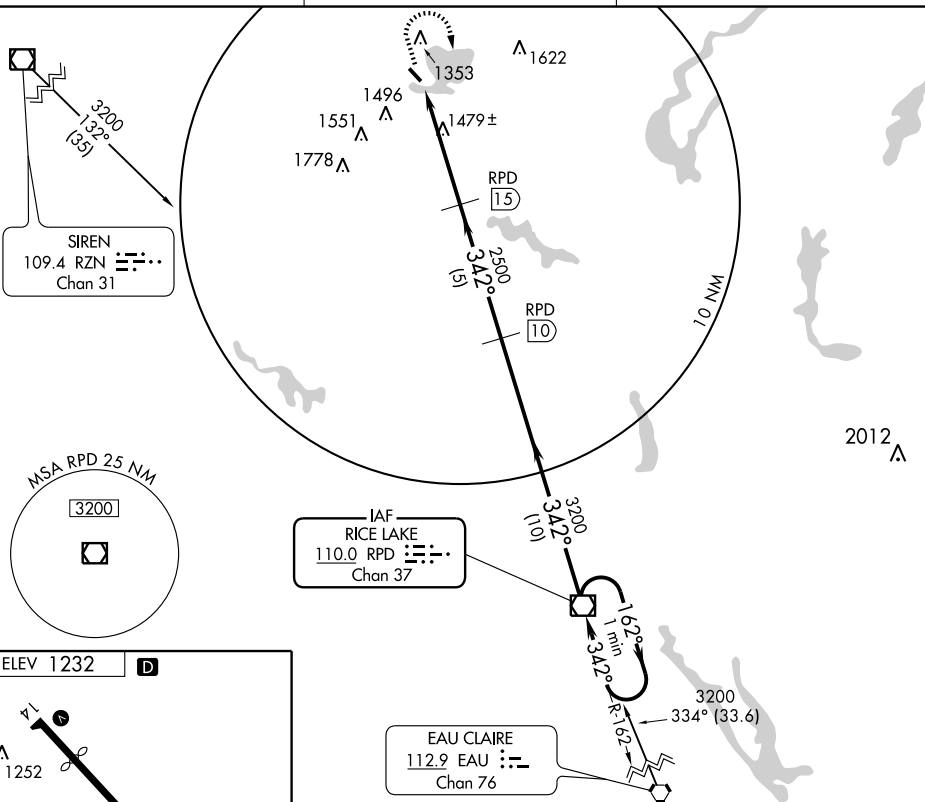

REIL Rwy 32 0
MIRL Rwy 14-32 0

SHELL LAKE, WISCONSIN
Orig 09351

45°44'N - 91°55'W

SHELL LAKE MUNI (SSQ)
VOR/DME RWY 32

SHELL LAKE MUNI (SSQ) 1 SE UTC-6(-5DT) N45°43.88' W91°55.24'

GREEN BAY

1233 B NOTAM FILE GRB

L-141

RWY 14-32: H3711X75 (ASPH) MIRL

IAP

RWY 14: PAPI(P2L)—GA 4.0° TCH 21'. Thld dspcd 619'. Trees.

RWY 32: REIL. PAPI(P2L)—GA 3.0° TCH 21'. Thld dspcd 211'. Boat.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 14: TORA-3711 TODA-3711 ASDA-3500 LDA-2881

RWY 32: TORA-3286 TODA-3711 ASDA-3711 LDA-3500

AIRPORT REMARKS: Unattended. Birds on and invof arpt. ACTIVATE MIRL

Rwy 14-32; PAPI Rwy 14 and Rwy 32; REIL Rwy 32—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RICE LAKE RCO 122.3 (FLIGHT SERVICES)


Ⓡ MINNEAPOLIS CENTER APP/DEP CON 126.45

GCO 121.725 (GREEN BAY FSS)

RADIO AIDS TO NAVIGATION: NOTAM FILE RPD.

RICE LAKE (T) VOR/DME 110.0 RPD Chan 37 N45°24.91'

W91°46.68' 341° 19.9 NM to fld. 1092/1E. OTS indef.

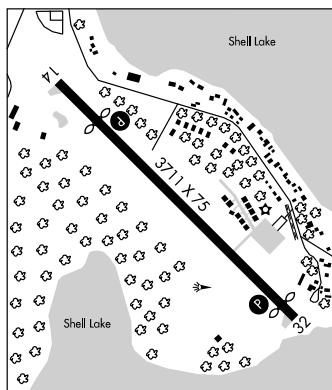

SHIOCTON (W34) 1 NE UTC-6(-5DT) N44°27.28' W88°33.71'

GREEN BAY

769 NOTAM FILE GRB

RWY 18-36: 2340X110 (TURF)

RWY 18: REIL(NSTD). Trees.

RWY 36: REIL(NSTD). Antenna.

RWY 09-27: 1415X110 (TURF)

RWY 09: Tree.

RWY 27: Road.

AIRPORT REMARKS: Unattended. Arpt CLOSED 15 Mar-25 Apr. Parachute Jumping. Ultralight activity on and invof arpt.

Deer activity on and invof arpt. Rwy 09-27 marked by orange and white barrels. Rwy 18-36 marked with orange

and white barrels. Rwy 18-36 NSTD REIL; solar powered. Rwy 18-36 cones marking drain ditch W of rwy where

Rwy 09-27 crosses.

COMMUNICATIONS: CTAF 122.9

SIREN N45°49.23' W92°22.47' NOTAM FILE RZN.

GREEN BAY

(L) VOR/DME 109.4 RZN Chan 31 at Burnett Co. 987/2E. HIWAS.

L-141

VOR unusable 125°-135° byd 25NM

DME unusable 115°-320° byd 25NM blo 4000'.

RCO 122.1 R 109.4T (GREEN BAY RADIO)

SIREN

BURNETT CO (RZN) 3 N UTC-6(-5DT) N45°49.36' W92°22.35'

GREEN BAY

989 B FUEL 100LL, JET A, MOGAS NOTAM FILE RZN

L-141

RWY 05-23: H3900X75 (ASPH) S-8 MIRL

IAP

RWY 05: REIL. PAPI(P2L)—GA 3.45 TCH 27'. Trees.

RWY 23: REIL. PAPI(P2L)—GA 3.0 TCH 28'. Road.

RWY 14-32: H3500X75 (ASPH) S-8 MIRL

RWY 14: REIL. PAPI(P2L)—GA 3.0 TCH 28'. Trees.

RWY 32: REIL. PAPI(P2L)—GA 3.45 TCH 26'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2230Z†, Sat-Sun

1500-2200Z†. Fuel 24 hr self svc. Occasional deer and bear on

rwy. Rwy 14 and Rwy 32 REIL OTS indef. ACTIVATE MIRL Rlys

05-23 and Rwy 14-32, REIL Rwy 05, Rwy 23, Rwy 14 and Rwy

32, and PAPI Rwy 05, Rwy 23 and Rwy 14 and Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.325 (715) 349-8563. HIWAS

109.4 RZN.

COMMUNICATIONS: CTAF/UNICOM 122.8

SIREN RCO 122.1R 109.4T (GREEN BAY RADIO)

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 121.05


RADIO AIDS TO NAVIGATION: NOTAM FILE RZN.

SIREN (L) VOR/DME 109.4 RZN Chan 31 N45°49.23'

W92°22.47' at fld. 987/2E. HIWAS.

BIG DOCTOR NDB (MHW) 203 BXR N45°49.28' W92°21.99' at fld.

NOTAM FILE GRB. VFR only.

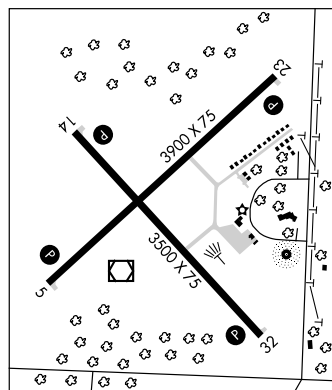

VOR/DME RZN 109.4 Chan 31	APP CRS 051°	Rwy Idg TDZE 989 Apt Elev 989	3900 989 989
---	------------------------	---	---

VOR or GPS RWY 5
SIREN/BURNETT COUNTY (RZN)


NA Obtain a local altimeter setting on CTAF; when not received, use Cambridge, MN altimeter setting.

MISSED APPROACH: Climbing right turn to 2800 in RZN VOR/DME holding pattern.



AWOS-3
118.325

MINNEAPOLIS CENTER
121.05 397.9

UNICOM
122.8 (CTAF)

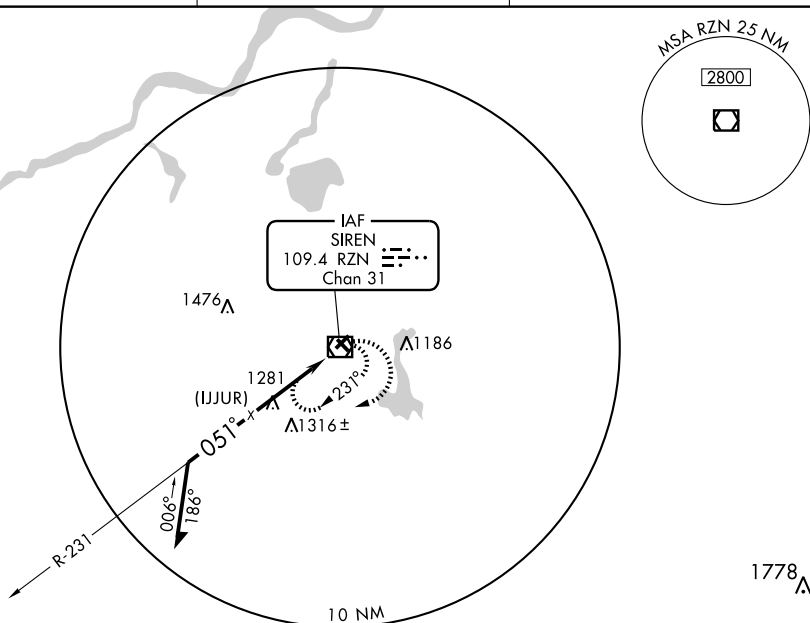


Remain
within 10 NM

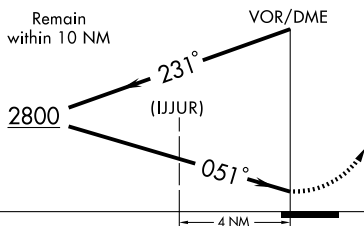

CATEGORY	A	B	C	D
S-5	1620-1 631 (700-1)		1620-1 3/4 631 (700-1 3/4)	1620-2 631 (700-2)
CIRCLING	1620-1 631 (700-1)		1620-1 3/4 631 (700-1 3/4)	1620-2 631 (700-2)
CAMBRIDGE, MN ALTIMETER SETTING MINIMUMS				
S-5	1720-1 731 (800-1)		1720-2 731 (800-2)	1720-2 1/4 731 (800-2 1/4)
CIRCLING	1720-1 731 (800-1)		1720-2 731 (800-2)	1720-2 1/4 731 (800-2 1/4)

ELEV 989



REIL Rwy 5, 14, 23 and 32
MIRL Rwy 5-23 and 14-32

SOLON SPRINGS

NORTH COUNTRY SPB (SS1) 1 E UTC-6(-5DT) N46°22.19' W91°47.88'

GREEN BAY

1000 NOTAM FILE GRB

WATERWAY 04-22: 6000X500 (WATER)

WATERWAY 09-27: 3500X500 (WATER)

SEAPLANE REMARKS: Unattended.

COMMUNICATIONS: CTAF 122.9

SOLON SPRINGS MUNI (OLG) 3 S UTC-6(-5DT) N46°18.89' W91°48.98'

GREEN BAY

1102 B S2 FUEL 100LL TPA-2102(1000) NOTAM FILE GRB

L-141

RWY 01-19: H3100X60 (ASPH) S-27 LIRL

IAP

RWY 01: Trees. RWY 19: Trees.

AIRPORT REMARKS: Unattended. Numerous deer on arpt. Acft mechanic on call 715-399-2171. LIRL Rwy 01-19 preset low ints dusk-dawn, ACTIVATE higher ints-CTAF. Twy to ramp from rwy marked by reflectors.

COMMUNICATIONS: CTAF 122.9

Ⓡ DULUTH APP/DEP CON 125.45 (1200-0500Z)

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 127.9 (0500-1200Z)


RADIO AIDS TO NAVIGATION: NOTAM FILE DLH.

DULUTH (H) VORTACW 112.6 DLH Chan 73 N46°48.13'

W92°12.17' 146° 33.3 NM to fld. 1428/5E. HIWAS.

NDB (MHW) 388 OLG N46°19.02' W91°48.84' at fld. NOTAM

FILE GRB. Unmonitored. SHUTDOWN.

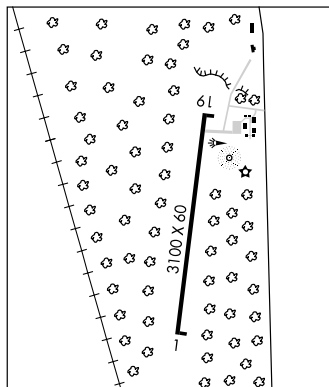

SOUTHERN WISCONSIN RGNL (See JANESVILLE)

SPARTA

SPARTA/FORT McCOY (CMY)(KCMY) CIV/MIL 3 NE UTC-6(-5DT) N43°57.50' W90°44.27'

CHICAGO

838 B FUEL 100LL NOTAM FILE CMY

L-28G

RWY 11-29: H4697X100 (ASPH) PCN 33 R/B/W/T MIRL

IAP

RWY 11: REIL. Trees. RWY 29: REIL. PVASI(PISR)-GA 3.0° TCH 65'. Thld displcd 432'. Road.

RWY 01-19: H4292X50 (ASPH) PCN 13 F/B/W/T MIRL 0.3% up S

RWY 01: Thld displcd 1328'. Road. RWY 19: Trees.

MILITARY SERVICE: FUEL J8 (Mil) (NC-100LL PPR) PPR C608-388-3721/3713, DSN 280-3721/3713.

AIRPORT REMARKS: Attended 1330-2200Z. Except national training holiday. PPR for fuel; call 608-269-3122.

Occasional wild game and birds on and invof arpt. ACTIVATE MIRL Rwy 01-19 and Rwy 11-29-CTAF. REIL Rwy 11 and Rwy 29 opr only when rwy lgts set on high ints.

MILITARY REMARKS: CAUTION Intermittent heavy C-130/high performance opr. Use advisory svc if avbl.

WEATHER DATA SOURCES: AWOS-3 118.375 (608) 269-0724.

COMMUNICATIONS: CTAF 124.6

Ⓡ VOLK APP/DEP CON 135.25 290.8 (Mon-Fri 1400-2200Z except holidays), other times etc,

Ⓡ CHICAGO CENTER APP/DEP CON 133.3 380.35

McCOY TOWER 38.5 124.6 241.0 (Mon-Fri 1400-2200Z exc Federal holidays) RANGE 43.15 46.8 124.6 247.4

GCO 121.725 (FLIGHT SERVICES)

AIRSPACE: CLASS D Mon-Fri 1400-2200Z exc Federal holidays, other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE LSE.

LA CROSSE (T) VORW/DME 108.4 LSE Chan 21 N43°52.57' W91°15.36' 075° 23 NM to fld. 650/2E.

McCOY NDB (MHW) 412 CMY N43°56.27' W90°38.51' 287° 4.3 NM to fld. NOTAM FILE CMY.

SPOONER

NEST OF EAGLES (1H9) 3E UTC-6(-5DT) N45°50.14' W91°48.17'

GREEN BAY

1120 B NOTAM FILE GRB Not insp.

RWY 01-19: 3600X100 (TURF)

RWY 01: Trees. RWY 19: Trees.

AIRPORT REMARKS: Unattended. Snow not plowed winter months, turf cut and maintained summer months.

COMMUNICATIONS: CTAF 122.9

NDB OLG 388	APP CRS 181°	Rwy Idg TDZE Apt Elev	3100 1102 1102
-----------------------	------------------------	-----------------------------	---

NDB RWY 19


SOLOON SPRINGS MUNI (OLG)

▲ NA Use Duluth/Sky Harbor altimeter setting.



MISSED APPROACH: Climb to 3000 then right turn direct OLG NDB and hold.

DULUTH APP CON ★
125.45 255.9

UNICOM
122.9 (CTAF) 0

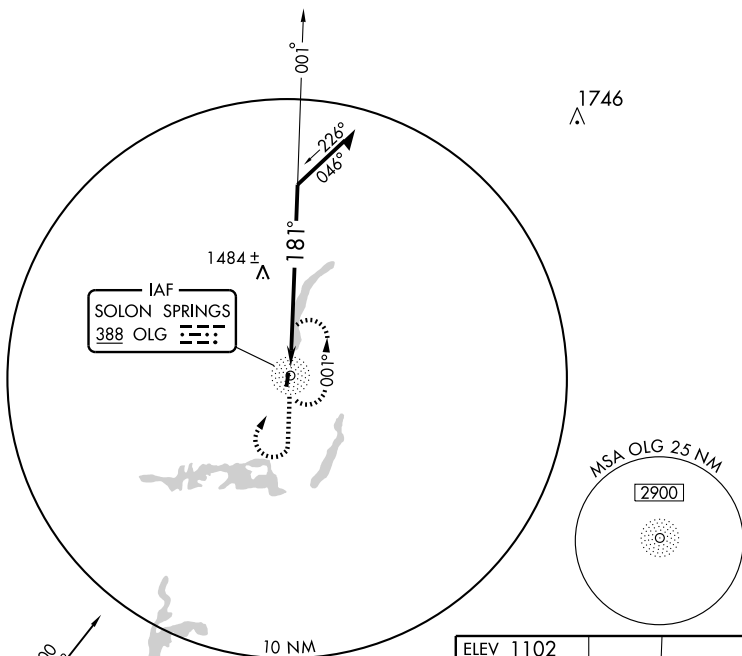

SIREN
109.4 RZN
Chan 31

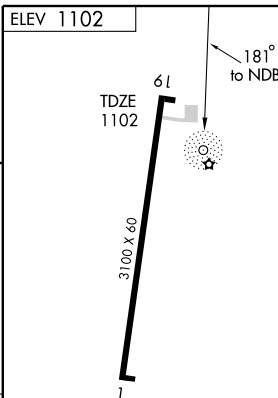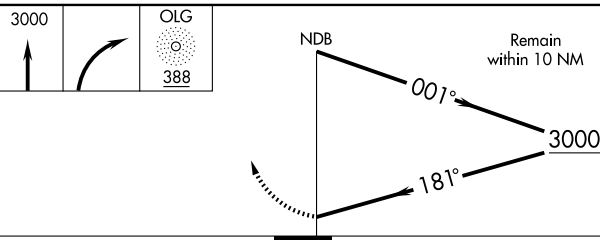

CATEGORY	A	B	C	D
S-19	2020-1¼ 918 (1000-1¼)		2020-2¾ 918 (1000-2¾)	NA
CIRCLING	2020-1¼ 918 (1000-1¼)		2020-2¾ 918 (1000-2¾)	NA

LIRL Rwy 1-19 0

Knots	60	90	120	150	180
Min:Sec					

APP CRS **187°**
Rwy ldg **3100**
TDZE **1102**
Apt Elev **1102**

RNAV (GPS) RWY 19

SOLOM SPRINGS MUNI (OLG)


▲ NA

Use Duluth/Sky Harbor altimeter setting.
GPS or RNP-0.3 Required.
DME/DME RNP-0.3 NA



MISSED APPROACH: Climbing right turn to 2800
direct HEBON WP and hold.

DULUTH APP CON ★
125.45 255.9


UNICOM
122.9 (CTAF) 0

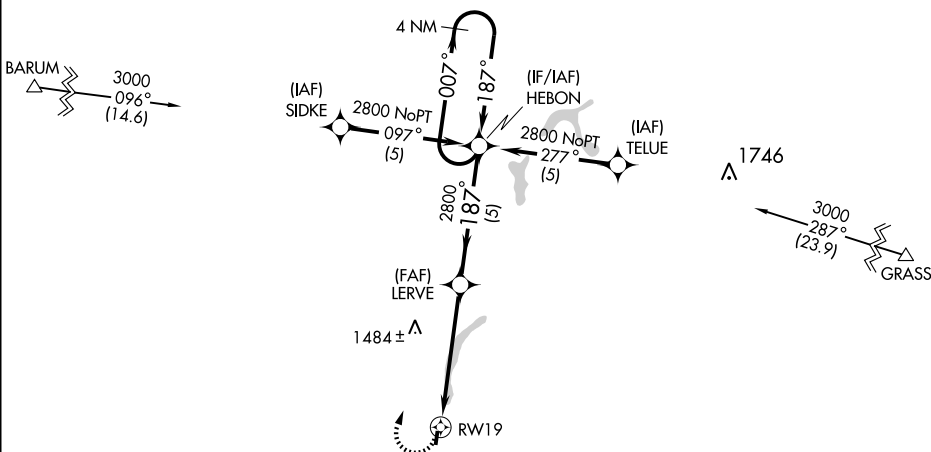

ELEV 1102



4 NM
Holding Pattern

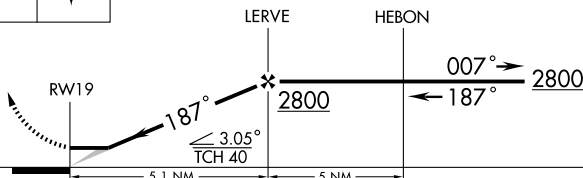

CATEGORY	A	B	C	D
LNAV MDA	1800-1	698 (700-1)	1800-2 698 (700-2)	NA
CIRCLING	1800-1	698 (700-1)	1800-2 698 (700-2)	NA

LIRL Rwy 1-19 0

SOLON SPRINGS

NORTH COUNTRY SPB (SS1) 1 E UTC-6(-5DT) N46°22.19' W91°47.88'

GREEN BAY

1000 NOTAM FILE GRB

WATERWAY 04-22: 6000X500 (WATER)

WATERWAY 09-27: 3500X500 (WATER)

SEAPLANE REMARKS: Unattended.

COMMUNICATIONS: CTAF 122.9

SOLON SPRINGS MUNI (OLG) 3 S UTC-6(-5DT) N46°18.89' W91°48.98'

GREEN BAY

1102 B S2 FUEL 100LL TPA-2102(1000) NOTAM FILE GRB

L-141

RWY 01-19: H3100X60 (ASPH) S-27 LIRL

IAP

RWY 01: Trees. RWY 19: Trees.

AIRPORT REMARKS: Unattended. Numerous deer on arpt. Acft mechanic on call 715-399-2171. LIRL Rwy 01-19 preset low ints dusk-dawn, ACTIVATE higher ints-CTAF. Twy to ramp from rwy marked by reflectors.

COMMUNICATIONS: CTAF 122.9

Ⓡ DULUTH APP/DEP CON 125.45 (1200-0500Z)

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 127.9 (0500-1200Z)


RADIO AIDS TO NAVIGATION: NOTAM FILE DLH.

DULUTH (H) VORTACW 112.6 DLH Chan 73 N46°48.13'

W92°12.17' 146° 33.3 NM to fld. 1428/5E. HIWAS.

NDB (MHW) 388 OLG N46°19.02' W91°48.84' at fld. NOTAM

FILE GRB. Unmonitored. SHUTDOWN.

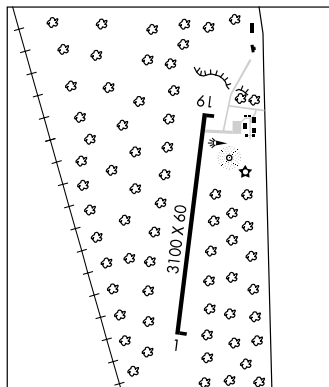

SOUTHERN WISCONSIN RGNL (See JANESVILLE)

SPARTA

SPARTA/FORT McCOY (CMY)(KCMY) CIV/MIL 3 NE UTC-6(-5DT) N43°57.50' W90°44.27'

CHICAGO

838 B FUEL 100LL NOTAM FILE CMY

L-28G

RWY 11-29: H4697X100 (ASPH) PCN 33 R/B/W/T MIRL

IAP

RWY 11: REIL. Trees. RWY 29: REIL. PVASI(PISR)-GA 3.0° TCH 65'. Thld displcd 432'. Road.

RWY 01-19: H4292X50 (ASPH) PCN 13 F/B/W/T MIRL 0.3% up S

RWY 01: Thld displcd 1328'. Road. RWY 19: Trees.

MILITARY SERVICE: FUEL J8 (Mil) (NC-100LL PPR) PPR C608-388-3721/3713, DSN 280-3721/3713.

AIRPORT REMARKS: Attended 1330-2200Z. Except national training holiday. PPR for fuel; call 608-269-3122.

Occasional wild game and birds on and invof arpt. ACTIVATE MIRL Rwy 01-19 and Rwy 11-29-CTAF. REIL Rwy 11 and Rwy 29 opr only when rwy lgts set on high ints.

MILITARY REMARKS: CAUTION Intermittent heavy C-130/high performance opr. Use advisory svc if avbl.

WEATHER DATA SOURCES: AWOS-3 118.375 (608) 269-0724.

COMMUNICATIONS: CTAF 124.6

Ⓡ VOLK APP/DEP CON 135.25 290.8 (Mon-Fri 1400-2200Z except holidays), other times etc,

Ⓡ CHICAGO CENTER APP/DEP CON 133.3 380.35

McCOY TOWER 38.5 124.6 241.0 (Mon-Fri 1400-2200Z exc Federal holidays) RANGE 43.15 46.8 124.6 247.4

GCO 121.725 (FLIGHT SERVICES)

AIRSPACE: CLASS D Mon-Fri 1400-2200Z exc Federal holidays, other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE LSE.

LA CROSSE (T) VORW/DME 108.4 LSE Chan 21 N43°52.57' W91°15.36' 075° 23 NM to fld. 650/2E.

McCOY NDB (MHW) 412 CMY N43°56.27' W90°38.51' 287° 4.3 NM to fld. NOTAM FILE CMY.

SPOONER

NEST OF EAGLES (1H9) 3E UTC-6(-5DT) N45°50.14' W91°48.17'

GREEN BAY

1120 B NOTAM FILE GRB Not insp.

RWY 01-19: 3600X100 (TURF)

RWY 01: Trees. RWY 19: Trees.

AIRPORT REMARKS: Unattended. Snow not plowed winter months, turf cut and maintained summer months.

COMMUNICATIONS: CTAF 122.9

NDB CMY	APP CRS	Rwy Idg	4265
<u>412</u>	287°	TDZE	832
		Apt Elev	837

NDB RWY 29
SPARTA/ FORT MC COY (CMY)

NA Procedure not authorized when R-6901B active.



MISSED APPROACH: Climb to 2100 then climbing left turn to 3200 direct CMY NDB and hold.


AWOS-3
118.375


VOLK APP CON ★
135.25 290.8

SPARTA TOWER ★
124.6(CTAF) 229.4

GCO
121.725

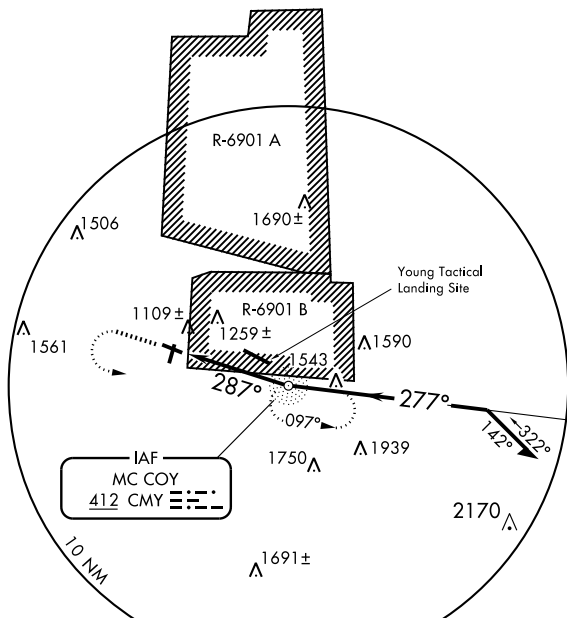


3200 HURST
270° — 
(19)

DELLS
117.0 DLL 
Chan 117

3200
299°
(44.7)


ELEV 837



REIL Rwys 11 and 29 **L**
MIRL Rwys 1-19 and 11-29 **L**

FAF to MAP 4 NM

Knots	60	90	120	150	180
Min:Sec	4:00	2:40	2:00	1:36	1:20

SPARTA, WISCONSIN
Amdt 3 10266

NDB

Remain
within 10 NM

3200

VGSI and descent angles not coincident.

CATEGORY	A	B	C	D
S-29	1560-1	728 (800-1)	1560-2 728 (800-2)	1560-2¼ 728 (800-2¼)
CIRCLING	1560-1	723 (800-1)	1560-2 723 (800-2)	1620-2½ 783 (800-2½)

SPARTA/ FORT MC COY (CMY)

NDB RWY 29

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

43° 58' N-90° 44' W

APP CRS **112°**
Rwy Idg **4697**
TDZE **830**
Apt Elev **837**

RNAV (GPS) RWY 11

SPARTA/ FORT MC COY (CMY)

GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA.
Procedure not authorized when R-6901B active.
IAF ARM approach mode prior to IAF.



MISSED APPROACH: Climb to 1600 then climbing right turn to 3000 direct BOOTY WP and hold.

AWOS-3
118.375


VOLK APP CON ★
135.25 290.8

SPARTA TOWER ★
124.6 (CTAF) 0 229.4

GCO
121.725

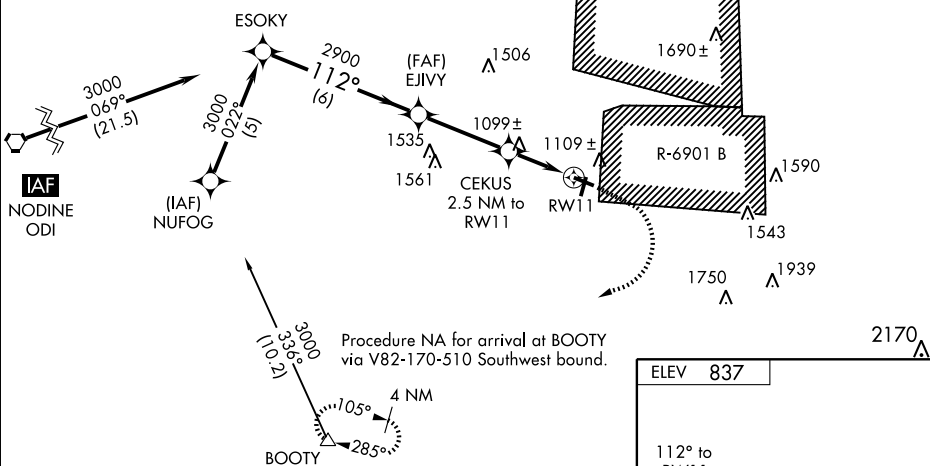

CATEGORY	ESOKY		EJVY		CEKUS		RW11	
	A	B	C	D	A	B	C	D
LNVA MDA	1360-1	530 (600-1)	1360-1½	1360-1¾	530 (600-1½)	530 (600-1¾)	530 (600-1½)	530 (600-1¾)
CIRCLING	1520-1	1540-1	1560-2	1620-2½	683 (700-1)	703 (800-1)	723 (800-2)	783 (800-2½)

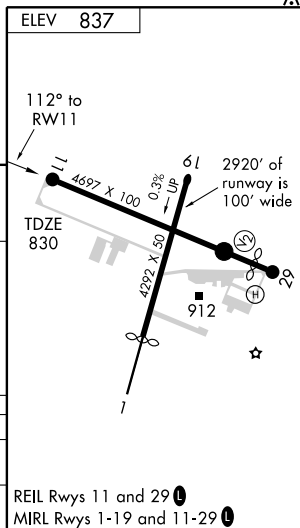

APP CRS	Rwy Idg	4265
292°	TDZE	832
	Apt Elev	837

RNAV (GPS) RWY 29

SPARTA/ FORT MC COY (CMY)

▽ GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA.
△ NA Procedure not authorized when R-6901B active.



MISSED APPROACH: Climb to 1600 then climbing left turn to 3000 direct BOOTY WP and hold.

AWOS-3
118.375

VOLK APP CON ★
135.25 290.8



SPARTA TOWER ★
124.6 (CTAF) 229.4

GCO
121.725

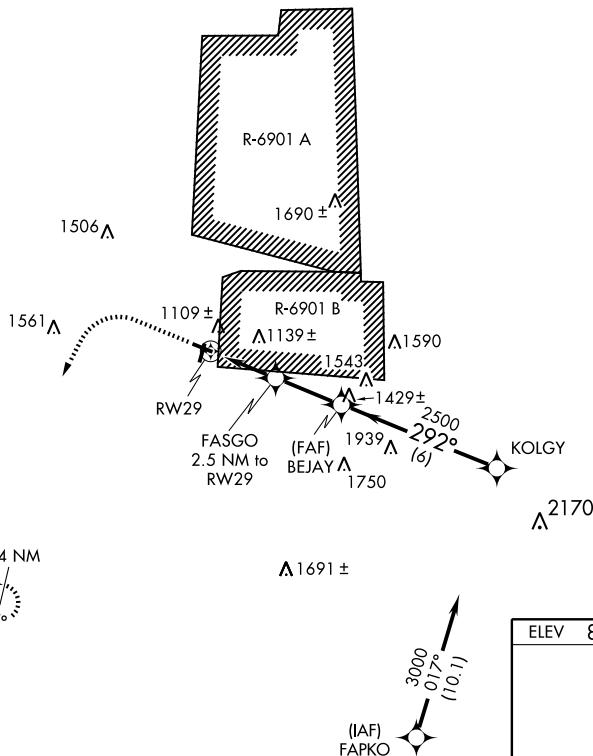

1600
3000
BOOTY

Procedure
Turn
NA

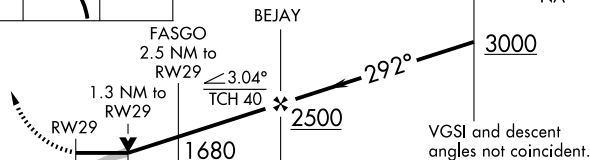

CATEGORY	A	B	C	D
LNVA MDA	1300-1	468 (500-1)	1300-1½ 468 (500-1½)	1300-1½ 468 (500-1½)
CIRCLING	1520-1 683 (700-1)	1540-1 703 (800-1)	1560-2 723 (800-2)	1620-2½ 783 (800-2½)

REIL Rwy 11 and 29
MIRL Rwy 1-19 and 11-29

STEVENS POINT MUNI (STE) 3 NE UTC-6(-5DT) N44°32.71' W89°31.82'

1110 B S4 FUEL 100LL, JET A TPA-2110(1000) NOTAM FILE STE

RWY 03-21: H6028X120 (ASPH) S-30, D-75, 2D-195 HIRL

RWY 03: REIL. PAPI(P2L)—GA 3.0° TCH 38'. Trees.

RWY 21: MALS. PAPI(P2L)—GA 3.0° TCH 37'. Tree.

RWY 12-30: H3635X75 (ASPH) S-9 D-75 HIRL

RWY 12: Road. RWY 30: Trees.

AIRPORT REMARKS: Attended daltg hrs. Fuel 24 hr self svc. Deer and migratory waterfowl on and invof arpt. ACTIVATE HIRL Rwy 03-21 and Rwy 12-30 and MALS Rwy 21 and REIL Rwy 03 and PAPI Rwys 03 and 21—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.275 (715) 344-5960.

HIWAS 110.6 STE.

COMMUNICATIONS: CTAF/UNICOM 122.7

RCO 122.1R 110.6T (GREEN BAY RADIO)

⑦ MINNEAPOLIS CENTER APP/DEP CON 124.4

RADIO AIDS TO NAVIGATION: NOTAM FILE STE.

(L) VORTAC 110.6 STE Chan 43 N44°32.60'

W89°31.83' at fld. 1110/2E. HIWAS.


DME unusable byd 35 NM blo 3000'.

ILS/DME 111.35 I-STE Chan 50Y Rwy 21.

GREEN BAY

H-2K, L-14J

IAP

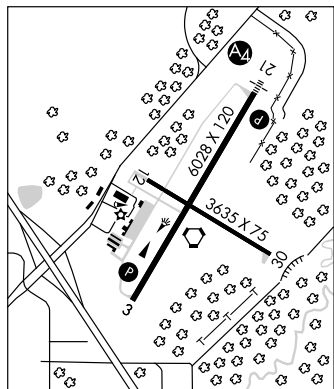**STOUGHTON****QUAMS MARINA SPB** (99C) 3 NW UTC-6(-5DT) N42°57.07' W89°16.26'

843 FUEL MOGAS TPA-1843(1000) NOTAM FILE GRB

WATERWAY ALL WAY: 15000X4000 (WATER)

SEAPLANE REMARKS: Attended Apr-Oct Mon-Fri 1400-0000Z†, Sat 1500-2300Z†, Sun 1500-2200Z†, Nov-Mar irregularly.

COMMUNICATIONS: CTAF 122.9

CHICAGO

STURGEON BAY N44°50.21' W87°25.35' NOTAM FILE SUE.

NDB (MHW) 414 SUE at Door Co Cherryland.

GREEN BAY

L-31B

STURGEON BAY**DOOR CO CHERRYLAND** (SUE) 2 W UTC-6(-5DT) N44°50.62' W87°25.29'

725 B S4 FUEL 100LL, JET A NOTAM FILE SUE

RWY 02-20: H4600X75 (ASPH) S-16, D-22 MIRL 0.4% up S

RWY 02: LDIN. REIL. PAPI(P4L)—GA 3.0° TCH 32'. Road.

RWY 20: REIL. PAPI(P4L)—GA 3.0° TCH 46'. Trees.

RWY 10-28: H3199X75 (ASPH) S-16, D-22 MIRL

RWY 10: REIL. PAPI(P4L)—GA 3.0° TCH 31'. Road.

RWY 28: REIL. PAPI(P4L)—GA 3.0° TCH 37'. Trees.

AIRPORT REMARKS: Attended Mon-Sat 1300-2200Z†, Sun 1600-2200Z†. Except summer hrs from Labor Day—Memorial Day Fri and Sat 1300-0000Z†, Sun 1500-2200Z†. After hrs fueling avbl, ctc 920-743-6952. Be Alert: No line of sight Rwy 02 to Rwy 20. Deer, turkeys and seagulls occasionally on arpt. Ultralight activity on and invof arpt. Group of five twrs approximately 4 NM northeast, tallest twr is 1300' MSL/489' AGL. ACTIVATE MIRL Rwys 02-20 and 10-28; PAPI Rwys 02, 20, 10 and 28; REIL Rwys 02; 20; 10 and 28; LDIN Rwy 02—CTAF.

WEATHER DATA SOURCES: AWOS-3 128.325 (920) 743-7087**COMMUNICATIONS:** CTAF/UNICOM 122.7

⑦ GREEN BAY APP/DEP CON 119.25 (1130-0530Z†)

⑦ MINNEAPOLIS CENTER APP/DEP CON 125.55 (0530-1130Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE GRB.

GREEN BAY (H) VORTACW 115.5 GRB Chan 102 N44°33.31' W88°11.69' 061° 37.3 NM to fld. 767/1E. HIWAS.

FICHY NDB (LOM) 224 II N44°45.36' W87°26.95' 016° 5.4 NM to fld. Unmonitored.

STURGEON BAY NDB (MHW) 414 SUE N44°50.21' W87°25.35' at fld. NOTAM FILE SUE.

SDF 111.9 III Rwy 02. LOM FICHY NDB. SDF unusable byd 12° left of course. Unmonitored.

GREEN BAY

L-31B

IAP

LOC/DME I-STE 111.35 Chn 50 (Y)	APP CRS 211°	Rwy Idg 6028 TDZE 1110 Apt Elev 1110
---	------------------------	---

ILS or LOC RWY 21
STEVENS POINT MUNI (STE)

T
A NA

Inoperative table does not apply to S-LOC 21 Cat C.
When local altimeter setting not received, use Mosinee altimeter setting and increase all DA and all UKENE FIX minimums MDA 60 feet, increase S-ILS 21 all Cats visibility $\frac{1}{4}$ mile. UKENE FIX minimums: increase S-LOC 21 Cat D and Circling Cats C and D visibility $\frac{1}{4}$ mile. VDP NA when using Mosinee altimeter setting.



MALS



MISSED APPROACH: Climb to 2800 then left turn direct STE VORTAC and hold.

AWOS-3
119.275

MINNEAPOLIS CENTER
124.4 317.7

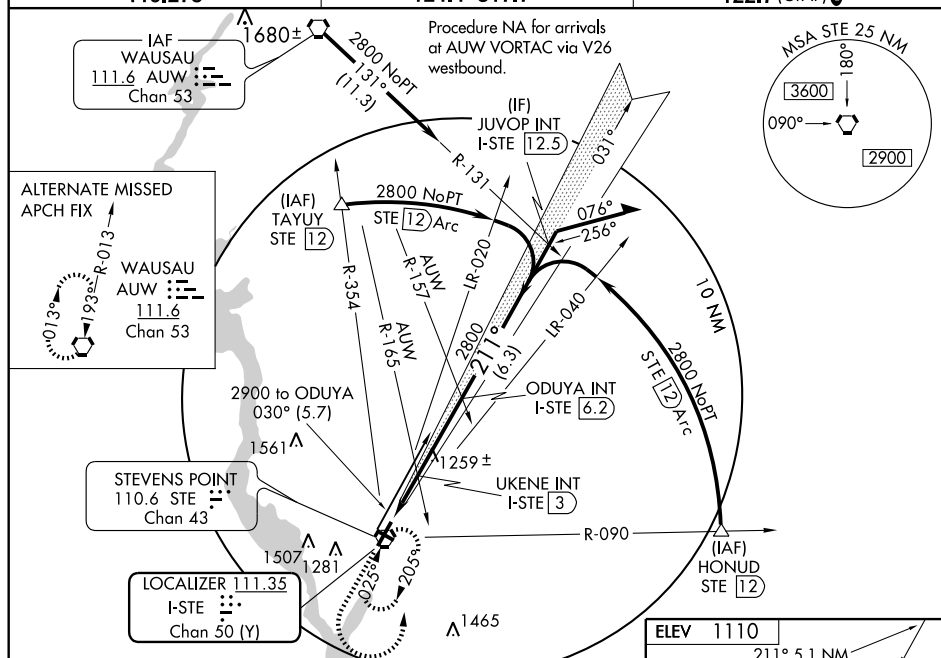UNICOM
122.7 (CTAF) 

2800		STE 
------	---	--

Use I-STE DME when on localizer course.


I-STE		UKENE INT	
I-STE	2.3	I-STE	3

Remain
within 10 NM

GS 3.00°
TCH 44

VGSI and ILS glidepath not coincident

CATEGORY	A	B	C	D
S-ILS 21	1310-3/4 200 (200-3/4)			
S-LOC 21	1760-3/4 650 (700-3/4)	1760-13/4 650 (700-13/4)	1760-2 650 (700-2)	
CIRCLING	1760-1 650 (700-1)	1760-13/4 650 (700-13/4)	1800-21/4 690 (700-21/4)	
UKENE FIX MINIMUMS				
S-LOC 21	1520-3/4 410 (500-3/4)	1520-11/4 410 (500-11/4)		
CIRCLING	1580-1 470 (500-1)	1660-11/2 550 (600-11/2)	1800-2 690 (700-2)	

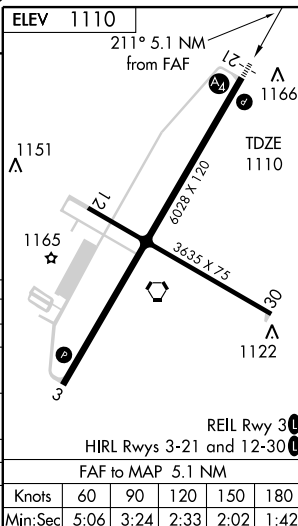

STEVENS POINT, WISCONSIN

Orig-A 10210

44°33'N - 89°32'W

STEVENS POINT MUNI (STE)
ILS or LOC RWY 21

EC-3. 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

WAAS CH 77910 W03A	APP CRS 031°	Rwy Idg 6028 TDZE 1108 Apt Elev 1110
--	------------------------	---

RNAV (GPS) RWY 3


STEVENS POINT MUNI (STE)

STEVEN'S POINT MUNI (STE)


<p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Mosinee altimeter setting and increase LPV DA to 1468 feet, LNAV/VNAV DA to 1643, increase all MDA 60 feet, increase LPV and LNAV/VNAV visibility all Cats. ¼ mile, increase LNAV Cat. C visibility ¼ mile and Circling Cat. C and D visibility ¼ mile. VDP and Baro-VNAV NA when using Mosinee altimeter setting.</p>	<p>MISSED APPROACH: Climb to 2900 direct JUVOP and hold.</p>
---	---

AWOS-3
119.275


MINNEAPOLIS CENTER
124.4 317.7

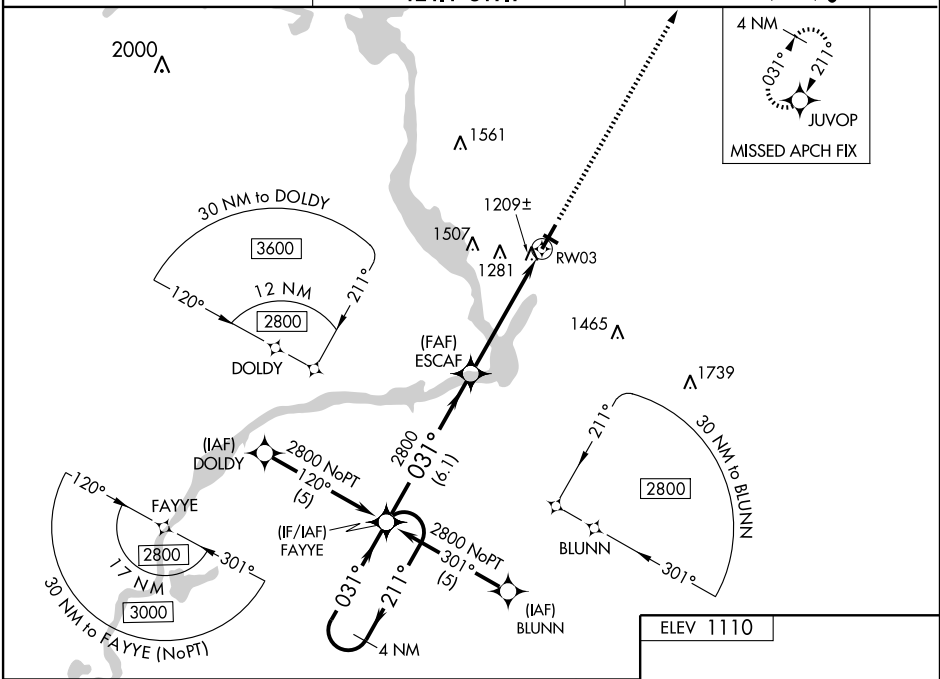UNICOM
122.7 (CTAF) **L**

4 NM
Holding Pattern

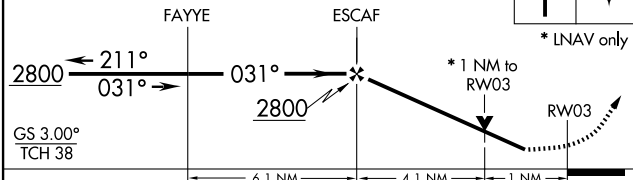

CATEGORY	A	B	C	D
LPV DA	1409-1 301 (300-1)			
INAV/ VNAV DA	1584-1 ³ / ₄ 476 (500-1 ³ / ₄)			
INAV MDA	1460-1 352 (400-1)			1460-1 ¹ / ₄ 352 (400-1 ¹ / ₄)
CIRCLING	1580-1 470 (500-1)		1660-1 ¹ / ₂ 550 (600-1 ¹ / ₂)	1800-2 ¹ / ₄ 690 (700-2 ¹ / ₄)

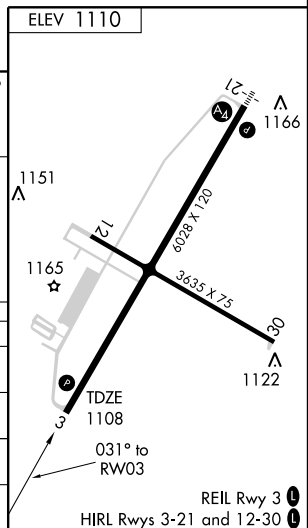

STEVENS POINT, WISCONSIN
Orig 10210

44°33'N - 89°32'W

STEVENS POINT MUNI (STE)
RNAV (GPS) RWY 3

HIRL Rwy 3-21 and 12-30 **L**

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

APP CRS **121°**
Rwy Idg **3635**
TDZE **1108**
Apt Elev **1110**

RNAV (GPS) RWY 12

STEVENS POINT MUNI (STE)




▼ DME/DME RNP-0.3 NA. Procedure NA at night. Visibility reduction by helicopters NA.
▲ When local altimeter setting not received, use Mosinee altimeter setting and increase all MDA 60 feet, increase LNAV Cat C and D visibility $\frac{1}{4}$ mile and Circling Cat C and D visibility $\frac{1}{4}$ mile.

MISSED APPROACH: Climb to 3000 direct SAJSI and hold.

AWOS-3
119.275

MINNEAPOLIS CENTER
124.4 317.7

UNICOM
122.7 (CTAF) 0

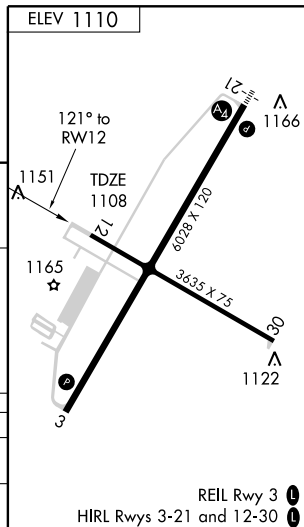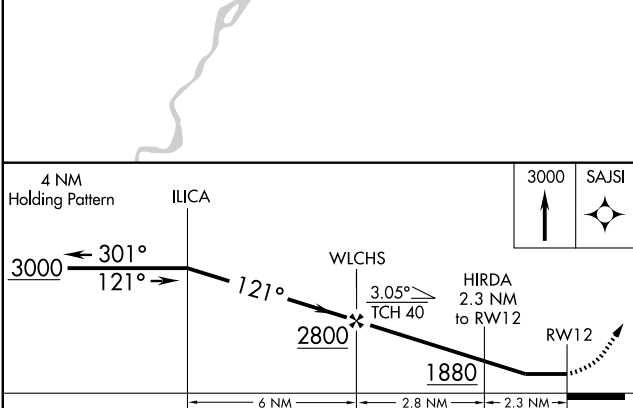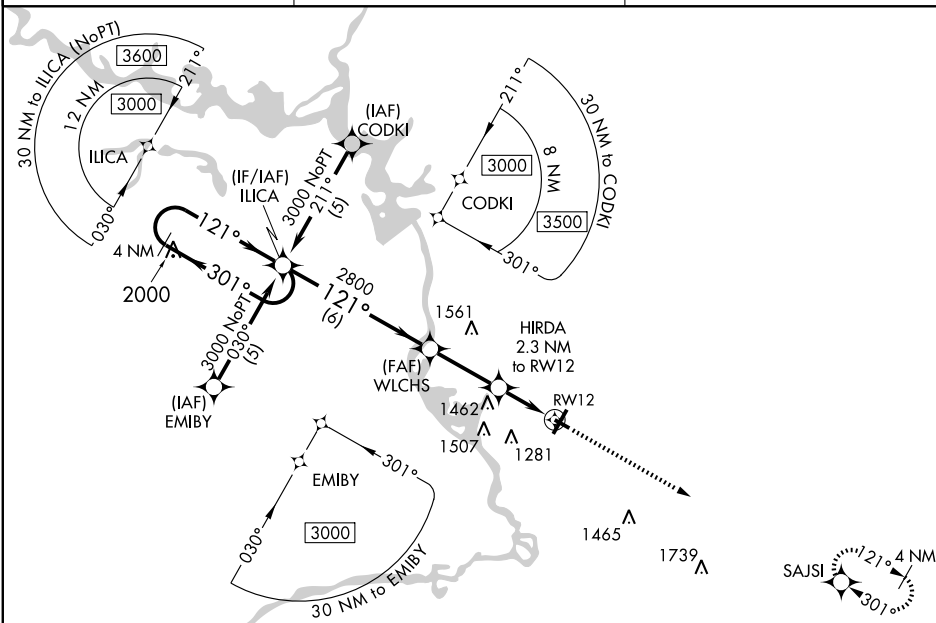

CATEGORY	A	B	C	D
LNAV MDA	1760-1 652 (700-1)	1760-1 $\frac{3}{4}$ 652 (700-1 $\frac{3}{4}$)	1760-2 652 (700-2)	1760-2 652 (700-2)
CIRCLING	1760-1 650 (700-1)	1760-1 $\frac{3}{4}$ 650 (700-1 $\frac{3}{4}$)	1800-2 $\frac{1}{4}$ 690 (700-2 $\frac{1}{4}$)	1800-2 $\frac{1}{4}$ 690 (700-2 $\frac{1}{4}$)

WAAS CH 86511 W21A	APP CRS 211°	Rwy Idg TDZE Apt Elev	6028 1110 1110
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21

STEVENS POINT MUNI (STE)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Mosinee altimeter setting and increase LPV DA to 1369, LNAV/VNAV DA to 1516, all MDA 60 feet, and increase LPV and LNAV/VNAV visibility all Cats. ¼ mile, increase LNAV Cat. D visibility ¼ mile and Circling Cat. C and D visibility ¼ mile. VDP and Baro-VNAV NA when using Mosinee altimeter setting. Inoperative table does not apply to LNAV/VNAV all Cats. and LNAV Cat. C.

MAIS






MISSED APPROACH:
Climb to 2800 direct
FAYYE and hold.

AWOS-3
119.275

MINNEAPOLIS CENTER
124.4 317.7

UNICOM
122.7 (CTAF) 1

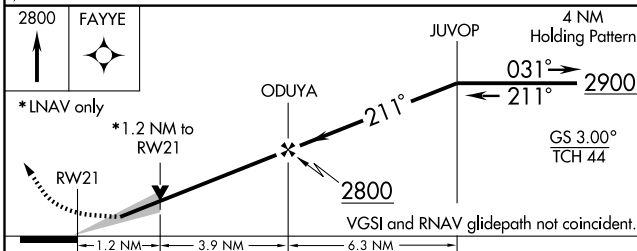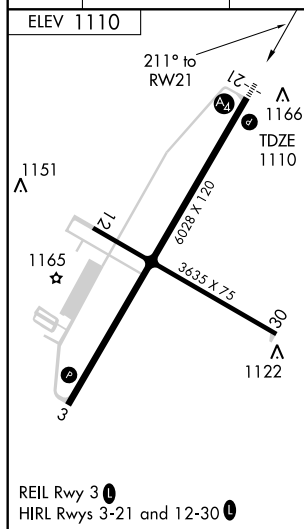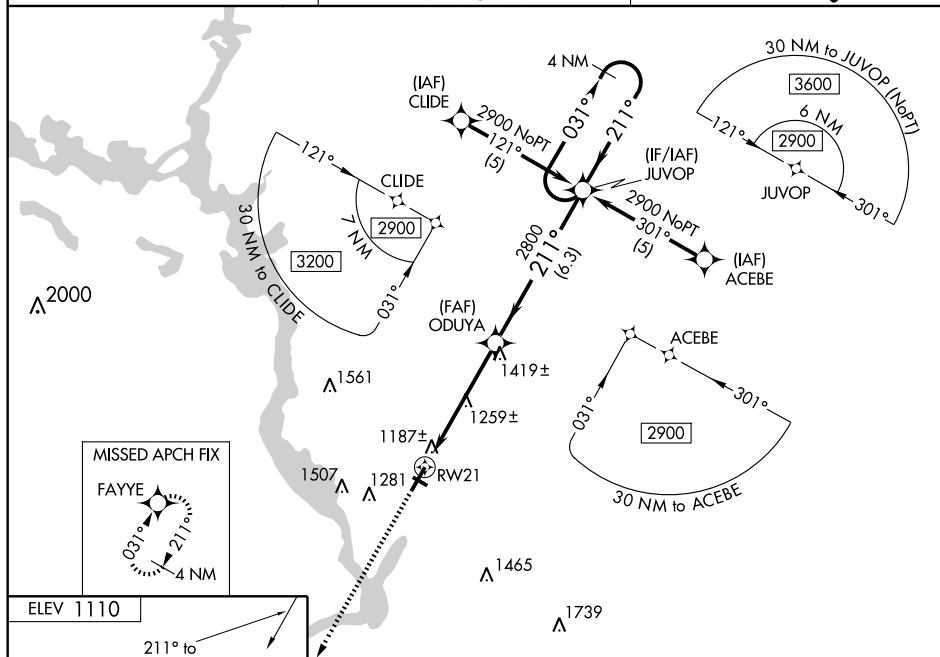

CATEGORY	A	B	C	D
LPV DA	1310-3/4 200 (200-3/4)			
LNAV/VNAV DA	1457-1 347 (400-1 1/4)			
LNAV MDA	1520-3/4 410 (500-3/4)		1520-1 410 (500-1 1/4)	
CIRCLING	1580-1 470 (500-1)		1660-1 1/2 550 (600-1 1/2) 1800-2 1/4 690 (700-2 1/4)	

APP CRS **301°**
Rwy Idg **3635**
TDZE **1108**
Apt Elev **1110**

RNAV (GPS) RWY 30

STEVENS POINT MUNI (STE)


▼ DME/DME RNP-0.3 NA. Procedure NA at night. Visibility reduction by helicopters NA.
▲ When local altimeter setting not received, use Mosinee altimeter setting and increase all MDA 60 feet, increase LNAV Cat D visibility ¼ mile and Circling Cat C and D visibility ¼ mile.

MISSED APPROACH:
Climbing left turn to 3000
direct SAJSI and hold.



AWOS-3
119.275

MINNEAPOLIS CENTER
124.4 317.7

UNICOM
122.7 (CTAF) 0

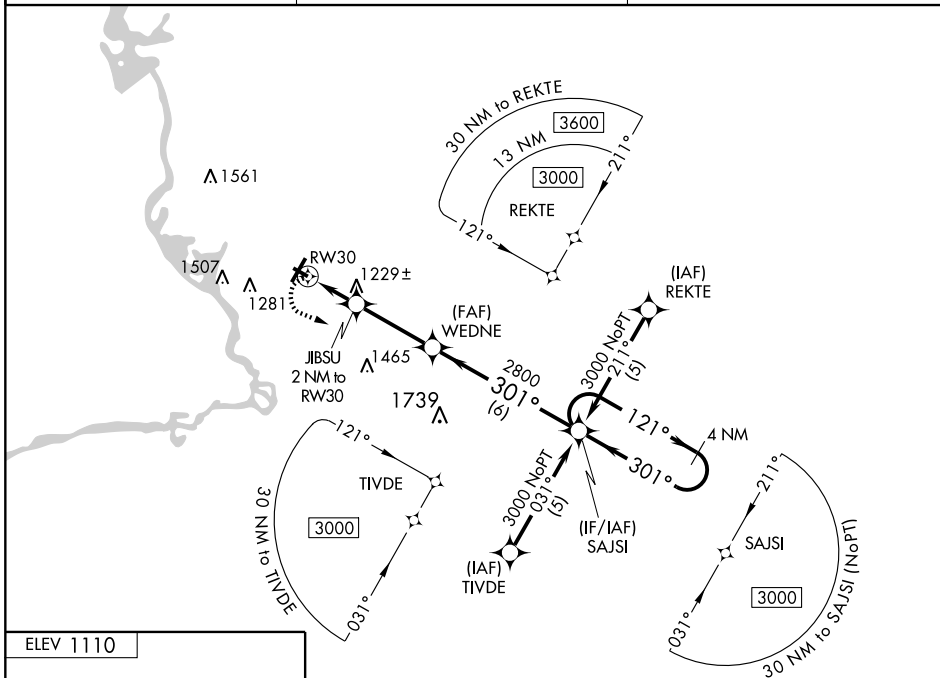

ELEV 1110

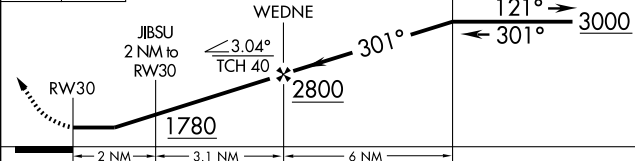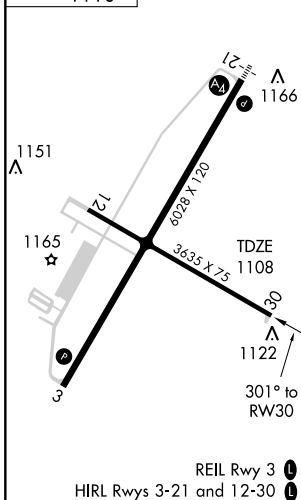

CATEGORY	A	B	C	D
LNAV MDA	1520-1	412 (500-1)	1520-1¼	412 (500-1¼)
CIRCLING	1580-1	470 (500-1)	1660-1½ 550 (600-1½)	1800-2¼ 690 (700-2¼)

VORTAC STE	APP CRS	Rwy Idg	6028
110.6		TDZE	1108
Chan 43	038°	Apt Elev	1110

VOR/DME RWY 3
STEVENS POINT MUNI (STE)


T
A Visibility reduction by helicopters NA. When local altimeter setting not received, use Mosinee altimeter setting and increase all MDA 60 feet and increase Circling Cat. C and D visibility $\frac{1}{4}$ mile. VDP NA when using Mosinee altimeter setting.

MISSED APPROACH: Climb to 2800, then left turn direct STE VORTAC and hold.

AWOS-3
119.275

MINNEAPOLIS CENTER
124.4 317.7

UNICOM
122.7 (CTAF) **L**

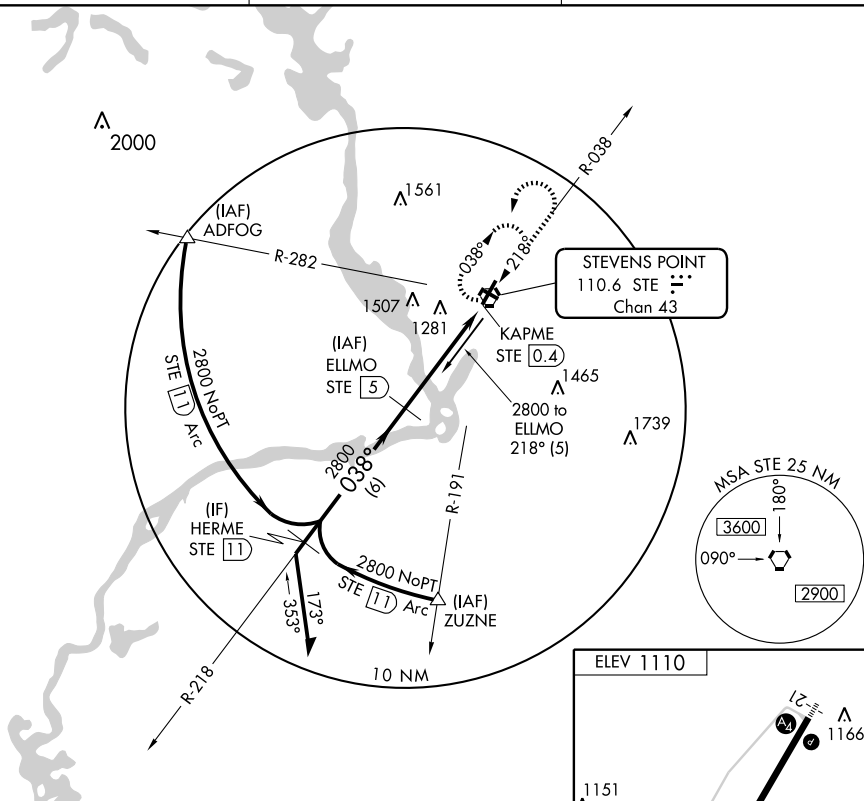


Remain
within 10 NM

2800 0200

VGSI and descent angles not coincident.

CATEGORY	A	B	C	D
S-3	1540-1	432 (500-1)	1540-1¼ 432 (500-1¼)	1540-1½ 432 (500-1½)
CIRCLING	1580-1	470 (500-1)	1660-1½ 550 (600-1½)	1800-2¼ 690 (700-2¼)

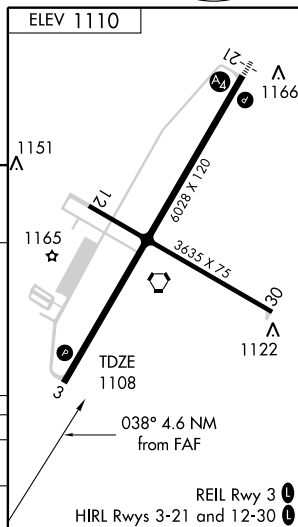

STEVENS POINT, WISCONSIN
Amdt 15 10210

44°33'N - 89°32'W

STEVENS POINT MUNI (STE)
VOR/DME RWY 3

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

VORTAC STE	APP CRS	Rwy Idg	6028
110.6	205°	TDZE	1110
Chan 43		Apt Elev	1110

VOR/DME RWY 21

STEVENS POINT MUNI (STE)

When local altimeter setting not received, use Mosinee altimeter setting and increase all MDA 60 feet and increase S-21 Cat. C visibility $\frac{1}{2}$ mile, Cat. D visibility $\frac{1}{4}$ mile and Circling Cat. C and D visibility $\frac{1}{4}$ mile. Inoperative table does not apply to Cat. C when using Mosinee altimeter setting. VDP NA when using Mosinee altimeter setting.

MAIS


(A) -

MISSED APPROACH:
Climb to 2800 then left turn direct STE VORTAC and hold.

AWOS-3
119.275

MINNEAPOLIS CENTER
124.4 317.7

UNICOM
122.7 (CTAF) 0

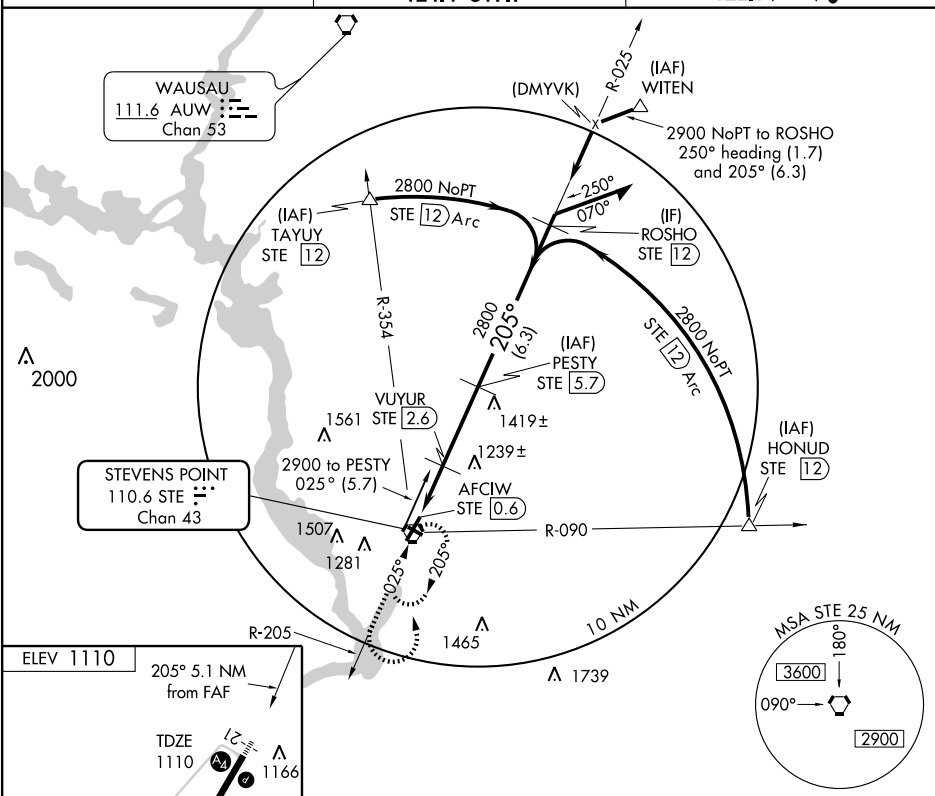

2000

ELEV 1110

1151


1165

REIL Rwy 3 0

HIRL Rwys 3-21 and 12-30 0

STEVENS POINT, WISCONSIN

Amdt 19 10210

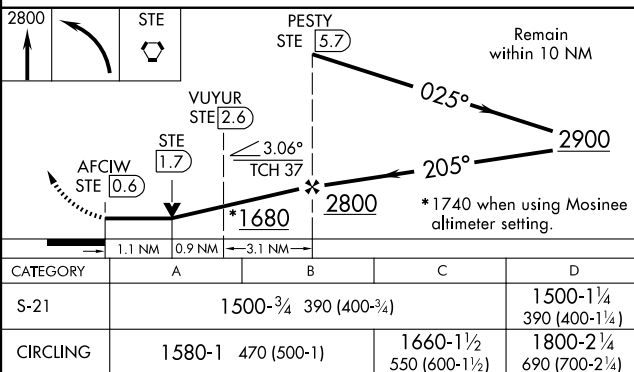

STEVENS POINT MUNI (STE)

VOR/DME RWY 21

VORTAC STE 110.6 Chan 43	APP CRS 292°	Rwy Idg TDZE 1108 Apt Elev 1110	3635
--	------------------------	---	-------------

VOR/DME RWY 30

STEVENS POINT MUNI (STE)



Procedure NA at night. Visibility reduction by helicopters NA. When local altimeter setting not received, use Mosinee altimeter setting and increase all MDA 60 feet and S-30 and Circling Cats C and D visibilities ¼ mile.

MISSED APPROACH: Climb to 2800 then right turn direct STE VORTAC and hold.

AWOS-3
119.275

MINNEAPOLIS CENTER
124.4 317.7

UNICOM
122.7 (CTAF) 0

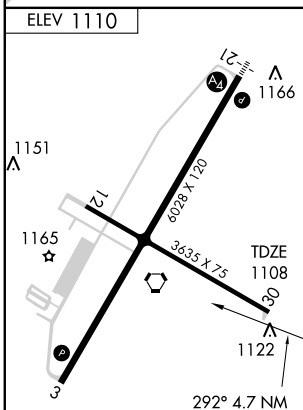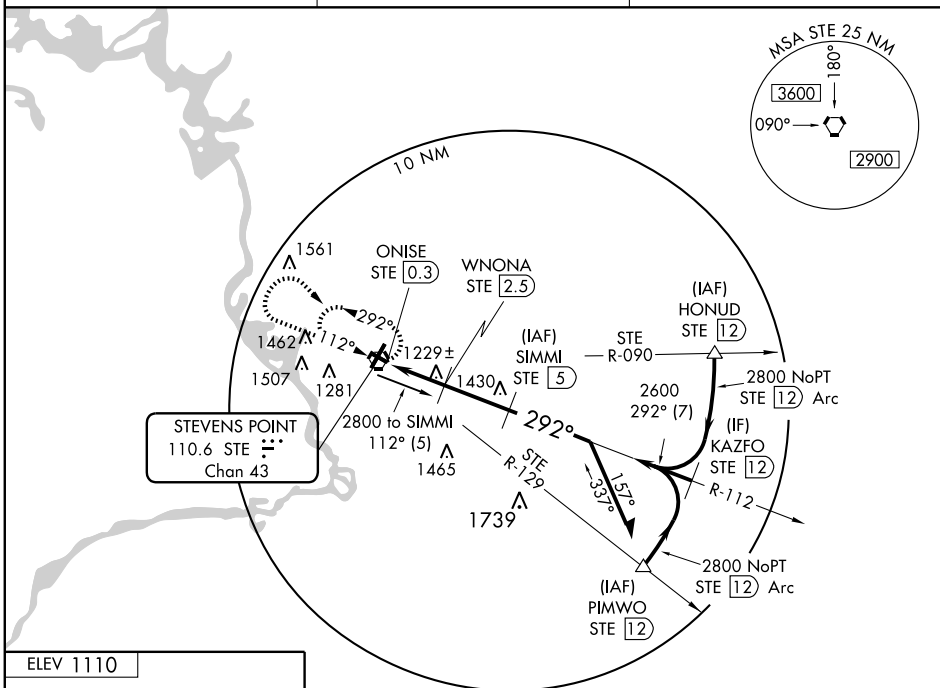

CATEGORY	A		B		C		D	
	S-30		1480-1 372 (400-1)		1480-1½ 372 (400-1½)		1480-1¾ 372 (400-1¾)	
CIRCLING	S-30		1580-1 470 (500-1)		1660-1½ 550 (600-1½)		1800-2¼ 690 (700-2¼)	
	S-30		1580-1 470 (500-1)		1660-1½ 550 (600-1½)		1800-2¼ 690 (700-2¼)	

REIL Rwy 30
HIRL Rwy 3-21 and 12-30

STEVENS POINT, WISCONSIN

Amdt 18 11FEB10

44°33'N - 89°32'W

STEVENS POINT MUNI (STE)

VOR/DME RWY 30

STEVENS POINT MUNI (STE) 3 NE UTC-6(-5DT) N44°32.71' W89°31.82'

1110 B S4 FUEL 100LL, JET A TPA-2110(1000) NOTAM FILE STE

RWY 03-21: H6028X120 (ASPH) S-30, D-75, 2D-195 HIRL

RWY 03: REIL. PAPI(P2L)—GA 3.0° TCH 38'. Trees.

RWY 21: MALS. PAPI(P2L)—GA 3.0° TCH 37'. Tree.

RWY 12-30: H3635X75 (ASPH) S-9 D-75 HIRL

RWY 12: Road. RWY 30: Trees.

AIRPORT REMARKS: Attended daltg hrs. Fuel 24 hr self svc. Deer and migratory waterfowl on and invof arpt. ACTIVATE HIRL Rwy 03-21 and Rwy 12-30 and MALS Rwy 21 and REIL Rwy 03 and PAPI Rwys 03 and 21—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.275 (715) 344-5960.

HIWAS 110.6 STE.

COMMUNICATIONS: CTAF/UNICOM 122.7

RCO 122.1R 110.6T (GREEN BAY RADIO)

⑦ MINNEAPOLIS CENTER APP/DEP CON 124.4

RADIO AIDS TO NAVIGATION: NOTAM FILE STE.

(L) VORTAC 110.6 STE Chan 43 N44°32.60'

W89°31.83' at fld. 1110/2E. HIWAS.


DME unusable byd 35 NM blo 3000'.

ILS/DME 111.35 I-STE Chan 50Y Rwy 21.

GREEN BAY

H-2K, L-14J

IAP

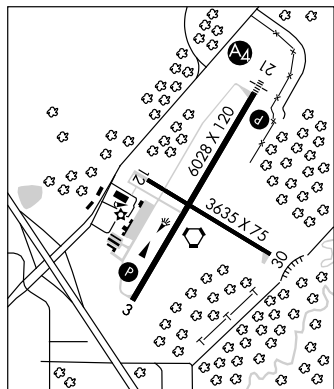**STOUGHTON****QUAMS MARINA SPB** (99C) 3 NW UTC-6(-5DT) N42°57.07' W89°16.26'

843 FUEL MOGAS TPA-1843(1000) NOTAM FILE GRB

WATERWAY ALL WAY: 15000X4000 (WATER)

SEAPLANE REMARKS: Attended Apr-Oct Mon-Fri 1400-0000Z†, Sat 1500-2300Z†, Sun 1500-2200Z†, Nov-Mar irregularly.

COMMUNICATIONS: CTAF 122.9

CHICAGO

STURGEON BAY N44°50.21' W87°25.35' NOTAM FILE SUE.

NDB (MHW) 414 SUE at Door Co Cherryland.

GREEN BAY

L-31B

STURGEON BAY**DOOR CO CHERRYLAND** (SUE) 2 W UTC-6(-5DT) N44°50.62' W87°25.29'

725 B S4 FUEL 100LL, JET A NOTAM FILE SUE

RWY 02-20: H4600X75 (ASPH) S-16, D-22 MIRL 0.4% up S

RWY 02: LDIN. REIL. PAPI(P4L)—GA 3.0° TCH 32'. Road.

RWY 20: REIL. PAPI(P4L)—GA 3.0° TCH 46'. Trees.

RWY 10-28: H3199X75 (ASPH) S-16, D-22 MIRL

RWY 10: REIL. PAPI(P4L)—GA 3.0° TCH 31'. Road.

RWY 28: REIL. PAPI(P4L)—GA 3.0° TCH 37'. Trees.

AIRPORT REMARKS: Attended Mon-Sat 1300-2200Z†, Sun 1600-2200Z†. Except summer hrs from Labor Day—Memorial Day Fri and Sat 1300-0000Z†, Sun 1500-2200Z†. After hrs fueling avbl, ctc 920-743-6952. Be Alert: No line of sight Rwy 02 to Rwy 20. Deer, turkeys and seagulls occasionally on arpt. Ultralight activity on and invof arpt. Group of five twrs approximately 4 NM northeast, tallest twr is 1300' MSL/489' AGL. ACTIVATE MIRL Rwy 02-20 and 10-28; PAPI Rwy 02, 20, 10 and 28; REIL Rwy 02; 20; 10 and 28; LDIN Rwy 02—CTAF.

WEATHER DATA SOURCES: AWOS-3 128.325 (920) 743-7087**COMMUNICATIONS:** CTAF/UNICOM 122.7

⑦ GREEN BAY APP/DEP CON 119.25 (1130-0530Z†)

⑦ MINNEAPOLIS CENTER APP/DEP CON 125.55 (0530-1130Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE GRB.

GREEN BAY (H) VORTACW 115.5 GRB Chan 102 N44°33.31' W88°11.69' 061° 37.3 NM to fld. 767/1E. HIWAS.

FICHY NDB (LOM) 224 II N44°45.36' W87°26.95' 016° 5.4 NM to fld. Unmonitored.

STURGEON BAY NDB (MHW) 414 SUE N44°50.21' W87°25.35' at fld. NOTAM FILE SUE.

SDF 111.9 III Rwy 02. LOM FICHY NDB. SDF unusable byd 12° left of course. Unmonitored.

GREEN BAY

L-31B

IAP

WAAS CH 81904 W02A	APP CRS 016°	Rwy Idg 4600 TDZE 725 Apt Elev 725
--	------------------------	---

RNAV (GPS) RWY 2

STURGEON BAY/DOOR COUNTY CHERRYLAND (SUE)




Baro-VNAV NA when using Menominee-Marquette Twin County altimeter setting. If local altimeter setting not received, use Menominee-Marquette Twin County altimeter setting and increase all DAs/MDAs 60 feet. For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 47°C (116°F). Visibility reduction by helicopters NA. DME/DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 2600 direct
VOBUY and hold.

AWOS-3
128.325

GREEN BAY APP CON *
119.25 338.2

UNICOM
122.7 (CTAF) 0

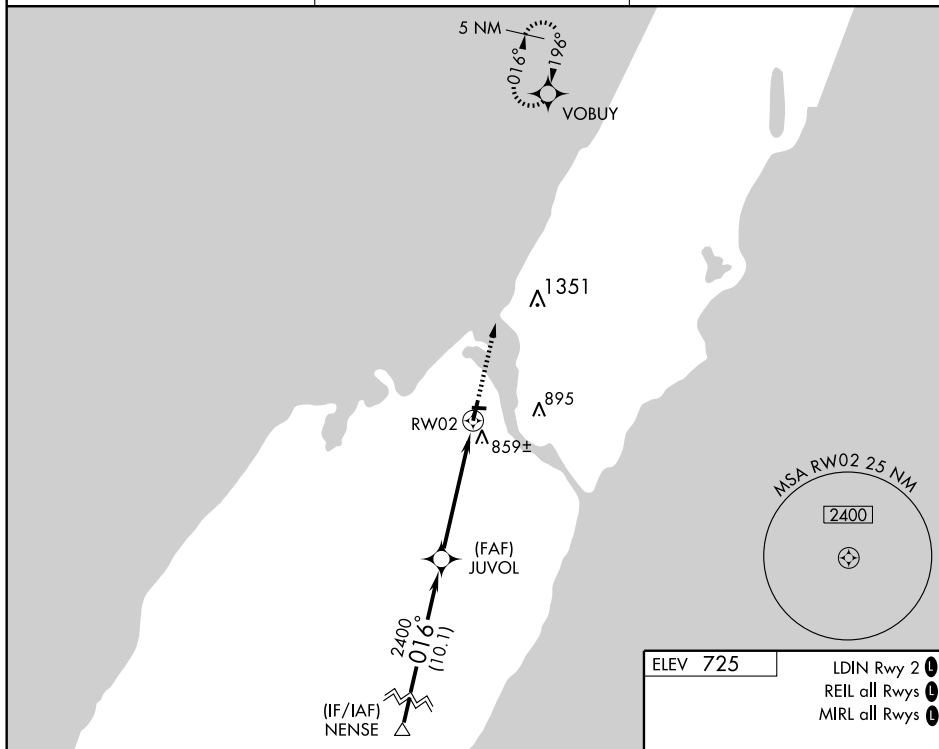

(IF/IAF)
NENSE

RW02

(FAF)
JUVOL

MSA RW02 25 NM

2400

ELEV 725

LDIN Rwy 2 0
REIL all Rwys 0
MIRL all Rwys 0

Procedure
Turn NA NENSE

3500

GS 3.00°
TCH 40


VGSI and RNAV glidepath
not coincident.

JUVOL

2400

2600

VOBUY

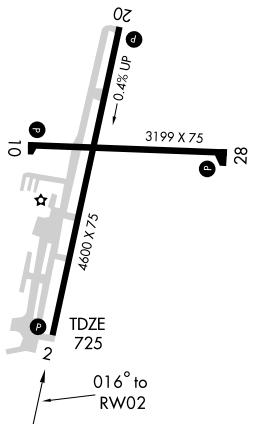

TDZE
725

016° to
RW02

APP CRS	Rwy Idg	3199
096°	TDZE	720
	Apt Elev	724



RNAV (GPS) RWY 10

STURGEON BAY/DOOR COUNTY CHERRYLAND (SUE)



DME/DME RNP -0.3 NA.

MISSED APPROACH: Climb to 2600 direct TOTUE and hold.

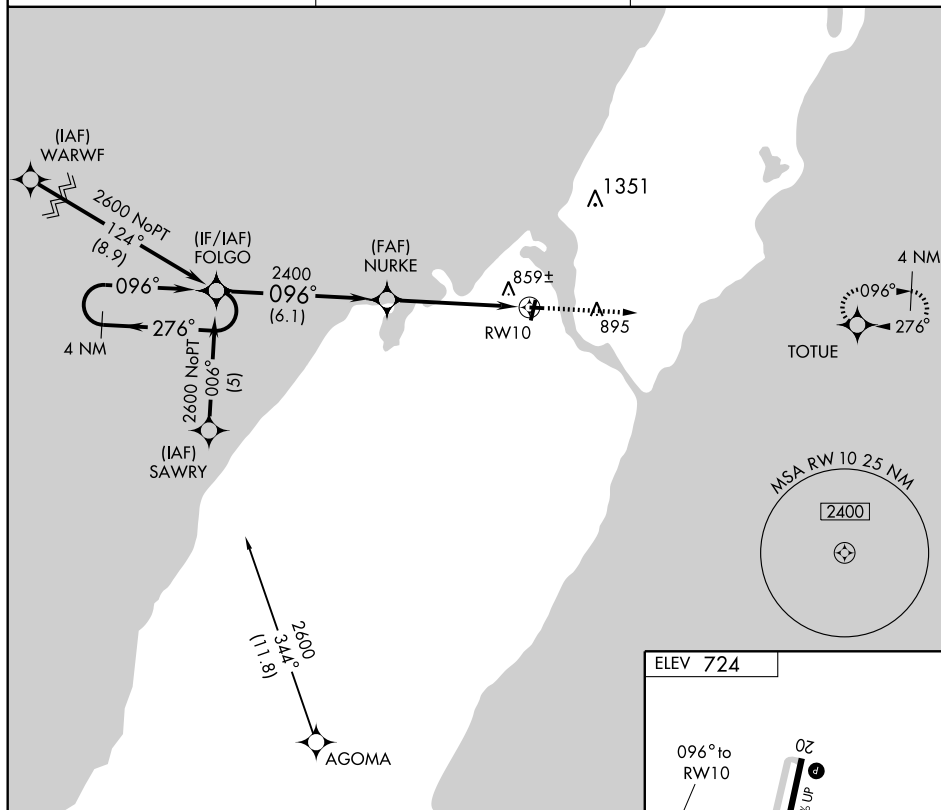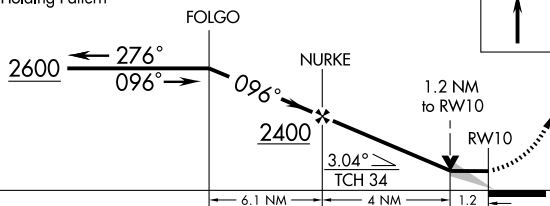
AWOS-3
128.325GREEN BAY APP CON ★
119.25 338.2UNICOM
122.7 (CTAF) 04 NM
Holding Pattern

2600



TOTUE

CATEGORY	A	B	C	D
LNAB MDA	1120-1 400 (400-1)			
CIRCLING	1160-1 436 (500-1)	1180-1 456 (500-1)	1180-1½ 456 (500-1½)	NA

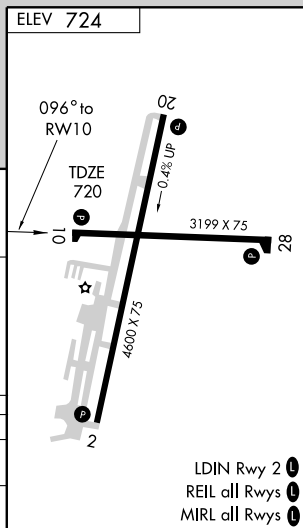

WAAS CH 86304 W20A	APP CRS 196°	Rwy Idg TDZE Apt Elev	4600 724 725
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 20


STURGEON/DOOR COUNTY CHERRYLAND (SUE)

- ▼** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F).
▲ DME/DME RNP-0.3 NA. If local altimeter setting not received, use Menominee-Marinette Twin County altimeter setting and increase all DAs/MDAs 60 feet. VDP and Baro-VNAV NA when using Menominee-Marinette Twin County altimeter setting.


MISSED APPROACH:
Climb to 3500 direct
NENSE and hold

AWOS-3
128.325

GREEN BAY APP CON ★
119.25 338.2

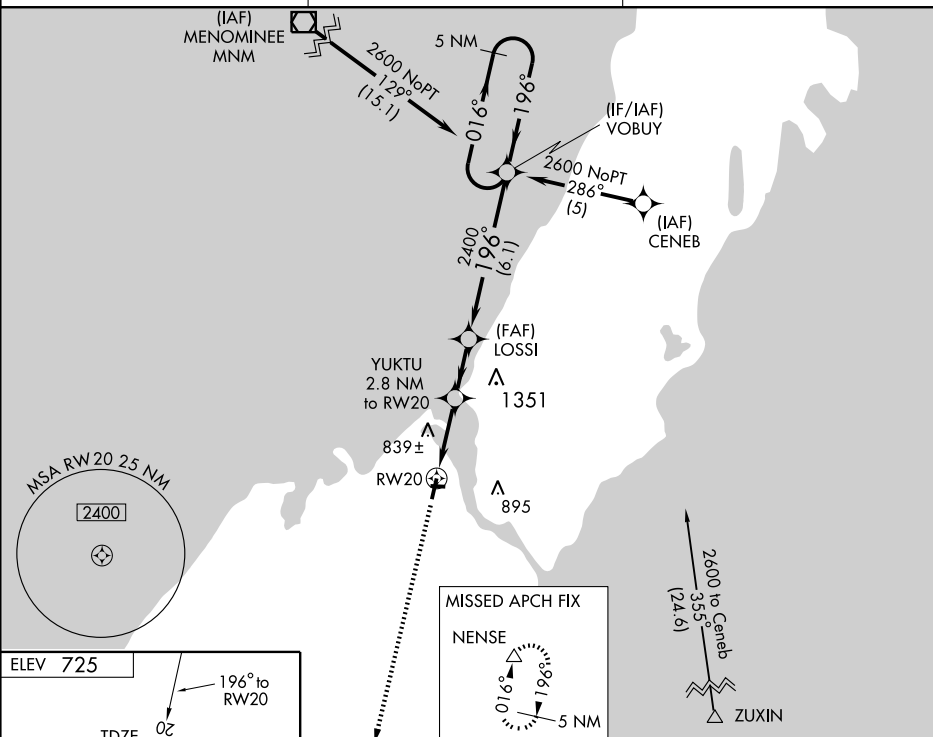UNICOM
122.7 (CTAF) **L**

ELEV 725

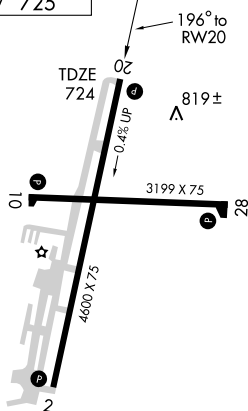

LDIN Rwy 2 **L**
REIL all Rwys **L**
MIRL all Rwys **L**

3500 		NENSE 		5 NM Holding Pattern	
*NNAV only					
CATEGORY		A		B	
LPV DA		974-1		250 (300-1)	
LNAV/DA VNAV		1069-1¼		345 (400-1¼)	
LNAV MDA		1120-1		396 (400-1)	
CIRCLING		1160-1 435 (500-1)		1180-1 455 (500-1)	
		1180-1½ 455 (500-1½)		1280-2 555 (600-2)	

STURGEON BAY, WISCONSIN

Amdt 1 07270

STURGEON/DOOR COUNTY CHERRYLAND (SUE)

44° 51'N-87° 25'W

RNAV (GPS) RWY 20

APP CRS	Rwy Idg	3199
276°	TDZE	720
	Apt Elev	724

RNAV (GPS) RWY 28

STURGEON BAY/DOOR COUNTY CHERRYLAND (SUE)




DME/DME RNP -0.3 NA.


MISSED APPROACH: Climb to 2600 direct FOLGO and hold.

AWOS-3
128.325


GREEN BAY APP CON ★
119.25 338.2

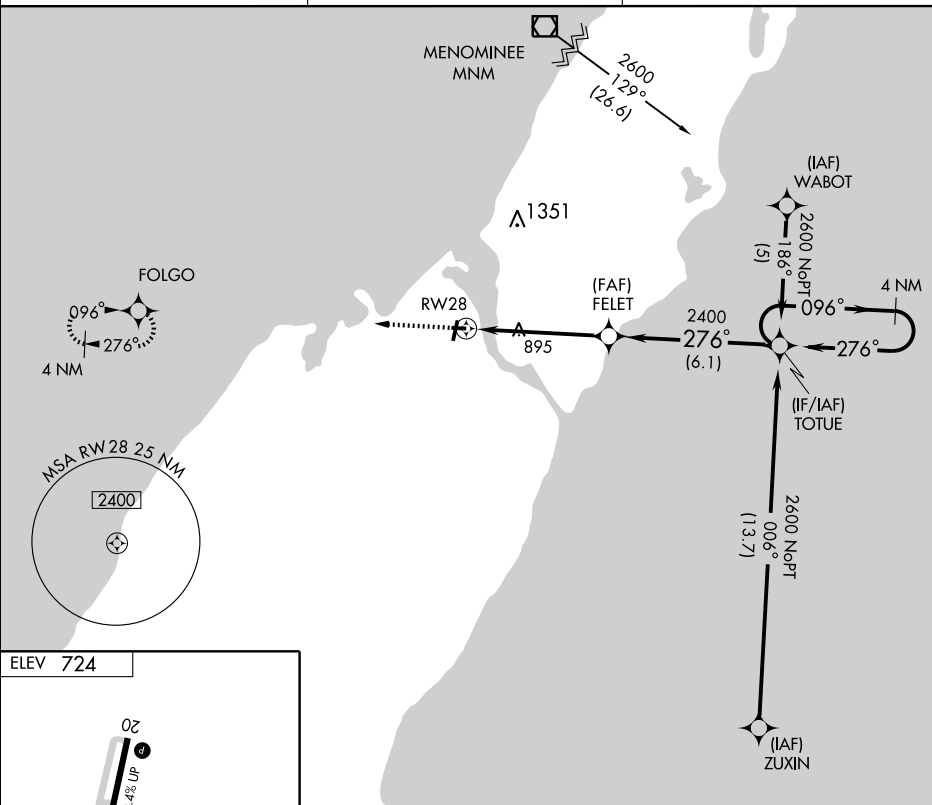UNICOM
122.7 (CTAF) **L**

ELEV 724

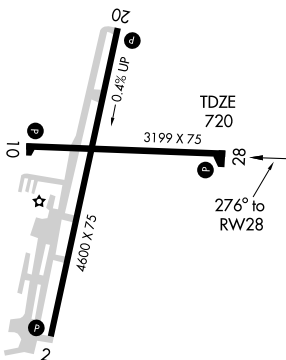

LDIN Rwy 2 **L**
REIL all Rwys **L**
MIRL all Rwys **L**

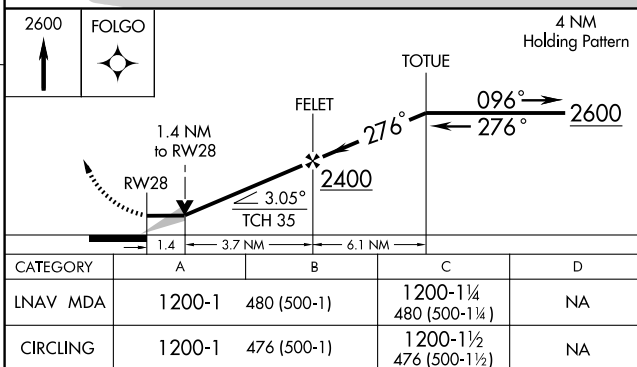

STURGEON BAY, WISCONSIN
Orig 07242

STURGEON BAY/ DOOR COUNTY CHERRYLAND (SUE)
44° 51' N-87° 25' W **PNAY (GPS) PWY 28**

RNAV (GPS) RWY 28

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

STURTEVANT**SYLVANIA** (C89) 3 W UTC-6(-5DT) N42°42.20' W87°57.54'

CHICAGO

785 B S4 FUEL 100LL TPA—1585(800) NOTAM FILE GRB

RWY 08L-26R: 2343X120 (TURF) MIRL

RWY 08L: Road. RWY 26R: Road.

RWY 08R-26L: H2272X38 (ASPH) MIRL (NSTD)

RWY 08R: Road. RWY 26L: PAPI(P2L). Thld dsplcd 140'. Road.

AIRPORT REMARKS: Attended 1400Z±-dusk. Parachute activity on and invof arpt. Ultralight activity on arpt. ACTIVATE MIRL Rwy 08R-26L and PAPI Rwy 26L—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8**SUPERIOR****RICHARD I BONG** (SUW) 3 S UTC-6(-5DT) N46°41.38' W92°05.68'

GREEN BAY

674 B S4 FUEL 100LL, JET A NOTAM FILE SUW

RWY 03-21: H5100X75 (ASPH) MIRL

RWY 03: REIL. PAPI(P4L)—GA 3.0° TCH 28'. Pole. RWY 21: REIL. Trees.

RWY 13-31: H4000X75 (ASPH) MIRL

RWY 13: REIL. Trees. RWY 31: REIL. PAPI(P4L)—GA 4.0°. Road.

AIRPORT REMARKS: Attended 1400Z±-dusk. Parachute Jumping. Deer on and invof arpt. ACTIVATE MIRL Rwys 13-31 and 03-21 and REIL Rwys 13-31 and 03-21—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.35 (715) 394-0283.**COMMUNICATIONS:** CTAF/UNICOM 122.7

Ⓡ DULUTH APP/DEP CON 125.45 (1200-0500Z±) CLNC DEL 124.8

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 127.9 (0500-1200Z±)

RADIO AIDS TO NAVIGATION: NOTAM FILE DLH.

DULUTH (H) VORTACW 112.6 DLH Chan 73 N46°48.13' W92°12.17' 141° 8.1 NM to fld. 1428/5E.

HIWAS.

BONG NDB (MHW) 260 SUW N46°41.48' W92°06.21' at fld. SHUTDOWN. NOTAM FILE SUW.

SURING**PISO** (7P5) 4.3 NW UTC-6(-5DT) N45°03.92' W88°25.59'

GREEN BAY

891 FUEL MOGAS TPA—1391(500) NOTAM FILE GRB

RWY 01-19: 2080X55 (TURF)

RWY 01: Trees. RWY 19: Trees.

AIRPORT REMARKS: Unattended. Fuel avbl and local full svc gas station N end of field during dalgt hrs. Rwys not plowed and arpt CLOSED Nov 15 thru Mar 31. Rwy 18-36 south half of rwy severely rutted. Rwy 01-19 marked with orange barrels.

COMMUNICATIONS: CTAF 122.9**SWEETWATER BAY SPB** (See OCONTO)**SYLVANIA** (See STURTEVANT)**TAYLOR CO** (See MEDFORD)**TEELS** N42°54.54' W88°02.46' NOTAM FILE MKE.

CHICAGO

NDB (MH/LOM) 242 GM 072° 6.8 NM to General Mitchell Intl. Unmonitored.

L-28H, A

THREE CASTLES AIRPARK (See WONEWOC)**THREE LAKES****THREE LAKES MUNI** (4ØD) 3 SE UTC-6(-5DT) N45°47.41' W89°07.26'

GREEN BAY

1636 B TPA—2436(800) NOTAM FILE GRB

RWY 03-21: 3400X120 (TURF) LIRL(NSTD)

RWY 03: Trees. RWY 21: PAPI(P2L)—GA 3.0° TCH 24'.

AIRPORT REMARKS: Unattended. Rwy 03-21 not plowed Nov-May. 1683' AGL, 3327' MSL twr 8.5 NM SW. Rwy 03-21 ends marked with yellow cones. PAPI Rwy 21 opr continuously, ACTIVATE LIRL—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7**TIMMERMAN** N43°06.59' W88°02.24'. NOTAM FILE MWC.

CHICAGO

(L) VOR/DME 112.5 LJT Chan 72 at Lawrence J. Timmerman. 737/2W.




VOR unusable byd 25 NM 030°-230° blo 5500', 230°-310° blo 6500', 310°-030° blo 4500'.

DME unusable 120°-200° byd 25 NM blo 3500', 200°-315° byd 20 NM blo 5000', 315°-120° byd 25 NM blo 4000'.

RCO 123.6R 112.5T (GREEN BAY RADIO)


APP CRS
035°Rwy ldg **5100**
TDZE **672**
Apt Elev **674**

NA

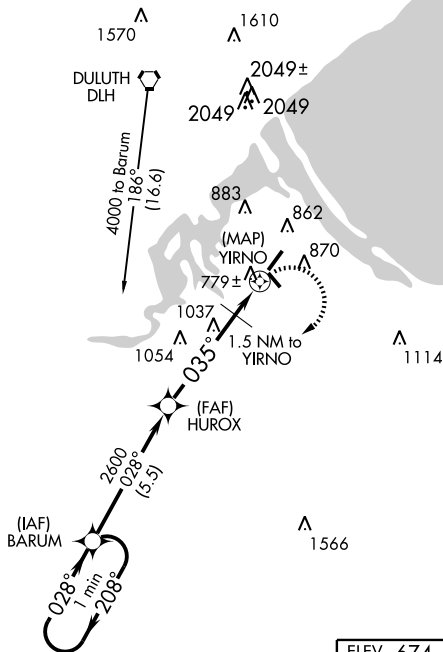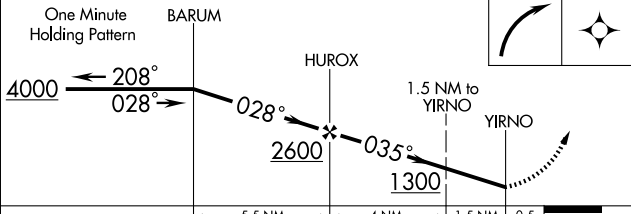MISSED APPROACH: Climbing right turn
to 4000 direct BARUM WP and hold.AWOS-3
120.35DULUTH APP CON ★
125.45 255.9CLNC DEL
124.8UNICOM
122.7 (CTAF) 0One Minute
Holding Pattern

CATEGORY	A	B	C	D
S-3	1080-1	408 (500-1)	1080-1¼	408 (500-1¼)
CIRCLING	1220-1	546 (600-1)	1220-1½ 546 (600-1½)	1240-2 566 (600-2)

ELEV 674

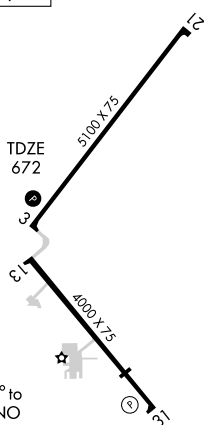REIL Rwy 3, 21, 13, and 31 0
MIRL Rwy 3-21 and 13-31 0

APP CRS	Rwy Idg	4000
139°	TDZE	674
	Apt Elev	674

GPS RWY 13

SUPERIOR/RICHARD I. BONG (SUW)

T
A NA



MISSED APPROACH: Climb to 3100
direct WENTT WP and hold.

AWOS-3
120.35



DULUTH APP CON ★
125.45 255.9

CLNC DEL
124.8

UNICOM
122.7 (CTAF) **L**

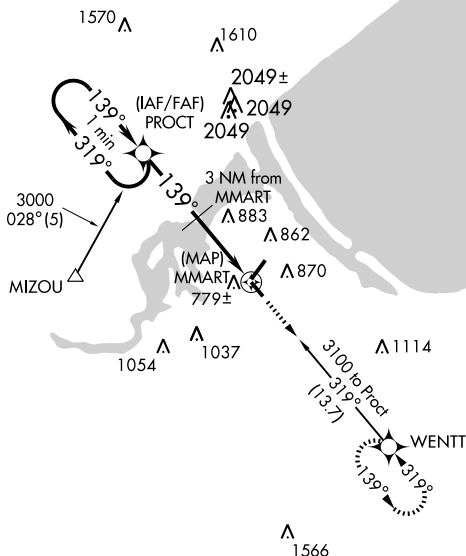

ELEV 674

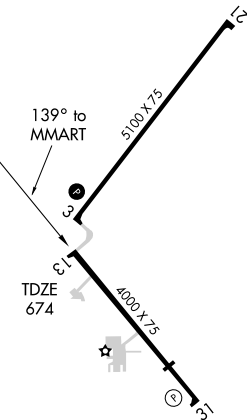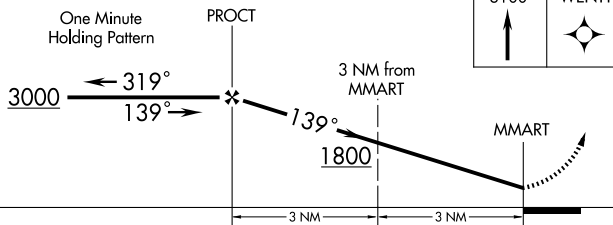

CATEGORY	A	B	C	D
S-13	1180-1	506 (600-1)	1180-1½	506 (600-1½)
CIRCLING	1220-1	546 (600-1)	1220-1½ 546 (600-1½)	1240-2 566 (600-2)

REIL Rwys 3, 21, 13, and 31 **L**
MIRL Rwys 3-21 and 13-31 **L**

APP CRS
319°

Rwy Idg	4000
TDZE	674
Apt Elev	674

GPS RWY 31

SUPERIOR/RICHARD I. BONG (SUW)

IAF ARM APPROACH MODE PRIOR TO IAF.




MISSED APPROACH: Climbing left turn to 3100 direct WENTT WP and hold.

AWOS-3
120.35

DULUTH APP CON ★
125.45 255.9



CLNC DEL
124.8

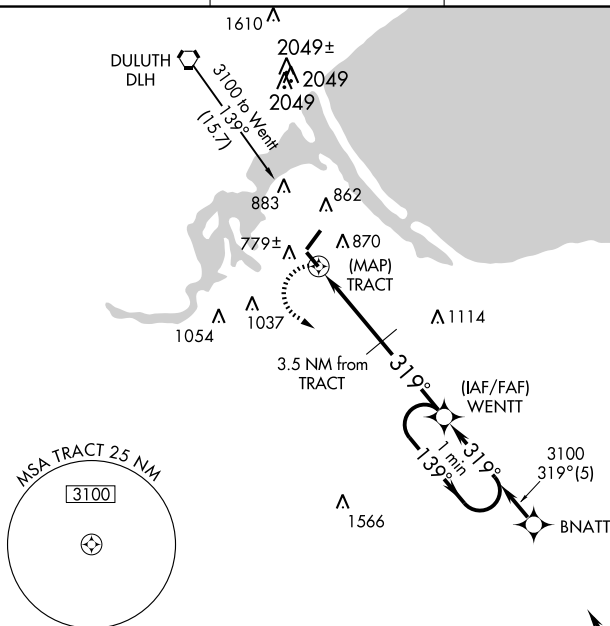UNICOM
122.7 (CTAF) **L**




ELEV 674



3100	WENTT
	

WENTT

One Minute Holding Pattern



CATEGORY

A

D

S. 31

1060-1 386 (400-1)

1060-1 $\frac{1}{4}$

1220-11½

1240-2

REF: Rwy 3, 21, 13, and 31. 1

MILP Pkys 3-21 and 13-31 0

SUPERIOR, WISCONSIN

Orig 10042

SUPERIOR / RICHARD J. BONG (STUW)

46° 41' N-92° 06' W

GPS RWY 31

EC-3. 23 SEP 2010 to 21 OCT 2010

TOMAH

BLOYER FLD (Y72) 1 E UTC-6(-5DT) N43°58.57' W90°28.84'

CHICAGO

966 B FUEL 100LL NOTAM FILE GRB

L-286

RWY 07-25: H3900X75 (ASPH) MIRL

RWY 07: REIL. PAPI(P2L)—GA 3.0° TCH 33'. Tree.

RWY 25: REIL. PAPI(P2L)—GA 3.0° TCH 35'. Trees.


AIRPORT REMARKS: Unattended. Deer and birds on and invof arpt. Rwy 07-25 E 300' has 1 inch dips. For fuel call 608-372-3125. MIRL Rwy 07-25 preset on low ints; to increase ints and ACTIVATE REIL Rwy 07 and Rwy 25—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

NODINE (H) VORTAC 117.9 ODI Chan 126 N43°54.74'

W91°28.05' 084° 43.0 NM to fld. 1282/1E.

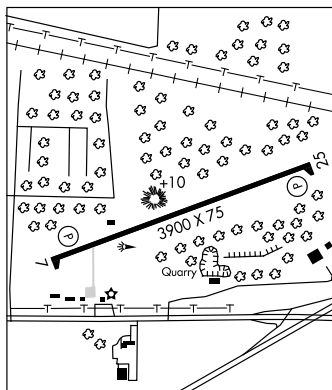

TOMAHAWK RGNL (TKV) 3 W UTC-6(-5DT) N45°28.16' W89°48.34'

GREEN BAY

1487 B S4 FUEL 100LL, JET A NOTAM FILE TKV

L-14J

RWY 09-27: H3998X75 (ASPH) S-26 MIRL 0.5% up E

IAP

RWY 09: REIL. PAPI(P2L)—GA 3.0° TCH 25'. Road.

RWY 27: REIL. PAPI(P2L)—GA 3.0° TCH 21'. Trees.

AIRPORT REMARKS: Attended continuously. Airframe and powerplant repairs by prior arrangement call 715-453-2264 or 453-3482. Deer on and invof arpt. ACTIVATE MIRL Rwy 09-27, PAPI and REIL Rwy 09 and Rwy 27—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.25 (715) 453-5716.

COMMUNICATIONS: CTAF/UNICOM 122.8

MINNEAPOLIS CENTER APP/DEP CON 133.65

RADIO AIDS TO NAVIGATION: NOTAM FILE RHI.

RHINELANDER (L) VORTAC 109.2 RHI Chan 29 N45°38.03' W89°27.47' 234° 17.7 NM to fld. 1590/2E.

HIWAS.

TRI-COUNTY RGNL (See LONE ROCK)

VERONA (W19) 1 E UTC-6(-5DT) N42°59.37' W89°30.57'

CHICAGO

960 TPA-1560(600) NOTAM FILE GRB

RWY 03-21: 2190X90 (TURF)

RWY 03: Trees. **RWY 21:** Trees.

RWY 04-22: 1897X85 (TURF)

RWY 04: Road. Rgt tfc. **RWY 22:** Trees.

AIRPORT REMARKS: Unattended. Arpt surfaces not plowed for snow. Confirm surface conditions with arpt manager 608-845-7239. Deer on and invof arpt. Ultralight activity on and invof arpt. Balloon ops normally early AM and PM—daigt hrs. Rwy 03-21 900' from S end rough. Rwy 04-22 marked with reflectors no markings on S end of rwy. Rwy 04-22 4-6' fence and berm 20' S of rwy edge parallels rwy. Avoid overflights of institution 0.5N and Village Park 1.0W of arpt.

COMMUNICATIONS: CTAF 122.9

VINCENT (See GENOA CITY)

WAAS CH 78308 W09A	APP CRS 090°	Rwy Idg 3998 TDZE 1482 Apt Elev 1487
--	------------------------	---

RNAV (GPS) RWY 9

TOMAHAWK RGNL (TKV)




When local altimeter setting not received, use Rhinelander altimeter setting and increase all DA and MDA 60 feet. Increase LPV and LNAV/VNAV visibility $\frac{1}{4}$ mile all Cat., and LNAV Cat. C, D $\frac{1}{2}$ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Rhinelander altimeter setting.

MISSED APPROACH: Climb to 4000 direct JAKLI and hold.

AWOS-3
118.250

MINNEAPOLIS CENTER
133.65 281.5

UNICOM
122.8 (CTAF) 0

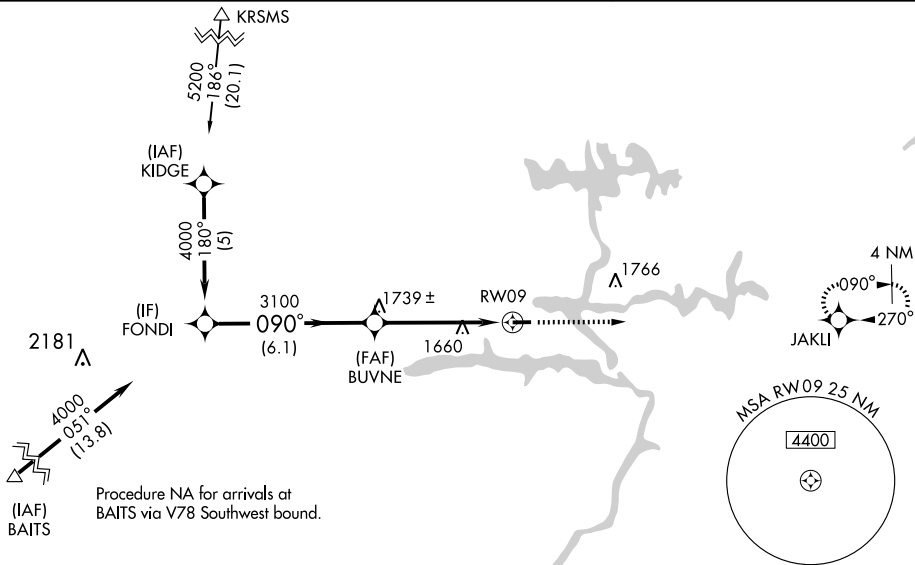

Procedure
Turn
NA

FONDI

VGSI and descent
angles not coincident.

BUVNE

4000 JAKLI

4000

090°

3100

* 1.5 NM to RWY 09

* LNAV Only.

GS 3.00°
TCH 40

6.1 NM

3.5 NM

1.5

CATEGORY

A

B

C

D

LPV DA

1732-1

250 (300-1)

LNAV/VNAV DA

1809-1 $\frac{1}{4}$

327

(400-1 $\frac{1}{4}$)

LNAV MDA

1960-1

478 (500-1)

1960-1 $\frac{1}{4}$

478 (500-1 $\frac{1}{4}$)

1960-1 $\frac{1}{2}$

478 (500-1 $\frac{1}{2}$)

CIRCLING

1960-1

473 (500-1)

1960-1 $\frac{1}{2}$

473 (500-1 $\frac{1}{2}$)

2040-2

553 (600-2)

ELEV 1487

090° to RWY 09

TDZE 1482

3998 X 75

0.5% UP

1539 ±

MIRL Rwy 9-27

REIL Rwy 9 and 27

WAAS CH 87008 W27A	APP CRS 270°	Rwy Idg 3998 TDZE 1487 Apt Elev 1487
--	------------------------	---

RNAV (GPS) RWY 27

TOMAHAWK RGNL (TKV)

V When local altimeter setting not received, use Rhinelander altimeter setting and increase all DA and MDA 60 feet. Increase LNAV/VNAV visibility ¼ mile all Cats., and LNAV Cat. C, D ½ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. Baro-VNAV NA when using Rhinelander altimeter setting. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 4000 direct FONDI and hold.



AWOS-3
118.250

MINNEAPOLIS CENTER
133.65 281.5


UNICOM
122.8 (CTAF) 0

Procedure NA for arrivals on RHI
VORTAC airway radials 156 CW 241.

(IAF)
RHINELANDER
RHI

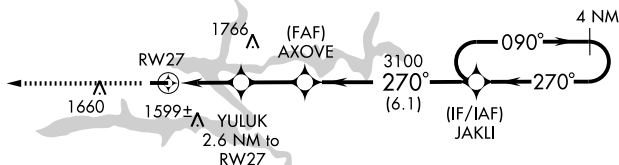


2140




Procedure NA for arrivals at USERS
via V191 Southeast bound.

ELEV 1487



VGSI and RNAV glidepath
not coincident.

* LNAV only



CATEGORY	A	B	C	D
LPV DA	1737-1	250 (300-1)		
LNAV/VNAV DA	1899-1½	412 (500-1½)		
LNAV MDA	1940-1	453 (500-1)	1940-1¼ 453 (500-1¼)	1940-1½ 453 (500-1½)
CIRCLING	1940-1	453 (500-1)	1960-1½ 473 (500-1½)	2040-2 553 (600-2)

MIRL Rwy 9-27 0
REIL Rwy 9 and 27 0

VORTAC RHI 109.2 Chan 29	APP CRS 234°	Rwy Idg TDZE Apt Elev 1486	N/A N/A 1486
--	------------------------	---	---

VOR/DME-A

TOMAHAWK RGNL (TKV)


V Obtain local altimeter setting on CTAF, when not received, use Rhinelander altimeter setting.

MISSED APPROACH: Climb to 2500 then climbing left turn to 3200 via RHI R-234 to TUBEE/13 DME and hold.

AWOS-3
118.250

MINNEAPOLIS CENTER
133.65 281.5

UNICOM
122.8 (CTAF)

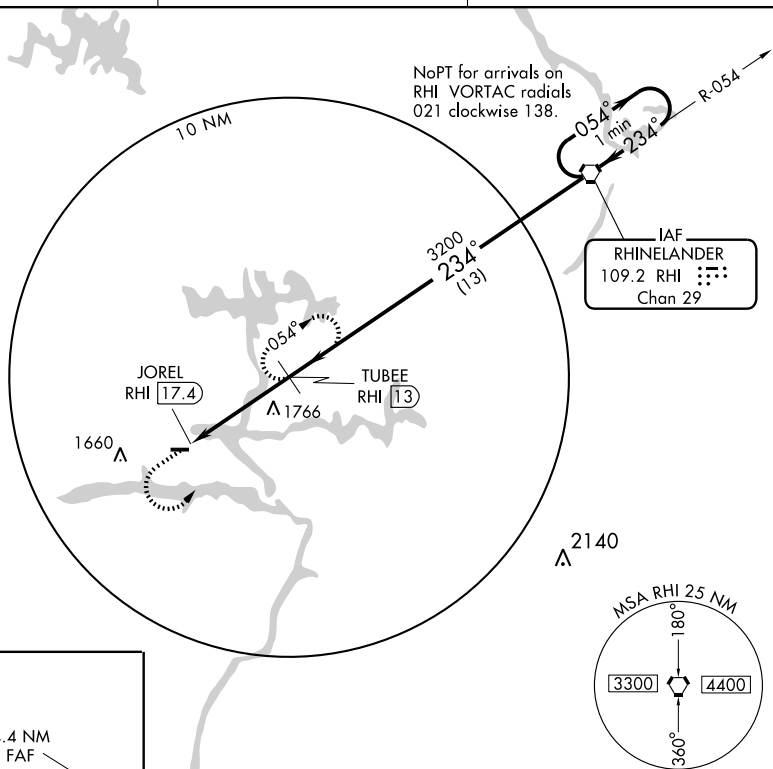

ELEV **1486**

234° 4.4 NM
from FAF

3998 X 75
0.5 % UP

MIRL Rwy 9-27

REIL Rws 9 and 27

Knots	60	90	120	150	180
-------	----	----	-----	-----	-----

Min:Sec					
---------	--	--	--	--	--

TOMAHAWK, WISCONSIN

Amdt 1 08269

2500	3200	TUBEE RHI 13
↑	RHI R-234 109.2	

JOREL
RHI 17.4

TUBEE
RHI 13

One Minute
Holding Pattern

VORTAC

234° 054° 3200
← 234° →

CATEGORY	A	B	C	D
CIRCLING	2080-1	594 (600-1)	2080-1½ 594 (600-1½)	2080-2 594 (600-2)

RHINELANDER ALTIMETER SETTING MINIMUMS

CIRCLING	2140-1	654 (700-1)	2140-1¾ 654 (700-1¾)	2140-2 654 (700-2)
----------	--------	-------------	-------------------------	-----------------------

TOMAHAWK RGNL (TKV)

VOR/DME-A

45°28'N-89°48'W

VIROQUA MUNI (Y51) 2 N UTC-6(-5DT) N43°34.76' W90°53.79'

CHICAGO

1292 B **FUEL** 100 NOTAM FILE GRB

L-28G

Rwy 11-29: H3346X60 (ASPH) S-12 HIRL 0.7% up SE

IAP

Rwy 29: Trees.

Rwy 02-20: 2555X90 (TURF) 1.0% up SW

Rwy 20: Trees.


AIRPORT REMARKS: Unattended. 24 hr fuel avbl. Rwy 02-20 CLOSED Nov 15 thru Apr 15. Rwy 02-20 has sharp 20' drop-off each end. Rwy slopes downhill to the N approximately 1.5%. Rwy 02-20 marked with yellow cones. Rwy 11-29 HIRLS on low ints—increase ints on CTAF.

COMMUNICATIONS: CTAF 122.9

MINNEAPOLIS CENTER APP/DEP CON 128.6

RADIO AIDS TO NAVIGATION: NOTAM FILE LSE.

LA CROSSE (T) VORW/DME 108.4 LSE Chan 21 N43°52.57' W91°15.36' 137° 23.7 NM to fld. 650/2E.

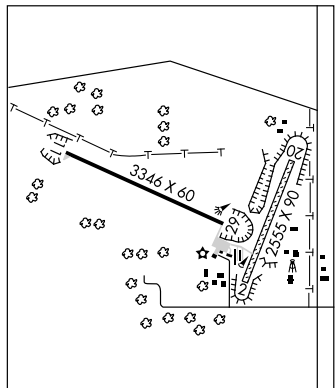

VOLK FLD (VOK) (KVOK) ANG 1N UTC-6(-5DT) N43°56.35' W90°15.19'

CHICAGO

912 B TPA—See Remarks NOTAM FILE GRB Not insp.

H-2K, L-28G

Rwy 09-27: H9000X150 (ASPH-CONC-GRVD) S-81, D-190, 2D-400 PCN 97 R/B/W/T HIRL

DIAP, AD

Rwy 09: MALSR. PAPI(P4L).

Rwy 27: ALSF1. PAPI(P4R). Rgt tfc.

ARRESTING GEAR/SYSTEM

Rwy 09 HOOK BAK-12B(B) (1260')

HOOK BAK-12B(B) (1250') **Rwy 27**

MILITARY SERVICE: LGT ACTIVATE-ALS, HIRL, PAPI Rwy 09-27-CTAF or 239.25. Rwy 27 PAPI NSTD located rgt side.

A-GEAR Normal BAK-12B(B) configuration: apch end down, dep end up; 20 min prior notice to reconnect apch end cable. **JASU** (AM32A-60A) 6(A/M32A-86) **FUEL** J8 Avbl limited, expect possible gnd delay for req exceeding 10,000 gal. **FLUID** LPOX LOX **TRAN ALERT** Extremely limited.

MILITARY REMARKS: Opr Mon-Fri 1400-2200Z except holidays, CLOSED other times except validated overseas or ANG mission, check NOTAM for current afld hrs. See FLIP AP/1 Supplementary Arpt Remarks.

RSTD Recommend use as emergency arpt only when rqr to land as soon as possible. PPR ctc Volk Fld DSN 871-1205, C608-427-1205. Issued PPR valid for ETA +/- 1 hr. Early/late arr/dep must be coordinated. After hr re-coordination or cancel will be passed to Base OPS standby personnel C608-343-0104. PPR must be received not later than 48 hours in advance of acft arrival or by 2200Z or Fri for the following Mon. Twy G ltd to F-16 acft or smaller and helicopter traffic. **CAUTION** FMQ-19 automated wx obsn avbl 24 hr, DSN 871-1066, C 608-427-1066. When wind is from S/SW expect possible Low Level Wind Shear 1 to 3 NM on final to Rwy 27. Due to tactical acft rqr, BAK-12 cable may be in position for Rwy 09-27 simultaneously. Twy E and F unlgtd, unlimited daytime VFR use. Follow Me rqr for day IFR and night IFR/VFR use. **TFC PAT** Left tfc Rwy 09. TPA-Helicopter rectangular 1500(588). **MISC** First 1600' Rwy 09 and first 1600' Rwy 27 grooved concrete, mid 5800' grooved asphalt. Standard USAF RSRs applied. Base Ops DSN 871-1205, C608-427-1205.

WEATHER DATA SOURCES: ASOS-FMQ 19 (608) 427-1066

COMMUNICATIONS: CTAF 127.5 ATIS 120.475 257.85 PTD 372.2

Ⓡ **APP/DEP CON** 135.25 290.8 (Mon-Fri 1400-1600Z, except holidays, subject short notice change in support of NGB validated flying, check NOTAMS for current afld hrs.), other time ctc

Ⓡ **CHICAGO CENTER APP/DEP CON** 133.3 257.92

TOWER 127.5 239.25 (Mon-Fri 1400-1600Z, except holidays, subject short notice change in support of NGB validated flying, check NOTAMS for current afld hrs.) **GND CON** 121.9 275.8

SHEBOYGAN RANGE 260.4

HARDWOOD RANGE 132.025 297.75 358.8

AIRSPACE: CLASS D svc Mon-Fri 1400-0600Z except holidays subject short notice change in support of NGB validated flying, other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE GRB.

(L) **TACAN** Chan 41 VOK (110.4) N43°56.57' W90°15.54' at fld. 961/OE. Unmonitored when twr clsd. No NOTAM MP Mon 1400-1530Z.

TACAN unusable byd 20NM blo 4,000'.

ILS 108.5 I-VOK Rwy 27. Class IE. Unmonitored when twr clsd. Back course unusable. No NOTAM MP: Localizer Mon 1930-2030Z; Glide slope Mon 2030-2130Z.

COMM/NAV/WEATHER REMARKS: Limited Special Rules Area svc avbl, ctc Radar Approach Control at DSN 871-1779, C608-427-1779.

APP CRS	Rwy Idg	3346
114°	TDZE	1292
	Apt Elev	1292


RNAV (GPS) RWY 11

VIROQUA MUNI (Y51)






V NA	GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA. Use La Crosse altimeter setting.	MISSED APPROACH: Climb to 3000 direct TACON WP and hold.
MINNEAPOLIS CENTER 128.6 363.0		CTAF 122.9

Procedure NA for arrival on UKN VORTAC radials 342 CW 100, and arrival at BOOTY on V82-170-510 southeastbound.

3000
238°
(7.3)



1664

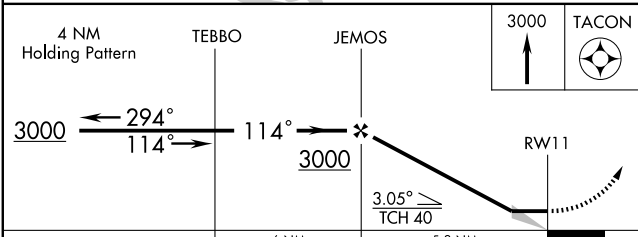

CATEGORY	A	B	C	D
LNNAV MDA	1800-1	508 (600-1)	1800-1½ 508 (600-1½)	NA
CIRCLING	2060-1 768 (800-1)	2060-1¼ 768 (800-1¼)	2120-2½ 828 (900-2½)	NA

HIRL Rwy 11-29

APP CRS
295°

Rwy Idg **3346**
TDZE **1292**
Apt Elev **1292**

RNAV (GPS) RWY 29


VIROQUA MUNI (Y51)

V GPS or RNP-0.3 Required.
A NA DME/DME RNP-0.3 NA.
Use La Crosse altimeter setting.


MISSED APPROACH: Climb to
3000 direct TEBBO WP and hold.

MINNEAPOLIS CENTER
128.6 363.0

CTAF
122.90

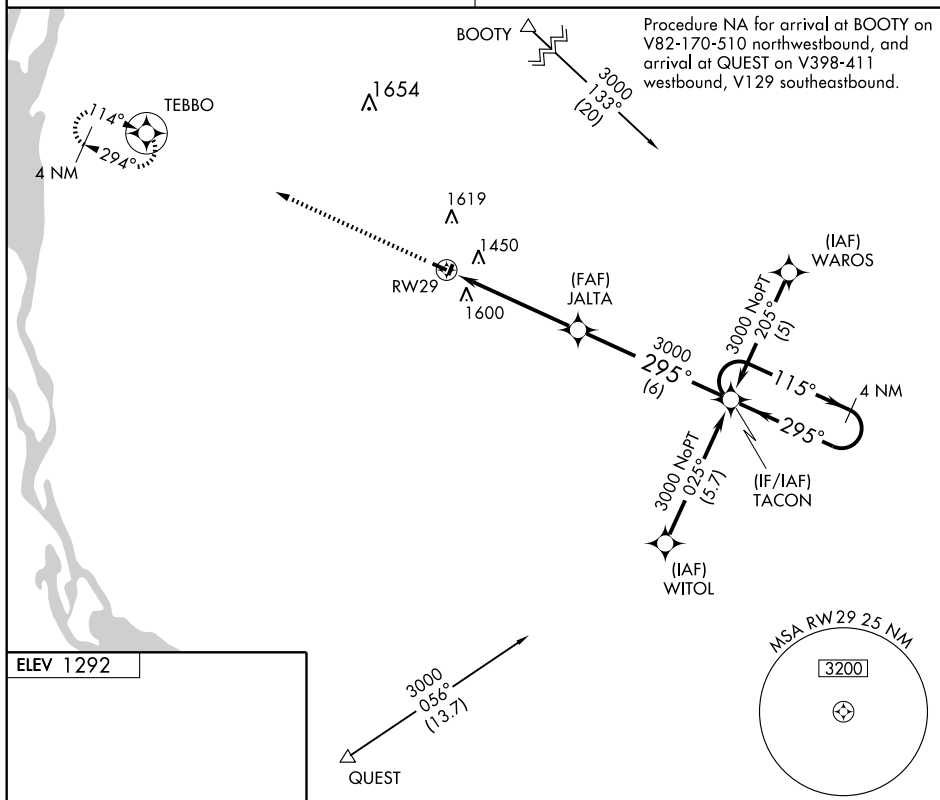

ELEV 1292



HIRL Rwy 11-29 **0**

VIROQUA, WISCONSIN
Orig-A 09295

43°35'N-90°54'W

VIROQUA MUNI (Y51)
RNAV (GPS) RWY 29

WALWORTH

BIG FOOT AIRFIELD (7V3) 3 W UTC-6(-5DT) N42°31.54' W88°39.18'

CHICAGO

951 TPA—1751(800) NOTAM FILE GRB

RWY 09-27: 2912X85 (TURF)

RWY 09: Tree.

RWY 18-36: 2108X100 (TURF) LIRL (NSTD)

RWY 18: Tree.

AIRPORT REMARKS: Unattended. Rwyms not plowed winter months—open to ski equipped acft only. Rwy 18-36 NSTD LIRL; Rwy 18 thld lgts are 45' S of rwy markers. Rwy 18-36 and Rwy 09-27 thlds marked with red half barrels.

ACTIVATE NSTD LIRL Rwy 18-36—123.75.

COMMUNICATIONS: CTAF 122.9

WASHINGTON ISLAND (2P2) 1 S UTC-6(-5DT) N45°23.17' W86°55.47'

GREEN BAY

652 B TPA—1652(1000) NOTAM FILE GRB

RWY 14-32: 2230X150 (TURF) LIRL

RWY 14: Road. **RWY 32:** Trees.

RWY 04-22: 1300X125 (TURF)

RWY 04: Trees. **RWY 22:** Trees.

AIRPORT REMARKS: Unattended. Rwy 14-32 +12' rise in rwy elevation NW 900'. Numerous flocks of waterfowl and deer on and in/ovf arpt. Rwy 14-32 and 04-22 plowed when snow is over 3 inches. Rwy 04-22 slopes downhill to the NE. Rwy 04 thld +20' higher than Rwy 22 thld. ACTIVATE LIRL Rwy 14-32 and rotating bcn—CTAF.

COMMUNICATIONS: CTAF 122.9

WATERTOWN MUNI (RYV) 0 S UTC-6(-5DT) N43°10.18' W88°43.39'

CHICAGO

833 B S4 FUEL 100LL, JET A OX 2 NOTAM FILE RYV

L-28H

RWY 05-23: H4429X75 (ASPH) S-30, D-60 MIRL

IAP

RWY 05: REIL. PAPI(P2L)—GA 3.0° TCH 50'. Thld dsplcd 190'. Tree. Rgt tfc.

RWY 23: REIL. PAPI(P2L)—GA 3.0° TCH 45'. Tree.

RWY 11-29: H2801X75 (ASPH) S-30 MIRL 0.4% up SE

RWY 11: Road. Rgt tfc. **RWY 29:** Road.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 05: TORA-4430 TODA-5110 ASDA-4550 LDA-4430

RWY 23: TORA-4430 TODA-4845 ASDA-4430 LDA-4430

AIRPORT REMARKS: Attended 1200-0400Z+. Arpt attended other hrs on req thru FBO. Ducks and seagulls occasionally near arpt during seasonal migrations. Deer on and in/ovf arpt. ACTIVATE MIRL Rwy 05-23 and Rwy 11-29, PAPI Rwy 05 and Rwy 23 and REIL Rwy 05 and Rwy 23—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.975 (920) 261-0734.

COMMUNICATIONS: CTAF/UNICOM 122.8

® MADISON APP/DEP CON 119.15 (1200-0500Z+)

® CHICAGO CENTER APP/DEP CON 133.3 (0500-1200Z+)

RADIO AIDS TO NAVIGATION: NOTAM FILE MKE.

BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01' W88°17.06' 277° 19.5 NM to fld. 1080/2E.
HIWAS.

ROCK RIVER NDB (MHW) 371 RYV N43°10.42' W88°43.52' at fld. NOTAM FILE RYV.

NDB unmonitored 0500-1000Z+.

NDB RYV	APP CRS	Rwy Idg	4239
371	039°	TDZE	821
		Apt Elev	833

NDB RWY 5

WATERTOWN MUNI (RYV)






MISSED APPROACH: Climb to 2500
then right turn direct RYV NDB and hold.

AWOS-3
119.975

MADISON APP CON ★
119.15 343.7

UNICOM
122.8 (CTAF) 0

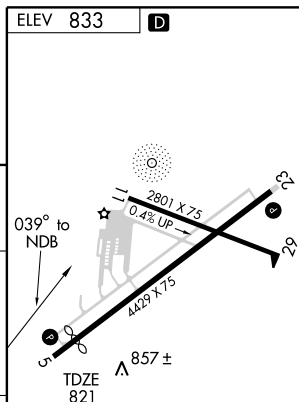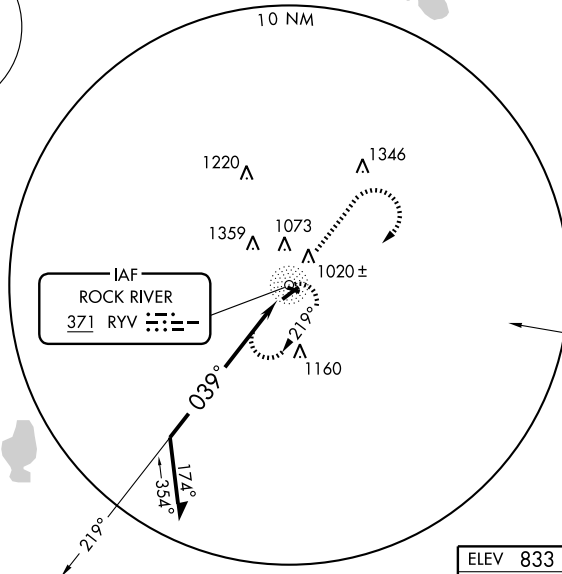

Remain
within 10 NM

2500

NDB

2500

RYV

371

CATEGORY	A	B	C	D
S-5	1440-1	619 (700-1)	1440-1¾ 619 (700-1¾)	1440-2 619 (700-2)
CIRCLING	1440-1	607 (700-1)	1440-1½ 607 (700-1½)	1720-3 887 (900-3)

REIL Rwy 5 and 23 0
MIRL Rwy 5-23 and 11-29 0

NDB RYV	APP CRS	Rwy Idg	4429
371	254°	TDZE	823
		Apt Elev	833

NDB RWY 23

WATERTOWN MUNI (RYV)


V Visibility reduction by helicopters NA. When local altimeter setting not received, use Dodge County altimeter setting and increase all MDA 60 feet, and increase visibility Cat. A, C and D ¼ mile.

MISSED APPROACH: Climb to 2800 then left turn direct RYV NDB and hold.

AWOS-3
119.975


MADISON APP CON ★
119.15 343.7

UNICOM
122.8 (CTAF) 0


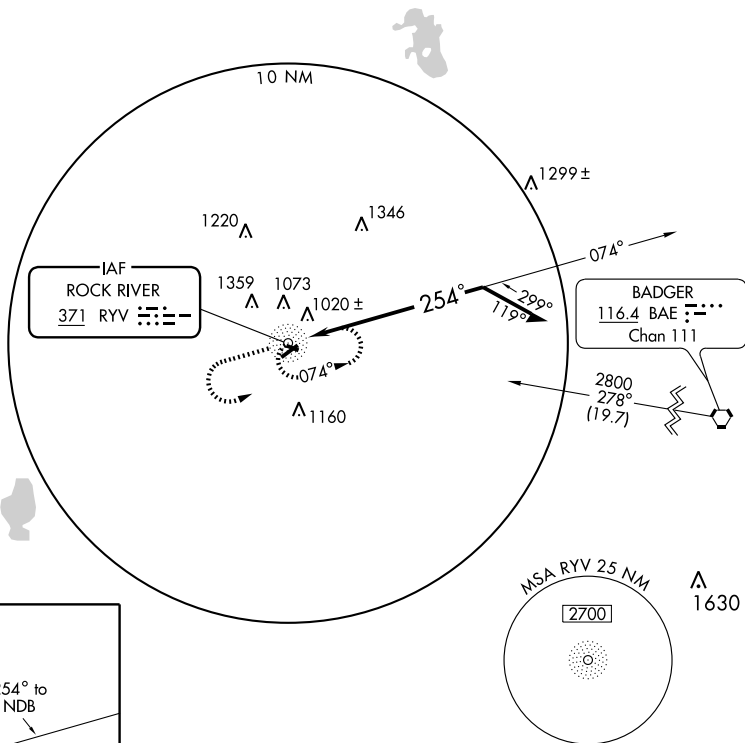


ELEV 833

D



REIL Rwy 5 and 23 **0**
MIRL Rwy 5-23 and 11-29 **0**

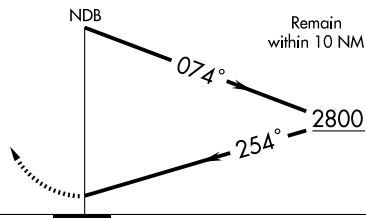

CATEGORY	A	B	C	D
S-23	1660-1 837 (900-1)	1660-1¼ 837 (900-1¼)	1660-2½ 837 (900-2½)	1660-2¾ 837 (900-2¾)
CIRCLING	1660-1 827 (900-1)	1660-1¼ 827 (900-1¼)	1660-2½ 827 (900-2½)	1720-3 887 (900-3)

WATERTOWN, WISCONSIN

Amdt 2 09071

43°10'N-88°43'W

WATERTOWN MUNI (RYV)

NDB RWY 23

APP CRS	Rwy Idg	4239
054°	TDZE	821
	Apt Elev	833

RNAV (GPS) RWY 5

WATERTOWN MUNI (RYV)


⚠ DME/DME RNP-0.3 NA Visibility reduction by helicopters NA. When local altimeter setting not received, use Dodge County altimeter setting. Straight-in minimums to Rwy 5 and Circling to Rwy 5/23 NA at night.

MISSED APPROACH: Climb to 3000 direct IJEMI and left turn via 019° track to WIGOR and hold.



AWOS-3
119.975

MADISON APP CON ★
119.15 343.7


UNICOM
122.8 (CTAF)

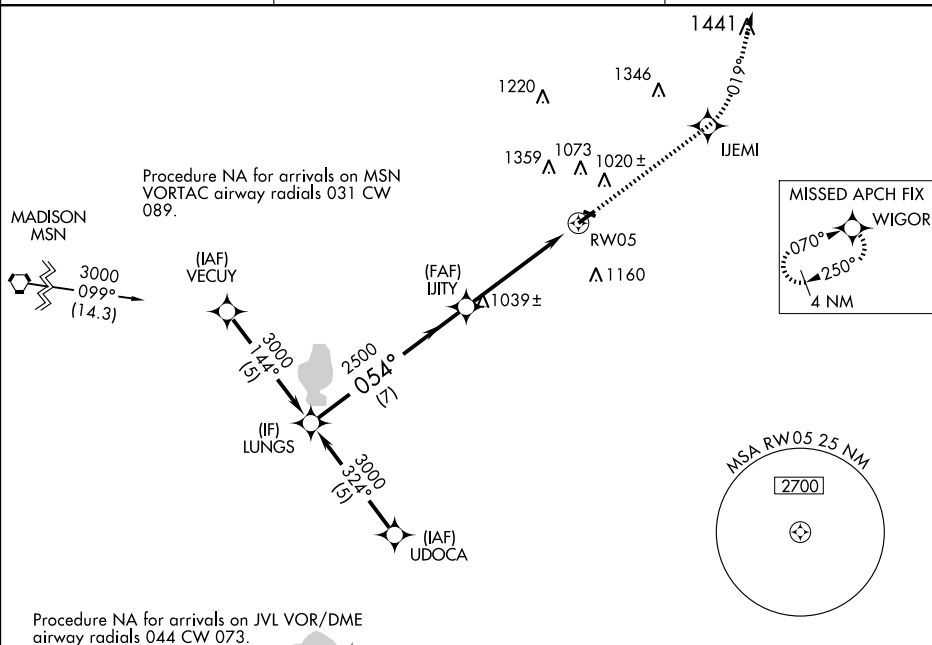

Procedure NA for arrivals on JVL VOR/DME airway radials 044 CW 073.

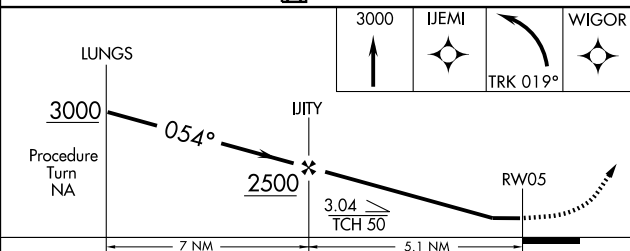

CATEGORY	A	B	C	D
LNNAV MDA	1440-1 619 (700-1)	1440-1 619 (700-1)	1440-1 619 (700-1)	1440-2 619 (700-2)
CIRCLING	1440-1 607 (700-1)	1440-1 607 (700-1)	1440-1 607 (700-1)	1720-3 887 (900-3)

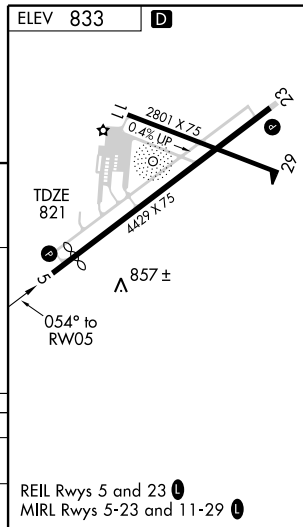

APP CRS	Rwy Idg	2801
113°	TDZE	833
	Apt Elev	833

RNAV (GPS) RWY 11

WATERTOWN MUNI (RYV)




▼ **▲** DME/DME RNP-0.3 NA When local altimeter setting not received, use Dodge County altimeter setting and increase all MDA 60 feet, increase LNAV visibility Cat. C and D ¼ mile, increase Circling visibility Cat. C ¼ mile. VDP NA when using Dodge County altimeter setting. Circling to Rwy 5/23 NA at night.

MISSED APPROACH: Climbing left turn to 3000 direct UCILU and hold.

AWOS-3
119.975

MADISON APP CON ★
119.15 343.7

UNICOM
122.8 (CTAF) 0

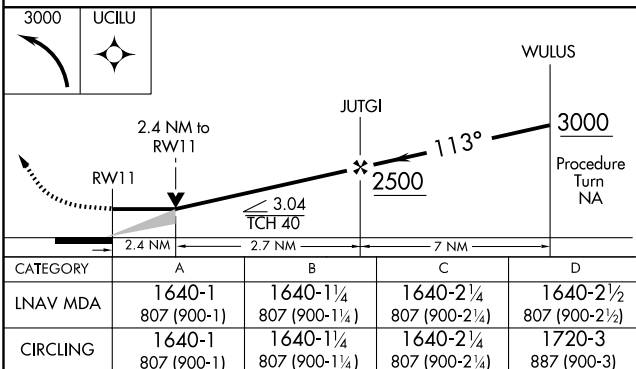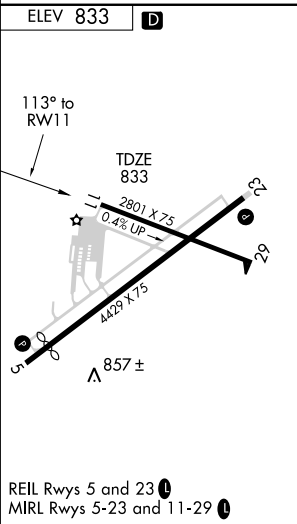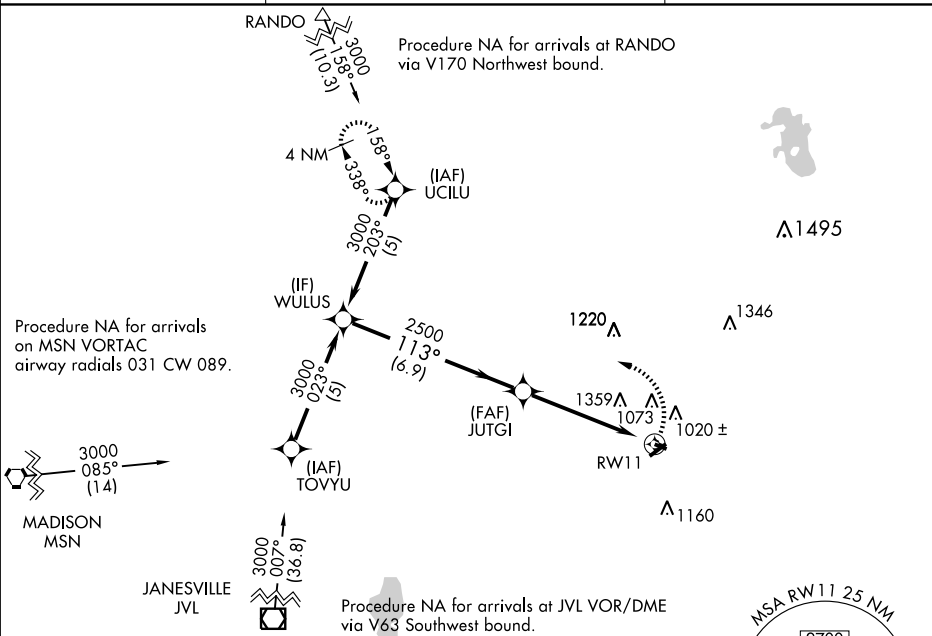

APP CRS	Rwy Idg	4429
234°	TDZE	823
	Apt Elev	833

RNAV (GPS) RWY 23

WATERTOWN MUNI (RYV)


T DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Dodge County altimeter setting and increase all MDA 60 feet, and increase LNAV Cat. C and D visibility ¼ mile. Straight-in minimums to Rwy 23 and Circling to Rwy 5/23 NA at night.

MISSED APPROACH:
Climbing right turn to 3000 direct WIGOR and hold.

AWOS-3
119.975


MADISON APP CON ★
119.15 343.7

UNICOM
122.8 (CTAF) ①

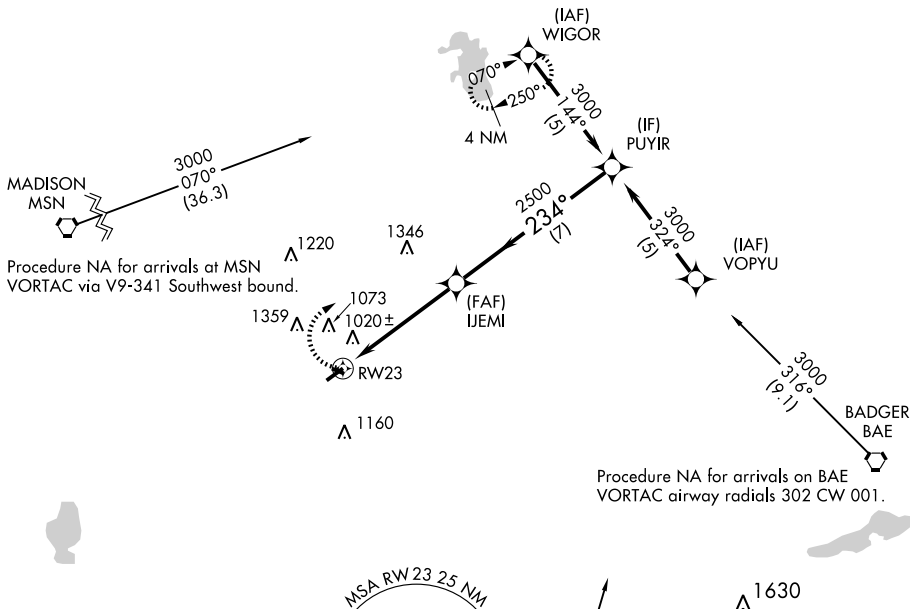



ELEV 833

D



REIL Rwy 5 and 23 ①

MIRL Rwy 5-23 and 11-29 ①

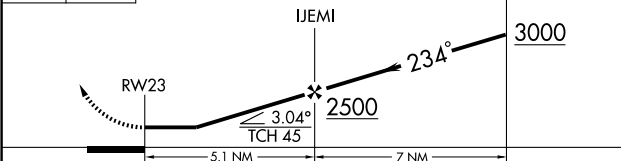

CATEGORY	A	B	C	D
LNAV MDA	1420-1	597 (600-1)	1420-1½ 597 (600-1½)	1420-1¾ 597 (600-1¾)
CIRCLING	1420-1 587 (600-1)	1440-1 607 (700-1)	1440-1¾ 607 (700-1¾)	1720-3 887 (900-3)

APP CRS	Rwy Idg	2801
293°	TDZE	833
	Apt Elev	833

RNAV (GPS) RWY 29

WATERTOWN MUNI (RYV)


▼ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Dodge County altimeter setting and increase all MDA 60 feet, increase LNAV Cat. C and D visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct JUTGI and right turn via 329° track to UCILU and hold.


AWOS-3
119.975

MADISON APP CON ★
119.15 343.7

UNICOM
122.8 (CTAF) 0

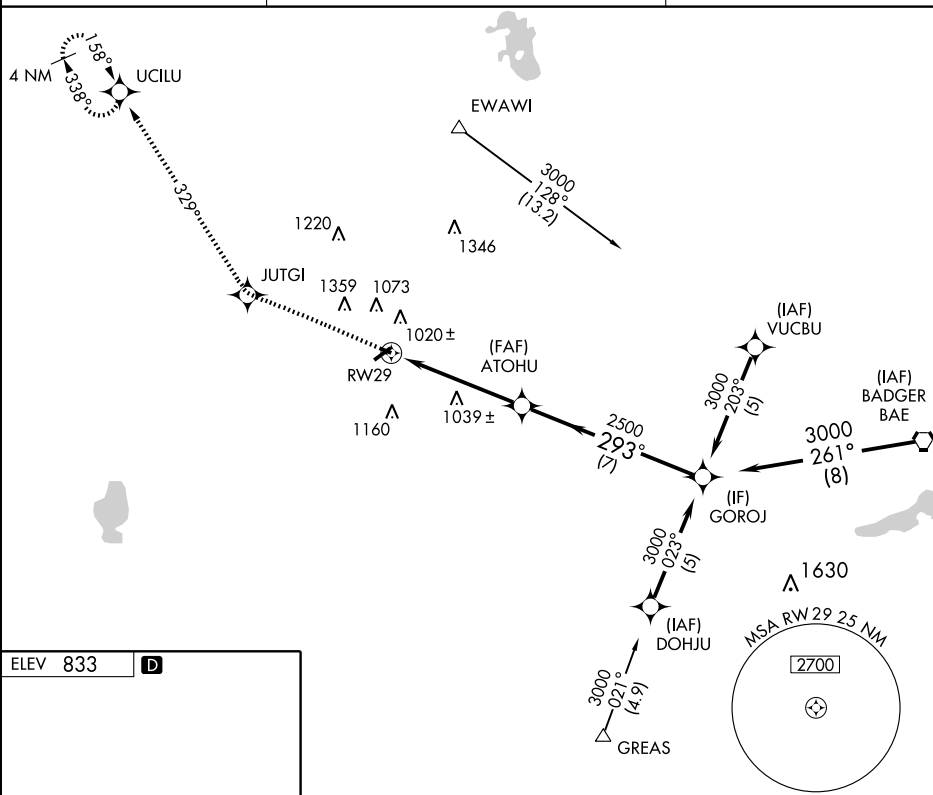

ELEV 833 **D**



REIL Rwy 5 and 23 **0**
MIRL Rwy 5-23 and 11-29 **0**

3000	JUTGI	329° TRK	UCILU	
				GOROJ Procedure Turn NA
			ATOHU	3000
			RW29	2500
				3.04° TCH 40
				5 NM
				7 NM
CATEGORY	A	B	C	D
LNAV MDA	1400-1	567 (600-1)	1400-1½ 567 (600-1½)	1400-1¾ 567 (600-1¾)
CIRCLING	1400-1 567 (600-1)	1440-1 607 (700-1)	1440-1¾ 607 (700-1¾)	1720-3 887 (900-3)

VORTAC BAE <u>116.4</u> Chan 111	APP CRS 278°	Rwy Idg 2801 TDZE 833 Apt Elev 833
--	------------------------	---

VOR/DME RWY 29
WATERTOWN MUNI (RYV)




MISSED APPROACH: Climb to 2500 then left turn via BAE R-278 to KABBE 14 DME and hold.


AWOS-3
119.975

MADISON APP CON ★
119.15 343.7


UNICOM
122.8 (CTAF) **L**

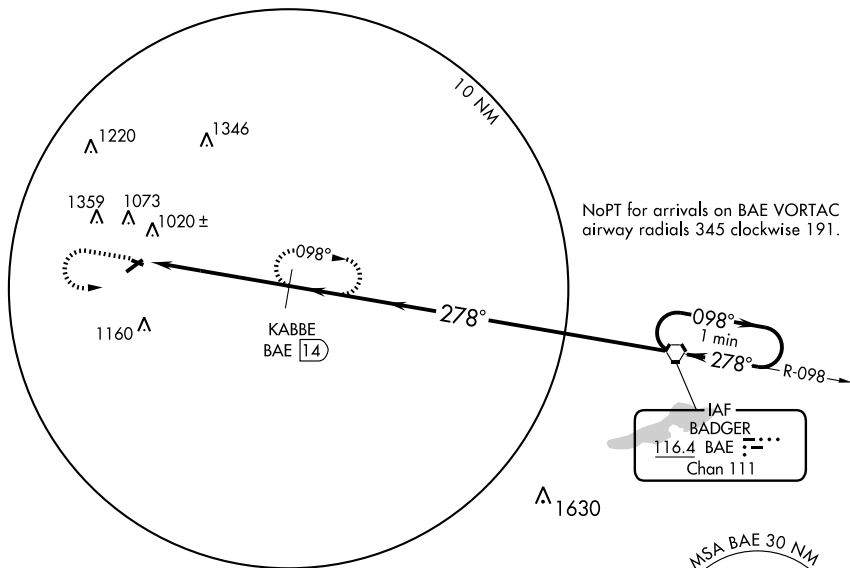

ELEV	833	D
------	-----	----------



REIL Rwys 5 and 23 **L**
MIRL Rwys 5-23 and 11-29 **L**

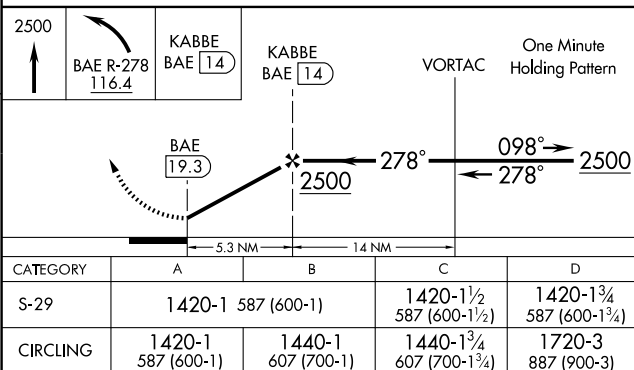

WATERTOWN, WISCONSIN
Orig-B 09071

43°10'N-88°43'W


WATERTOWN MUNI (RYV)
VOR/DME RWY 29

EC-3, 23 SEP 2010 to 21 OCT 2010

AIRPORT DIAGRAM

AL-5078 (FAA)

WAUKESHA COUNTY (UES)
WAUKESHA, WISCONSIN

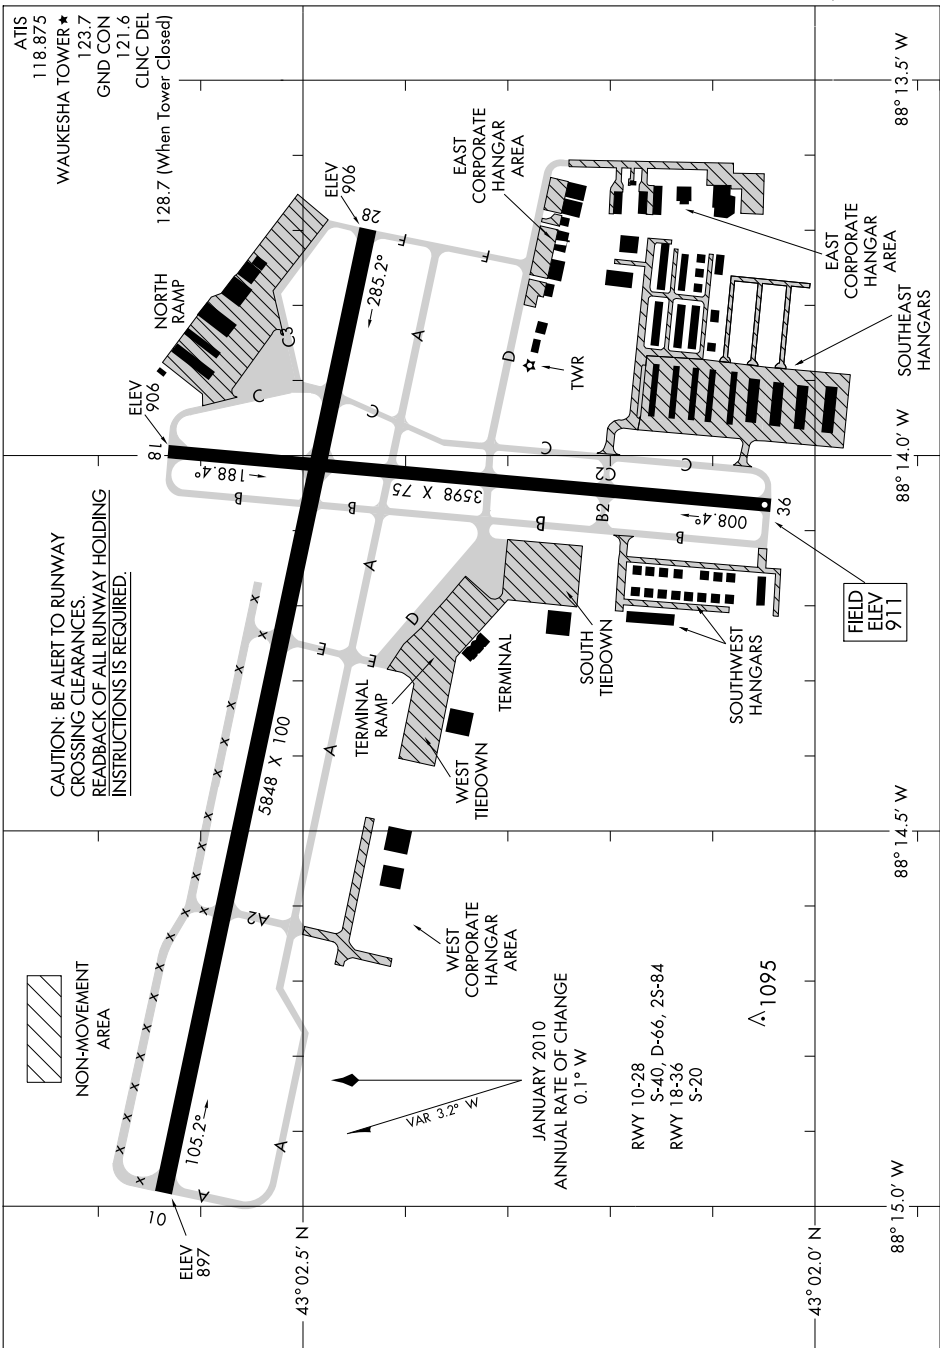

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010

AIRPORT DIAGRAM

WAUKESHA, WISCONSIN
WAUKESHA COUNTY (UES)

WAUKESHA CO (UES) 2 N UTC-6(-5DT) N43°02.46' W88°14.22'

CHICAGO

911 B S4 FUEL 100LL, JET A OX 1 TPA-2811(1900) NOTAM FILE UES

H-5E, L-28H, A

RWY 10-28: H5848X100 (CONC-GRVD) S-40, D-66, 2S-84 HIRL

IAP, AD

RWY 10: MALSR. PAPI(P4R)—GA 3.0° TCH 53'. Trees.

RWY 28: REIL. VASI(V4L)—GA 3.75° TCH 37'. Tree.

RWY 18-36: H3598X75 (ASPH) S-20 MIRL

RWY 18: REIL. PAPI (P2L). Road.

RWY 36: REIL. PAPI (P2L). Road.

AIRPORT REMARKS: Attended continuously. Deer and coyotes on and in/ovf arpt. Call 262-549-6150 for oxygen availability. Twy D clsd at Rwy 18-36 indef. HIRL Rwy 10-28 preset on low ints; to increase ints and ACTIVATE MIRL Rwy 18-36; REIL Rwy 28, Rwy 18, Rwy 36, and MALSR Rwy 10—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.875 (262) 521-5226.

Unavailable 1200-0300Z†.

COMMUNICATIONS: CTAF 123.7 ATIS 118.875 UNICOM 122.95

① MILWAUKEE APP/DEP CON 125.35 Cinc Del 128.7 (When UES twr clsd)

TOWER 123.7 (1200-0300Z†) GND CON 121.6


AIRSPACE: CLASS D svc 1200-0300Z† other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE MKE.

BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01'

W88°17.06' 153° 5 NM to fld. 1080/2E. HIWAS.

NDB (MHW) 359 UES N43°02.68' W88°14.11' at fld. NOTAM FILE UES. OTS indef. SHUT DOWN.

ILS 109.5 I-SKC Rwy 10. Unmonitored when twr clsd.

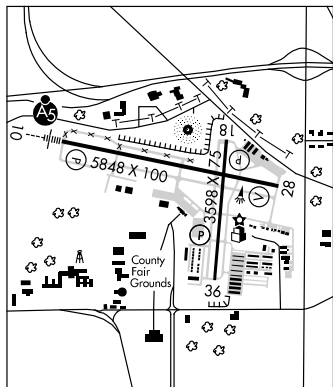**WAUNAKEE** (6P3) 1 S UTC-6(-5DT) N43°10.72' W89°27.08'

CHICAGO

954 FUEL 100LL TPA-1954(1000) NOTAM FILE GRB

RWY 09-27: H2223X30 (ASPH) LIRL (NSTD)

RWY 27: Thld dsplcd 146'. Building.

AIRPORT REMARKS: Unattended. For fuel call 608-225-1109. ACTIVATE LIRL Rwy 09-27—CTAF. Rwy 09-27 NSTD LIRL 165' from E end; 155' from W end. 1910' of rwy is lgtd. Rwy lgts approximately 60' from pavement edge. Rwy 27 NSTD dsplcd thld markings.

COMMUNICATIONS: CTAF 122.9**WAUPACA MUNI** (PCZ) 3 SE UTC-6(-5DT) N44°20.00' W89°01.19'

GREEN BAY

840 B S4 FUEL 100LL OX 4 TPA-1840(1000) NOTAM FILE PCZ

H-2K, L-14J, 28H

RWY 10-28: H5200X100 (ASPH) MIRL 0.7% up W

IAP

RWY 10: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.

RWY 28: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Trees. Rgt tfc.

RWY 13-31: H3899X75 (ASPH) S-13 MIRL 0.6% up W

RWY 13: PAPI(P4L)—GA 3.0° TCH 33'. Trees.

RWY 31: PAPI(P2L)—GA 3.0° TCH 38'. Road.

AIRPORT REMARKS: Attended May 21-Sep 9 1400-0200Z†, Sep 10-May 20 1400-2300Z†. ACTIVATE MIRL Rwy 13-31 and PAPI Rwy 13 and Rwy 31 and REIL Rwy 10—CTAF. MIRL Rwy 10-28 and PAPI Rwy 10 and Rwy 28 opr dusk-dawn, to incr ints ACTIVATE—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.625 (920) 867-2407.**COMMUNICATIONS:** CTAF/UNICOM 122.8

① MINNEAPOLIS CENTER APP/DEP CON 124.4

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE STE.

STEVENS POINT (L) VORTAC 110.6 STE Chan 43 N44°32.60' W89°31.83' 121° 25.3 NM to fld. 1110/2E.

HIWAS.

NDB (MHW) 382 PCZ N44°20.06' W89°01.18' at fld. Unmonitored. NOTAM FILE PCZ. NDB OTS indef.

LOC I-SKC 109.5	APP CRS 103°	Rwy Idg TDZE Apt Elev	5848 901 911
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 10



WAUKESHA COUNTY (UES)

▼ When local altimeter setting not received, use Lawrence J. Timmerman altimeter setting and increase DA to 1147 and all MDAs 60 feet, increase S-LOC 10 Cat. C visibility to RVR 5000, Cat. D to RVR 6000. Increase circling visibility Cat. D ¼ mile.
▲ * RVR 1800 authorized with the use of FD or AP or HUD to DA.





MISSED APPROACH: Climb to 1500 then climbing left turn to 2800 direct BAE VORTAC and hold.

ATIS 118.875	MILWAUKEE APP CON 125.35 307.0	WAUKESHA TOWER ★ 123.7 (CTAF) 0	GND CON 121.6	MILWAUKEE CLNC DEL 128.7 (When tower closed)	UNICOM 122.95
------------------------	--	--	-------------------------	--	-------------------------

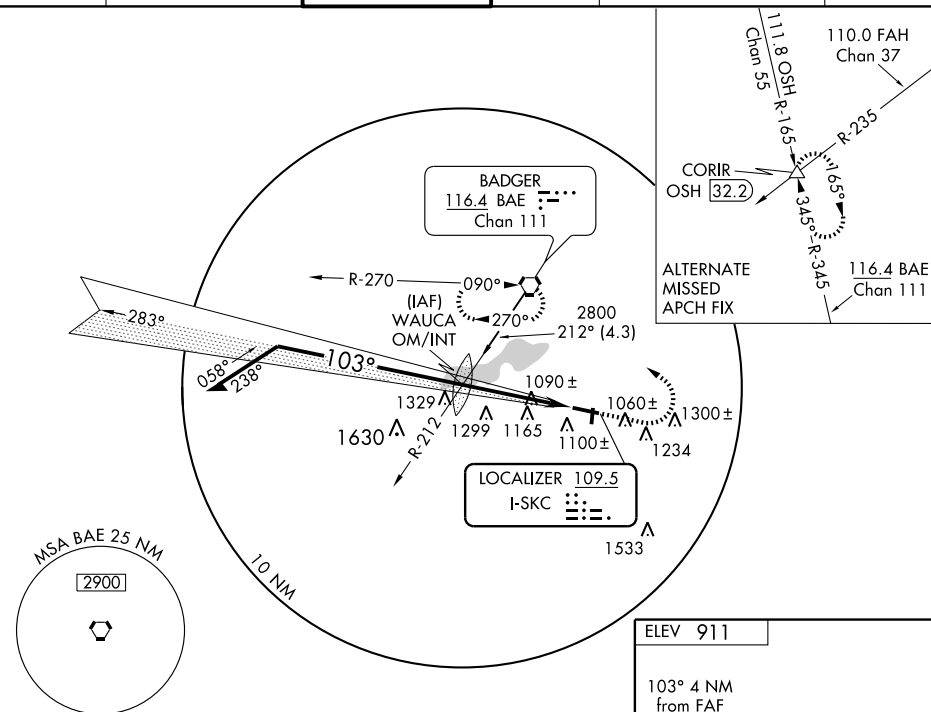

ALTERNATE MISSED APCH FIX

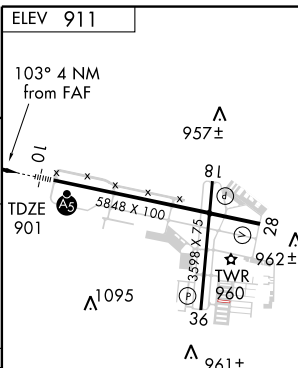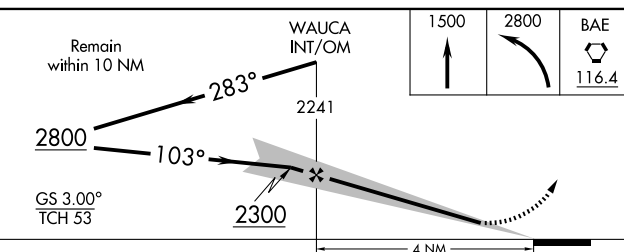

CATEGORY	A	B	C	D
S-ILS-10	*1101/24 200 (200-½)			
S-LOC-10	1360/24 459 (500-½)	1360/40 459 (500-¾)	1360/50 459 (500-1)	
CIRCLING	1460-1 549 (600-1)	1480-1 569 (600-1)	1520-1¾ 609 (700-1¾)	1600-2¼ 689 (700-2¼)

HIRL Rwy 10-28	60	90	120	150	180
MIRL Rwy 18-36	60	90	120	150	180
REIL Rwy 18, 28 and 36	60	90	120	150	180
FAF to MAP 4 NM	4:00	2:40	2:00	1:36	1:20

WAAS CH 53411 W10A	APP CRS 103°	Rwy Idg TDZE 901 Apt Elev 911
--	------------------------	---

RNAV (GPS) RWY 10

WAUKESHA COUNTY (UES)


▼ Baro-VNAV NA when using Lawrence J Timmerman altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lawrence J Timmerman altimeter setting and increase all DA 46 feet and all MDA 60 feet, increase LNAV/VNAV all Cats. visibility ¼ mile; increase Circling Cat. D visibility ¼ mile.

MALSR




MISSED APPROACH: Climb to 3000 direct WOGPO and left turn via 013° track to WOGUR and via 312° track to HAWKN and hold.

ATIS 118.875	MILWAUKEE APP CON 125.35 307.0	WAUKESHA TOWER ★ 123.7 (CTAF) 0	GND CON 121.6	MILWAUKEE CLNC DEL 128.7 (When tower closed)	UNICOM 122.95
------------------------	--	---	-------------------------	--	-------------------------

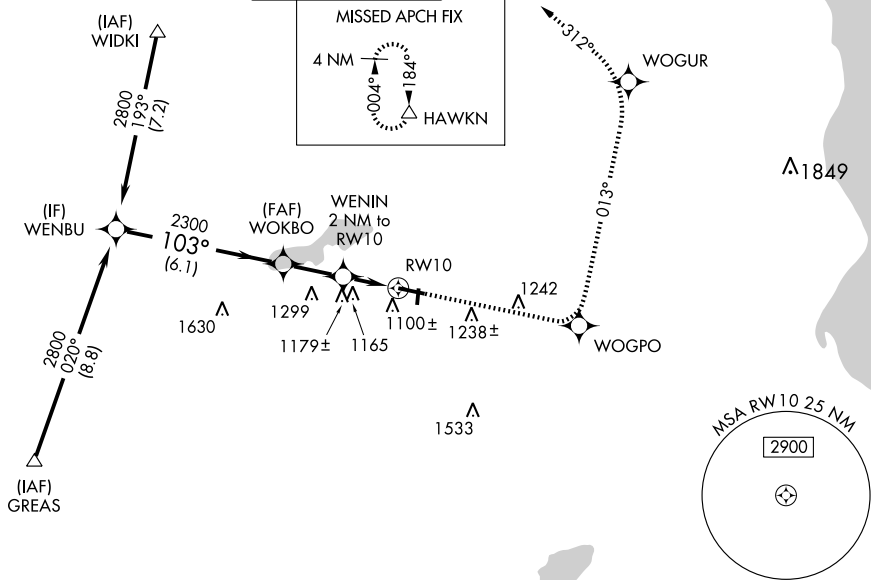


Procedure NA for arrivals at GREAS via V63 Southwest bound.

Procedure Turn NA	3000	WOGPO	WOGUR	TRK 013°	TRK 312°	HAWKN
-------------------	------	-------	-------	----------	----------	-------

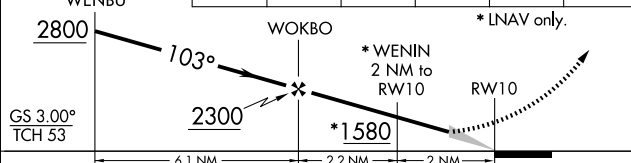

CATEGORY	A	B	C	D
LPV DA	1101/24 200 (200-½)			
LNAV/VNAV DA	1537-1¾ 636 (700-1¾)			
LNAV MDA	1440/24 539 (600-½)	1440/50 539 (600-1)	1440/60 539 (600-1¼)	
CIRCLING	1460-1 549 (600-1)	1480-1 569 (600-1)	1520-1¾ 609 (700-1¾)	1600-2¼ 689 (700-2¼)

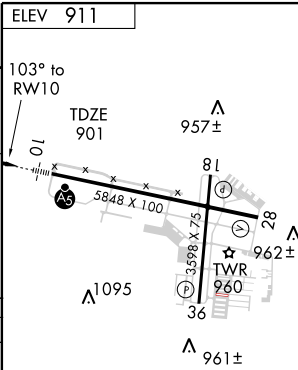

HIRL Rwy 10-28 0
MIRL Rwy 18-36 0
REIL Rwy 18, 28 and 36 0

APP CRS	Rwy Idg	5848
270°	TDZE	906
	Apt Elev	911

RNAV (GPS) RWY 28

Waukesha County (UES)

- T** DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local
A altimeter setting not received, use Lawrence J Timmerman altimeter setting
and increase all MDA 60 feet, increase Circling Cat. C and D visibility ¼ mile.

MISSED APPROACH: Climb to 3000
direct VAGYU and right turn via
012° track to HAWKN and hold.


ATIS
118.875

MILWAUKEE APP CON
125.35 307.0


WAUKESHA TOWER ★
123.7 (CTAF) L

GND CON
121.6

MILWAUKEE CLNC DEL
128.7 (When tower closed)

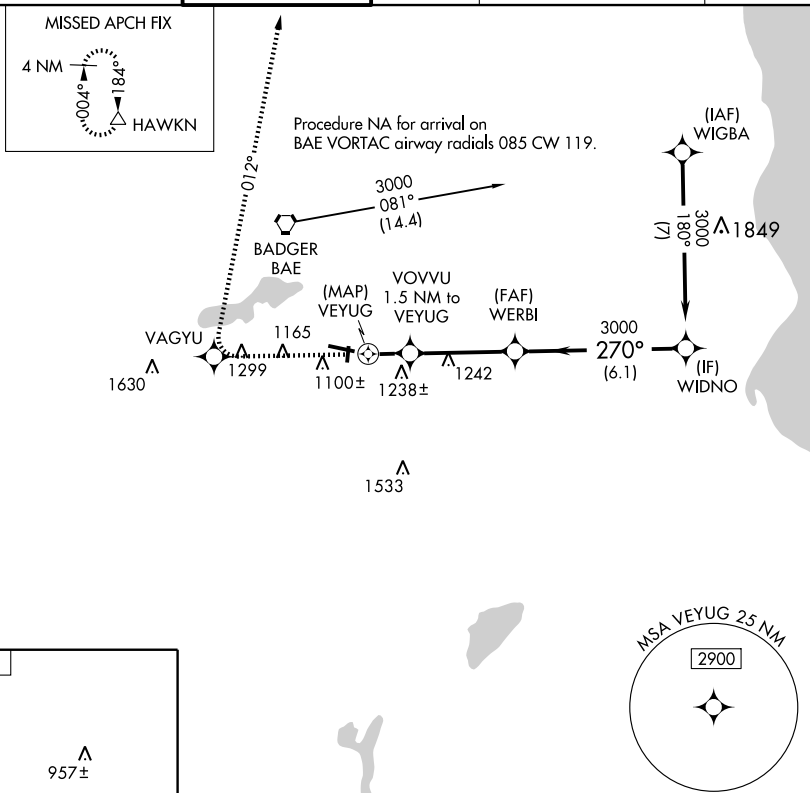UNICOM
122.95

ELEV	911
------	-----



HIRL Rwy 10-28 **L**
MIRL Rwy 18-36 **L**
REIL Rwy 18, 28 and 36 **L**

Waukesha, Wisconsin

Orig 10154

43°02'N - 88°14'W

Waukesha County (UES)

RNAV (GPS) RWY 28

Procedure Turn NA

3000

VAGYU

TRK 012°

HAWK

WERBI

WIDNO

VOVVU 1.5 NM to VYUG

VEYUG

3.38°

TCH 37

3000

270°

3000

VGSi and descent angles not coincident.

1.5 NM

3.8 NM

6.1 NM

CATEGORY	A	B	C	D
RNAV MDA	1420-1	514 (600-1)	1420-1½ 514 (600-1½)	1420-1¾ 514 (600-1¾)
CIRCLING	1460-1 549 (600-1)	1480-1 569 (600-1)	1520-1¾ 609 (700-1¾)	1600-2¼ 689 (700-2¼)

VEENA TWO ARRIVAL (VEENA.VEENA2)


MILWAUKEE, WISCONSIN

MILWAUKEE APP CON
126.5 307.0
GENERAL MITCHELL ATIS
126.4
TIMMERMAN ATIS
128.3
WAUKEGAN ATIS
132.4
KENOSHA ATIS
127.175
WAUKESHA ATIS
118.875

BADGER
116.4 BAE
Chan 111

JANESVILLE
114.3 JVL
Chan 90
N42° 33.48' - W89° 06.32'
L-28

JOLIET
112.3 JOT
Chan 70
N41° 32.79' - W88° 19.10'
L-28, H-5

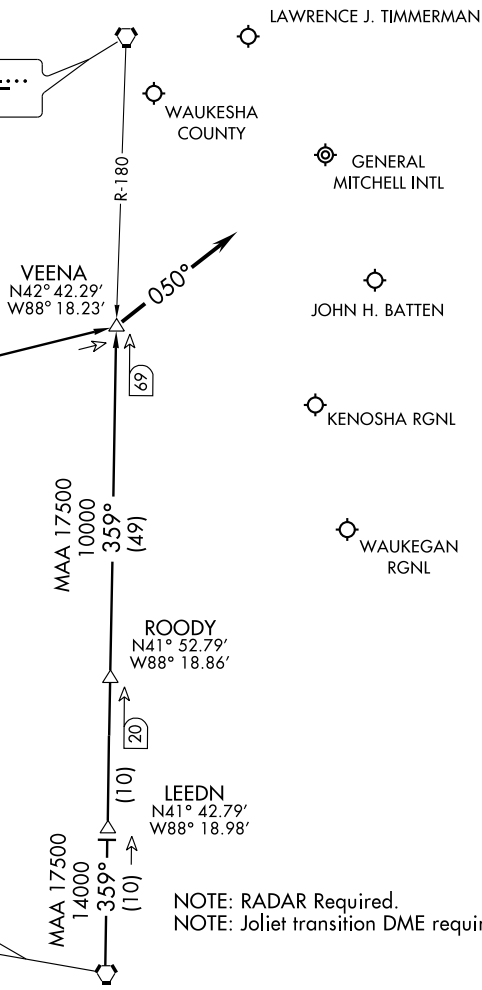

NOTE: Chart not to scale.

JANESVILLE TRANSITION (JVL.VEENA2): From over JVL VOR/DME via JVL R-073 to VEENA INT. Thence . . .

JOLIET TRANSITION (JOT.VEENA2): From over JOT VORTAC via JOT R-359 to VEENA INT. Thence . . .

. . . Depart VEENA INT heading 050° for initial vector to final approach.

LOST COMMUNICATIONS: From VEENA INT proceed direct IAF for destination airport.

VEENA TWO ARRIVAL (VEENA.VEENA2)

MILWAUKEE, WISCONSIN



VORTAC BAE 116.4 Chan 111	APP CRS 153°	Rwy ldg TDZE Apt Elev 911	N/A N/A 911
---	------------------------	---	--------------------------

VOR-A
WAUKESHA COUNTY (UES)



▼ When local altimeter setting not received, use Lawrence J Timmerman
▲ altimeter setting and increase all MDA 60 feet, increase Circling Cat.
D visibility ¼ mile.

MISSED APPROACH: Climb to 2000,
then climbing right turn to 2800
direct BAE VORTAC and hold.

ATIS 118.875	MILWAUKEE APP CON 125.35 307.0	WAUKESHA TOWER ★ 123.7 (CTAF) 0	GND CON 121.6	MILWAUKEE CLNC DEL 128.7 (When tower closed)	UNICOM 122.95
------------------------	--	---	-------------------------	--	-------------------------

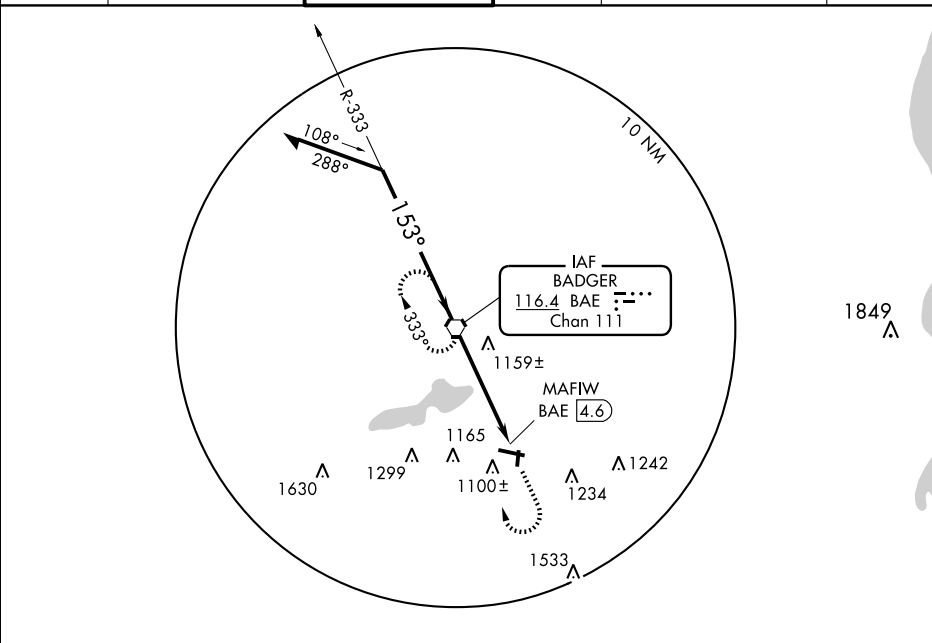

Remain
within 10 NM

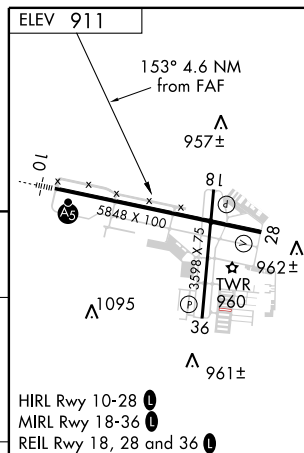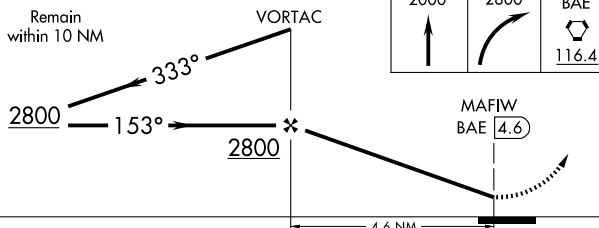

CATEGORY	A	B	C	D	FAF to MAP 4.6 NM					
CIRCLING	1460-1 549 (600-1)	1480-1 569 (600-1)	1520-1¾ 609 (700-1¾)	1600-2¼ 689 (700-2¼)	Knots	60	90	120	150	180
					Min:Sec	4:36	3:04	2:18	1:50	1:32

WAUKESHA CO (UES) 2 N UTC-6(-5DT) N43°02.46' W88°14.22'

CHICAGO

911 B S4 FUEL 100LL, JET A OX 1 TPA-2811(1900) NOTAM FILE UES

H-5E, L-28H, A

RWY 10-28: H5848X100 (CONC-GRVD) S-40, D-66, 2S-84 HIRL

IAP, AD

RWY 10: MALSR. PAPI(P4R)—GA 3.0° TCH 53'. Trees.

RWY 28: REIL. VASI(V4L)—GA 3.75° TCH 37'. Tree.

RWY 18-36: H3598X75 (ASPH) S-20 MIRL

RWY 18: REIL. PAPI (P2L). Road.

RWY 36: REIL. PAPI (P2L). Road.

AIRPORT REMARKS: Attended continuously. Deer and coyotes on and in/ovf arpt. Call 262-549-6150 for oxygen availability. Twy D clsd at Rwy 18-36 indef. HIRL Rwy 10-28 preset on low ints; to increase ints and ACTIVATE MIRL Rwy 18-36; REIL Rwy 28, Rwy 18, Rwy 36, and MALSR Rwy 10—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.875 (262) 521-5226.

Unavailable 1200-0300Z†.

COMMUNICATIONS: CTAF 123.7 ATIS 118.875 UNICOM 122.95

Ⓡ **MILWAUKEE APP/DEP CON** 125.35 Cinc Del 128.7 (When UES twr clsd)
TOWER 123.7 (1200-0300Z†) **GND CON** 121.6


AIRSPACE: CLASS D svc 1200-0300Z† other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE MKE.

BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01'

W88°17.06' 153° 5 NM to fld. 1080/2E. HIWAS.

NDB (MHW) 359 UES N43°02.68' W88°14.11' at fld. NOTAM FILE UES. OTS indef. SHUT DOWN.

ILS 109.5 I-SKC Rwy 10. Unmonitored when twr clsd.

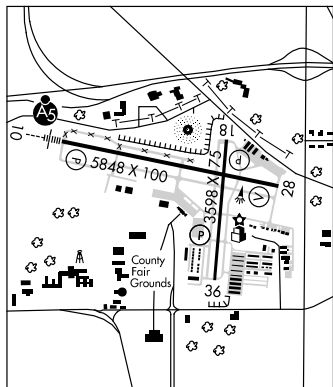**WAUNAKEE** (6P3) 1 S UTC-6(-5DT) N43°10.72' W89°27.08'

CHICAGO

954 FUEL 100LL TPA-1954(1000) NOTAM FILE GRB

RWY 09-27: H2223X30 (ASPH) LIRL (NSTD)

RWY 27: Thld dsplcd 146'. Building.

AIRPORT REMARKS: Unattended. For fuel call 608-225-1109. ACTIVATE LIRL Rwy 09-27—CTAF. Rwy 09-27 NSTD LIRL 165' from E end; 155' from W end. 1910' of rwy is lgtd. Rwy lgts approximately 60' from pavement edge. Rwy 27 NSTD dsplcd thld markings.

COMMUNICATIONS: CTAF 122.9**WAUPACA MUNI** (PCZ) 3 SE UTC-6(-5DT) N44°20.00' W89°01.19'

GREEN BAY

840 B S4 FUEL 100LL OX 4 TPA-1840(1000) NOTAM FILE PCZ

H-2K, L-14J, 28H

RWY 10-28: H5200X100 (ASPH) MIRL 0.7% up W

IAP

RWY 10: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.

RWY 28: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Trees. Rgt tfc.

RWY 13-31: H3899X75 (ASPH) S-13 MIRL 0.6% up W

RWY 13: PAPI(P4L)—GA 3.0° TCH 33'. Trees.

RWY 31: PAPI(P2L)—GA 3.0° TCH 38'. Road.

AIRPORT REMARKS: Attended May 21-Sep 9 1400-0200Z†, Sep 10-May 20 1400-2300Z†. ACTIVATE MIRL Rwy 13-31 and PAPI Rwy 13 and Rwy 31 and REIL Rwy 10—CTAF. MIRL Rwy 10-28 and PAPI Rwy 10 and Rwy 28 opr dusk-dawn, to incr ints ACTIVATE—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.625 (920) 867-2407.**COMMUNICATIONS:** CTAF/UNICOM 122.8Ⓡ **MINNEAPOLIS CENTER APP/DEP CON** 124.4

GCO 121.725 (FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE STE.

STEVENS POINT (L) VORTAC 110.6 STE Chan 43 N44°32.60' W89°31.83' 121° 25.3 NM to fld. 1110/2E.

HIWAS.

NDB (MHW) 382 PCZ N44°20.06' W89°01.18' at fld. Unmonitored. NOTAM FILE PCZ. NDB OTS indef.

NDB PCZ 382	APP CRS 300°	Rwy Idg TDZE 819 Apt Elev 840	3899
-----------------------	------------------------	---	-------------

NDB RWY 31

WAUPACA MUNI (PCZ)

NA If local altimeter setting not received, use Outagamie County Rgnl altimeter setting and increase all MDAs 80 feet. Circling to Rwy 13 NA at night.



MISSED APPROACH: Climb to 2000 then climbing left turn to 2800 direct PCZ NDB and hold.

AWOS-3
118.625

MINNEAPOLIS CENTER
124.4 317.7


GCO
121.725

UNICOM
122.8 (CTAF) **0**

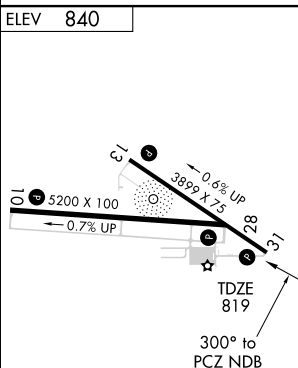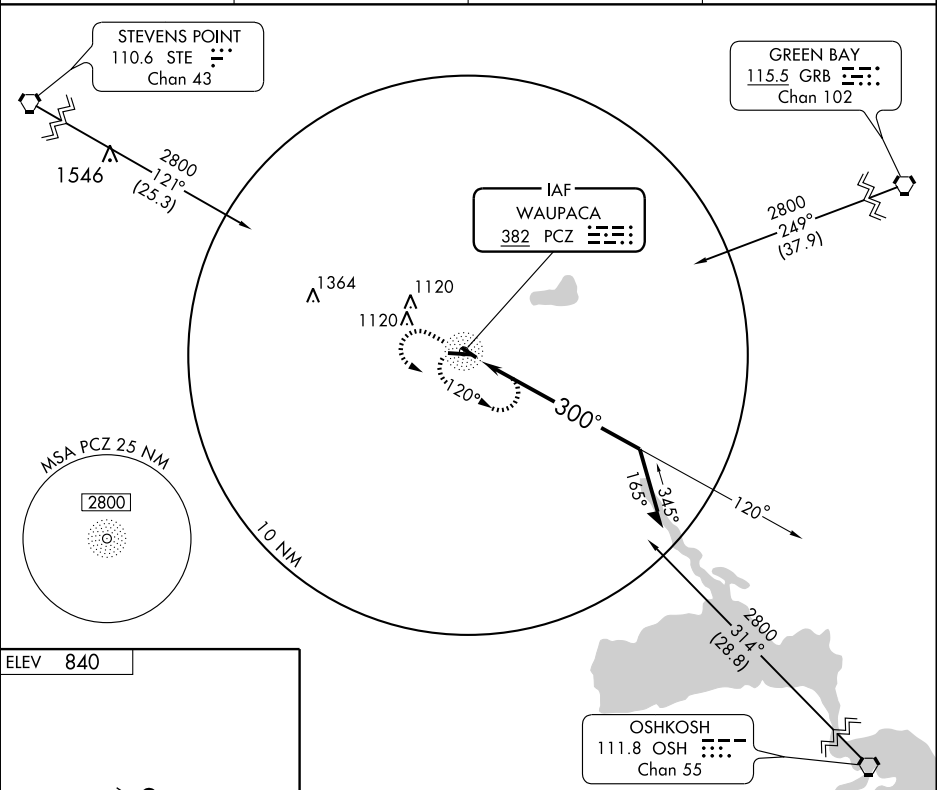

REIL Rwy 28
REIL Rwy 10 **0**
MRL Rwy 10-28 and 13-31 **0**

2000	2800	PCZ 382
------	------	-------------------

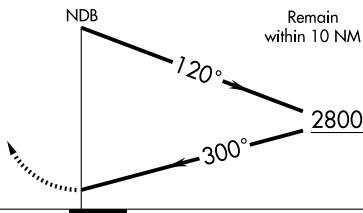

CATEGORY	A	B	C	D
S-31	1440-1	621 (600-1)	1440-1¾ 621 (600-1¾)	1440-2 621 (600-2)
CIRCLING	1440-1	600 (600-1)	1440-1¾ 600 (600-1¾)	1440-2 600 (600-2)

APP CRS **094°**
Rwy ldg **5200**
TDZE **840**
Apt Elev **840**

RNAV (GPS) RWY 10

WAUPACA MUNI (PCZ)

▽ If local altimeter setting not received, use Outagamie County
▲ Rgnl altimeter setting and increase all MDAs 80 feet.
Circling to Rwy 13 NA at night. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to
2800 direct WVEGA and hold.


AWOS-3
118.625

MINNEAPOLIS CENTER
124.4 317.7



GCO
121.725

UNICOM
122.8 (CTAF) 0

Procedure NA for arrival at
STE VORTAC on V228 northbound.

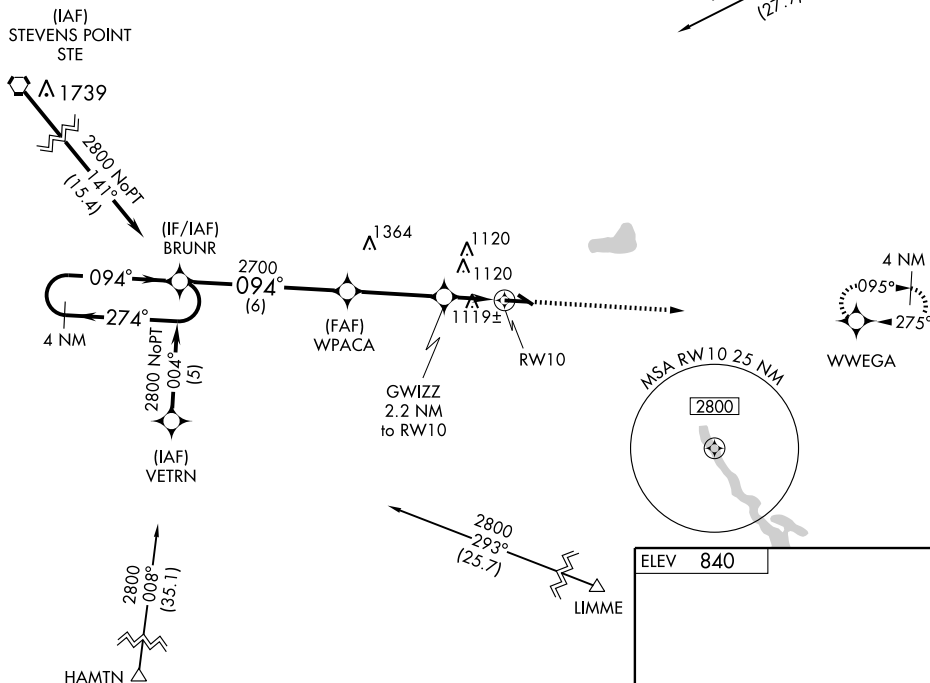

VDP NA with Outagamie County
Rgnl altimeter setting.

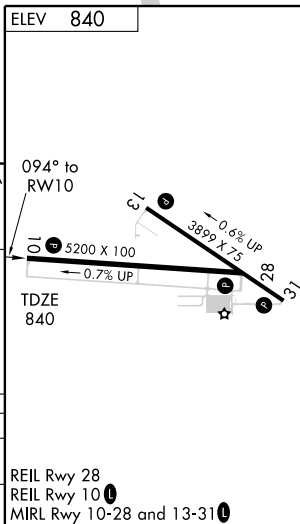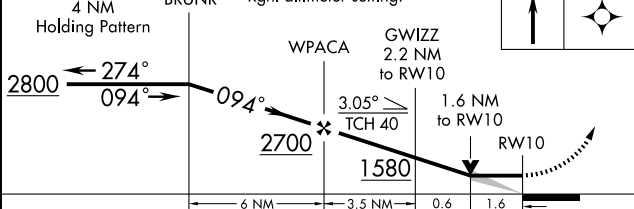

CATEGORY	A	B	C	D
RNAV MDA	1380-1 540 (600-1)	1380-1½ 540 (600-1½)	1380-1¾ 540 (600-1¾)	1380-2 580 (600-2)
CIRCLING	1420-1 580 (600-1)	1420-1½ 580 (600-1½)	1420-2 580 (600-2)	1420-2 580 (600-2)

REIL Rwy 28
REIL Rwy 10
MIRL Rwy 10-28 and 13-31

APP CRS **275°**
Rwy Idg **5200**
TDZE **825**
Apt Elev **840**

RNAV (GPS) RWY 28

WAUPACA MUNI (PCZ)

▽ If local altimeter setting not received, use Outagamie County
▲ Rgnl altimeter setting and increase all MDAs 80 feet.
Circling to Rwy 13 NA at night. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to
2800 direct BRUNR and hold.


AWOS-3
118.625

MINNEAPOLIS CENTER
124.4 317.7

GCO
121.725

UNICOM
122.8 (CTAF) 1

Procedure NA for arrival at CHURP
via V26 westbound and V191
northwestbound, and for arrival
at HAMTN via V177 southbound.

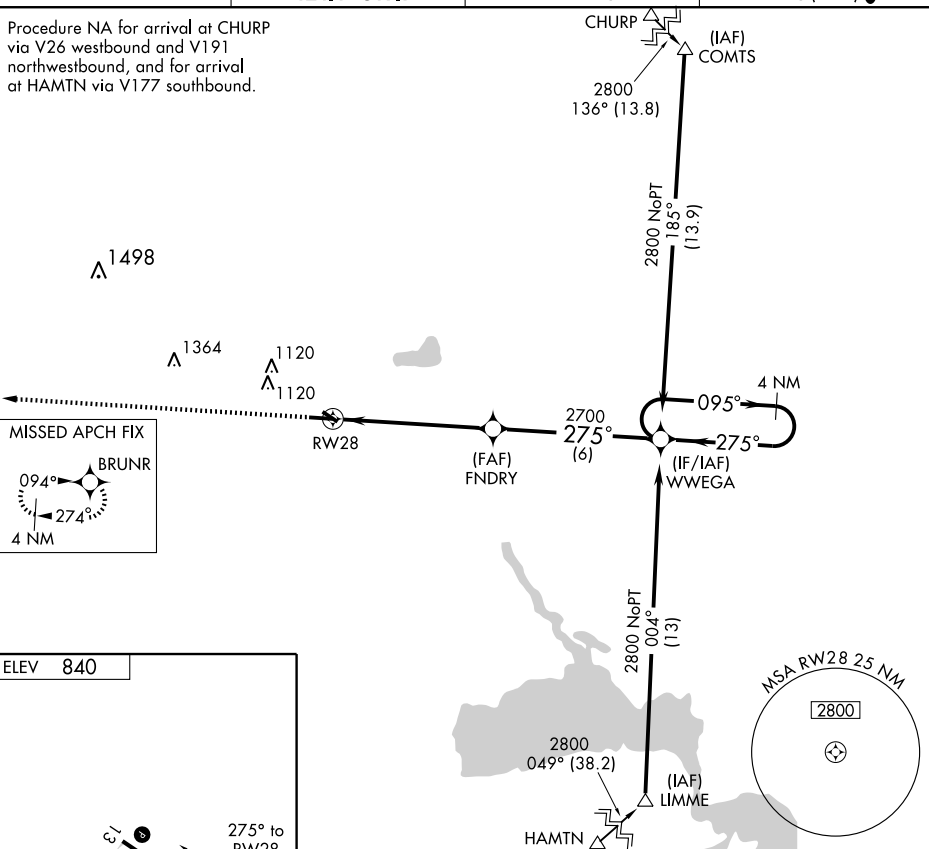

2800	BRUNR	VDP NA with Outagamie County Rgnl altimeter setting.	WWEGA	4 NM Holding Pattern
		FNDRY		095° → 2800
		1.6 NM to RW28		← 275°
		≤ 3.05°		
		TCH 40		
		2700		
		1.6	4.2 NM	6 NM
CATEGORY	A	B	C	D
LNVA MDA	1340-1	515 (500-1)	1340-1½ 515 (500-1½)	1340-1¾ 515 (500-1¾)
CIRCLING	1420-1	580 (600-1)	1420-1½ 580 (600-1½)	1420-2 580 (600-2)

REIL Rwy 28
REIL Rwy 10 1
MIRL Rwy 10-28 and 13-31 1

WAUSAU DOWNTOWN (AUW) 0 S UTC-6(-5DT) N44°55.58' W89°37.62'
 1201 B S4 FUEL 100LL, JET A, MOGAS TPA-2201(1000) NOTAM FILE AUW
Rwy 12-30: H5200X100 (ASPH) S-45, D-80, 2S-102, 2D-140 MIRL
Rwy 12: REIL. PAPI(P4L)—GA 3.0°TCH 43'. Trees.
Rwy 30: REIL. PAPI(P4L)—GA 3.0° TCH 47'. Trees.
Rwy 04-22: H3078X100 (ASPH) S-32, D-55,
 2D-95 MIRL 0.4% up NE
Rwy 22: Trees.

AIRPORT REMARKS: Attended May-Sep Mon-Fri 1400-0000Z†, Sat-Sun 1400-2300Z†, Oct-Apr 1400-2300Z†. MIRL Rwy 12-30 and Rwy 04-22 preset low ints; to increase ints and ACTIVATE REIL Rwy 12 and Rwy 30, PAPI Rwy 12 and Rwy 30—CTAF.

WEATHER DATA SOURCES: ASOS 125.925 (715) 843-7215.

COMMUNICATIONS: CTAF/UNICOM 122.7

RCO 122.4 (GREEN BAY RADIO)

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 124.4

RADIO AIDS TO NAVIGATION: NOTAM FILE AUW.

(L) VORTACW 111.6 AUW Chan 53 N44°50.81'
 W89°35.19' 338° 5.1 NM to fld. 1205/2E.
 VOR unusable:

050°-209° byd 8 NM
 210°-049° byd 10 NM'

114°-157°

DME unusable:

300°-320° byd 30 NM blo 4000' 320°-300° byd 30 NM blo 3000'

NDB (MHW) 243 FZK N44°55.67' W89°37.52' at fld.



1161 TPA-2161(1000)

WATERWAY 12-30: 8000X300 (WATER)

SEAPLANE REMARKS: Access road poor.

WAUSAU/STEVENS POINT (See CENTRAL WISCONSIN, MOSINEE)

WAUTOMA MUNI (Y50) 2 SW UTC-6(-5DT) N44°02.50' W89°18.27'

859 B S4 FUEL 100LL NOTAM FILE GRB

Rwy 13-31: H3300X60 (ASPH) S-12.5 MIRL

Rwy 13: Trees. **Rwy 31:** Tree.

Rwy 08-26: 2280X150 (TURF)

Rwy 08: Trees. **Rwy 26:** Trees.

Rwy 05-23: H1190X35 (ASPH)

Rwy 05: Trees. **Rwy 23:** Trees.

AIRPORT REMARKS: Attended May-Sep 1300-0200Z†, Oct-Apr 1300-0000Z†. 24 hour self svc fuel. Rwy 08-26 CLOSED winter months except for ski equipped acft. Rwy 08-26 East 430' CLOSED in winter. Waterfowl and deer on and invof arpt. Ultralights on and invof arpt. MIRL Rwy 13-31 preset on low ints; to increase ints ACTIVATE—CTAF. Rwy 08-26 ends marked with white markers.

WEATHER DATA SOURCES: ASOS 119.475 (920) 787-0515.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ MILWAUKEE APP/DEP CON 127.0

RADIO AIDS TO NAVIGATION: NOTAM FILE STE.

STEVENS POINT (L) VORTAC 110.6 STE Chan 43 N44°32.60' W89°31.83' 163° 31.6 NM to fld. 1110/2E.
 HIWAS.

WEST BEND

HAHN SKY RANCH (2T5) 5 NW UTC-6(-5DT) N43°27.98' W88°17.46'

1090 S2 NOTAM FILE GRB

Rwy 10-28: 2900X60 (TURF)

Rwy 10: Brush. **Rwy 28:** Tree.

AIRPORT REMARKS: Unattended. Rwy 10-28 has soft areas approximately 1000' from W end.

Rwy 10-28 surface rough and rolling. Ultralight activity on and invof arpt. Rwy 10-28 thld not marked.

COMMUNICATIONS: CTAF 122.9

GREEN BAY
 H-2K, L-14J
 IAP

GREEN BAY
 L-28H
 IAP

CHICAGO

NDB FZK
243

APP CRS
308°

Rwy Idg	N/A
TDZE	N/A
Apt Elev	1201

N/A
N/A
1201

NDB or GPS-B

WAUSAU DOWNTOWN (AUW)





Circling not authorized SW of Rwy 12-30.


MISSED APPROACH: Climb to 3500 then right turn direct FZK NDB and hold.

ASOS
125.925

MINNEAPOLIS CENTER
124.4 317.7

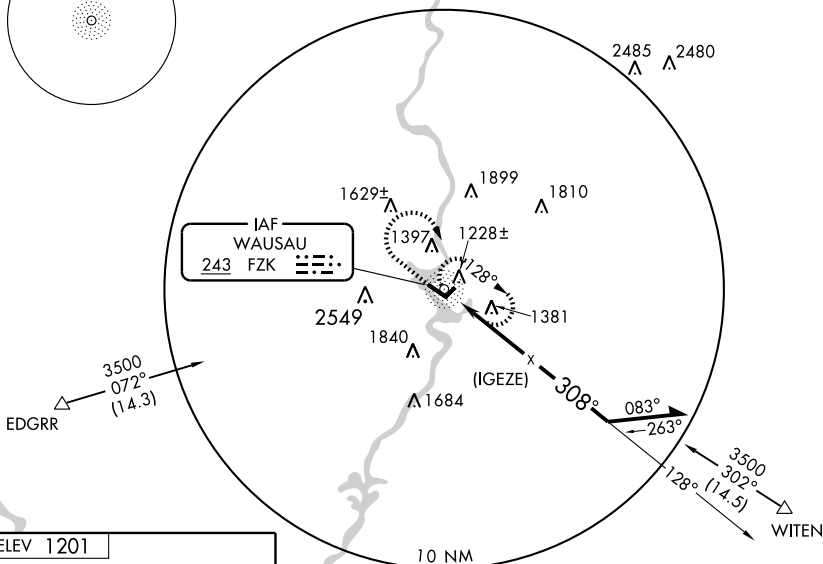UNICOM
122.7 (CTAF) **L**

ELEV 1201



3500



FZK




NDB*

Remain
within 10 NM

-125

3200

- * Maintain 3500 or above until established outbound for procedure turn.

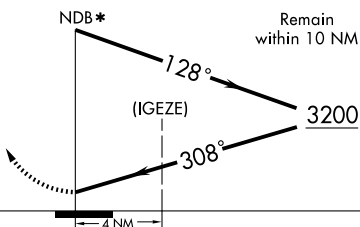

REIL Rwy 12 and 30 **L**
MIRL Rwy 4-22 and 12-30 **L**

CATEGORY	A	B	C	D
CIRCLING	1780-1	579 (600-1)	1840-1 ³ / ₄ 639 (700-1 ³ / ₄)	1840-2 639 (700-2)

WAUSAU, WISCONSIN

Orig 09015

WAUSAU DOWNTOWN (AUW)

NDB or GPS-B

44°56'N-89°38'W

APP CRS	Rwy Idg	5200
123°	TDZE	1195
	Apt Elev	1201

RNAV (GPS) RWY 12

WAUSAU DOWNTOWN (AUW)




DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Circling NA Southwest of Rwy 12-30. When local altimeter setting not received, use Mosinee altimeter setting and increase all MDAs 40 feet and LNAV visibility Cat. C ¼ mile, and Circling visibility Cats. C and D ½ mile.

MISSED APPROACH: Climb to 3000 direct AVOKE and via 120° track to WITEN and hold.


ASOS
125.925

MINNEAPOLIS CENTER
124.4 317.7


UNICOM
122.7 (CTAF) 0

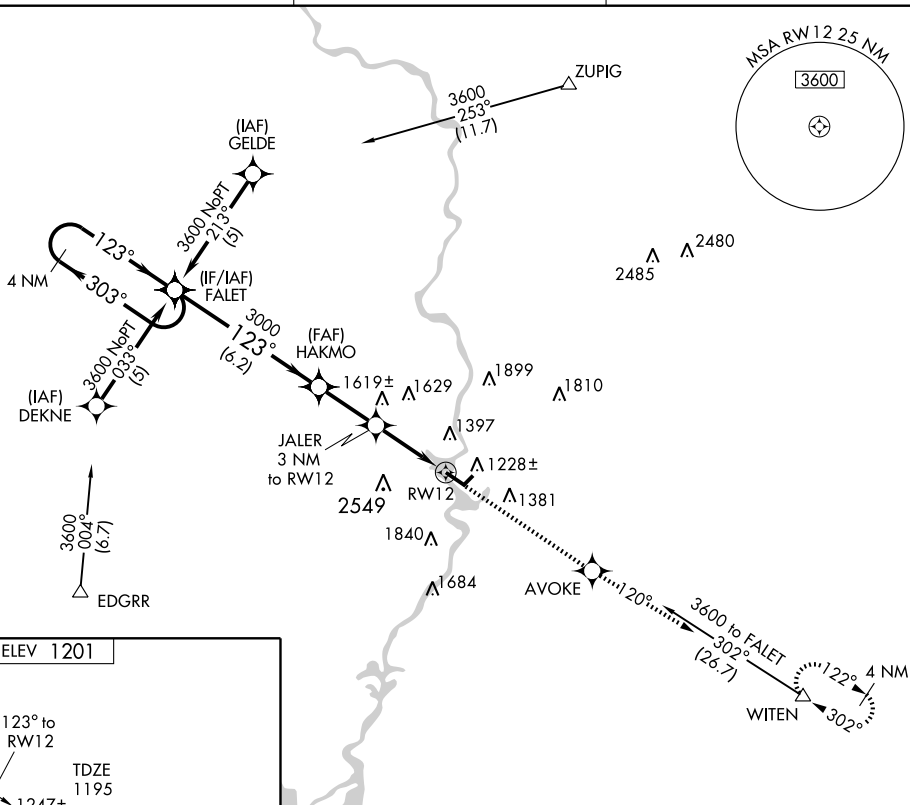

ELEV 1201



REIL Rwy 12 and 30
MIRL Rwy 4-22 and 12-30

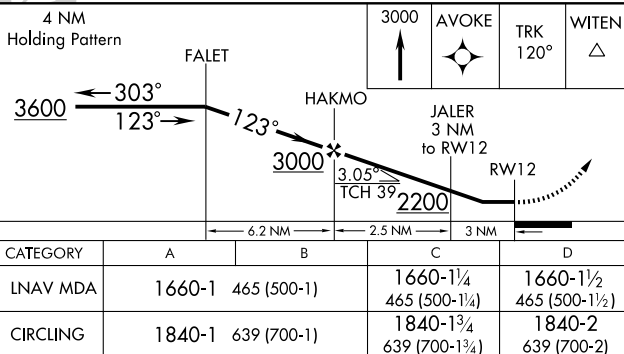

VORTAC AUVW 111.6 Chan 53	APP CRS 339°	Rwy Idg TDZE Apt Elev	N/A N/A 1201
---	------------------------	-----------------------------	---------------------------

VOR or GPS-A WAUSAU DOWNTOWN (AUV)

▼ Circling not authorized southwest of Runway 12-30.


MISSED APPROACH: Climb to 2000 via AUV R-339 then climbing right turn to 3000 direct AUV VORTAC and hold.

ASOS
125.925


MINNEAPOLIS CENTER
124.4 317.7

UNICOM
122.7 (CTAF)

Do not confuse Mosinee/Central Wisconsin airport with Wausau Downtown airport.

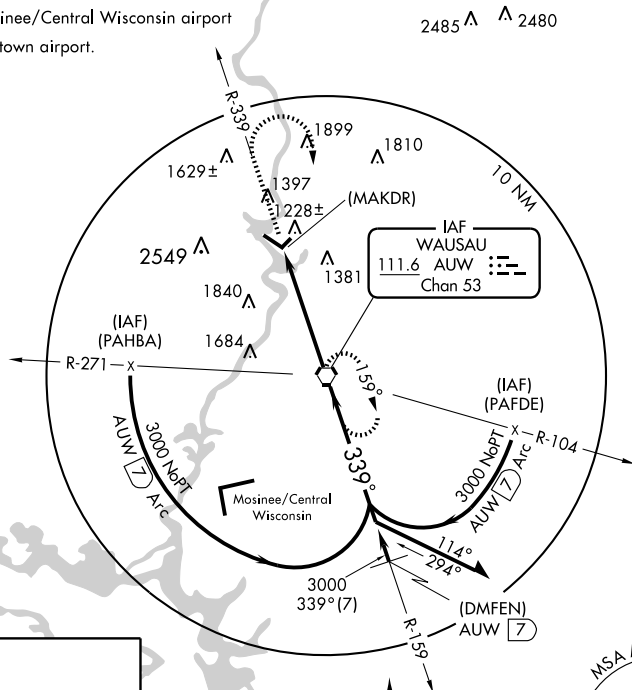

ELEV 1201



REIL Rwy 12 and 30
MIRL Rwy 4-22 and 12-30

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

IAF STEVENS POINT
110.6 STE
Chan 43

2000
AUV R-339
111.6

3000
AUV

VORTAC

159°

Remain within 10 NM

(MAKDR) AUV 4.8

3000

339°

3000

4.8 NM

CATEGORY	A	B	C	D
CIRCLING	1840-1	639 (700-1)	1840-1 $\frac{3}{4}$ 639 (700-1 $\frac{3}{4}$)	1840-2 639 (700-2)

WAUSAU, WISCONSIN
Amdt 18A 08353

44° 56'N-89° 38'W

WAUSAU DOWNTOWN (AUV)
VOR or GPS-A

WAUSAU DOWNTOWN (AUW) 0 S UTC-6(-5DT) N44°55.58' W89°37.62'
 1201 B S4 FUEL 100LL, JET A, MOGAS TPA-2201(1000) NOTAM FILE AUW
 RWY 12-30: H5200X100 (ASPH) S-45, D-80, 2S-102, 2D-140 MIRL
 RWY 12: REIL. PAPI(P4L)—GA 3.0°TCH 43'. Trees.
 RWY 30: REIL. PAPI(P4L)—GA 3.0° TCH 47'. Trees.
 RWY 04-22: H3078X100 (ASPH) S-32, D-55,
 2D-95 MIRL 0.4% up NE
 RWY 22: Trees.

AIRPORT REMARKS: Attended May-Sep Mon-Fri 1400-0000Z†, Sat-Sun 1400-2300Z†, Oct-Apr 1400-2300Z†. MIRL Rwy 12-30 and Rwy 04-22 preset low ints; to increase ints and ACTIVATE REIL Rwy 12 and Rwy 30, PAPI Rwy 12 and Rwy 30—CTAF.

WEATHER DATA SOURCES: ASOS 125.925 (715) 843-7215.

COMMUNICATIONS: CTAF/UNICOM 122.7

RCO 122.4 (GREEN BAY RADIO)

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 124.4

RADIO AIDS TO NAVIGATION: NOTAM FILE AUW.

(L) VORTACW 111.6 AUW Chan 53 N44°50.81'
 W89°35.19' 338° 5.1 NM to fld. 1205/2E.
 VOR unusable:

050°-209° byd 8 NM
 210°-049° byd 10 NM'

114°-157°

DME unusable:

300°-320° byd 30 NM blo 4000' 320°-300° byd 30 NM blo 3000'

NDB (MHW) 243 FZK N44°55.67' W89°37.52' at fld.



1161 TPA-2161(1000)

WATERWAY 12-30: 8000X300 (WATER)

SEAPLANE REMARKS: Access road poor.

WAUSAU/STEVENS POINT (See CENTRAL WISCONSIN, MOSINEE)

WAUTOMA MUNI (Y50) 2 SW UTC-6(-5DT) N44°02.50' W89°18.27'

859 B S4 FUEL 100LL NOTAM FILE GRB

RWY 13-31: H3300X60 (ASPH) S-12.5 MIRL

RWY 13: Trees. RWY 31: Tree.

RWY 08-26: 2280X150 (TURF)

RWY 08: Trees. RWY 26: Trees.

RWY 05-23: H1190X35 (ASPH)

RWY 05: Trees. RWY 23: Trees.

AIRPORT REMARKS: Attended May-Sep 1300-0200Z†, Oct-Apr 1300-0000Z†. 24 hour self svc fuel. Rwy 08-26 CLOSED winter months except for ski equipped acft. Rwy 08-26 East 430' CLOSED in winter. Waterfowl and deer on and invof arpt. Ultralights on and invof arpt. MIRL Rwy 13-31 preset on low ints; to increase ints ACTIVATE—CTAF. Rwy 08-26 ends marked with white markers.

WEATHER DATA SOURCES: ASOS 119.475 (920) 787-0515.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ MILWAUKEE APP/DEP CON 127.0

RADIO AIDS TO NAVIGATION: NOTAM FILE STE.

STEVENS POINT (L) VORTAC 110.6 STE Chan 43 N44°32.60' W89°31.83' 163° 31.6 NM to fld. 1110/2E.

HIWAS.

WEST BEND

HAHN SKY RANCH (2T5) 5 NW UTC-6(-5DT) N43°27.98' W88°17.46'

1090 S2 NOTAM FILE GRB

RWY 10-28: 2900X60 (TURF)

RWY 10: Brush. RWY 28: Tree.

AIRPORT REMARKS: Unattended. Rwy 10-28 has soft areas approximately 1000' from W end.

Rwy 10-28 surface rough and rolling. Ultralight activity on and invof arpt. Rwy 10-28 thld not marked.

COMMUNICATIONS: CTAF 122.9

GREEN BAY
 H-2K, L-14J
 IAP

GREEN BAY
 L-28H
 IAP

CHICAGO

APP CRS	Rwy Idg	3300
314°	TDZE	859
	Apt Elev	859

GPS RWY 31
WAUTOMA MUNI (Y50)






Use Stevens Point Muni altimeter setting.

MISSED APPROACH: Climb to 1800 then climbing left turn to 2600 direct KILRY WP and hold.


ASOS
119.475

MILWAUKEE APP CON
127.0 263.075

UNICOM
122.8 (CTAF) **L**

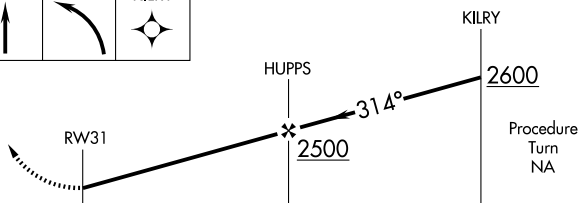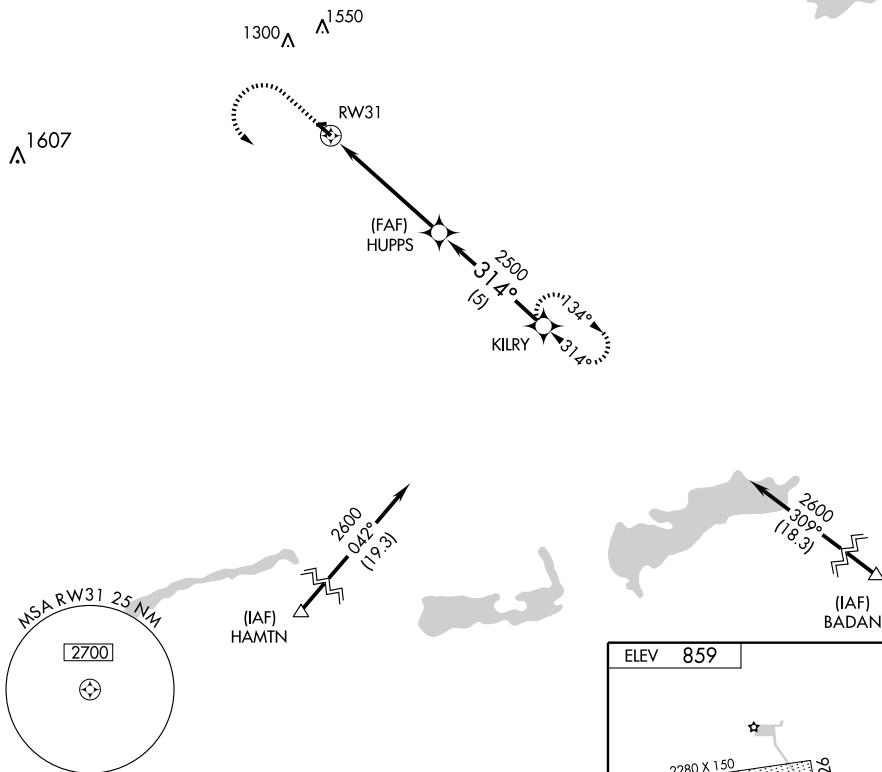

CATEGORY	5.2 NM		5 NM	
	A	B	C	D
S-31	1440-1 581 (600-1)		1440-1½ 581 (600-1½)	NA
CIRCLING	1480-1 621 (700-1)	1520-1 661 (700-1)	1520-1¾ 661 (700-1¾)	NA

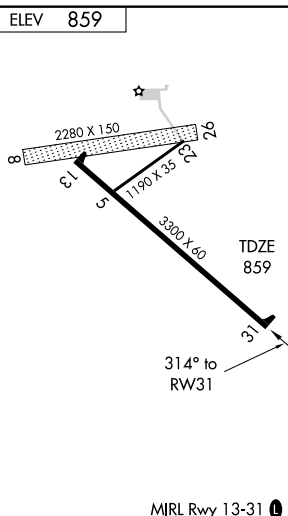

WAUTOMA, WISCONSIN
Orig-A 10098

WAUTOMA MUNI (Y50)
GPS RWY 31

44°02'N - 89°18'W

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3. 23 SEP 2010 to 21 OCT 2010

CHICAGO

L-28H

IAP

RWY 31: REIL. VASI(V2L)—GA 3.0° TCH 28'. Trees.

.3% up SW

RWY 24: Road.

COMMUNICATIONS: CTAF/UNICOM 122.8

MILWAUKEE APP/DEP CON 125.35 CLNC DEL 124.75

BADGER (H) VORTACW 116.4 BAE Chan 111 N43°07.01' W88°17.06' 018° 19.6 NM to fld. 1080/2E.

(T) VOR 109.8 BJB N43°25.32' W88°07.51' at fld. NOTAM FILE ETB.

SHUTDOWN

ILS 108.9 1-ETB Rwy 31. LOC monitored 1300-0300Z± daily.

COMM/NAV/WEATHER REMARKS: AWOS-3 ceiling unreliable.

HELIPAD H1: H100X100 (ASPH)

HELIPORT REMARKS: When using military helipad military helicopters use pattern to the N or W of arpt. Helipad H1 blue perimeter lgts.

TEWATER

CHICAGO

RWY 18-36: 2523X140 (TURF) LIRL (NSTD)

RWY 18: Trees. RWY 36: Building.

AIRPORT REMARKS: Attended Apr–Nov 1400Z–SS. Rwy 18–36 not plowed winters. Arpt CLOSED to wheeled acft when rwy snow covered. Extensive ultralight and hang glider ops on and in/ovf arpt. Rwy 18–36 not sanded or plowed.

Rwy 18–36 thld marked with white and orange L-shaped wooden A-frames. Rwy 18–36 NSTD LIRL; lgts not on frangible mounts.

COMMUNICATIONS: CTAF 122.9

NDB (LOM) 221 RP 010° 6.3 NM to Rice Lake Rgnl–Carl's Fld.

CHICAGO

RWY 09-27: 2990X100 (TURF) RWY LGTS (NSTD)

RWY 09: Tree. RWY 27: Tree.

RWY 18-36: 1695X100 (TURF)





RWY 18: Trees. RWY 36: Trees.

AIRPORT REMARKS: Unattended. Rwy 18–36 CLOSED Nov 15 thru Apr 1. Ultralight activity on and invof arpt. Deer and cranes on and invof arpt. Rwy 09–27 plowed winter months. Rwy 9–27 NSTD thld lgts. ACTIVATE LIRL Rwy 09–27—CTAF. Rwy 09 thld lgts OTS indef. Rwy 18–36 marked with black and yellow panels. Rwy 09–27 marked with yellow panels and orange edge markers. Rwy 27 additional obstruction road 0' from thld 90' right; apch ratio 0:1.



COMMUNICATIONS: CTAF/UNICOM 122.8

LOC I-ETB	APP CRS	Rwy Idg	4494
<u>108.9</u>	309°	TDZE	880
		Apt Elev	886

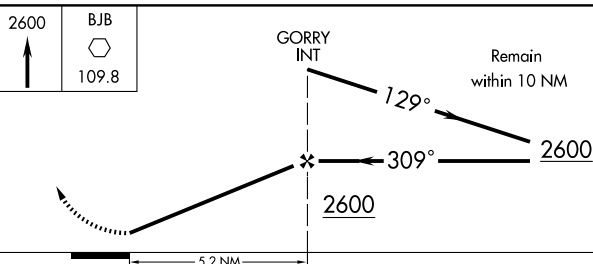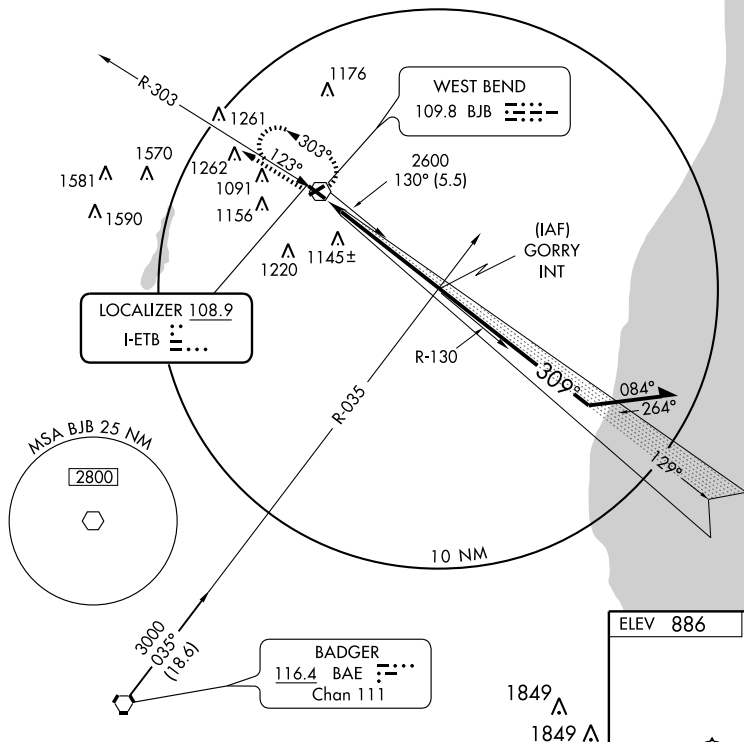LOC RWY 31
WEST BEND MUNI (ETB)



CATEGORY	A	B	C	D
S-31	1400-1 520 (600-1)		1400-1½ 520 (600-1½)	1400-1¾ 520 (600-1¾)
CIRCLING	1400-1 512 (600-1)	1420-1 532 (600-1)	1460-1½ 572 (600-1½)	1520-2 632 (700-2)

REIL Rwy's 13 and 31 					
MIRI Rwy's 6-24 and 13-31 					
FAF to MAP 5.2 NM					
Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

APP CRS **060°**
Rwy Idg **3897**
TDZE **887**
Apt Elev **887**

RNAV (GPS) RWY 6

WEST BEND MUNI (ETB)

▼ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Milwaukee altimeter setting and increase all MDA 80 feet, increase all Cat C/D visibilities ¼ mile. VDP NA with Milwaukee altimeter setting.

MISSED APPROACH: Climb to 3000 direct KEKSE and hold.


AWOS-3
120.0

MILWAUKEE APP CON
125.35 307.0

CLNC DEL
124.75

UNICOM
122.8 (CTAF) ①


Procedure NA for arrivals at CORIR via V63-191 northbound.

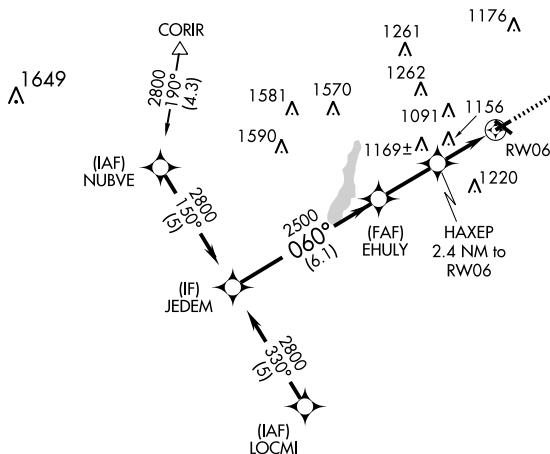


Procedure NA for arrivals on BAE VORTAC airway radials 302 CW 001.



ELEV **887**

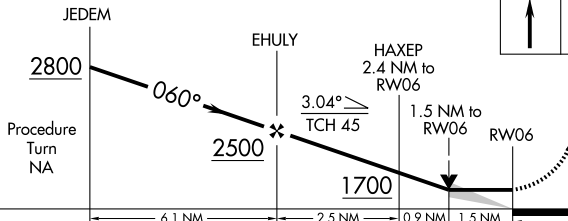

CATEGORY	A	B	C	D
LNAV MDA	1420-1	533 (600-1)	1420-1½ 533 (600-1½)	1420-1¾ 533 (600-1¾)
CIRCLING	1420-1	533 (600-1)	1460-1½ 573 (600-1½)	1520-2 633 (700-2)



REIL Rwy 13 and 31 ①
MIRL Rwy 6-24 and 13-31 ①

APP CRS **127°**
 Rwy Idg **4494**
 TDZE **882**
 Apt Elev **887**

RNAV (GPS) RWY 13

WEST BEND MUNI (ETB)

▼ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Milwaukee/Lawrence J. Timmerman altimeter setting and increase all MDA 80 feet, and increase LNAV Cats C/D and Circling Cat C visibility ½ mile, and Circling Cat D visibility ¼ mile. VDP NA with Milwaukee/Lawrence J. Timmerman altimeter setting.

MISSED APPROACH:
 Climb to 3000 direct COVNI and hold.

AWOS-3
120.0

MILWAUKEE APP CON
125.35 307.0



CLNC DEL
124.75

UNICOM
122.8 (CTAF) 0


1659±Δ

(IAF) HISUB

3000 NoPT
 206°
 (10.5)

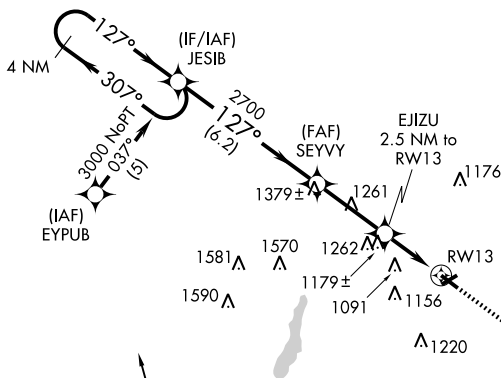

Procedure NA for arrivals
 on BAE VORTAC
 airway radials 302 CW 345.






ELEV **887**

MISSED APCH FIX



4 NM
 Holding Pattern

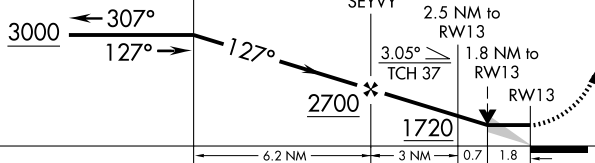

CATEGORY	A	B	C	D
LNAV MDA	1480-1 598 (600-1)	1480-1½ 598 (600-1½)	1480-1¾ 598 (600-1¾)	1480-2 633 (700-2)
CIRCLING	1480-1 593 (600-1)	1480-1½ 593 (600-1½)	1480-1¾ 593 (600-1¾)	1520-2 633 (700-2)

REIL Rwy 13 and 31 **0**
 MRL Rwy 6-24 and 13-31 **0**

WAAS CH 70716 W24A	APP CRS 240°	Rwy Idg TDZE Apt Elev	3897 884 887
--	------------------------	-----------------------------	---



RNAV (GPS) RWY 24

WEST BEND MUNI (ETB)

▼ Baro-VNAV NA when using Milwaukee altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Milwaukee altimeter setting and increase all DA 64 feet, all MDA 80 feet, increase LPV and LNAV/VNAV visibility ¼ mile, LNAV Cat D visibility ¼ mile, Circling Cat C/D visibility ¼ mile.

MISSED APPROACH:
Climb to 3000 direct
JEDEM and hold.

AWOS-3 120.0	MILWAUKEE APP CON 125.35 307.0	CLNC DEL 124.75	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------	--

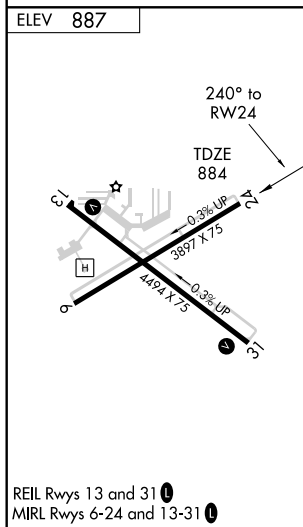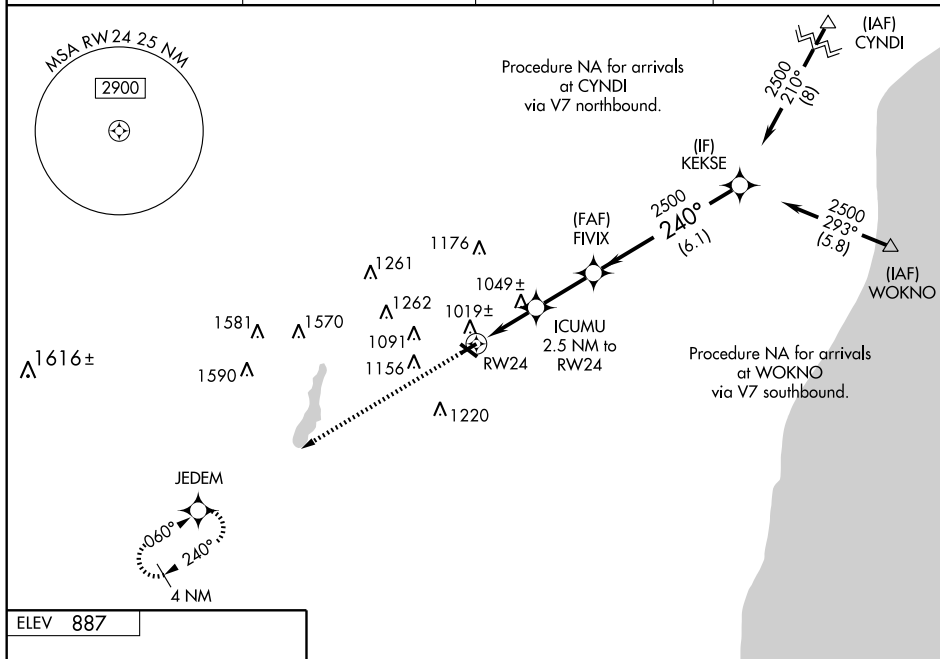

ELEV 887		3000 JEDEM		Procedure Turn NA	
*LNAV only		ICUMU 2.5 NM to RW24		FIVIX	
RW24		240°		2500	
2.5 NM		2.4 NM		6.1 NM	
CATEGORY	A	B	C	D	
LPV DA	1196-1 312 (400-1)				
LNAV/VNAV DA	1369-1¾ 485 (500-1¾)				
LNAV MDA	1300-1	416 (500-1)	1300-1¼	416 (500-1¼)	
CIRCLING	1420-1	533 (600-1)	1460-1½ 573 (600-1½)	1520-2 633 (700-2)	

WAAS CH 93816 W31A	APP CRS 308°	Rwy Idg TDZE Apt Elev	4494 879 887
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 31

WEST BEND MUNI (ETB)

▼ Baro-VNAV NA when using Milwaukee/Lawrence J. Timmerman altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Milwaukee/Lawrence J. Timmerman altimeter setting and increase all DA 64 feet and all MDA 80 feet. Increase LPV all Cats and LNAV and Circling Cats C/D visibility ¼ mile.

MISSED APPROACH:
Climb to 3000 direct
JESIB and hold.

AWOS-3
120.0

MILWAUKEE APP CON
125.35 307.0

CLNC DEL
124.75

UNICOM
122.8 (CTAF)


MISSED APCH FIX



MSA RW31 25 NM


2900

ELEV 887



REIL Rwy 13 and 31

MIRL Rwy 6-24 and 13-31

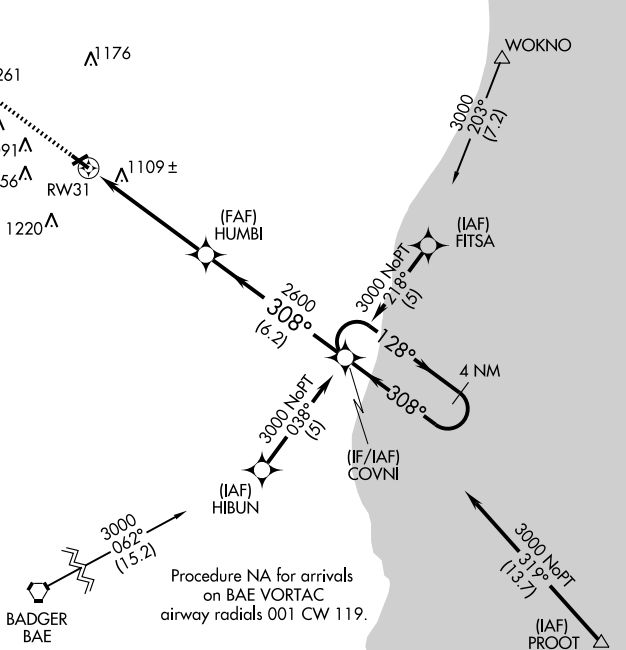

Procedure NA for arrivals
on BAE VORTAC
airway radials 001 CW 119.

3000

↑

JESIB

VGSI and LPV glidepath not coincident.

HUMBI

COVNI

4 NM Holding Pattern

128° →

← 308°

3000

GS 3.00°

TCH 45

RW31

5.2 NM

6.2 NM

CATEGORY	A	B	C	D
LPV DA	1175-1 296 (300-1)			
LNAV/DA VNAV	1482-2 603 (600-2)			
LNAV MDA	1420-1	541 (600-1)	1420-1½ 541 (600-1½)	1420-1¾ 541 (600-1¾)
CIRCLING	1420-1	533 (600-1)	1460-1½ 573 (600-1½)	1520-2 633 (700-2)

VORTAC BJB	APP CRS	Rwy Idg	4494
109.8	123°	TDZE	882
		Apt Elev	886

VOR RWY 13

WEST BEND MUNI (ETB)



ACTIVATE MIRL Rwy 13-31-CTAF.




MISSED APPROACH: Climbing left turn to 2700 in BJB VOR holding pattern.

AWOS-3
120.0

MILWAUKEE APP CON
125.35 307.0

CLNC DEL
124.75

UNICOM
122.8 (CTAF)

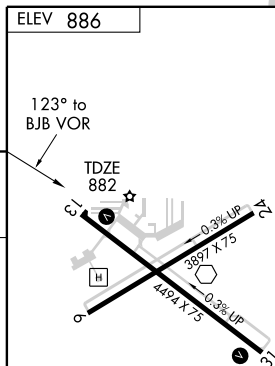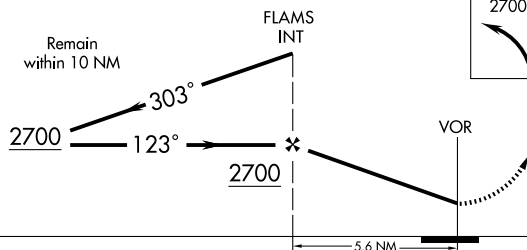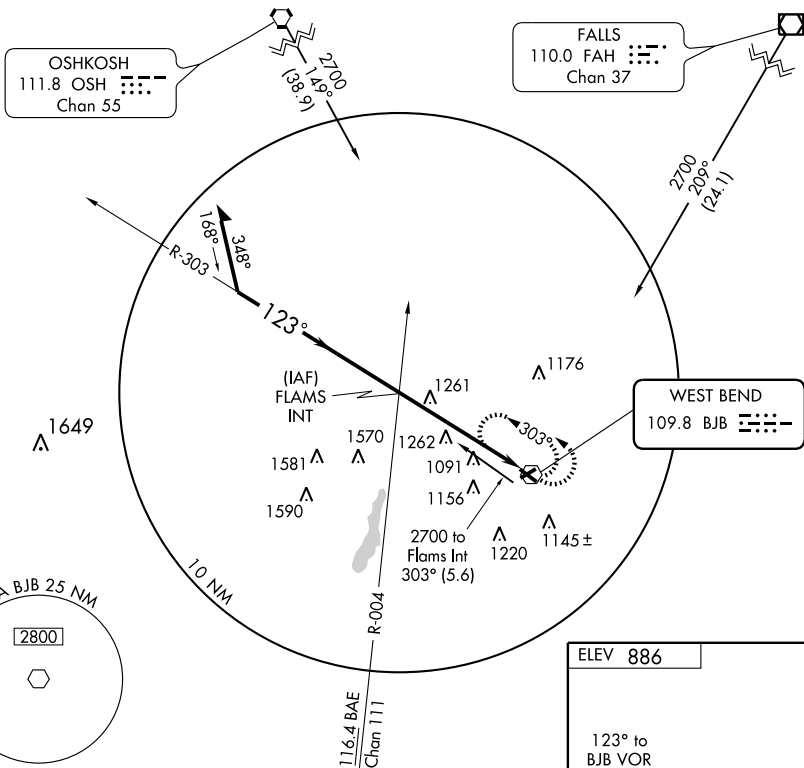

CATEGORY	A	B	C	D
S-13	1540-1	658 (700-1)	1540-1 3/4 658 (700-1 3/4)	1540-2 658 (700-2)
CIRCLING	1540-1	652 (700-1)	1540-1 3/4 652 (700-1 3/4)	1540-2 652 (700-2)

REIL Rwy 13 and 31
MIRL Rwy 6-24 and 13-31

VOR BJB 109.8	APP CRS 232°	Rwy Idg TDZE Apt Elev	3897 884 887
-------------------------	------------------------	-----------------------------	---

VOR RWY 24
WEST BEND MUNI (ETB)

▼ Visibility reduction by helicopters NA.
▲ When local altimeter setting not received, use Milwaukee altimeter setting and increase all MDA 80 feet, increase all Cat C/D visibilities ¼ mile.


MISSED APPROACH: Climb to 1900 then climbing right turn 2700 direct BJB VOR and hold, continue climb-in-hold to 2700.

AWOS-3
120.0




MILWAUKEE APP CON
125.35 307.0

CLNC DEL
124.75

UNICOM
122.8 (CTAF) **0**

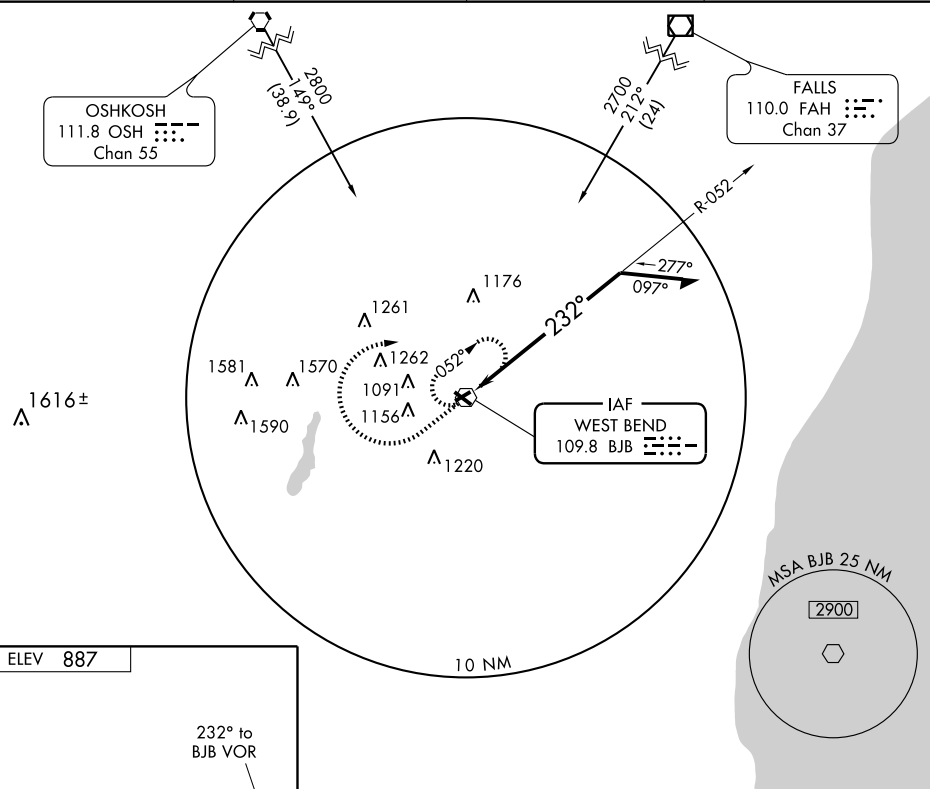

ELEV 887



REIL Rwy 13 and 31 **0**
MIRL Rwy 6-24 and 13-31 **0**

WEST BEND, WISCONSIN
Amdt 3 03JUN10

43°25'N - 88°08'W

WEST BEND MUNI (ETB)
VOR RWY 24

WILMOT

WESTOSHA (5K6) 1 W UTC-6(-5DT) N42°30.85' W88°12.31'

CHICAGO

850 B S4 FUEL 100LL TPA-1500(650) NOTAM FILE GRB

RWY 03-21: H2849X38 (ASPH-CONC) LIRL (NSTD)

RWY 03: Thld dsplcd 36'. Road. RWY 21: Thld dsplcd 9'.

RWY 14-32: 1517X45 (TURF)

RWY 14: Fence.

RWY 32: Trees.

AIRPORT REMARKS: Attended 1400-0000Z†. Rwy 14-32 CLOSED Nov 15 thru Mar 31. Arpt has noise abatement procedures ctc arpt manager on 262-862-6111. Rwy 03-21 SW 400' conc and NE 27' conc rest of rwy asph. Rwy 03-21 has a 60' drop-off 10' from NE end. ACTIVATE LIRL Rwy 03-21—CTAF. ACTIVATE rotating bcn—CTAF. Rwy 14-32 A-frames painted orange and white. Rwy 03-21 NSTD LIRL due to height, Rwy 03-21 thld lgts 3 each side.

COMMUNICATIONS: CTAF/UNICOM 123.0

WISCONSIN RAPIDS NOTAM FILE ISW.

GREEN BAY

NDB (MHW) 215 ISW N44°21.84' W89°50.39' at Alexander Fld South Wood Co.

L-28G

RCO 122.45 (GREEN BAY RADIO)

WISCONSIN RAPIDS

ALEXANDER FLD SOUTH WOOD CO (ISW) 1 S UTC-6(-5DT) N44°21.62' W89°50.34'

GREEN BAY

1021 B FUEL 100LL, JET A TPA—See Remarks NOTAM FILE ISW

H-2K, L-28G

RWY 02-20: H5500X100 (ASPH) S-40, D-60 MIRL

IAP

RWY 02: REIL. PAPI(P4L)—GA 3.0° TCH 50'. Trees.

RWY 20: REIL. PAPI(P4L)—GA 3.0° TCH 50'. Tree.

RWY 11-29: H3640X50 (ASPH) S-12, D-20 MIRL

RWY 11: Road.

RWY 29: PAPI(P4L)—GA 4.0° TCH 50'. Thld dsplcd 170'. Trees.

RWY 18-36: 2100X50 (TURF)

RWY 18: Tree.

RWY 36: Trees.

AIRPORT REMARKS: Attended May-Sep 1400-2330Z†, Oct-Apr 1400-2300Z†. After hours svc call 715-572-9464. Birds on and infov arpt. Rwy 18-36 marked with yellow metal triangles. Ultralight acft must have an operating altimeter, two-way radio, use ultralight ops area (Rwy 18-36), avoid overflight of hard surface rwys. Ultralights use rgt tfc for Rwys 02, 20 and 11 and left tfc for Rwy 29. When Rwy 18-36 is closed ultralights may use Rwy 02-20 and Rwy 11-29. TPA: ultralight TPA 1521(500). ACTIVATE MIRL Rwy 02-20; MIRL Rwy 11-29; REIL Rwy 02 and Rwy 20; PAPI Rwy 02; Rwy 20 and Rwy 29—CTAF.

WEATHER DATA SOURCES: ASOS 126.575 (715) 421-2120.

COMMUNICATIONS: CTAF/UNICOM 122.8

WISCONSIN RAPIDS RCO 122.45 (GREEN BAY RADIO)

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 124.4

RADIO AIDS TO NAVIGATION: NOTAM FILE STE.


STEVENS POINT (L) VORTAC 110.6 STE Chan 43 N44°32.60' W89°31.83' 231° 17.2 NM to fld. 1110/2E.

HIWAS.

WISCONSIN RAPIDS NDB (MHW) 215 ISW N44°21.84' W89°50.39' at fld. NOTAM FILE ISW.

NEPCO NDB (LOM) 326 EK N44°15.59' W89°53.27' 020° 6.4 NM to fld. Unmonitored.

SDF 108.7 EKP Rwy 02 LOM NEPCO NDB. Unmonitored.

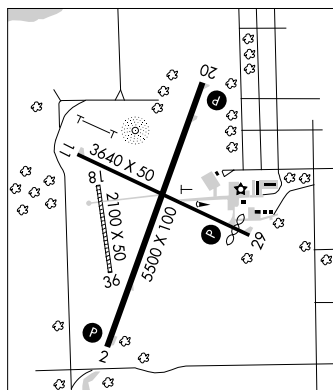

WITTMAN RGNL (See OSHKOSH)

WONEWOC

THREE CASTLES AIRPARK (4D1) 1 NW UTC-6(-5DT) N43°40.20' W90°13.96'

CHICAGO

921 TPA-1921(1000) NOTAM FILE GRB

RWY 10-28: 2740X90 (TURF)

RWY 10: Tree.

RWY 28: Trees.

AIRPORT REMARKS: Unattended.

COMMUNICATIONS: CTAF 122.9

WOODRUFF N45°53.33' W89°36.43'

GREEN BAY

RCO 122.6 (GREEN BAY RADIO)

L-10H, 12E

YANKS N43°03.60' W87°52.61' NOTAM FILE MKE.

CHICAGO

NDB (MHW/LOM) 260 BL 189° 6.8 NM to General Mitchell Intl. Unmonitored.

LOM EK **326**
 APP CRS **020°**
 Rwy ldg **5500**
 TDZE **1018**
 Apt Elev **1021**

WISCONSIN RAPIDS/
 ALEXANDER FIELD SOUTH WOOD COUNTY (ISW)

NDB or GPS RWY 2





Procedure not authorized when R-6904 A and B active.

MISSED APPROACH: Climb to 2600 then right turn direct EK LOM and hold.


ASOS
126.575

MINNEAPOLIS CENTER
124.4 317.7

UNICOM
122.8 (CTAF) 0

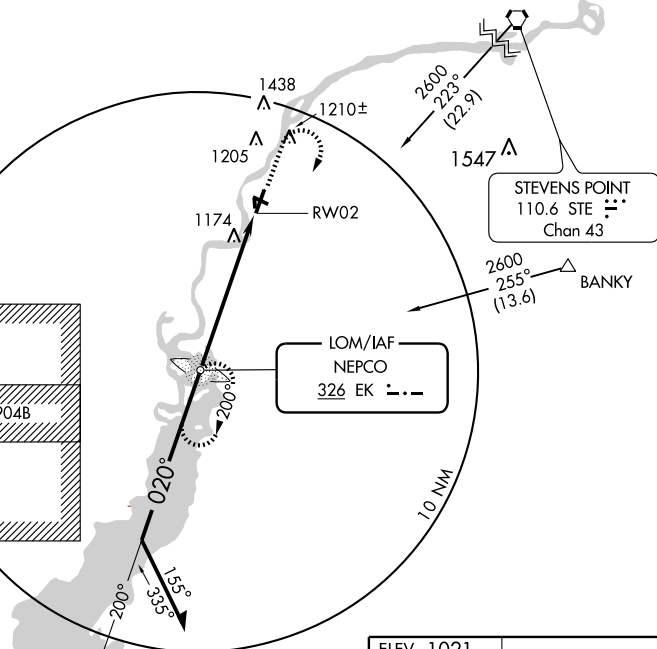

Remain
 within 10 NM



2600




EK



RW02

5.9 NM

CATEGORY	A	B	C	D
S-2	1480-1	462 (500-1)	1480-1¼ 462 (500-1¼)	1480-1½ 462 (500-1½)
CIRCLING	1480-1	459 (500-1)	1520-1½ 499 (500-1½)	1620-2 599 (600-2)



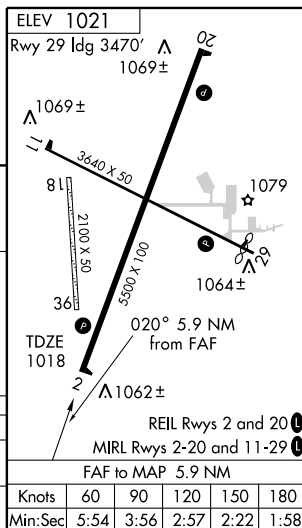


FAF to MAP 5.9 NM					
Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

NDB ISW 215	APP CRS 305°	Rwy Idg TDZE Apt Elev	3470 1019 1021
-----------------------	------------------------	-----------------------------	---

WISCONSIN RAPIDS/
ALEXANDER FIELD SOUTH WOOD COUNTY (ISW)**NDB or GPS RWY 29**
ALEXANDER FIELD SOUTH WOOD COUNTY (ISW)

▲ NA

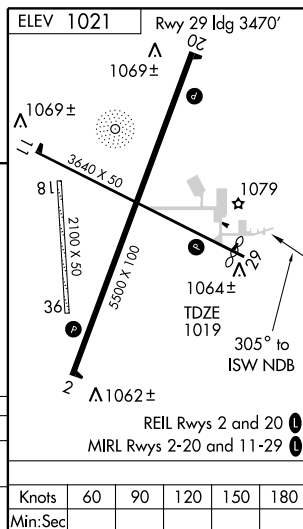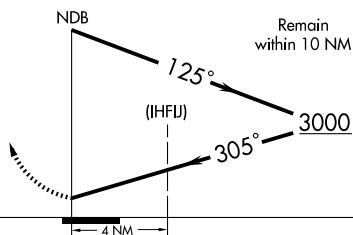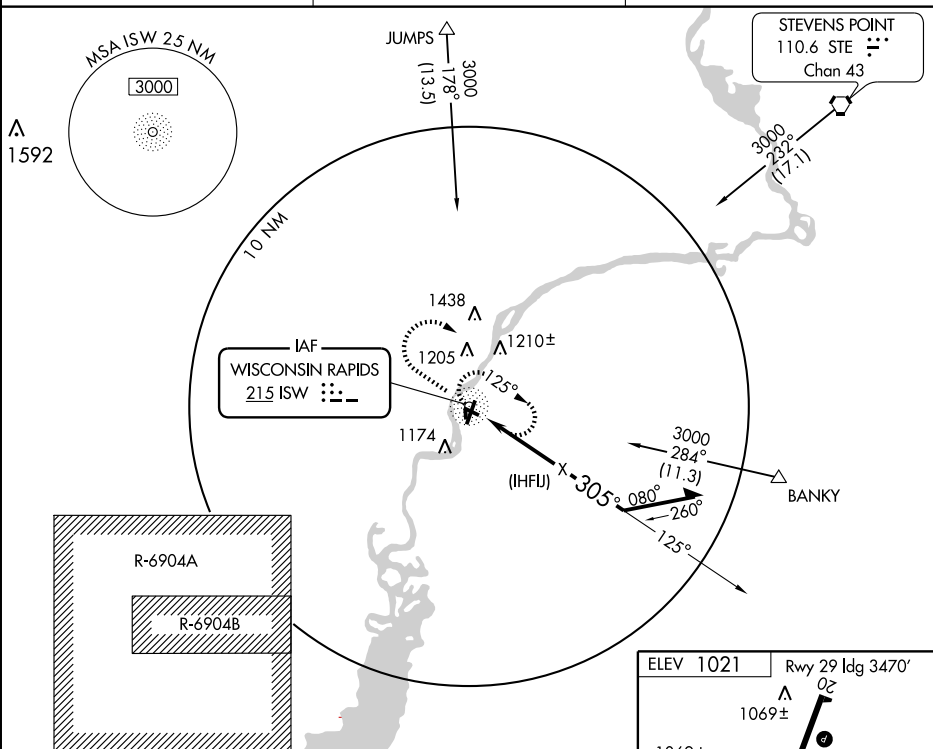MISSED APPROACH: Climb to 3000 then
right turn direct ISW NDB and hold.ASOS
126.575MINNEAPOLIS CENTER
124.4 317.7UNICOM
122.8 (CTAF) 0

CATEGORY	A	B	C	D
S-29	1620-1 601 (600-1)		1620-1¾ 601 (600-1¾)	1620-2 601 (600-2)
CIRCLING	1620-1 599 (600-1)		1620-1¾ 599 (600-1¾)	1620-2 599 (600-2)

SDF EKP **108.7** APP CRS **021°** Rwy ldg **5500**
 TDZE **1018** Apt Elev **1021**

WISCONSIN RAPIDS/

ALEXANDER FIELD SOUTH WOOD COUNTY (ISW)

SDF RWY 2



▲ NA Procedure not authorized when R-6904 A and B active.

MISSED APPROACH: Climb to 2600 then right turn
 direct EK LOM and hold.



ASOS
126.575

MINNEAPOLIS CENTER
124.4 317.7

UNICOM
122.8 (CTAF) 0

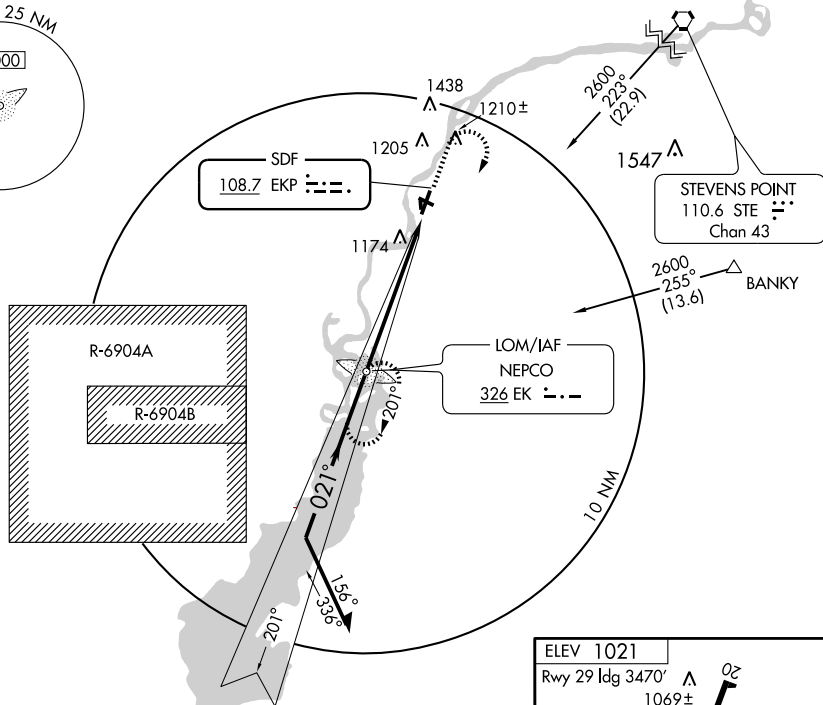
**ADF REQUIRED**

Remain
 within 10 NM

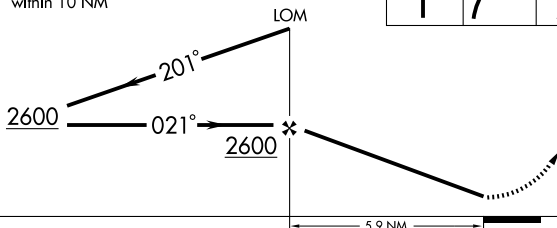

ELEV 1021

Rwy 29 ldg 3470'

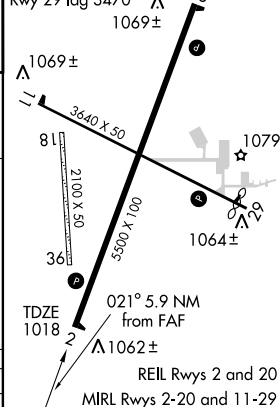

TDZE
 1018


REIL Rwy 2 and 20 0

MIRL Rwy 2-20 and 11-29 0

FAF to MAP 5.9 NM

Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

VORTAC STE 110.6 Chan 43	APP CRS 232°	Rwy Idg TDZE Apt Elev	N/A N/A 1021
--	------------------------	-----------------------------	---

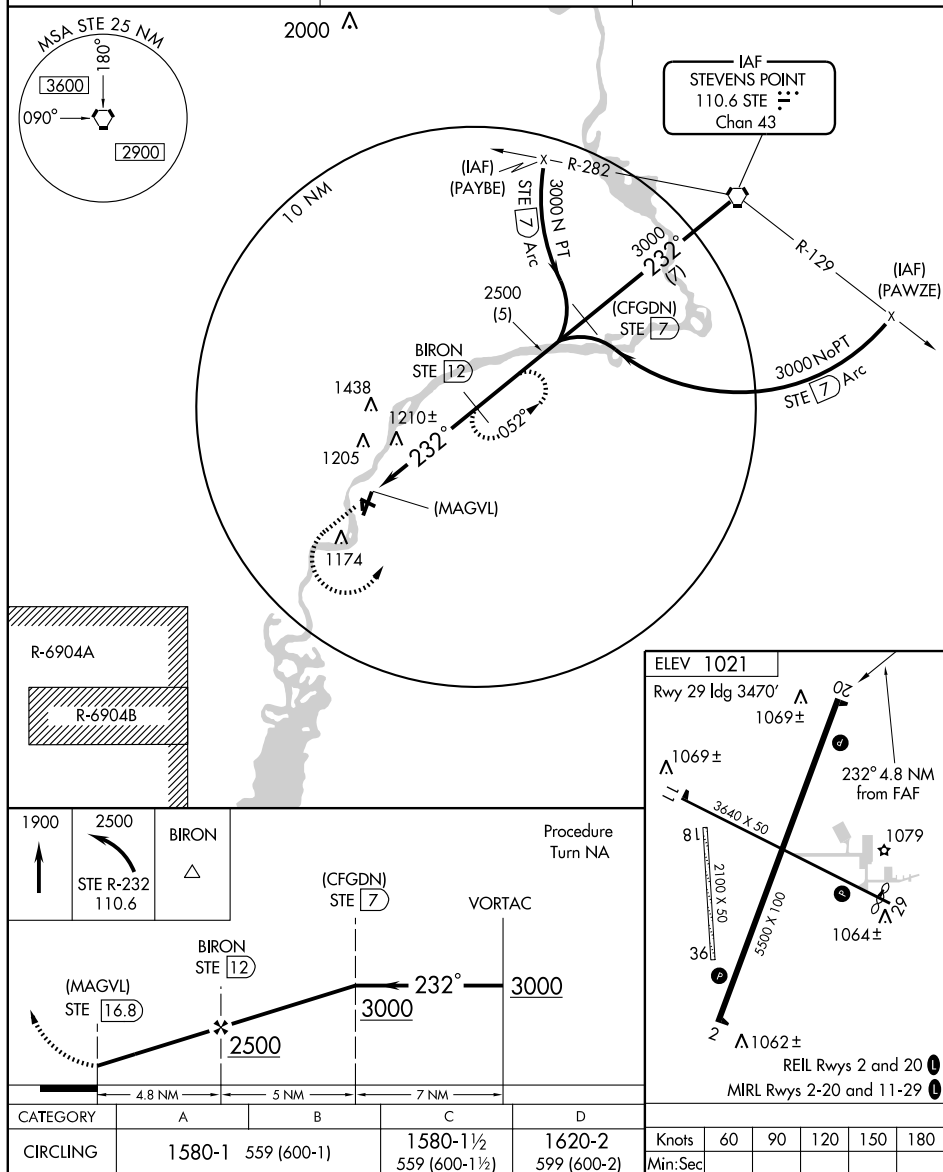WISCONSIN RAPIDS/
ALEXANDER FIELD SOUTH WOOD COUNTY (ISW)**VOR/DME or GPS-A**MISSED APPROACH: Climb to 1900 then climbing
left turn to 2500 via STE R-232 to BIRON and hold.ASOS
126.575MINNEAPOLIS CENTER
124.4 317.7UNICOM
122.8 (CTAF) 0

EC-3, 23 SEP 2010 to 21 OCT 2010

EC-3, 23 SEP 2010 to 21 OCT 2010